

D

D

C


C

B


B

A


A

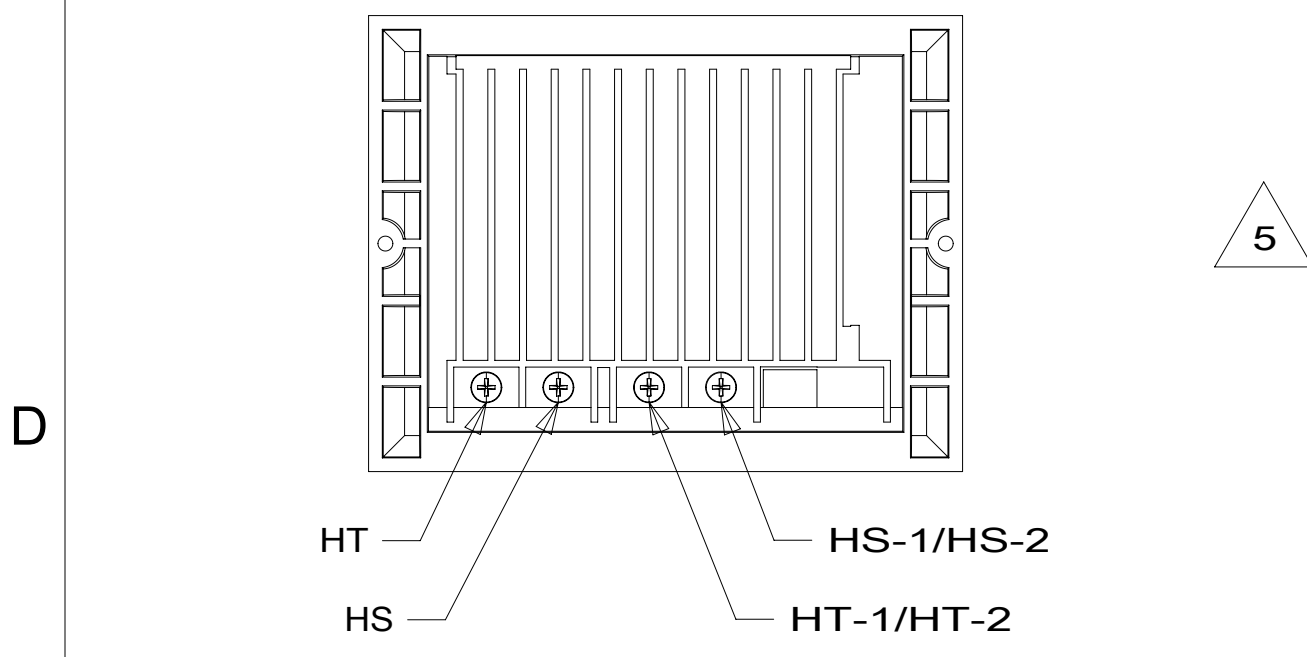


DETAIL AB 6 282

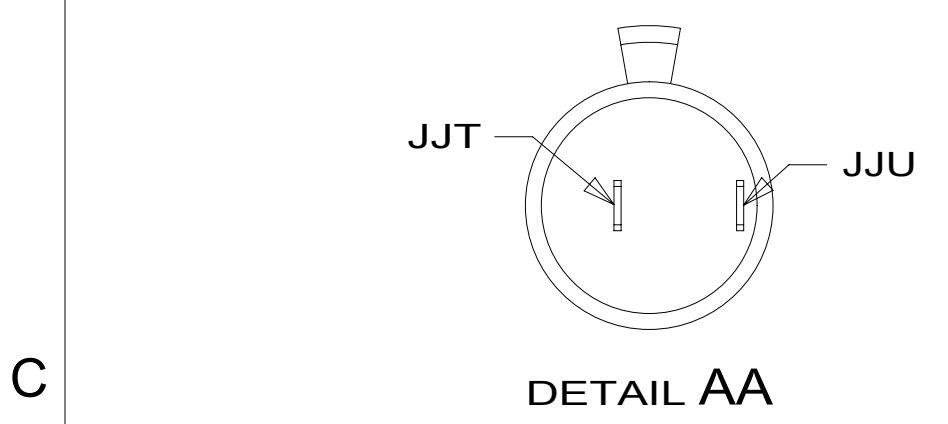


DETAIL AA

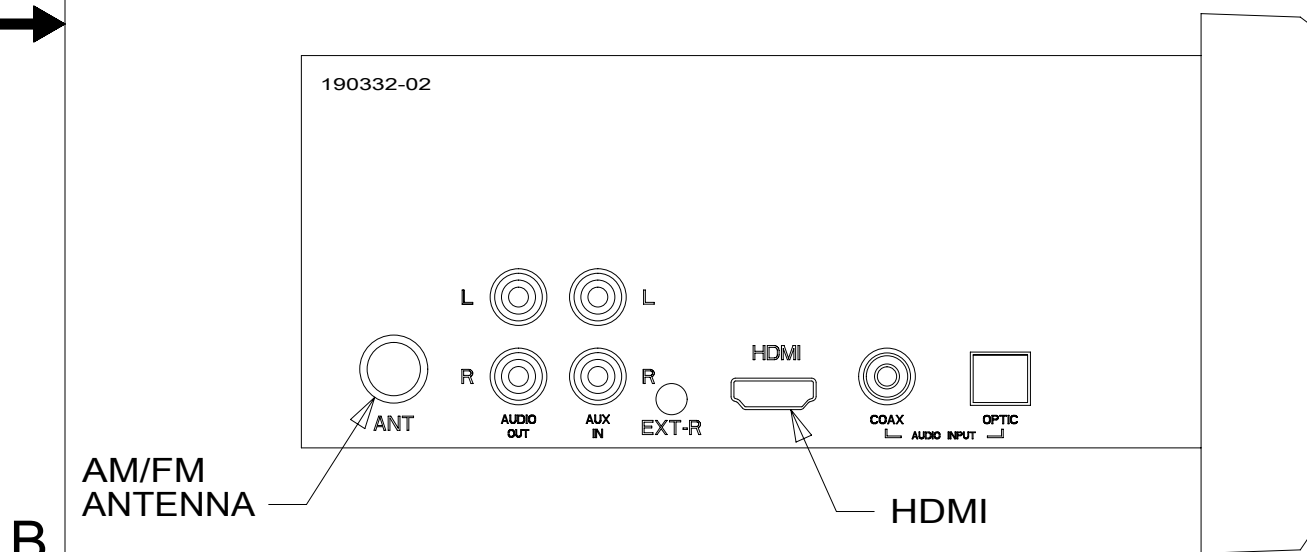

DETAIL AC

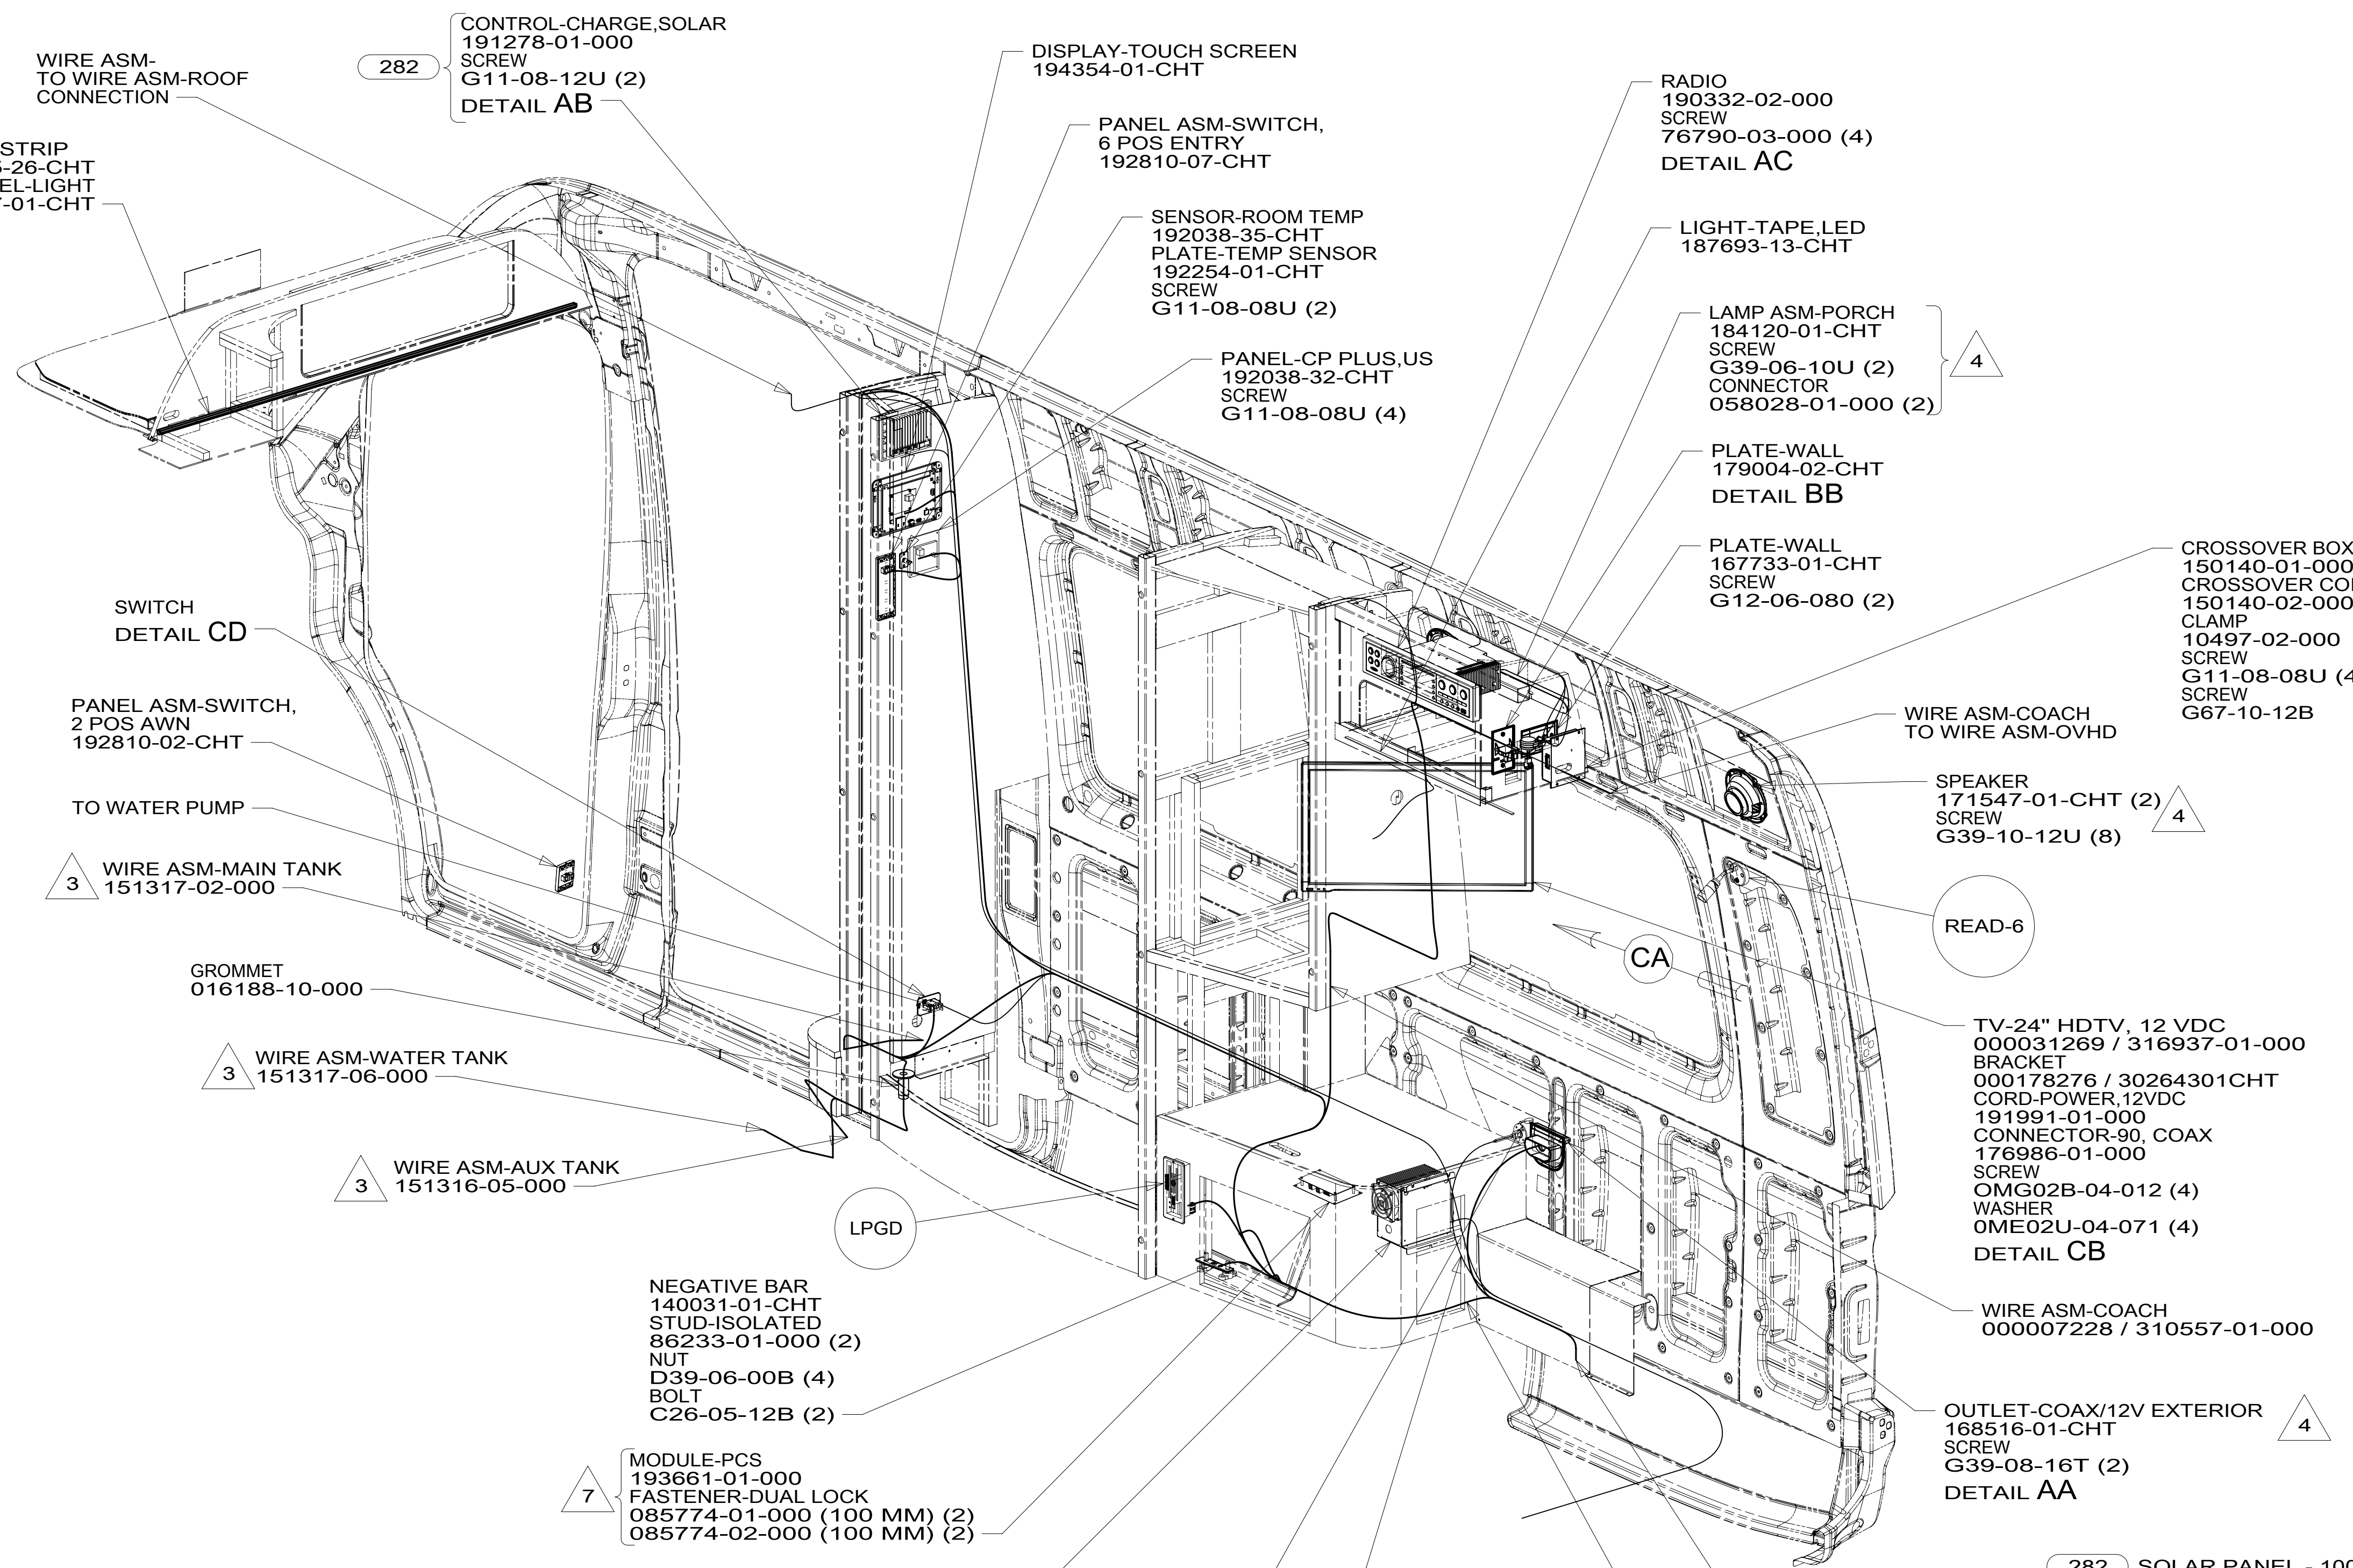

- NOTES:**
- 7 MOUNT TO TOP OF WHEEL WELL. CLEAN SURFACES.
 - 6 SEE WIRE ASM-SOLAR SYSTEM AND WIRE INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
 - 5 CUT TO LENGTH NEEDED TO FIT CABINET.
 - 4 MOUNT ON EXTERIOR SURFACE OF VAN SIDEWALL.
 - 3 PLACE CROSS LOCATOR ON SENSORS OVER DIMPLES ON TANK.
2. ROUTE TANK SENSOR WIRES SO THEY DO NOT PASSOVER SENSORS. USE WIRE TIE MOUNT 155366-01-000 AND WIRE TIE 8343-01-000 AS NEEDED. TANK SURFACE MUST BE CLEANED USING ISOPROPYL ALCOHOL AND PRIMED WITH PRIMER 94.
 1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

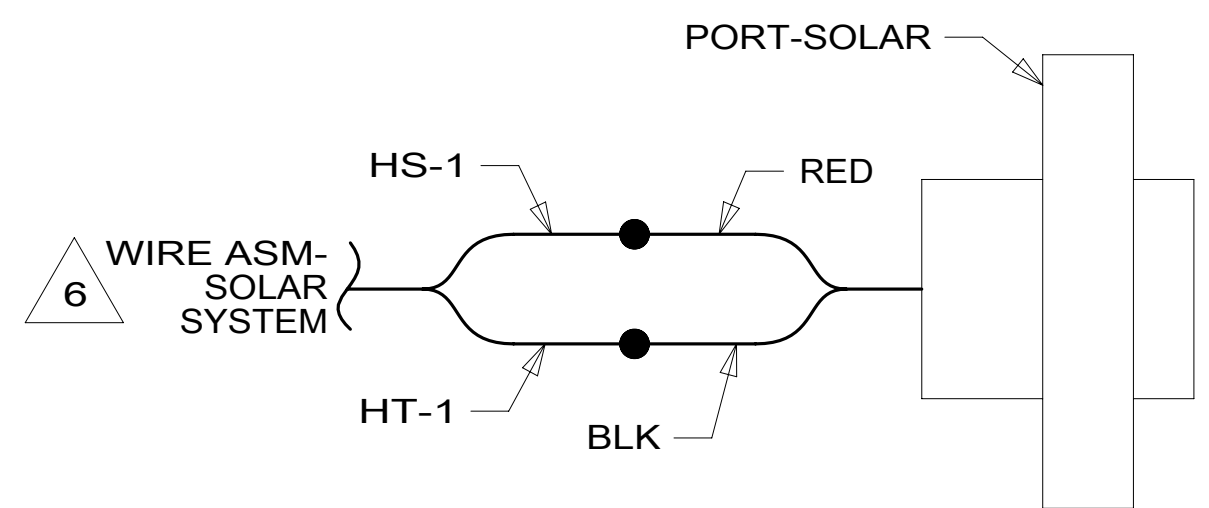

DETAIL AD 282


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 282 SOLAR PANEL - 100 WATT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

WINNEBAGO
COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.

DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS
DFFR:	
UNSPECIFIED TOLERANCES:	MATERIAL:
WHOLE DIM (X) : 3	
ONE-PLACE (X.X) : 1.5	
TWO-PLACE (X.XX) : 0.50	
ANGLE : 1°	
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS) FIRST USED: 16 170X
DESCRIPTION: WIRING INSTL-BODY, 12V	
SHEET: 1 OF 4	ITEM/PART NO: 000180116 / 30029401000
REF:	REV: 1 05-Oct-2016

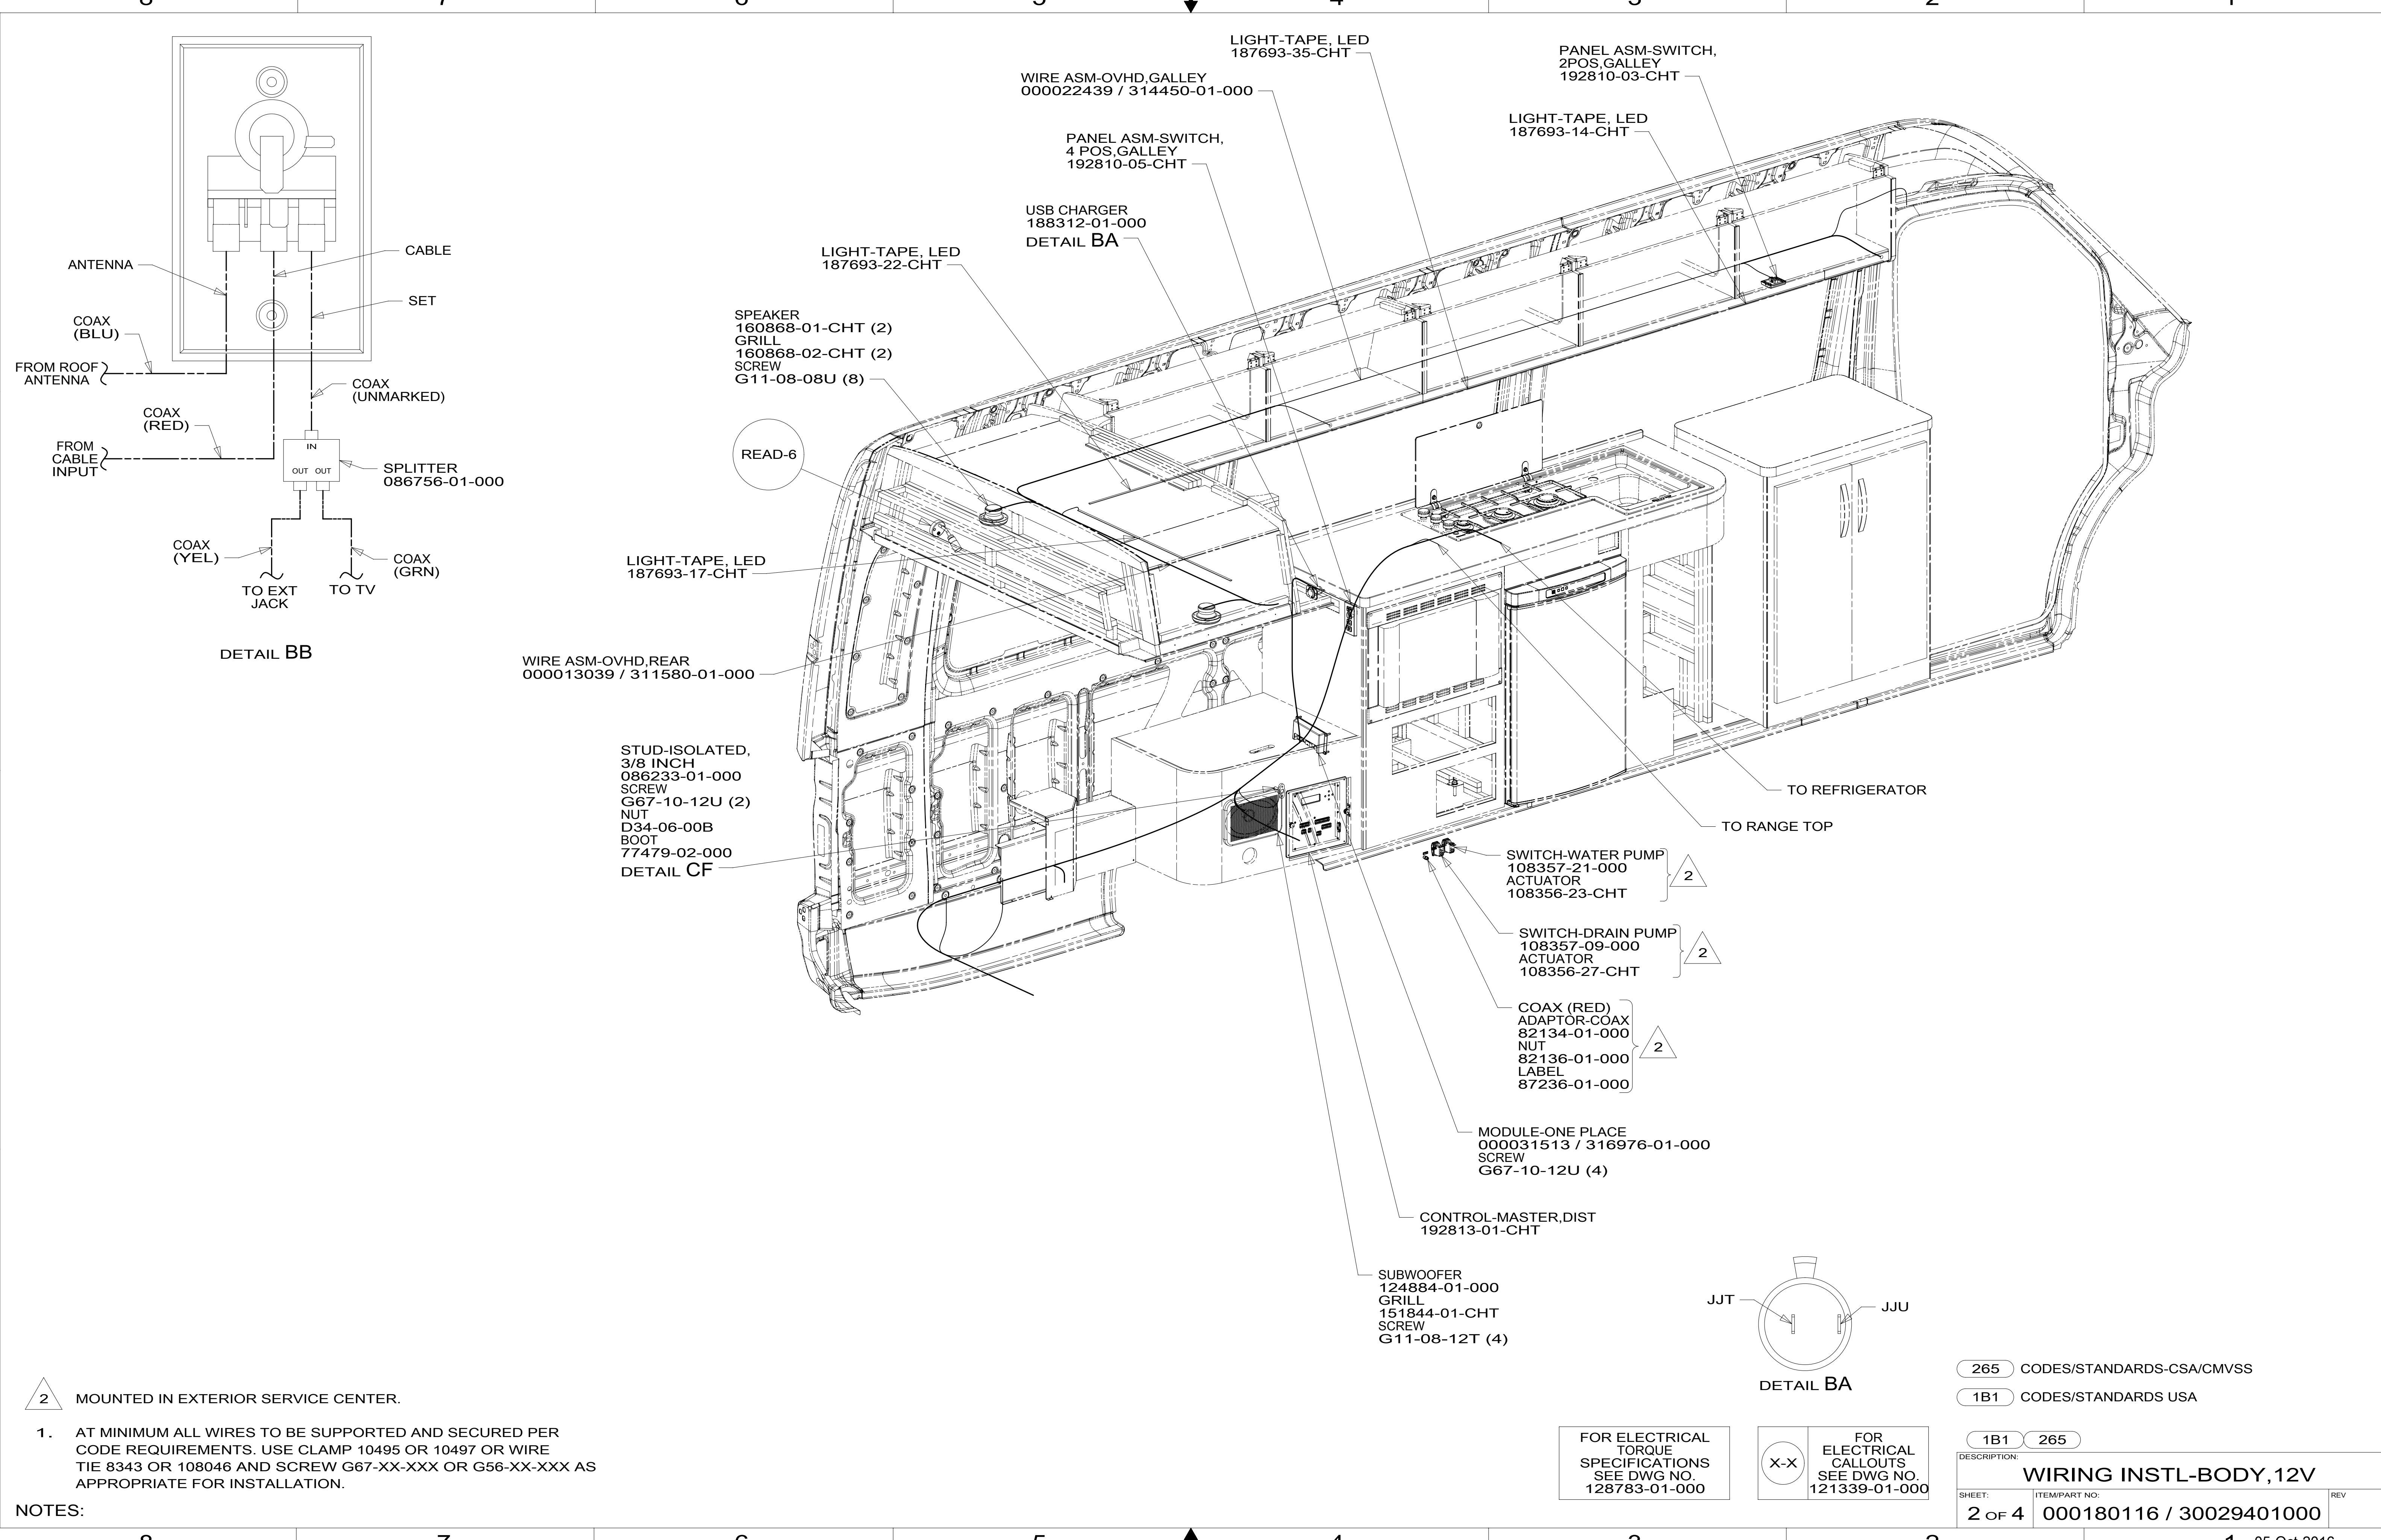

8 7 6 5 4 3 2 1

D

C

B

A

8 7 6 5 4 3 2 1

↑

ANTENNA

CABLE

SET

COAX (BLU)

FROM ROOF ANTENNA

COAX (RED)

FROM CABLE INPUT

COAX (UNMARKED)

SPLITTER 086756-01-000

COAX (YEL)

TO EXT JACK

COAX (GRN)

TO TV

DETAIL BB

WIRE ASM-OVHD,GALLEY 000022439 / 314450-01-000

PANEL ASM-SWITCH, 4 POS,GALLEY 192810-05-CHT

USB CHARGER 188312-01-000 DETAIL BA

LIGHT-TAPE, LED 187693-22-CHT

SPEAKER 160868-01-CHT (2) GRILL 160868-02-CHT (2) SCREW G11-08-08U (8)

READ-6

LIGHT-TAPE, LED 187693-17-CHT

WIRE ASM-OVHD,REAR 000013039 / 311580-01-000

STUD-ISOLATED, 3/8 INCH 086233-01-000 SCREW G67-10-12U (2) NUT D34-06-00B BOOT 77479-02-000 DETAIL CF

LIGHT-TAPE, LED 187693-35-CHT

PANEL ASM-SWITCH, 2 POS,GALLEY 192810-03-CHT

LIGHT-TAPE, LED 187693-14-CHT

TO REFRIGERATOR

TO RANGE TOP

SWITCH-WATER PUMP 108357-21-000 ACTUATOR 108356-23-CHT 2

SWITCH-DRAIN PUMP 108357-09-000 ACTUATOR 108356-27-CHT 2

COAX (RED) ADAPTOR-COAX 82134-01-000 NUT 82136-01-000 LABEL 87236-01-000 2

MODULE-ONE PLACE 000031513 / 316976-01-000 SCREW G67-10-12U (4)

CONTROL-MASTER,DIST 192813-01-CHT

SUBWOOFER 124884-01-000 GRILL 151844-01-CHT SCREW G11-08-12T (4)

2 MOUNTED IN EXTERIOR SERVICE CENTER.

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

DESCRIPTION: WIRING INSTL-BODY, 12V

SHEET: 2 OF 4


ITEM/PART NO: 000180116 / 30029401000

REV


8 7 6 5 4 3 2 1

↑

05-Oct-2016

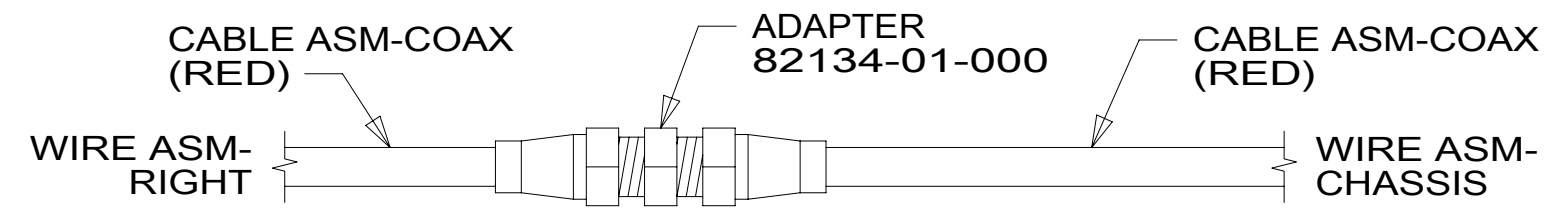


DETAIL CC

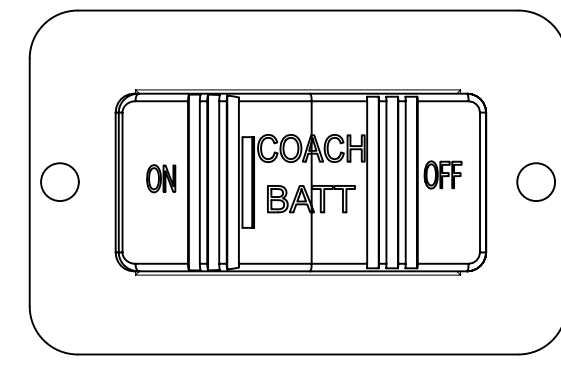


DETAIL CD

- SWITCH-BATTERY,DISC
108357-18-000
- ACTUATOR-SWITCH
108356-19-CHT
- PLATE-SWITCH
144363-02-CHT
- SCREW
G11-06-10U (2)
- WIRE ASM-THERMISTOR
186796-01-000

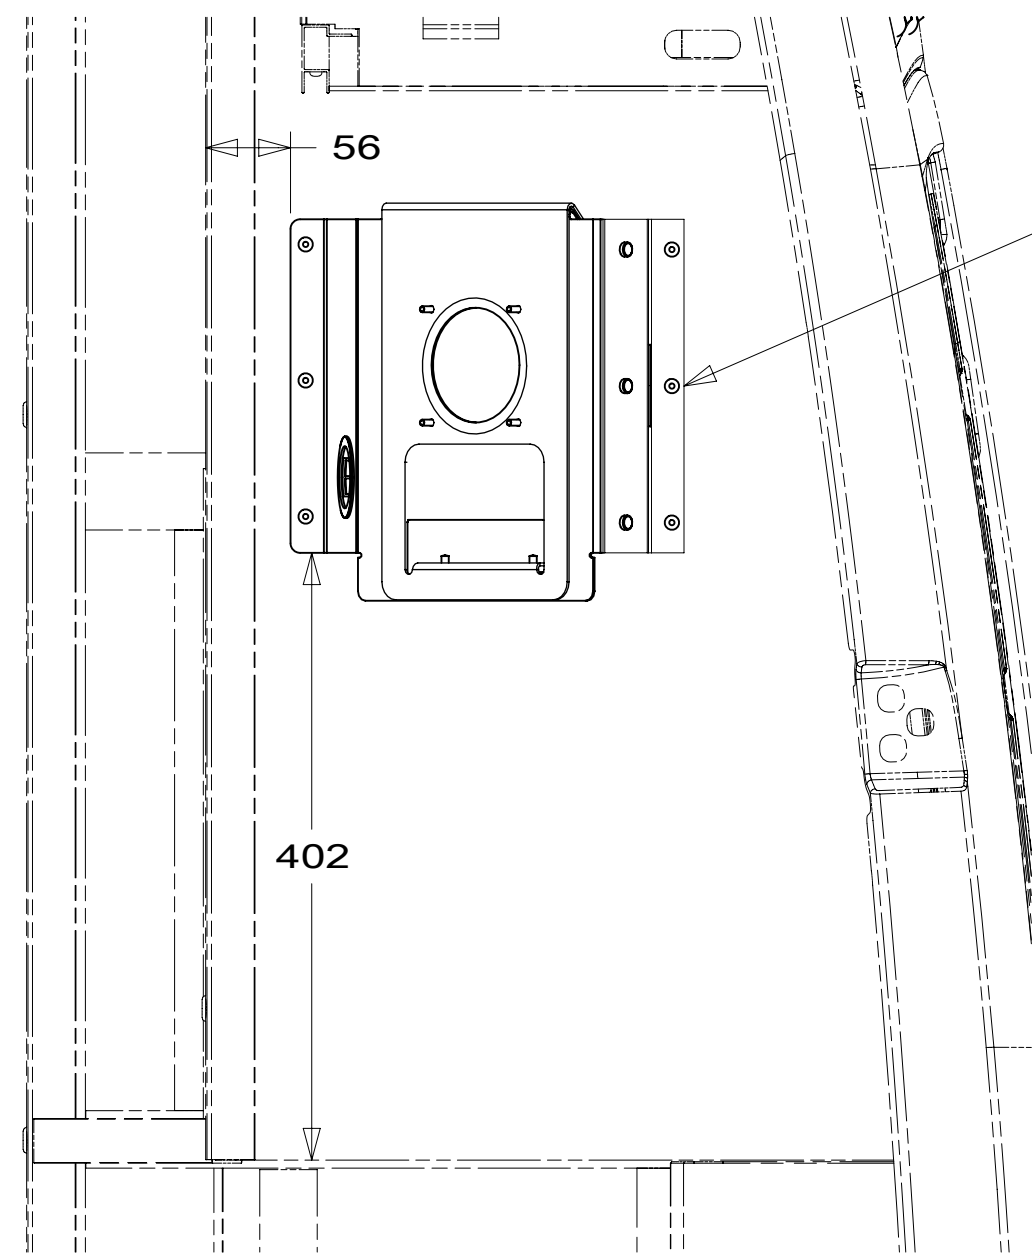


VIEW CA
(TV NOT SHOWN)

- BRACKET-TV
302677-01-CHT
192438-02-CHT
- SCREW
G39-10-08U (5)
G11-10-08U (6)
- GROMMET
114208-05-000 (2)

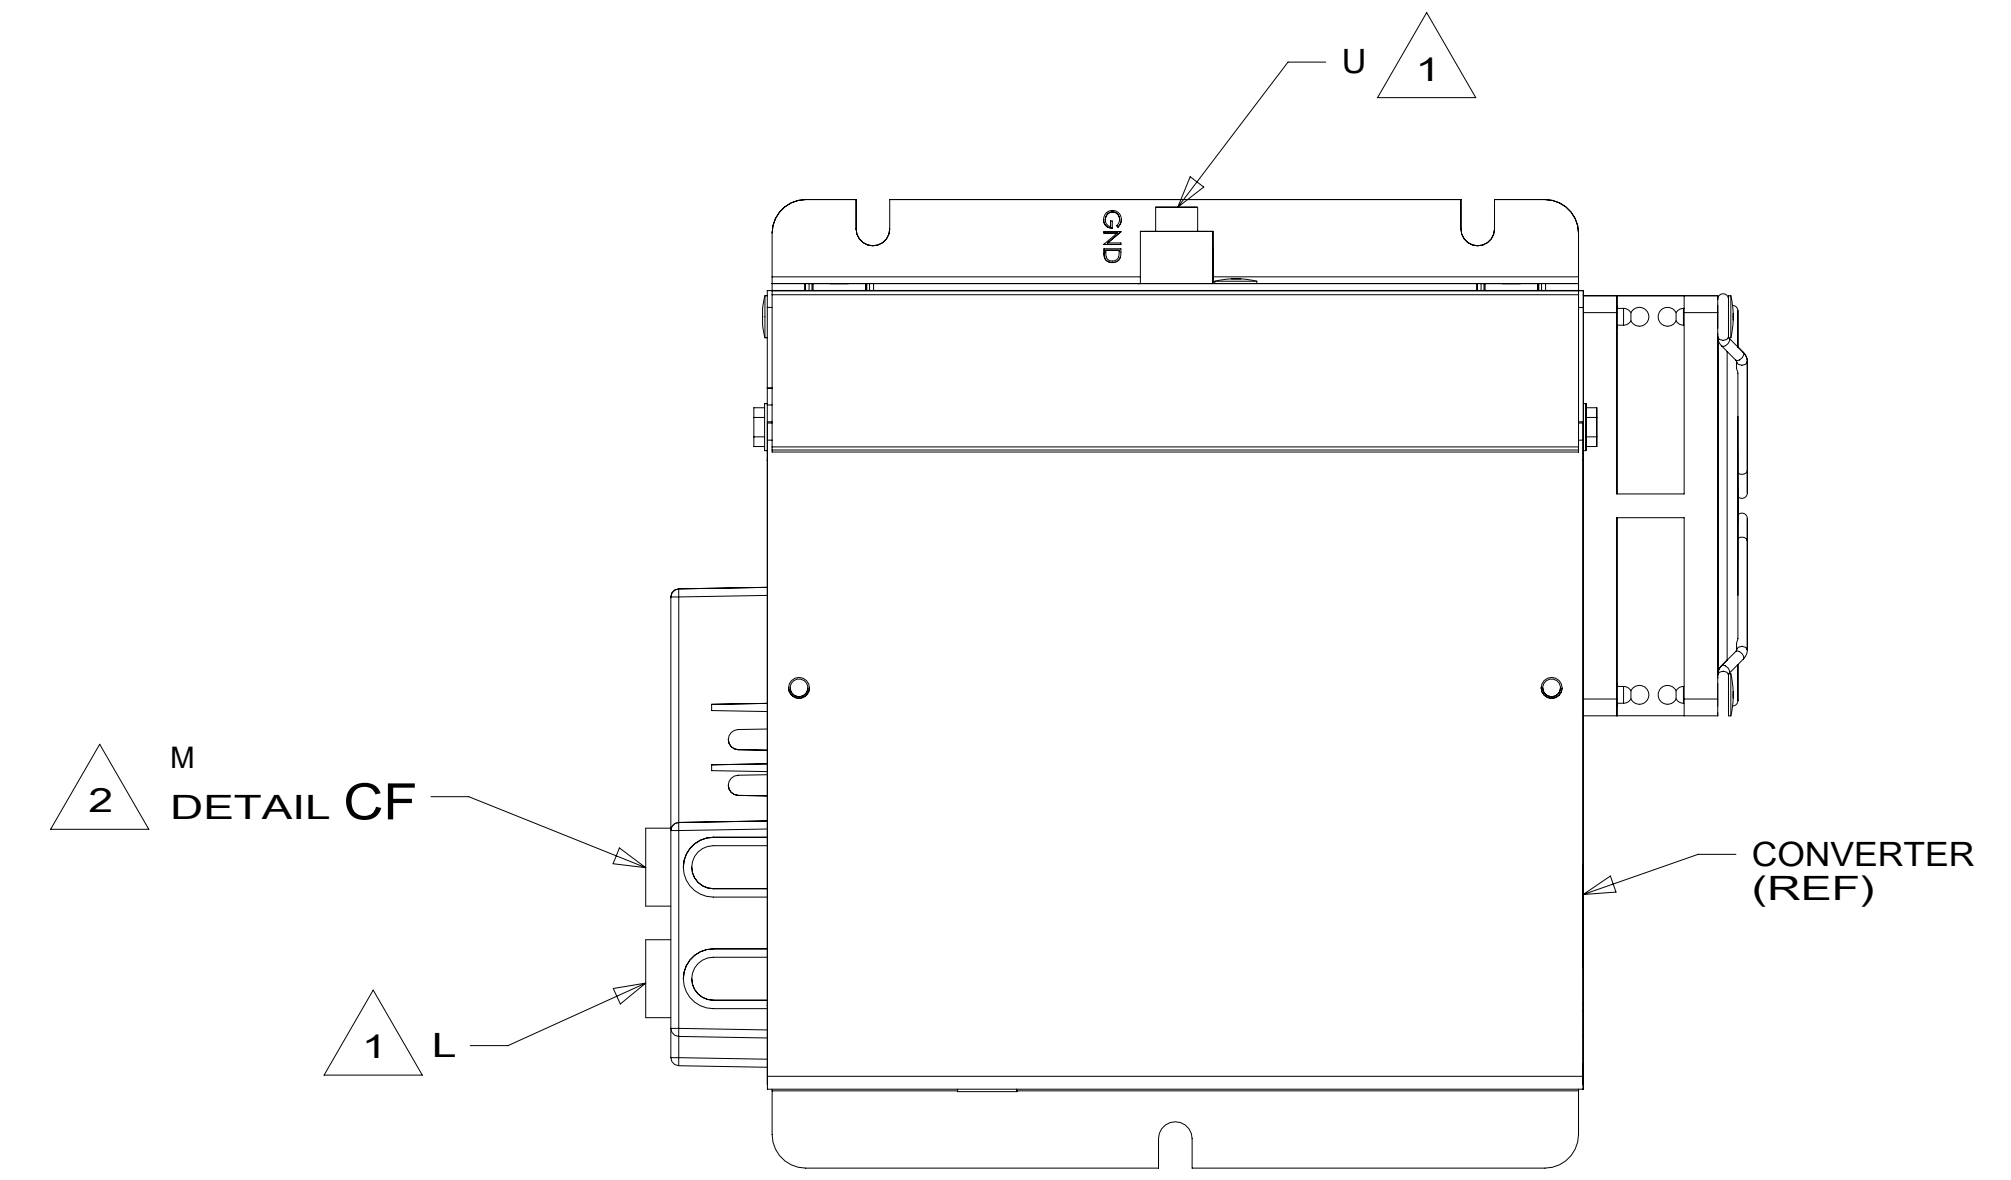


DETAIL CE

CONVERTER
(REF)

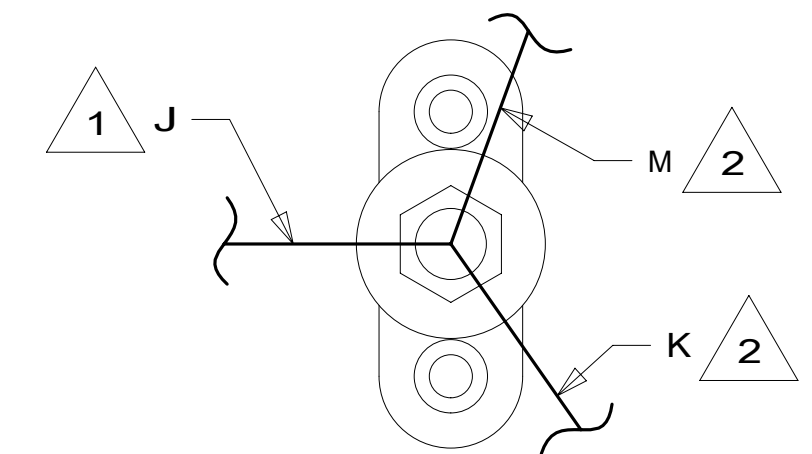

DETAIL CF

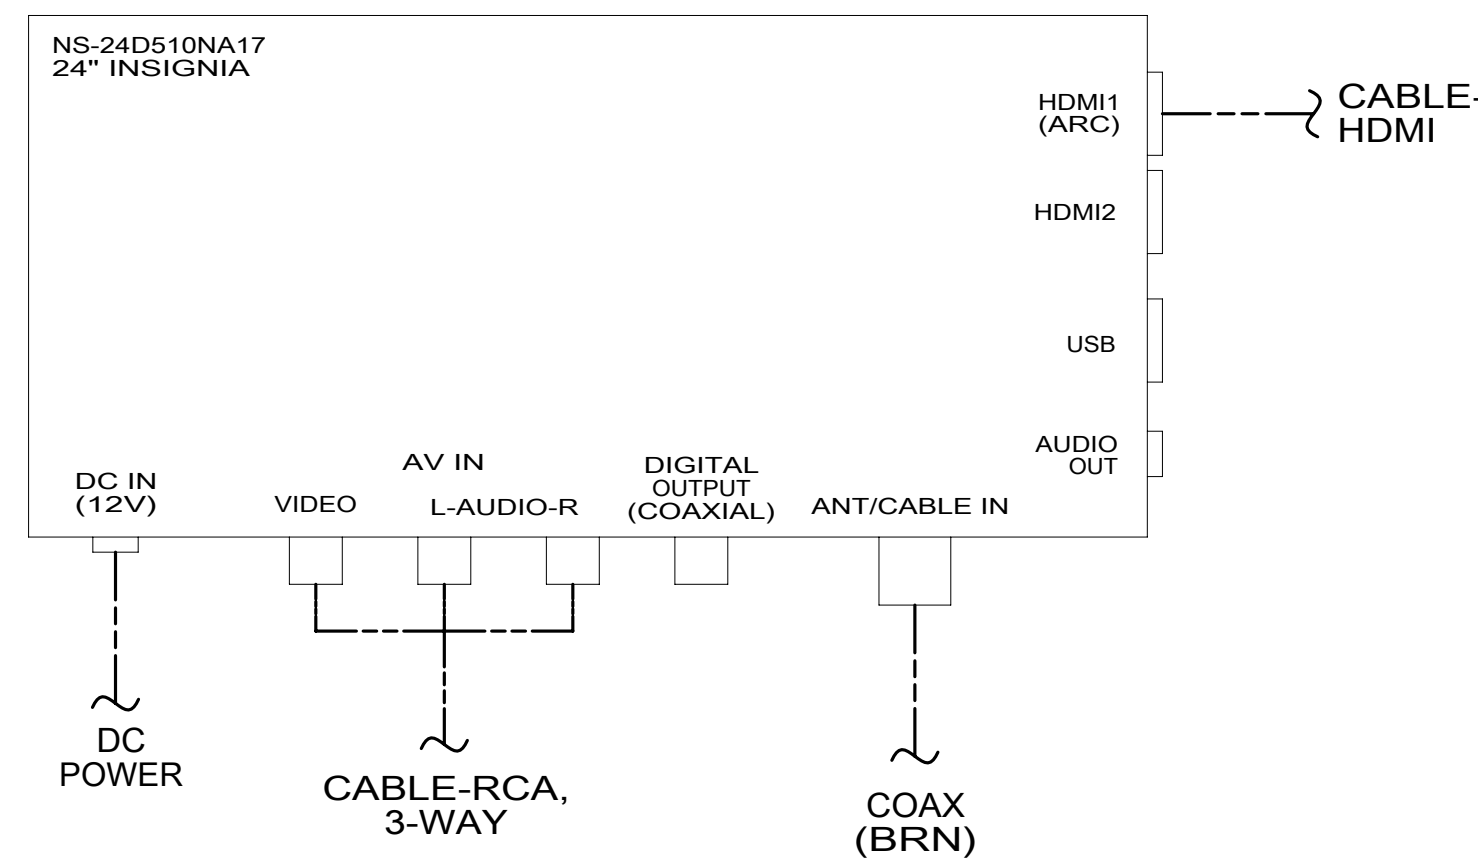

DETAIL CB



- NOTES:
- 2 CIRCUIT FROM WIRE ASM-COACH.
 - 1 CIRCUIT FROM WIRE ASM-CHASSIS

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION:		1B1 265	
WIRING INSTL-BODY, 12V			
SHEET:	ITEM/PART NO.:	REV	
3 OF 4	000180116 / 30029401000		

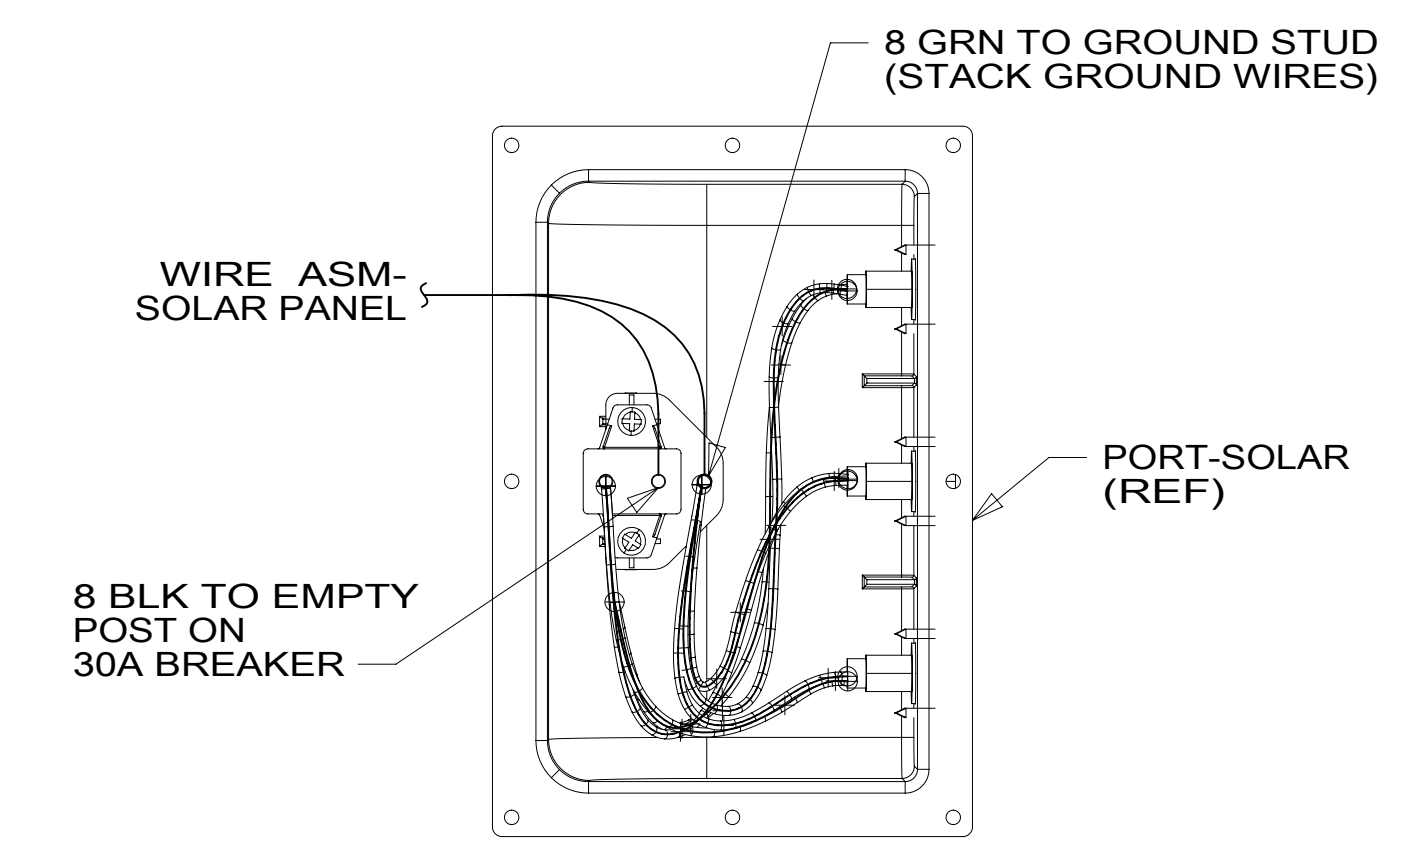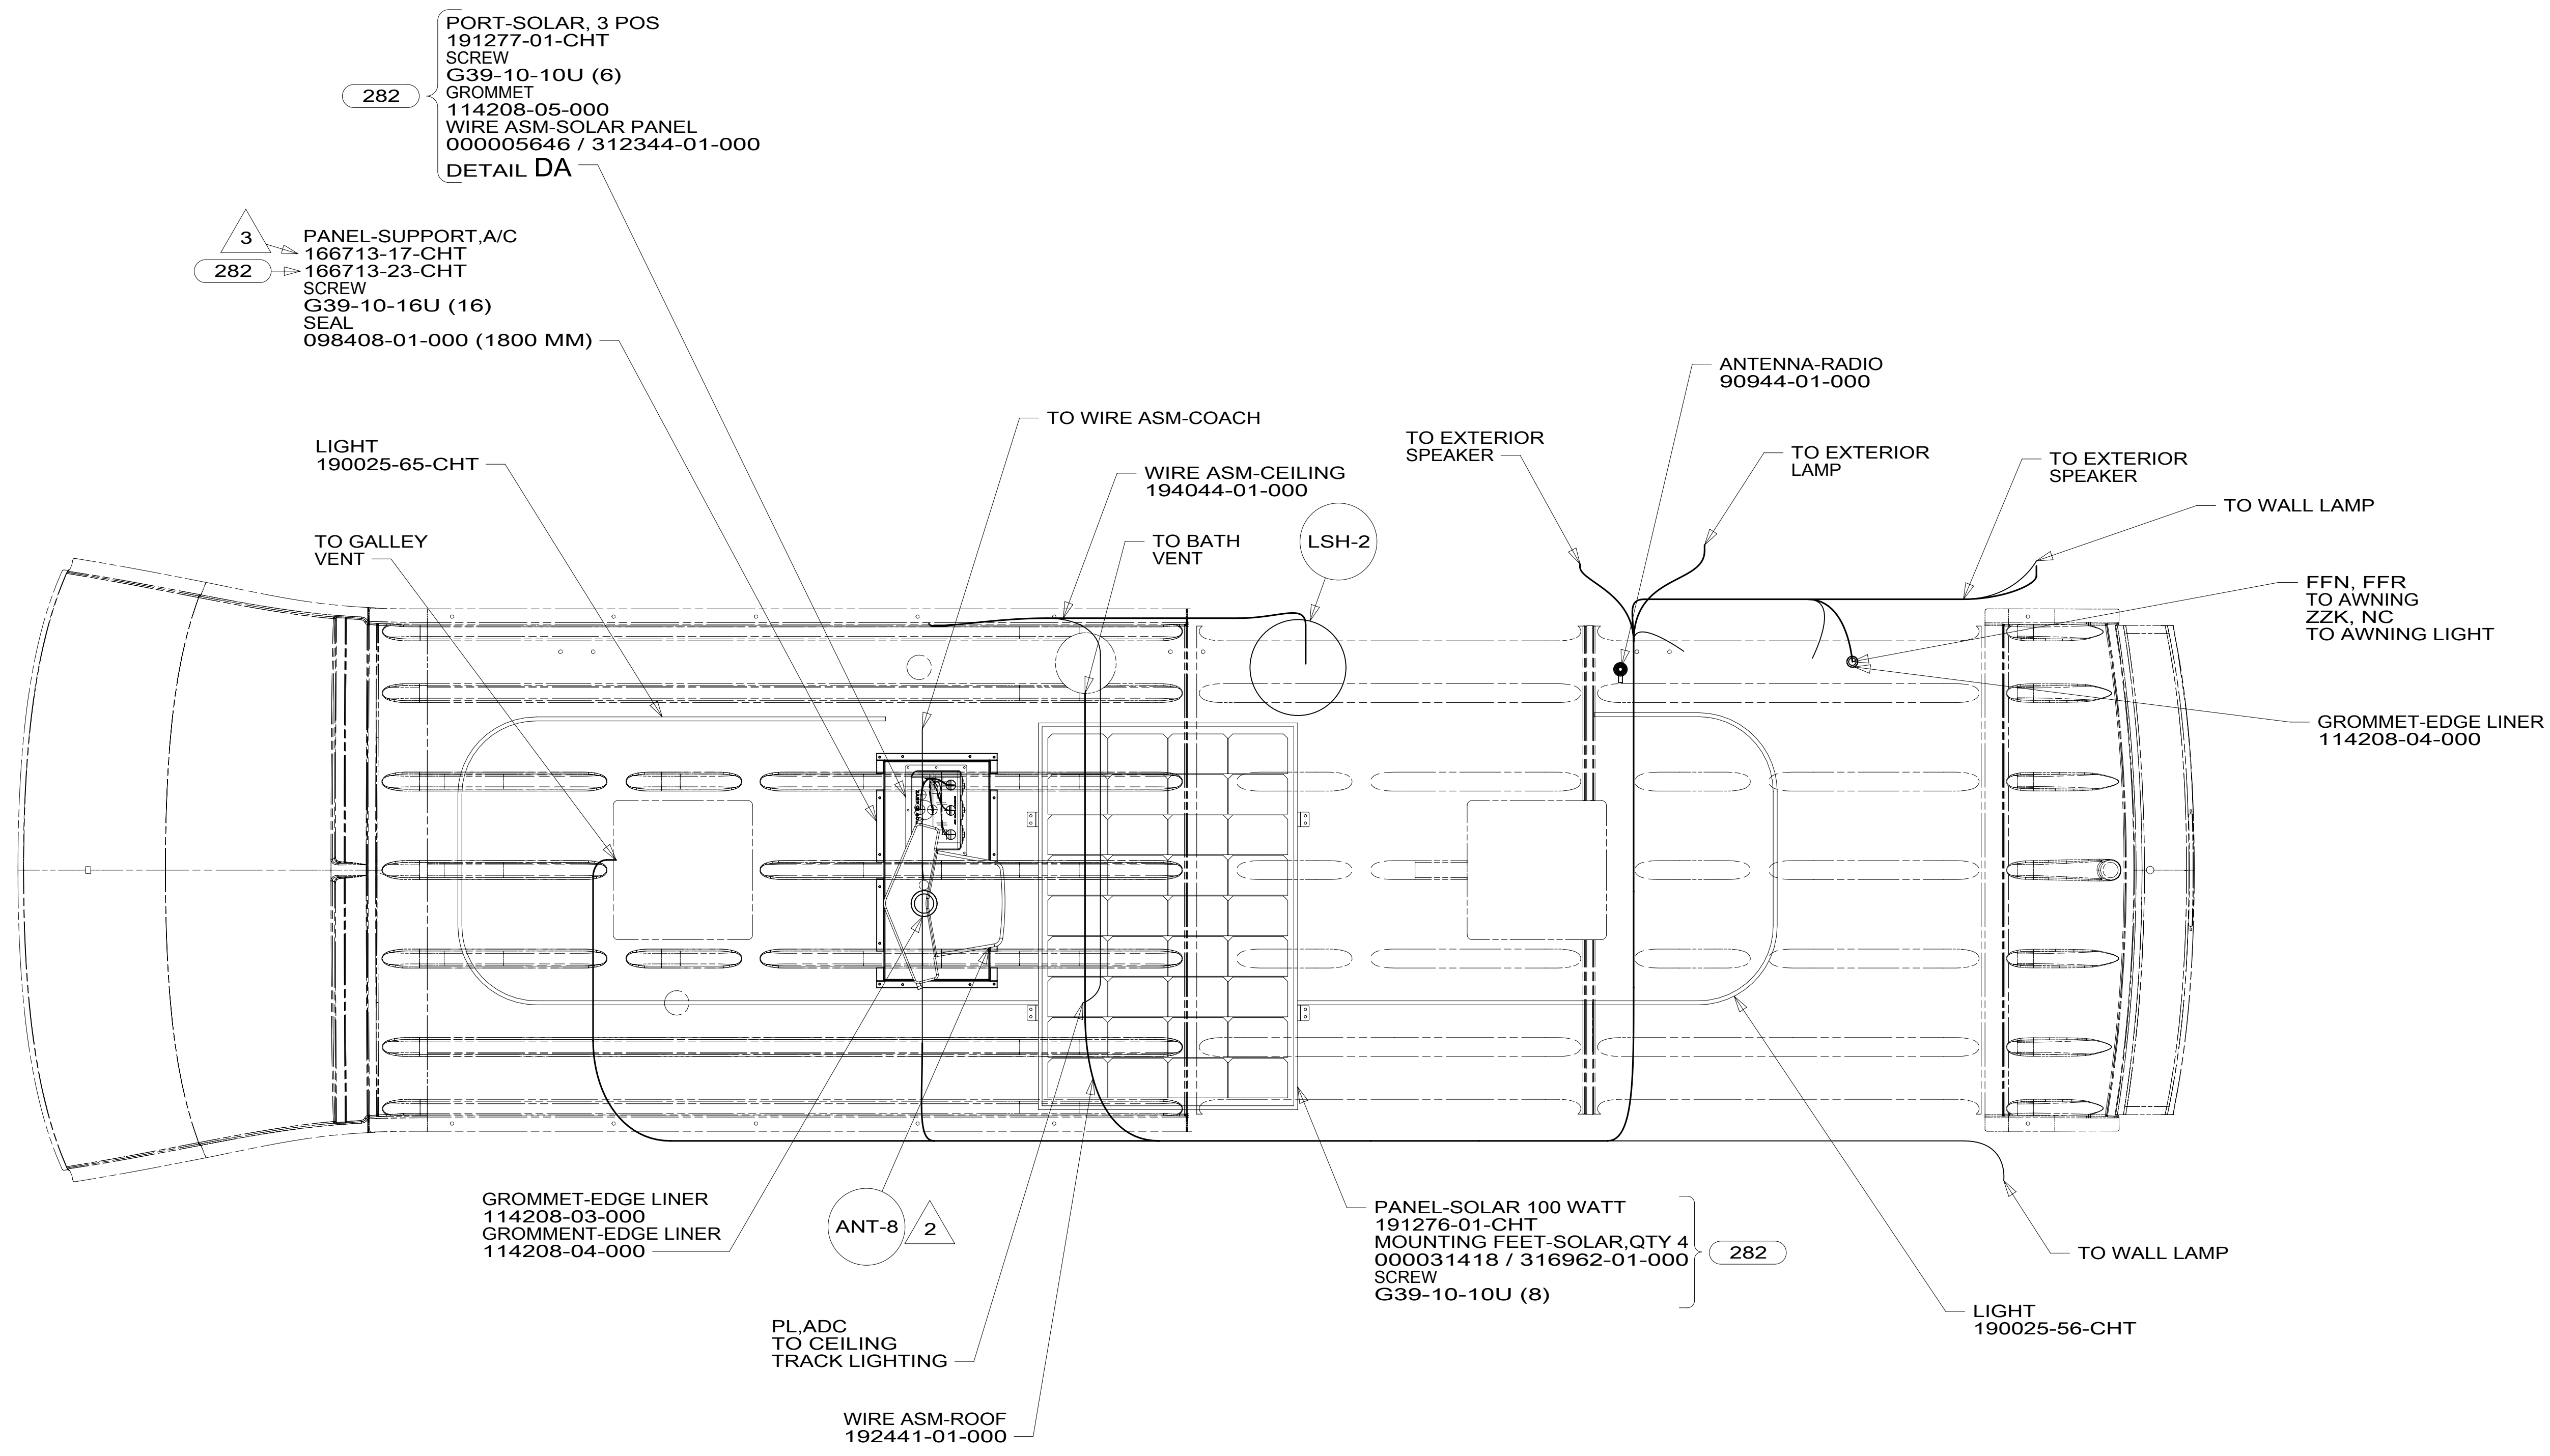

- 3 WITHOUT 282
- 2 MOUNTED ON EXTERIOR SURFACE OF ROOF.

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 282 SOLAR PANEL - 100 WATT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION: WIRING INSTL-BODY, 12V		
SHEET: 4 OF 4	ITEM/PART NO: 000180116 / 30029401000	REV