


- 10 DRILL 12.3 MM HOLE INTO DASH PANEL.
- 9 REMOVE REAR VIEW MIRROR & MOUNT CAMERA TO CENTER OF WINDSHIELD AND 25MMBELOW REAR VIEW MIRROR BUTTON. ROUTE CABLE UP ABOVE HEADLINER THEN LEFT DOWN LEFT A-POST COVER TO CENTER DASH TO CONNECT TO WIRE ASM-CHASSIS.
- 8 NOTCH A-POST COVER WHERE IT MEETS THE DASH TO ALLOW DISPLAY CABLE THROUGH. MOUNT DISPLAY TO A-POST COVER AND ADJUST FOR DRIVER'S VIEWING. ROUTE DISPLAY CABLE TO CENTER DASH AND CONNECT TO CAMERA HARNESS.
- 7 REMOVE PLASTIC TRAY AND DISCARD.
- 6 SEE SHT 5 AND SHT 6 FOR ADDITIONAL INFORMATION.
- 5 REMOVE PAINT AND UNDER COATING FROM GROUND BOLT AND NUT TO INSURE PROPER CONTACT.
- 4 SEE WIRING INSTL-BODY, 12V FOR ADDITIONAL INFORMATION.
- 3 CUT WIRE TIE AROUND SPRINTER SEAL, ROUTE THE CHASSIS WIRING THROUGH HOLE AND WIRE TIE SEAL WITH WIRE TIE 8343-04-000.
- 2 SEE BATTERY INSTL. FOR ADDITIONAL INFORMATION.

1. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

NOTES:

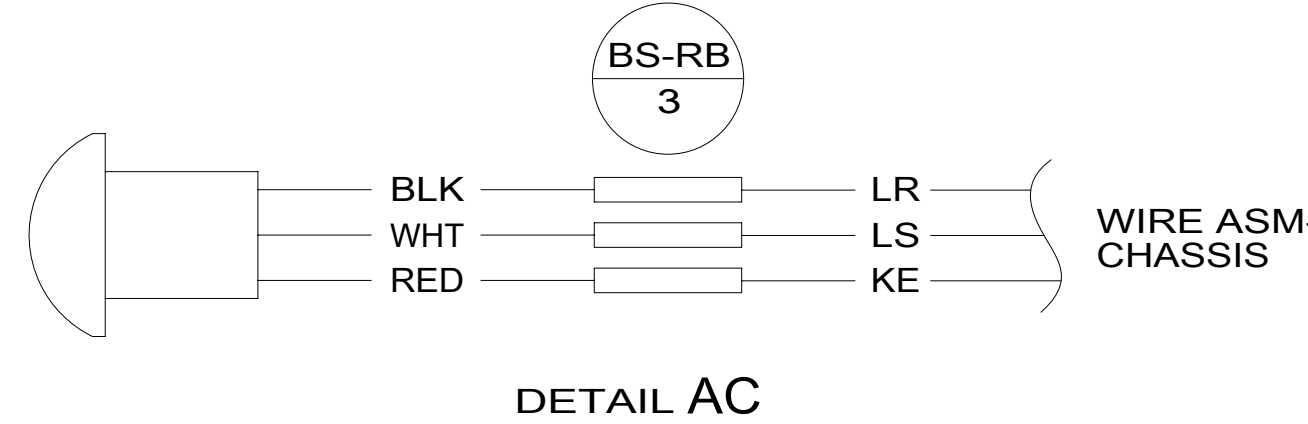

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 36C COLLISION AVOIDANCE SYSTEM
- 1MW MERCD-11030# DSL,D DOOR VAN
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265 1MW


WINNEBAGO
COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.

DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS	
DFFR:	MATERIAL:	
UNSPECIFIED TOLERANCES:		
WHOLE DIM (X)	3	
ONE-PLACE (X.X)	1.5	
TWO-PLACE (X.XX)	0.50	
ANGLE	1°	
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS)	FIRST USED:
		16 170C
DESCRIPTION: WIRING INSTL-CHASSIS		
SHEET: 1 OF 6	ITEM/PART NO: 000180121 / 30029901000	REV:
REF:		1 07-Oct-2016

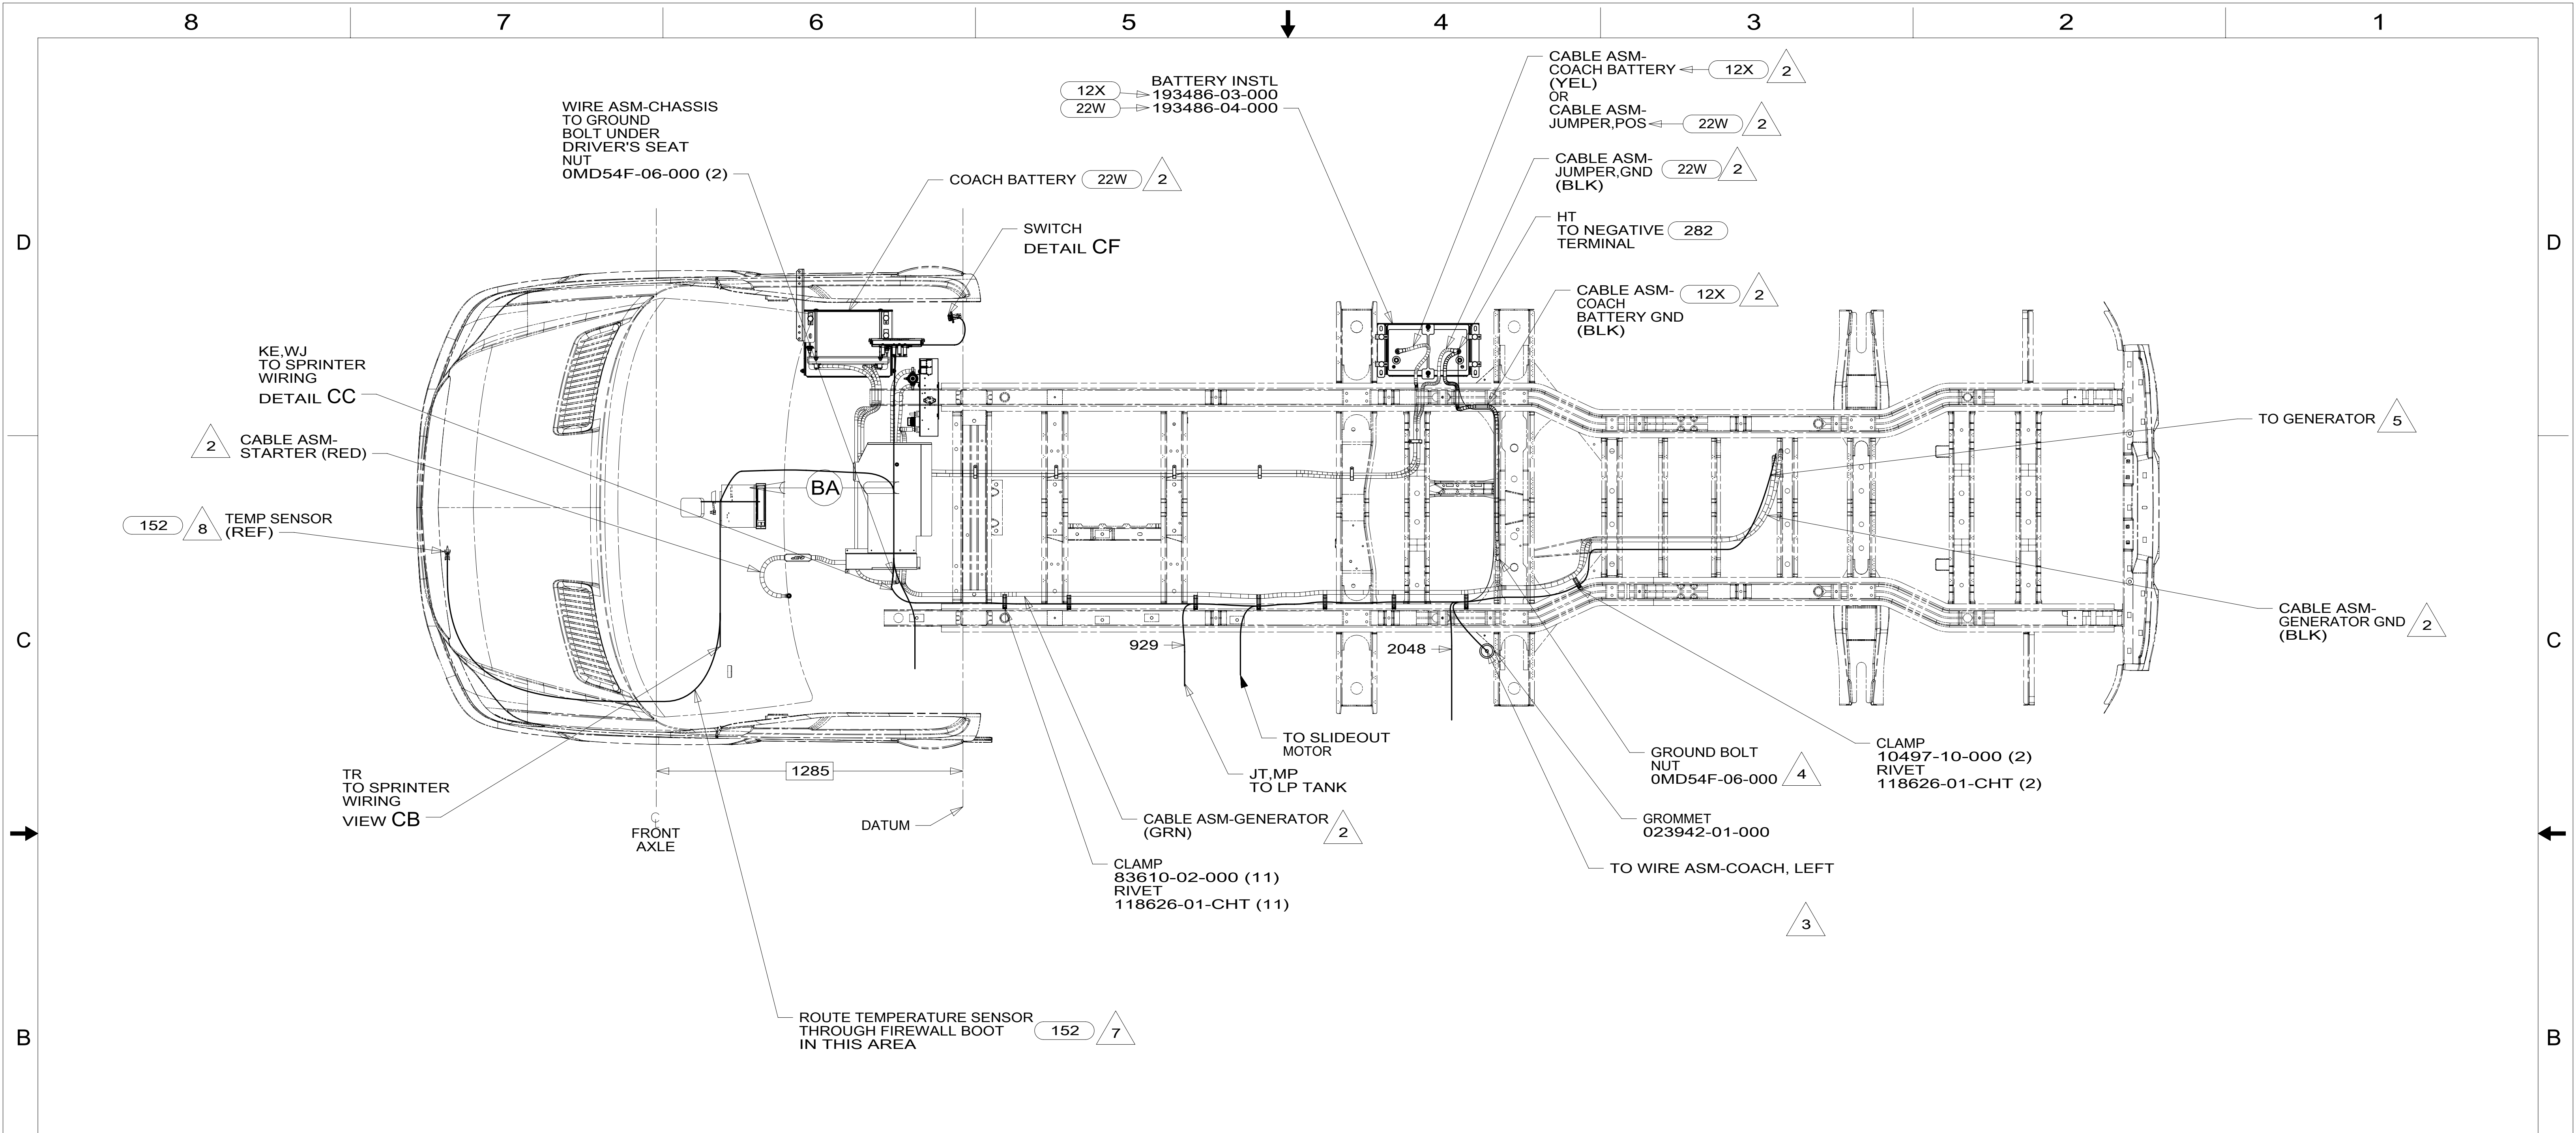

- 9 FOR CUTOUT DIMENSIONS SEE DETAIL CA AND DETAIL CB
- 8 DRILL 16MM HOLE THROUGH BUMPER COVER BEHIND LICENSE PLATE BRACKET AND INSTALL SENSOR.
- 7 SEE SHEET 4 FOR ADDITIONAL INFORMATION.
- 6 CUT BROWN/BLACK WIRE FROM PARK BRAKE SWITCH AND RECONNECT TO CIRCUIT DY OF WIRE ASM-CHASSIS AS SHOWN.
- 5 SEE GENERATOR INSTL FOR ADDITIONAL INFORMATION.
- 4 REMOVE PAINT AND UNDER COATING FROM GROUND BOLT AND NUT TO INSURE PROPER CONTACT.
- 3 SEE WIRING INSTL-BODY, 12V FOR ADDITIONAL INFORMATION.
- 2 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.

1. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

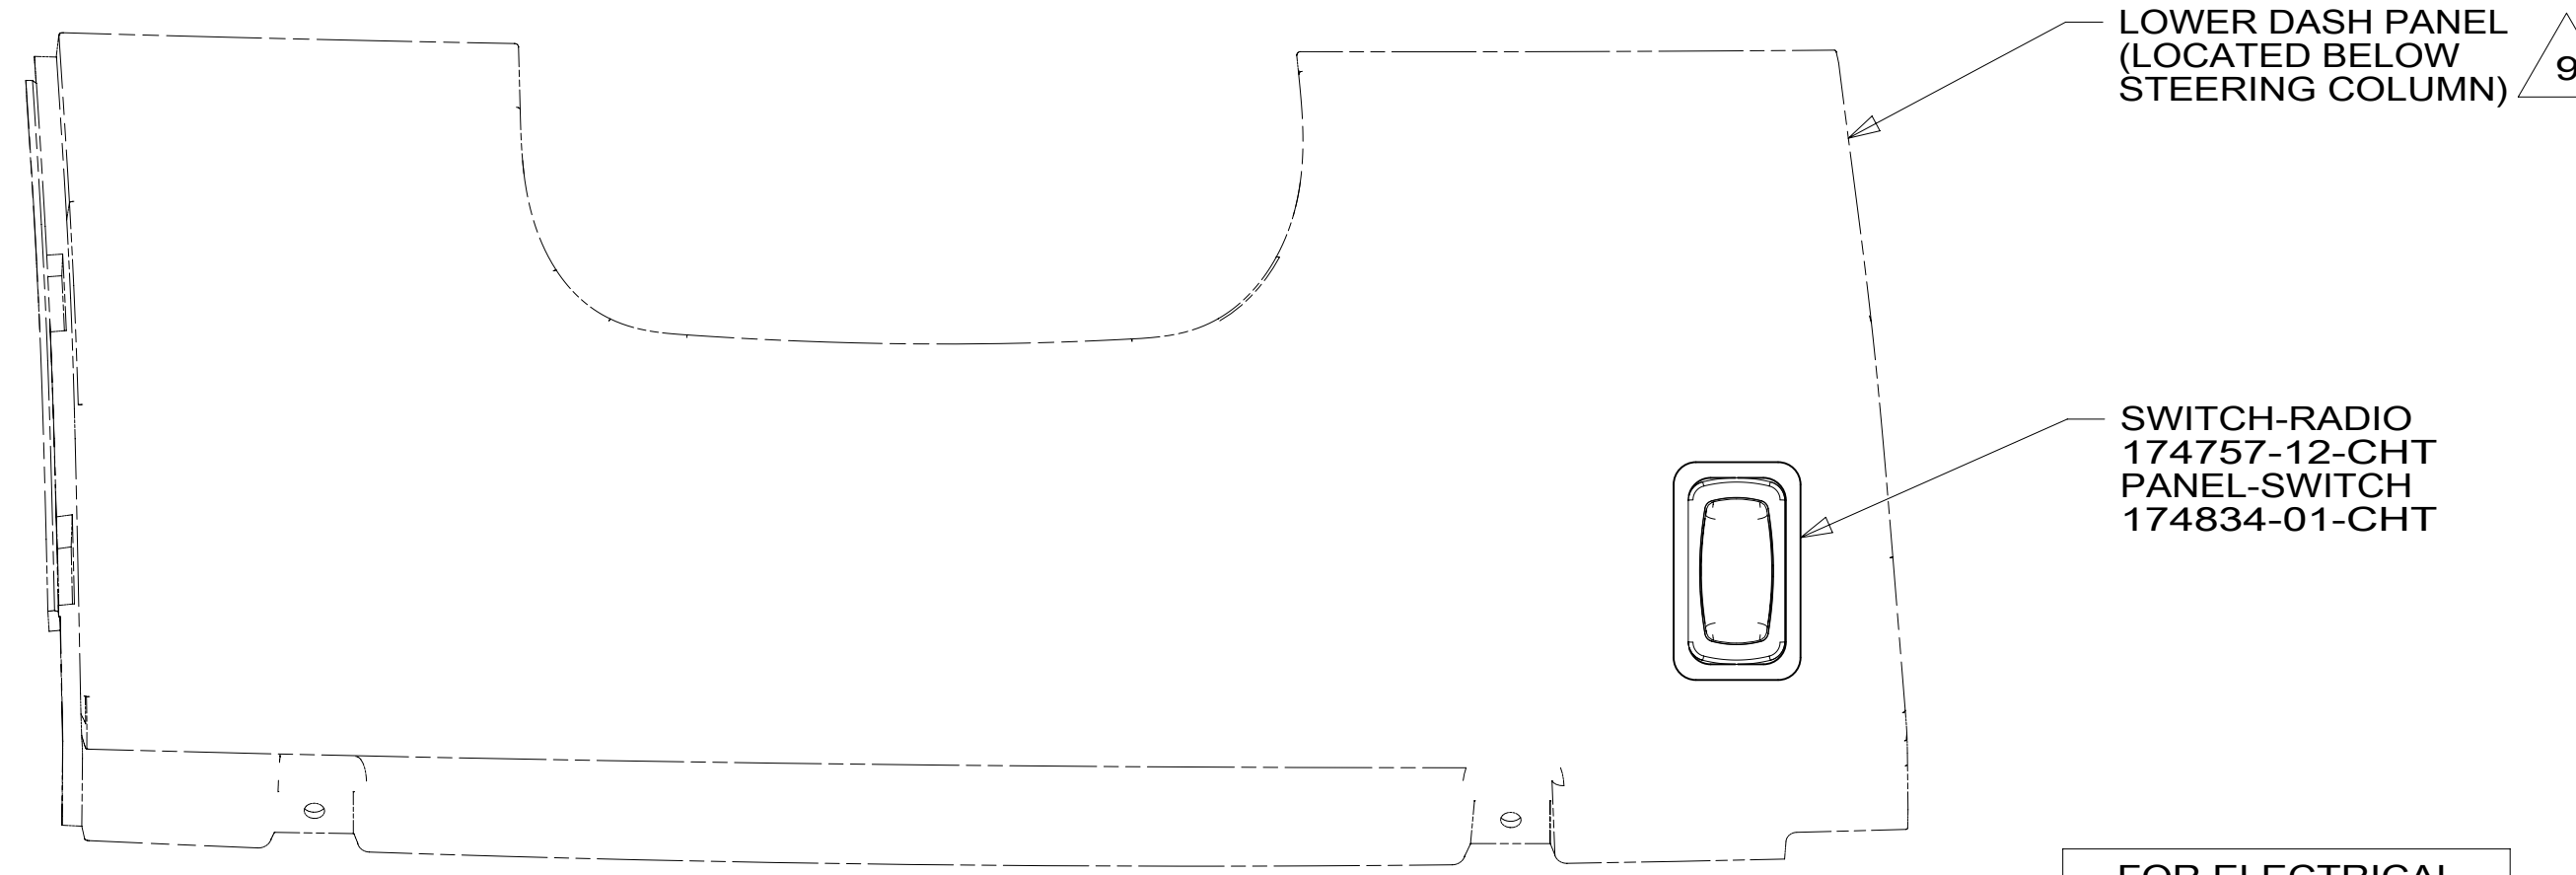









DETAIL BA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 282 SOLAR PANEL - 100 WATT
- 152 LG SCREEN-INFOTAIN CTR/GPS
- 22W BATTERY-SECOND
- 12X BATTERY-ONE
- 1MW MERCD-11030# DSL, D DOOR VAN
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION: WIRING INSTL-CHASSIS		
SHEET: 2 OF 6	ITEM/PART NO: 000180121 / 30029901000	REV

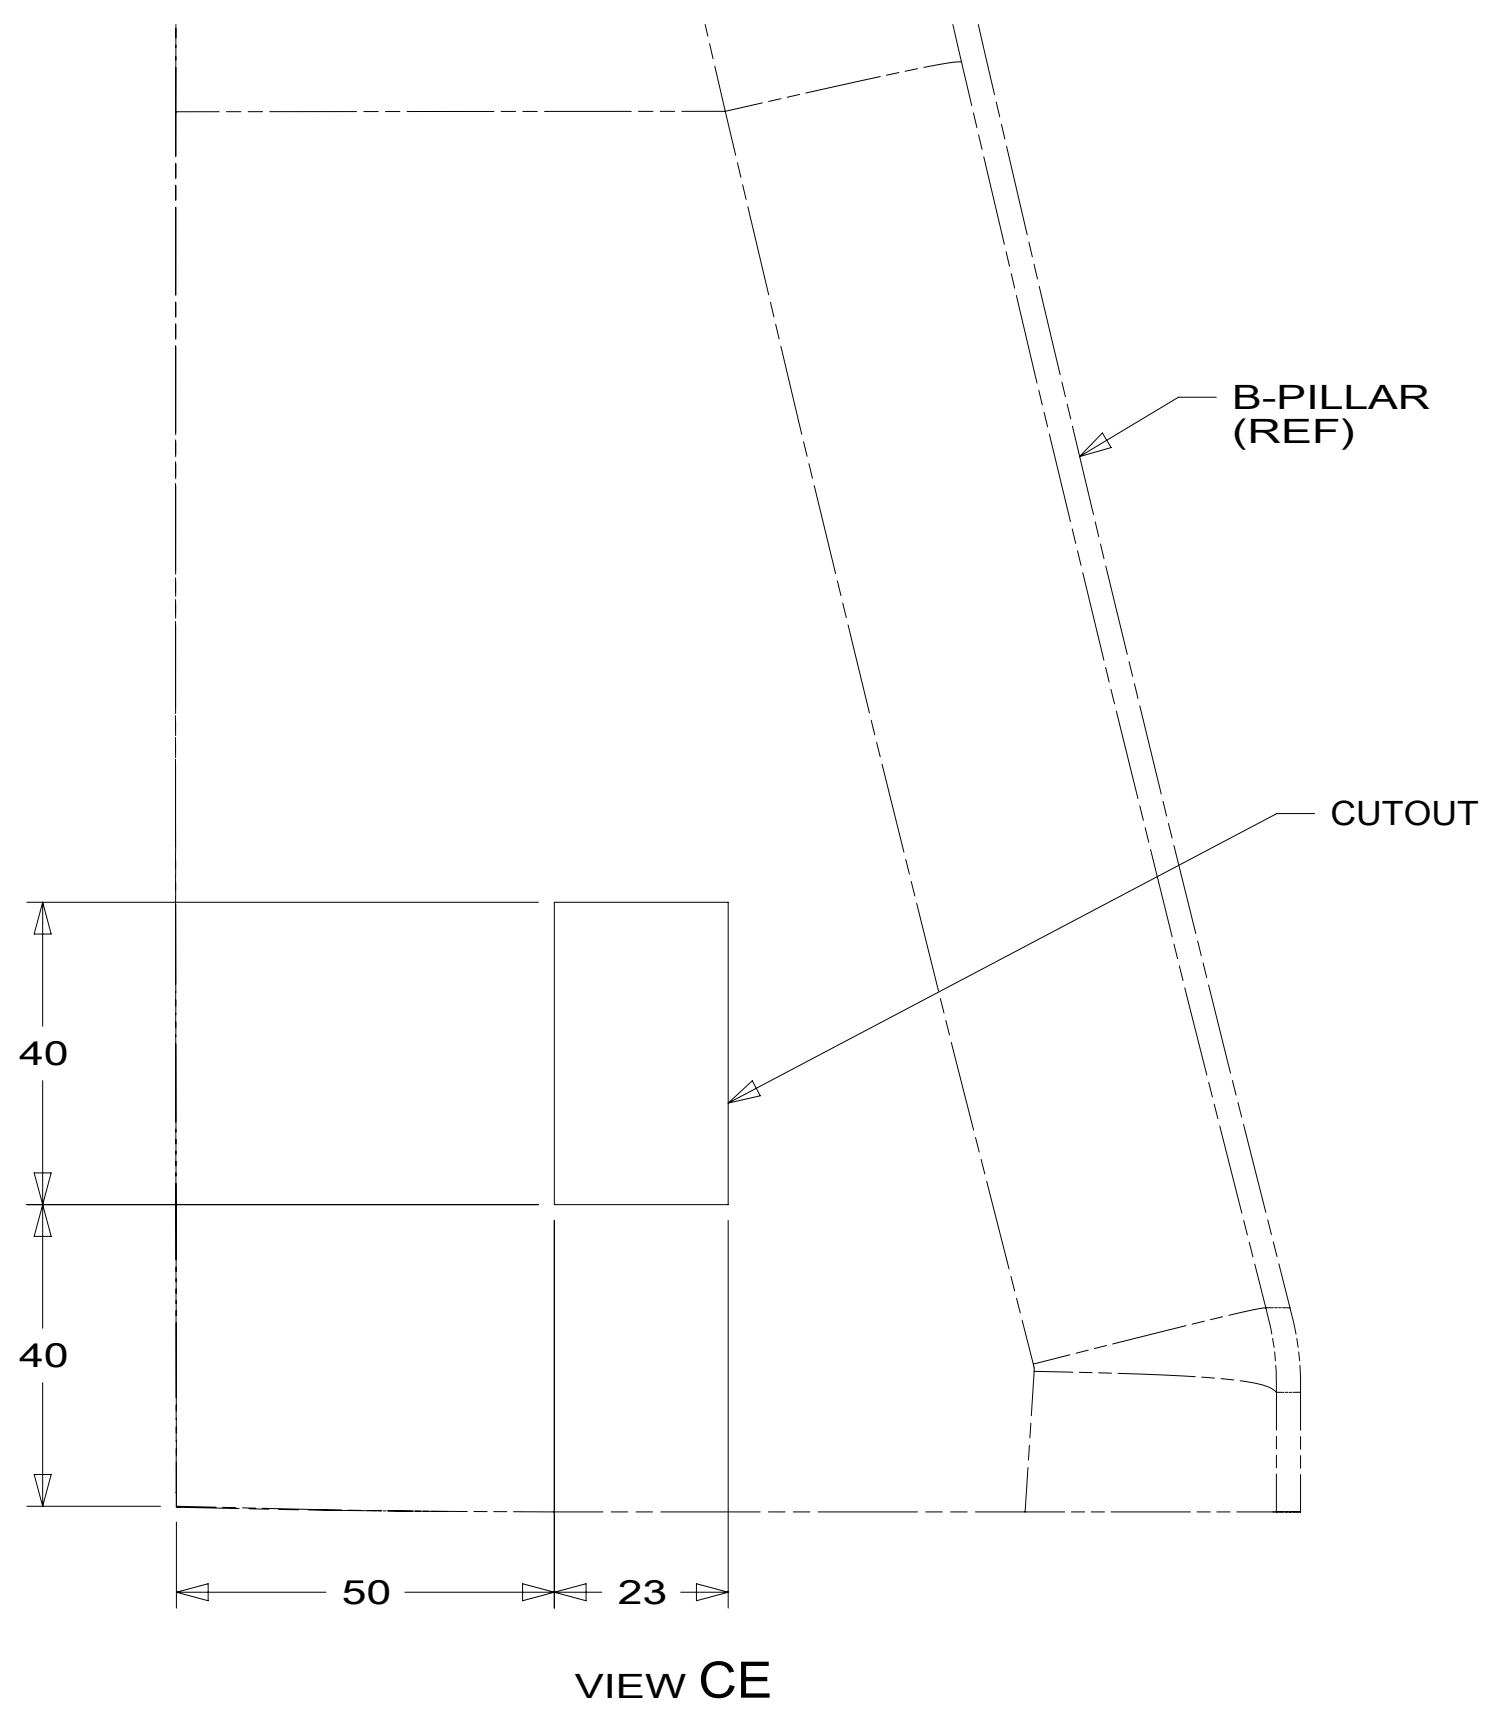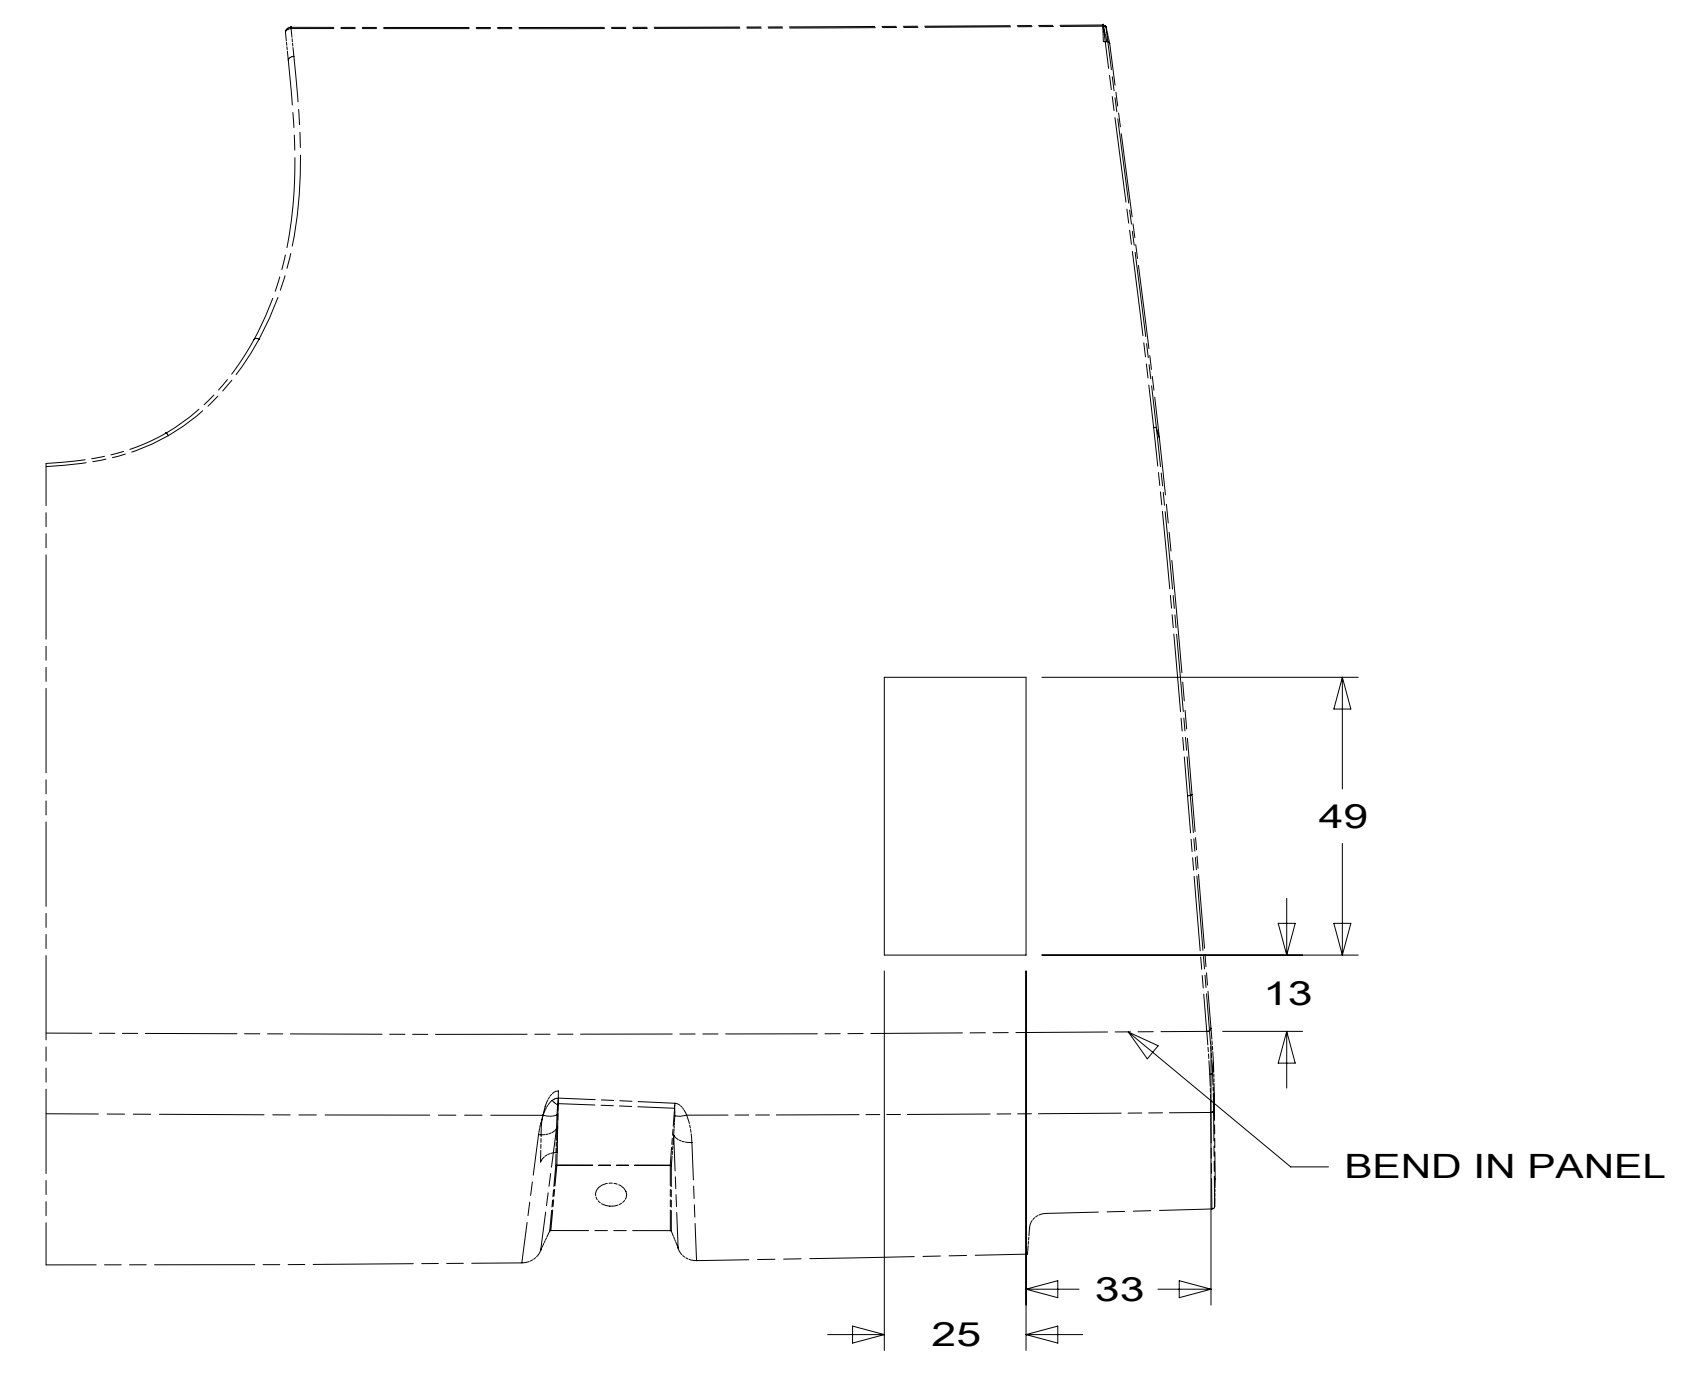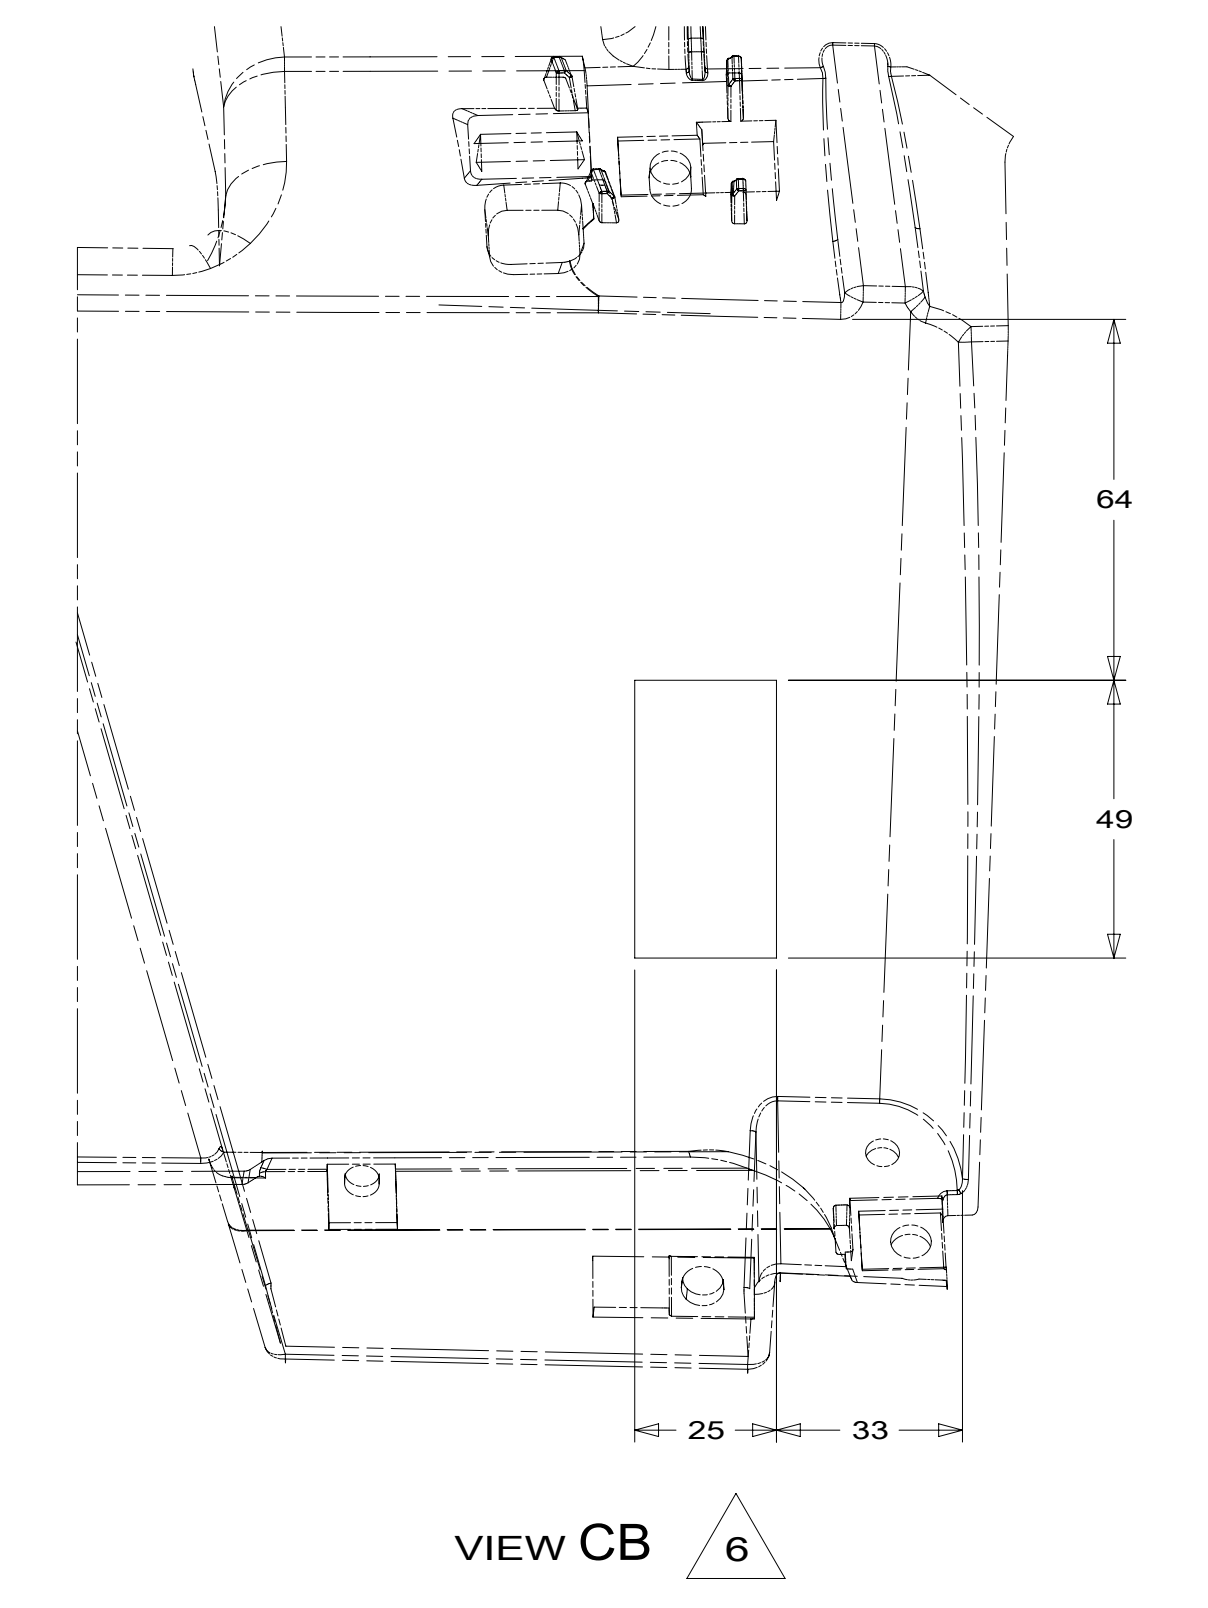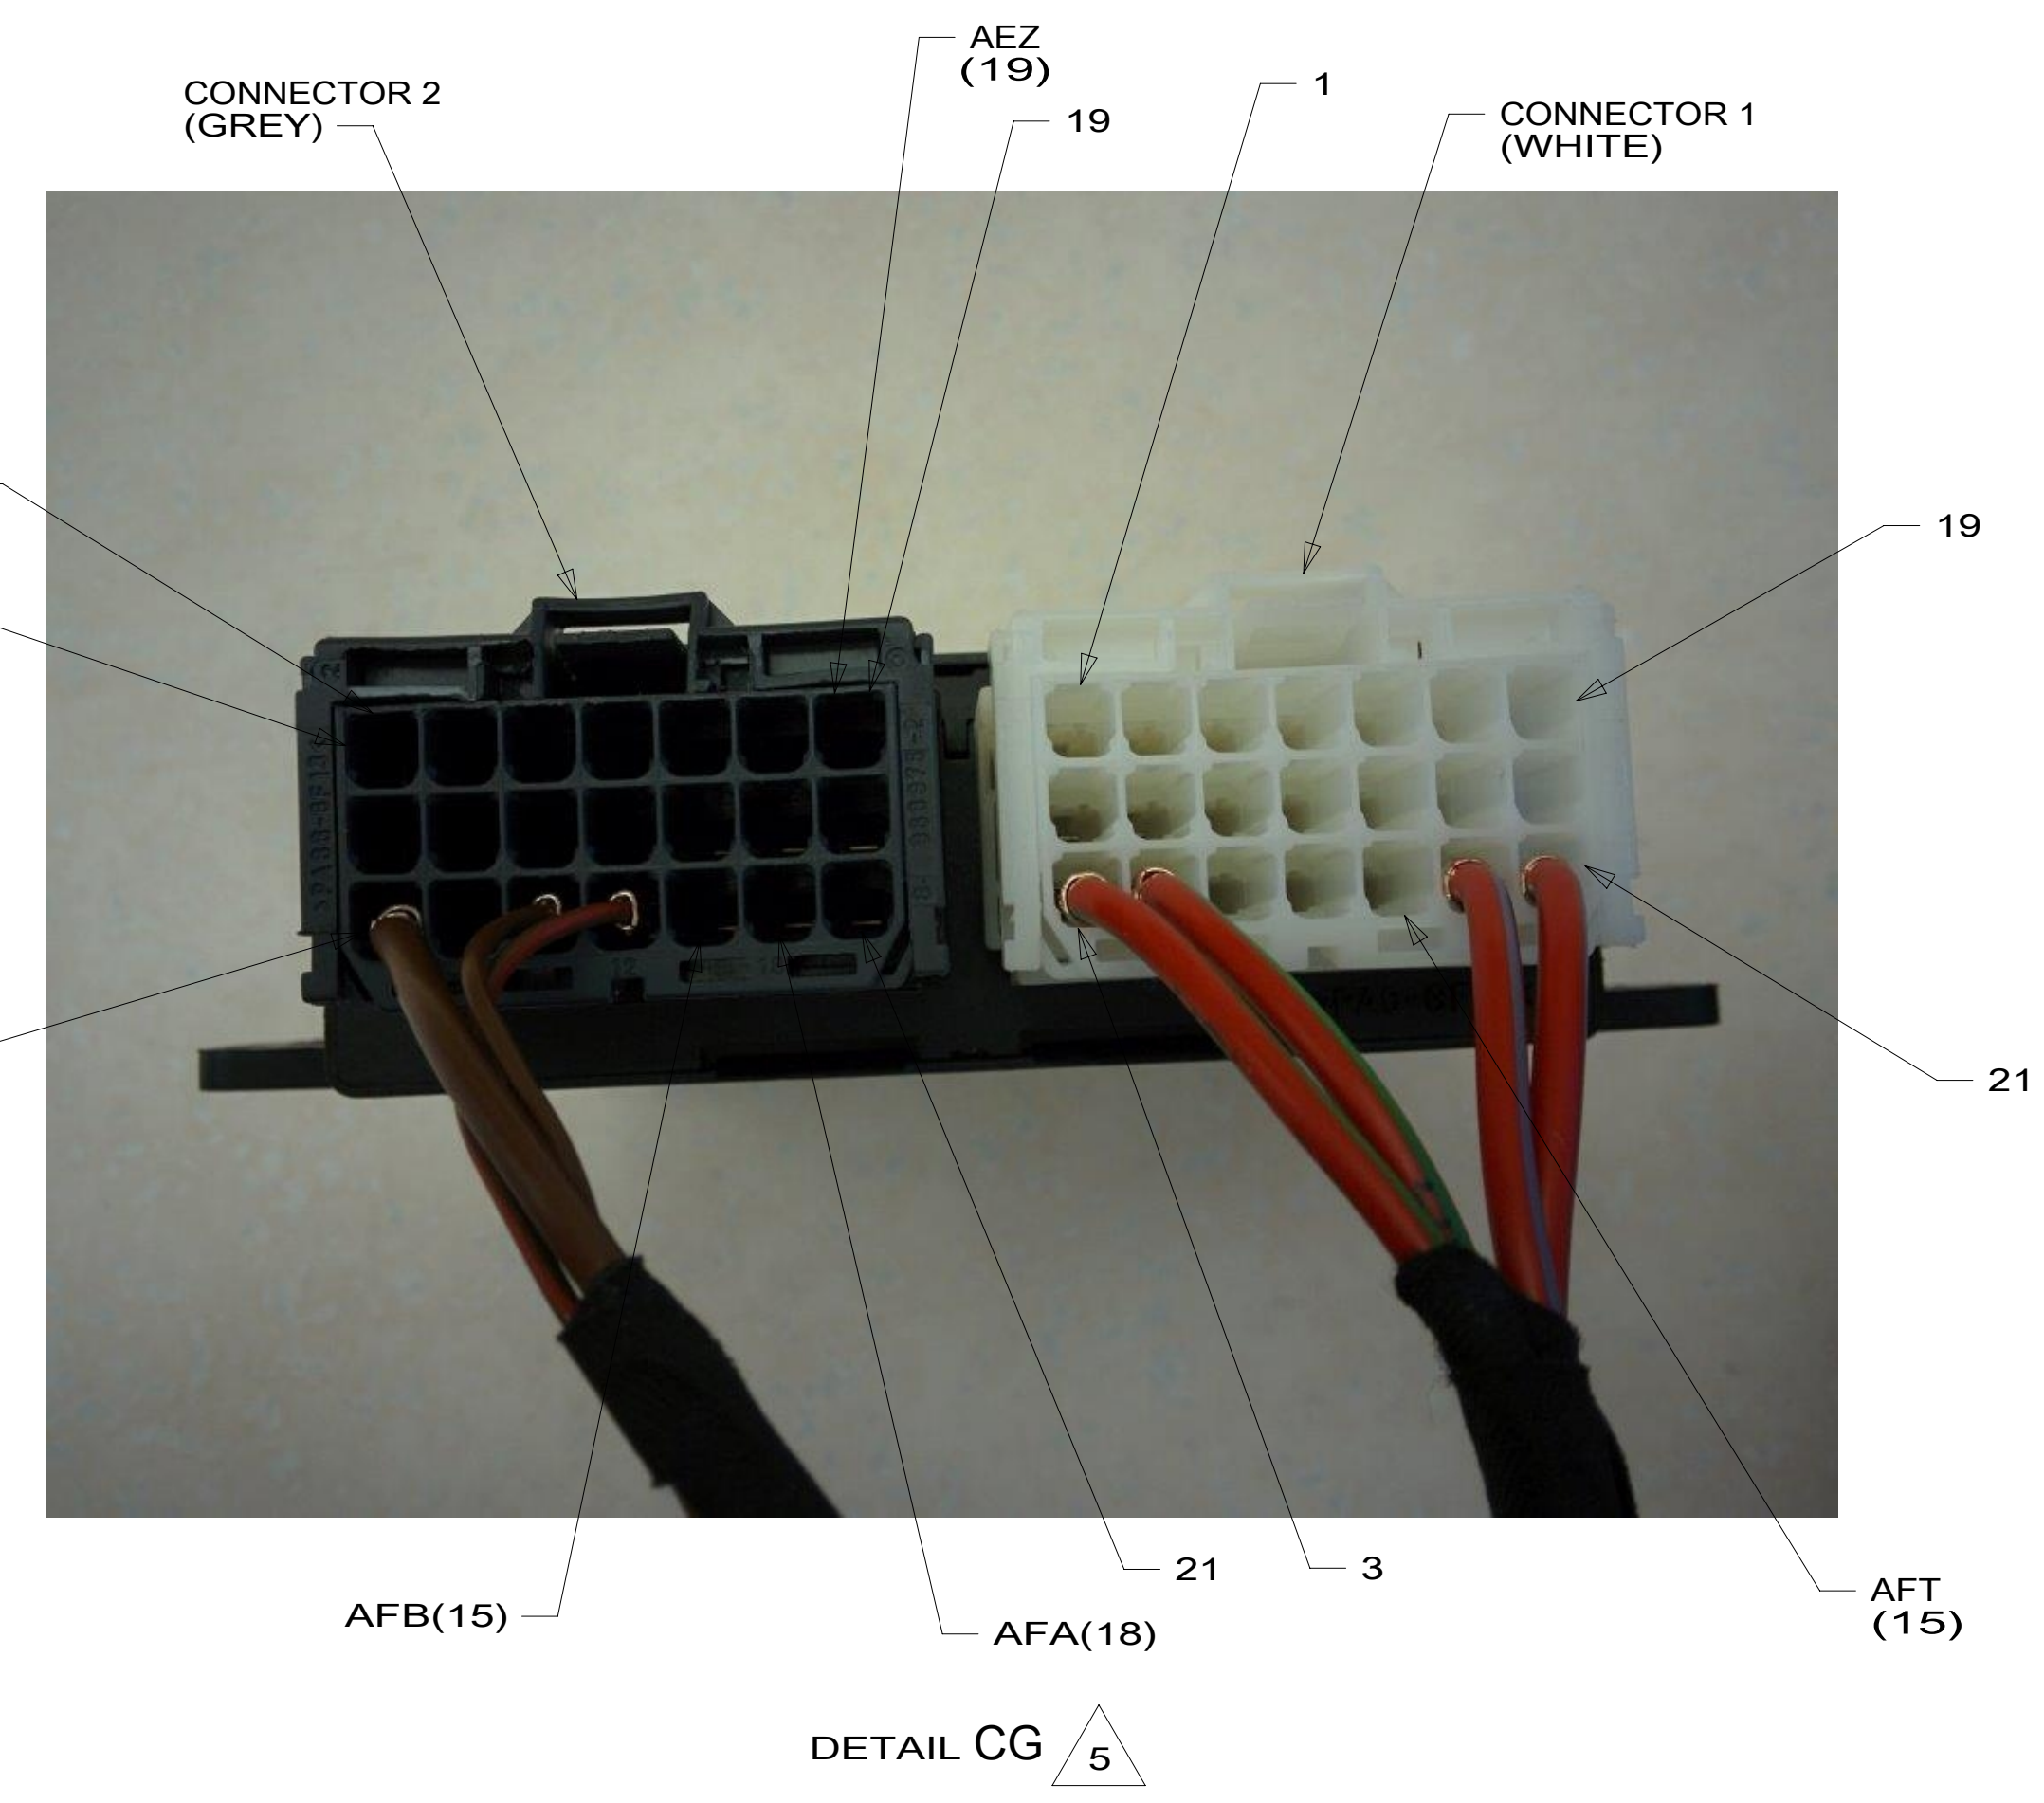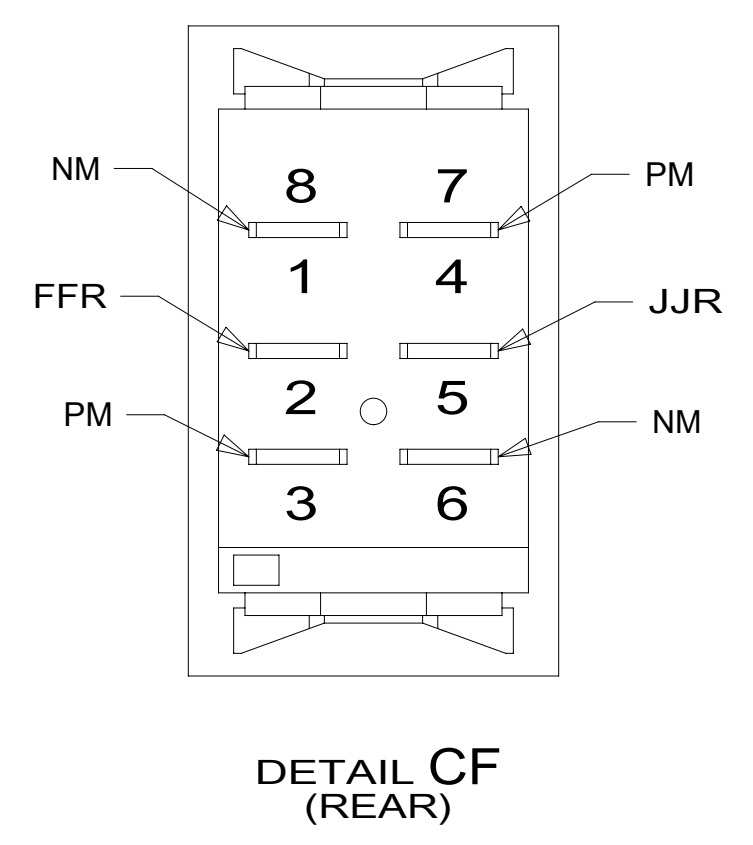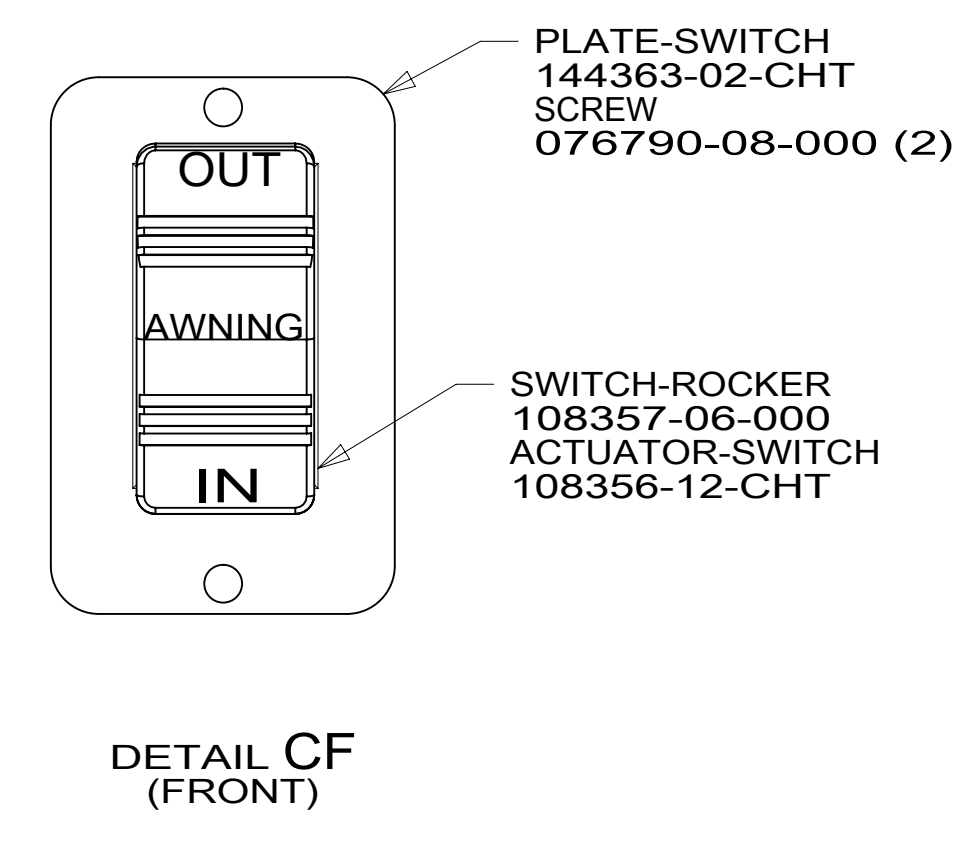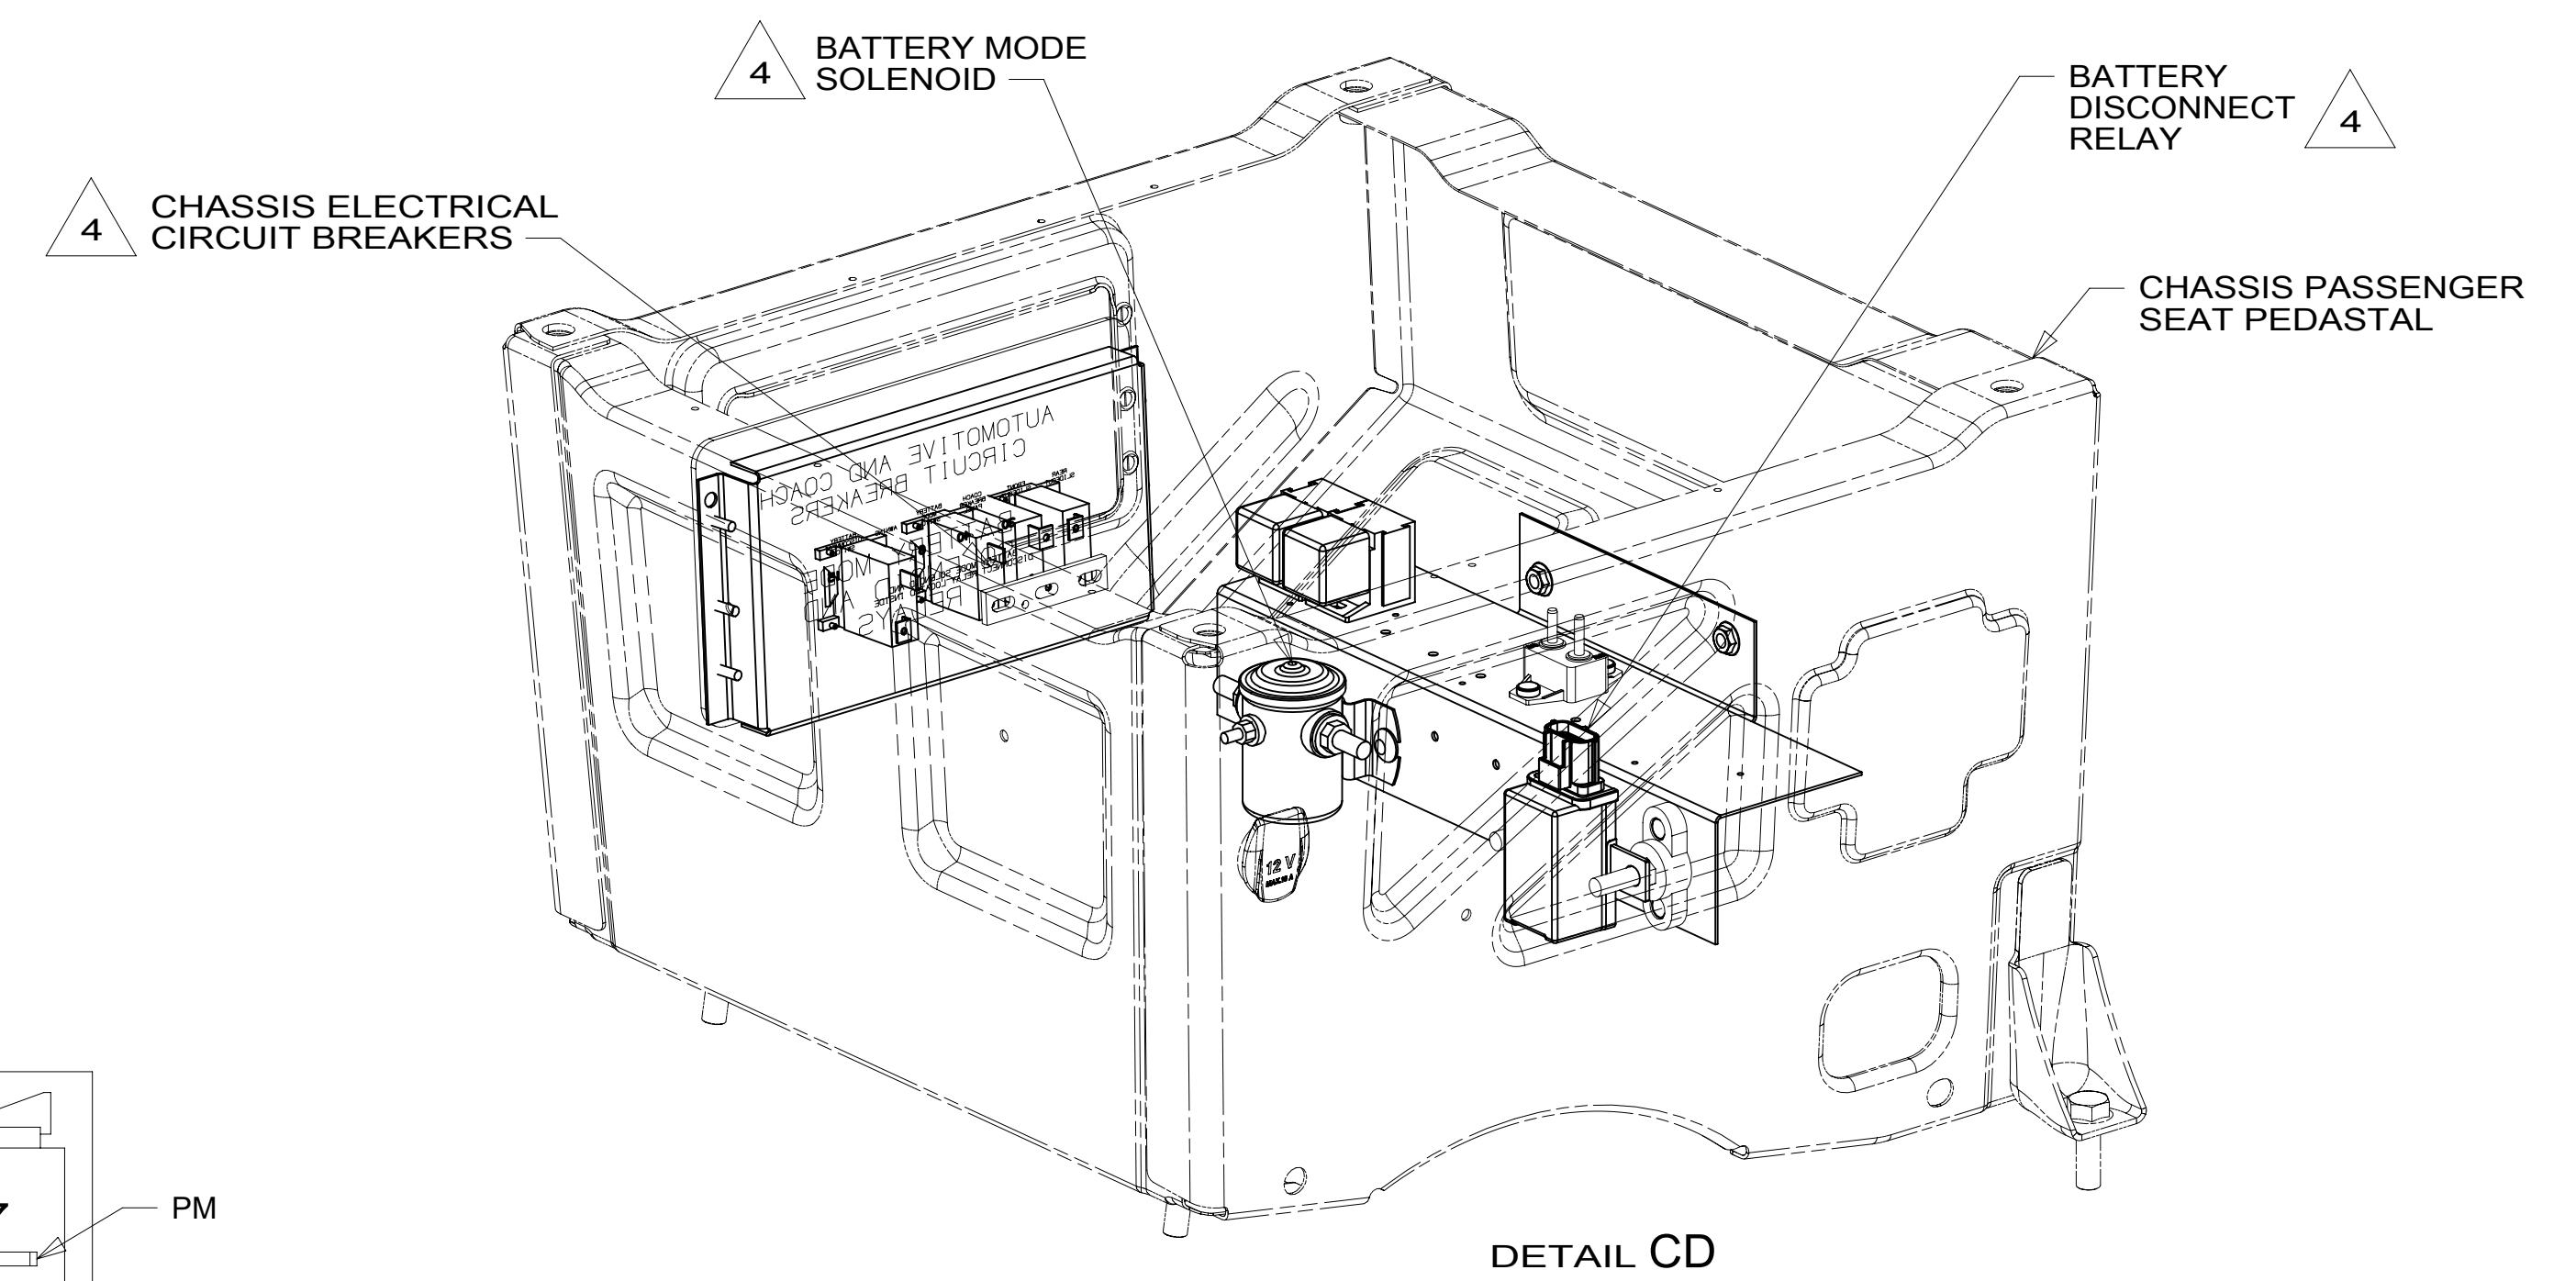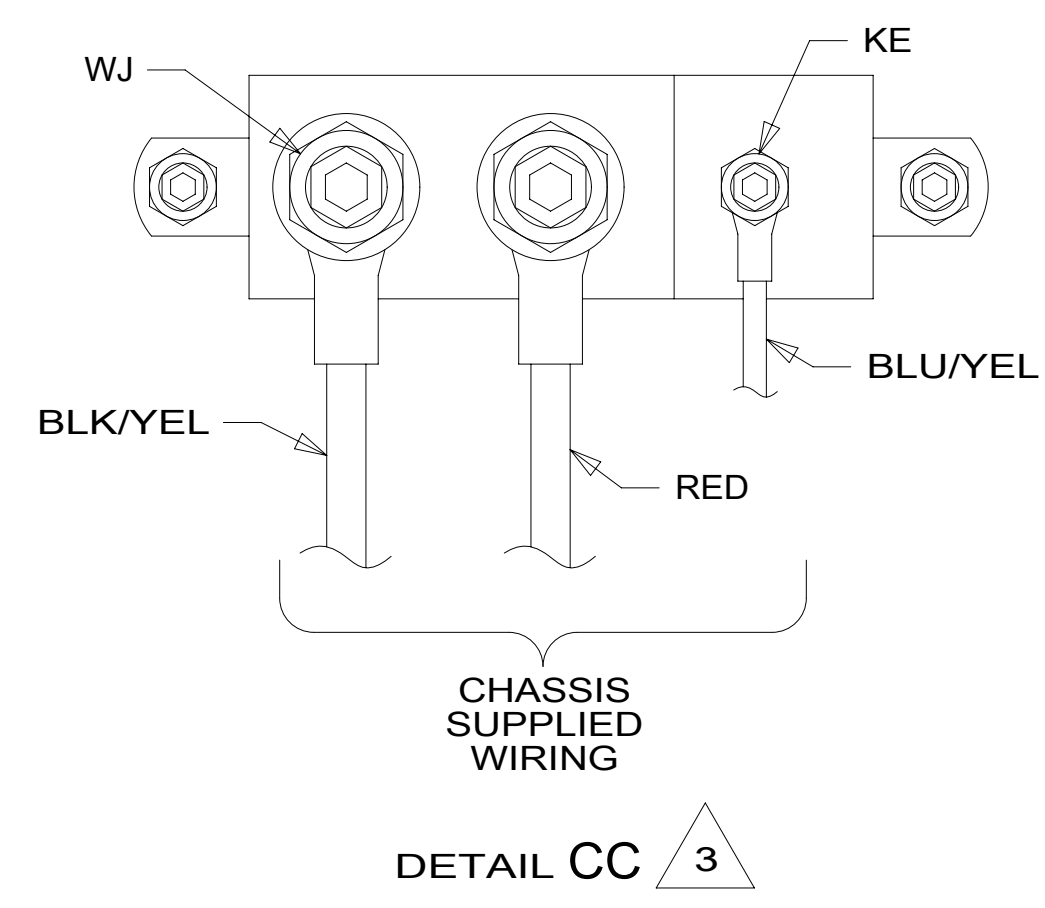


- 6 DASH STRUCTURE LOCATED BEHIND LOWER DASH PANEL.
 - 5 LOCATED UNDER DRIVER'S SEAT.
 - 4 SEE CHASSIS ELECTRICAL BOX ASM FOR ADDITIONAL INFORMATION.
 - 3 CONNECTION POINT IS LOCATED UNDER DRIVERS SEAT.
 - 2 LOWER DASH PANEL.
- NOTES:
1. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

1MW MERCD-11030# DSL,D DOOR VAN
265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

DESCRIPTION: WIRING INSTL-CHASSIS		
SHEET: 3 OF 6	ITEM/PART NO.: 000180121 / 30029901000	REV

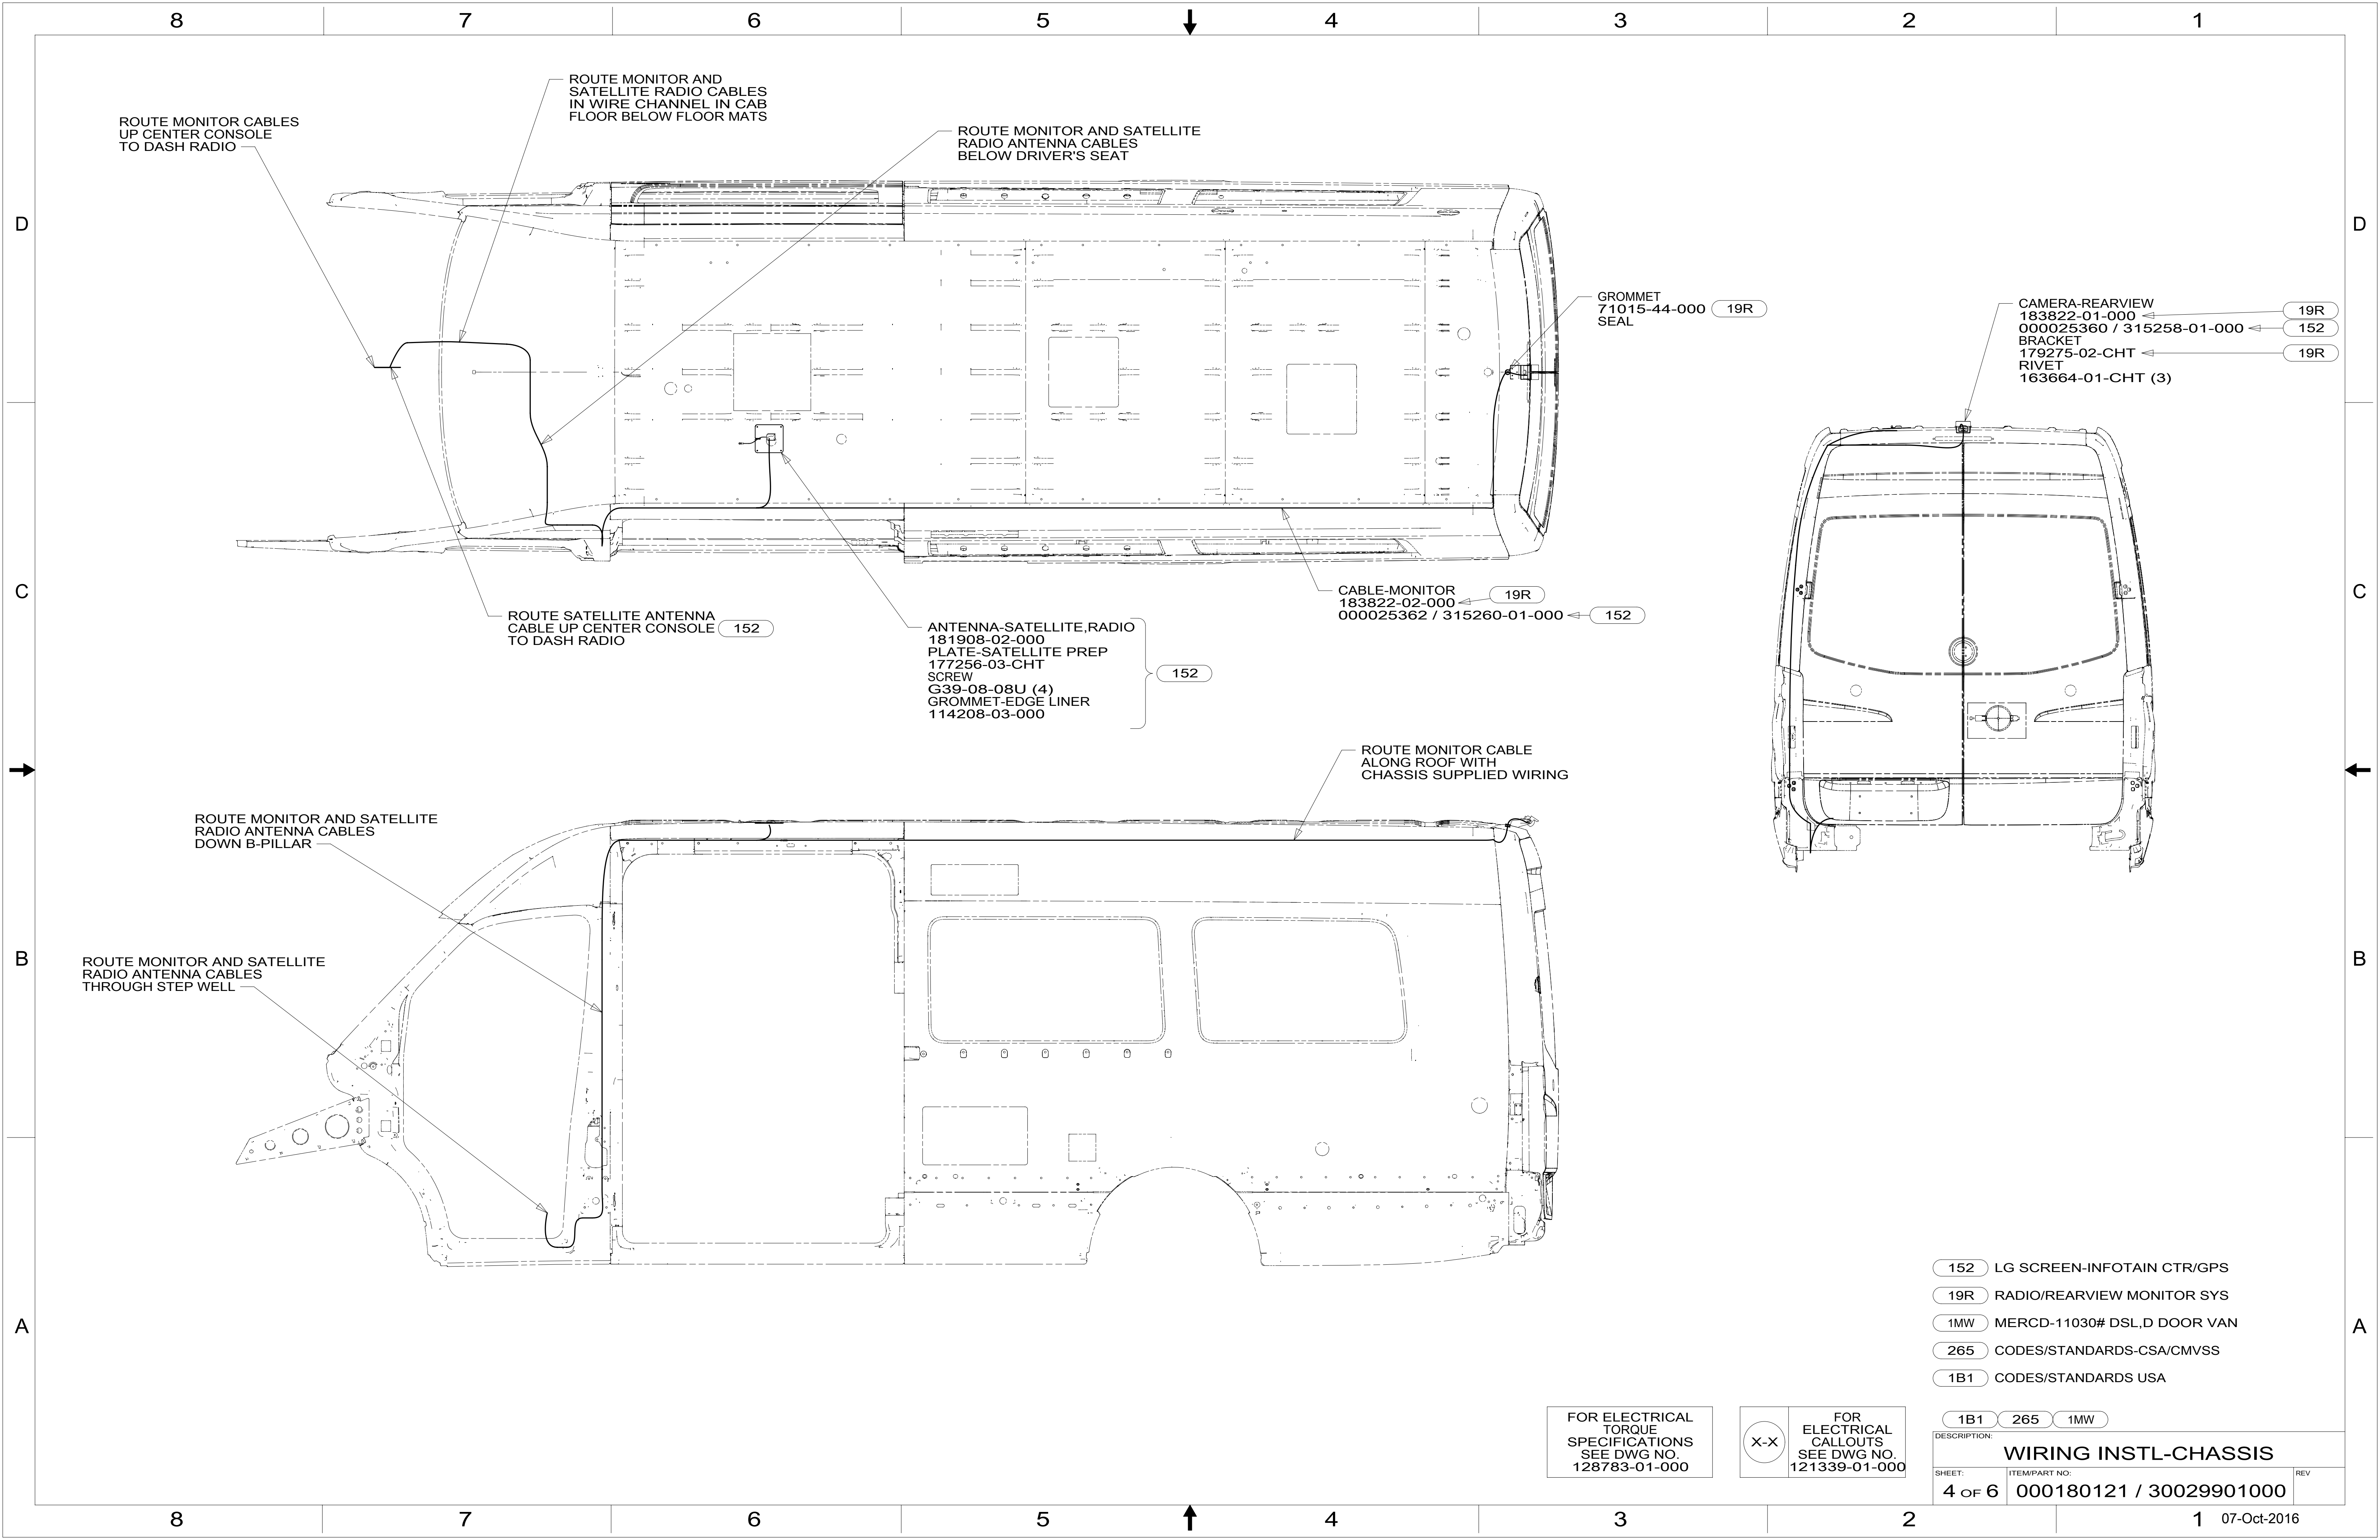

ROUTE MONITOR CABLES UP CENTER CONSOLE TO DASH RADIO

ROUTE MONITOR AND SATELLITE RADIO CABLES IN WIRE CHANNEL IN CAB FLOOR BELOW FLOOR MATS

ROUTE MONITOR AND SATELLITE RADIO ANTENNA CABLES BELOW DRIVER'S SEAT

GROMMET 71015-44-000 19R SEAL

CAMERA-REARVIEW 183822-01-000 19R
 000025360 / 315258-01-000 152
 BRACKET 179275-02-CHT 19R
 RIVET 163664-01-CHT (3)

ROUTE SATELLITE ANTENNA CABLE UP CENTER CONSOLE TO DASH RADIO 152

ANTENNA-SATELLITE,RADIO 181908-02-000
 PLATE-SATELLITE PREP 177256-03-CHT
 SCREW G39-08-08U (4)
 GROMMET-EDGE LINER 114208-03-000 152

CABLE-MONITOR 183822-02-000 19R
 000025362 / 315260-01-000 152

ROUTE MONITOR CABLE ALONG ROOF WITH CHASSIS SUPPLIED WIRING

ROUTE MONITOR AND SATELLITE RADIO ANTENNA CABLES DOWN B-PILLAR



ROUTE MONITOR AND SATELLITE RADIO ANTENNA CABLES THROUGH STEP WELL

- 152 LG SCREEN-INFOTAIN CTR/GPS
- 19R RADIO/REARVIEW MONITOR SYS
- 1MW MERCD-11030# DSL,D DOOR VAN
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:	1B1 265 1MW	
WIRING INSTL-CHASSIS		
SHEET:	ITEM/PART NO:	REV
4 OF 6	000180121 / 30029901000	

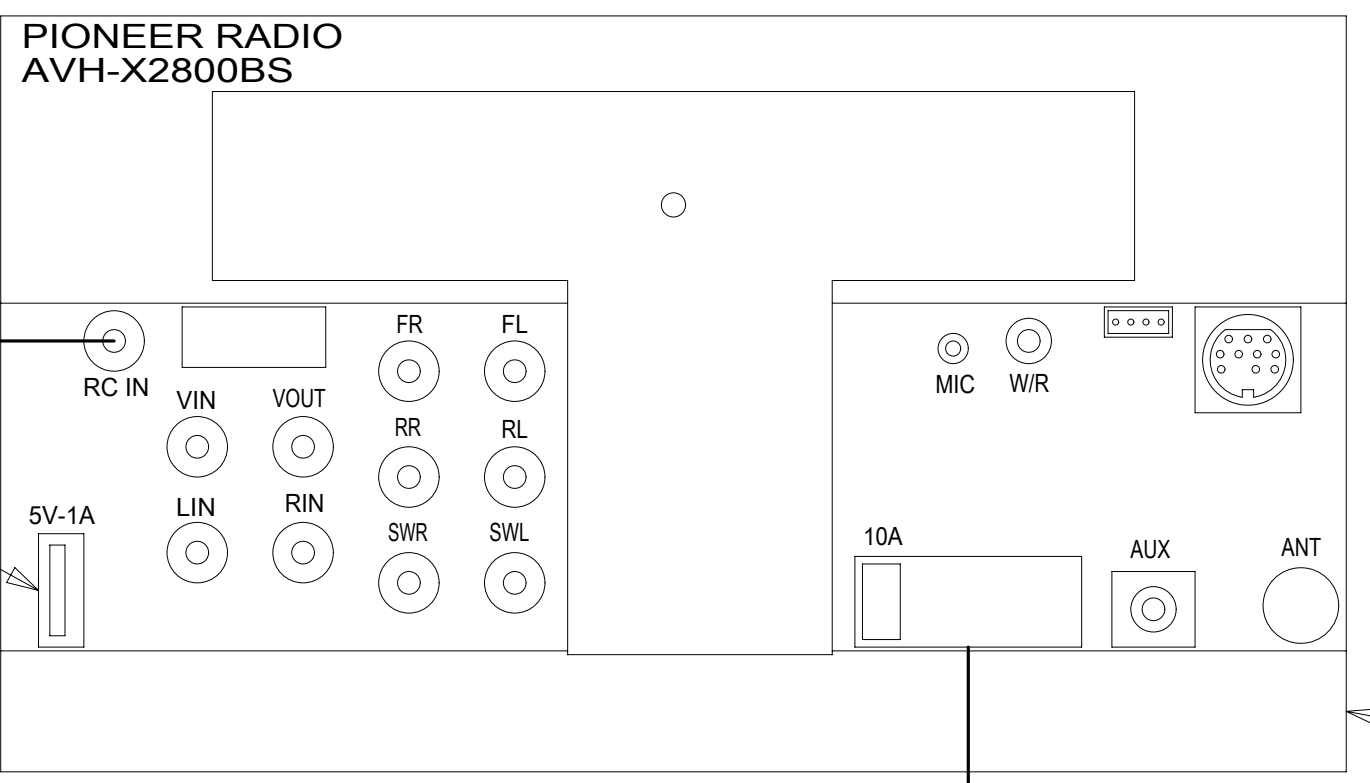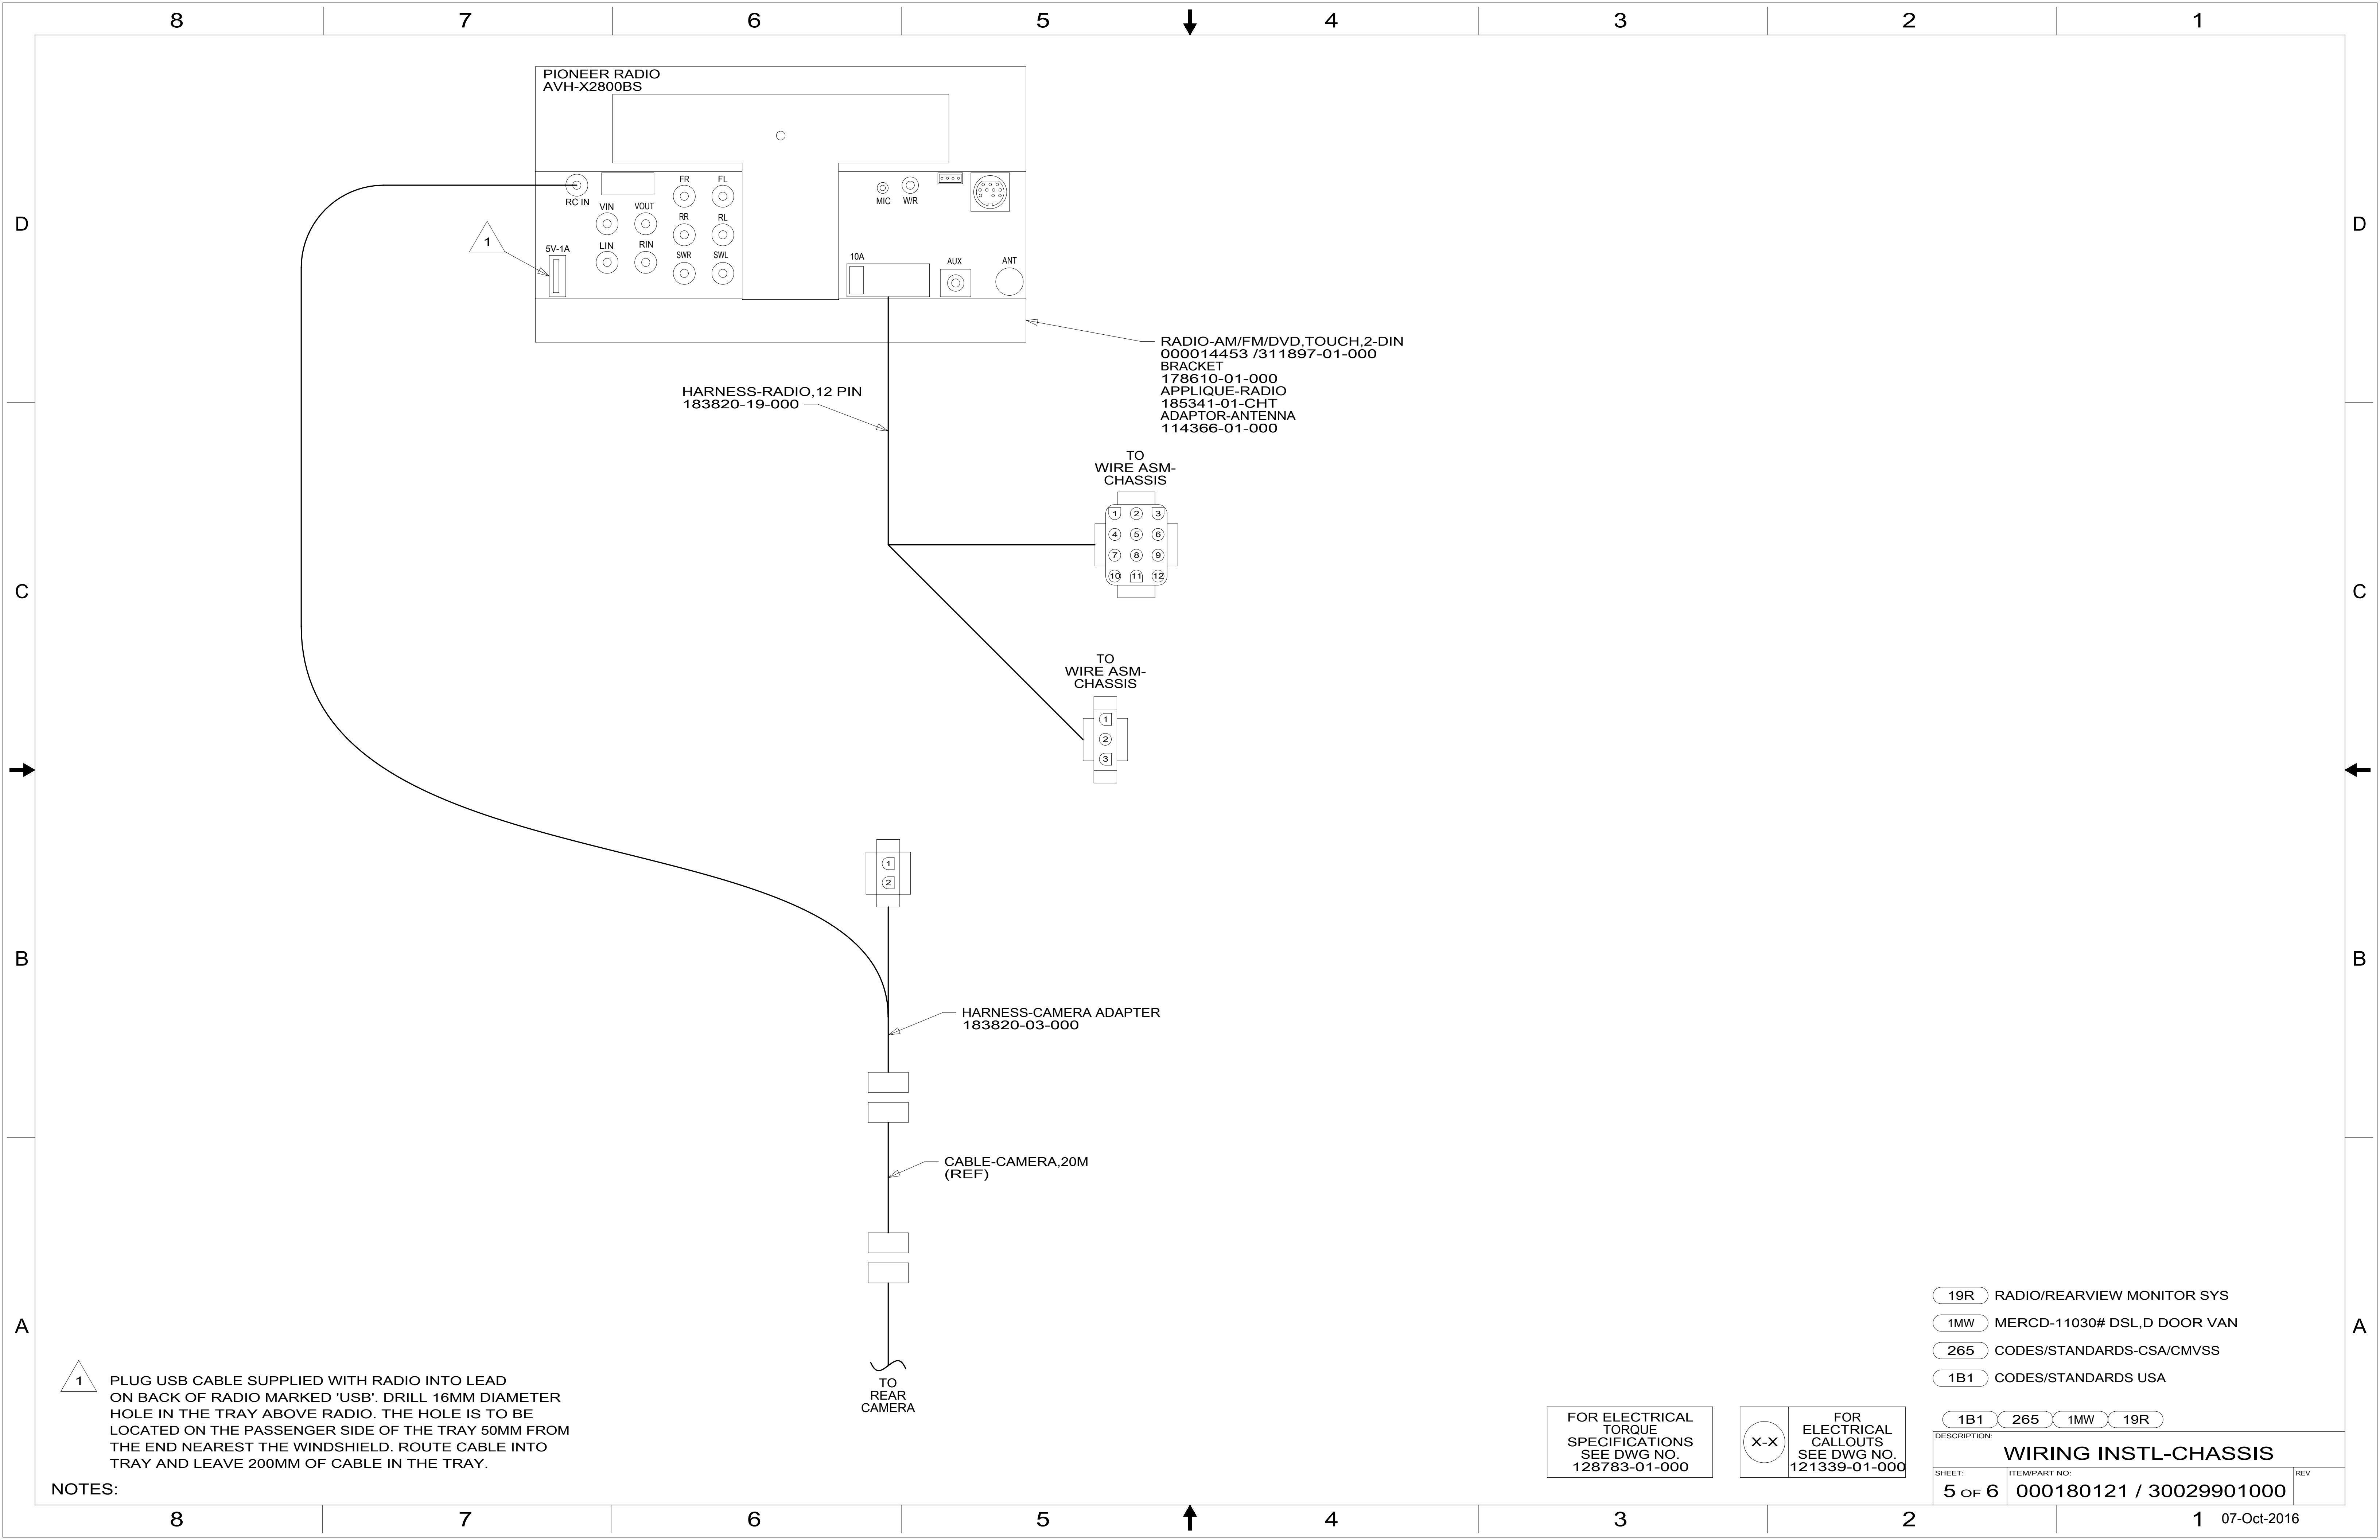

RADIO-AM/FM/DVD, TOUCH, 2-DIN
 000014453 /311897-01-000
 BRACKET
 178610-01-000
 APPLIQUE-RADIO
 185341-01-CHT
 ADAPTOR-ANTENNA
 114366-01-000

HARNESS-RADIO, 12 PIN
 183820-19-000

TO WIRE ASM-
 CHASSIS

TO WIRE ASM-
 CHASSIS

HARNESS-CAMERA ADAPTER
 183820-03-000

CABLE-CAMERA, 20M
 (REF)

TO REAR
 CAMERA

1 PLUG USB CABLE SUPPLIED WITH RADIO INTO LEAD ON BACK OF RADIO MARKED 'USB'. DRILL 16MM DIAMETER HOLE IN THE TRAY ABOVE RADIO. THE HOLE IS TO BE LOCATED ON THE PASSENGER SIDE OF THE TRAY 50MM FROM THE END NEAREST THE WINDSHIELD. ROUTE CABLE INTO TRAY AND LEAVE 200MM OF CABLE IN THE TRAY.

NOTES:




FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000







- 19R RADIO/REARVIEW MONITOR SYS
- 1MW MERCD-11030# DSL,D DOOR VAN
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265 1MW 19R

DESCRIPTION: WIRING INSTL-CHASSIS		
SHEET: 5 OF 6	ITEM/PART NO: 000180121 / 30029901000	REV

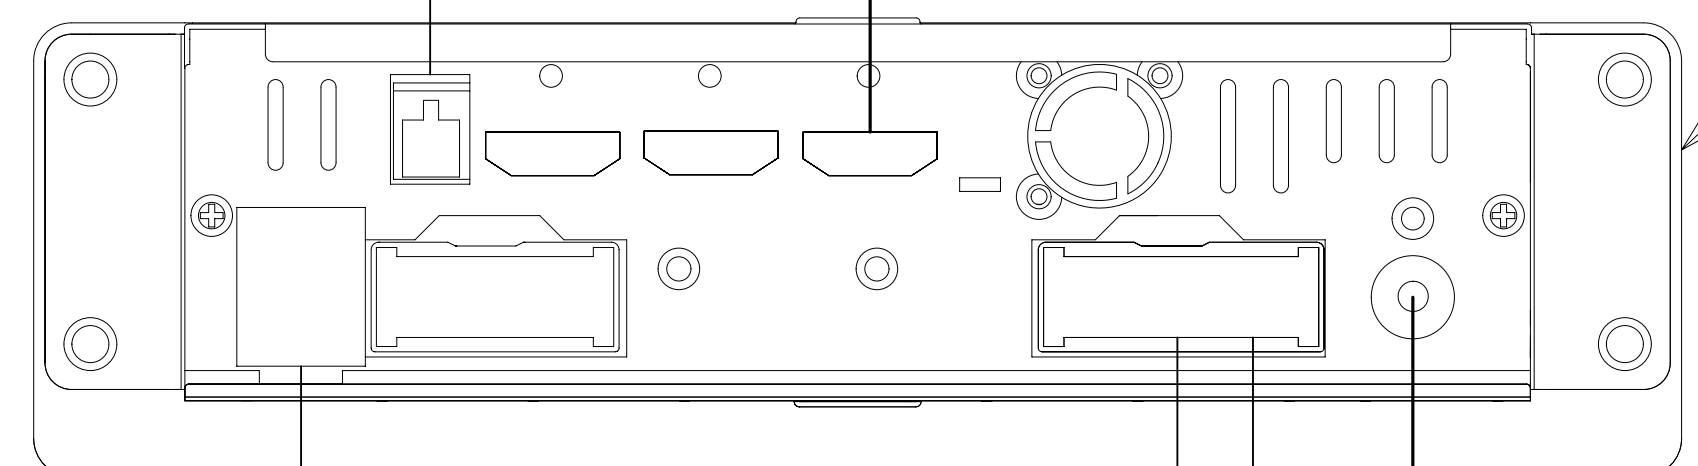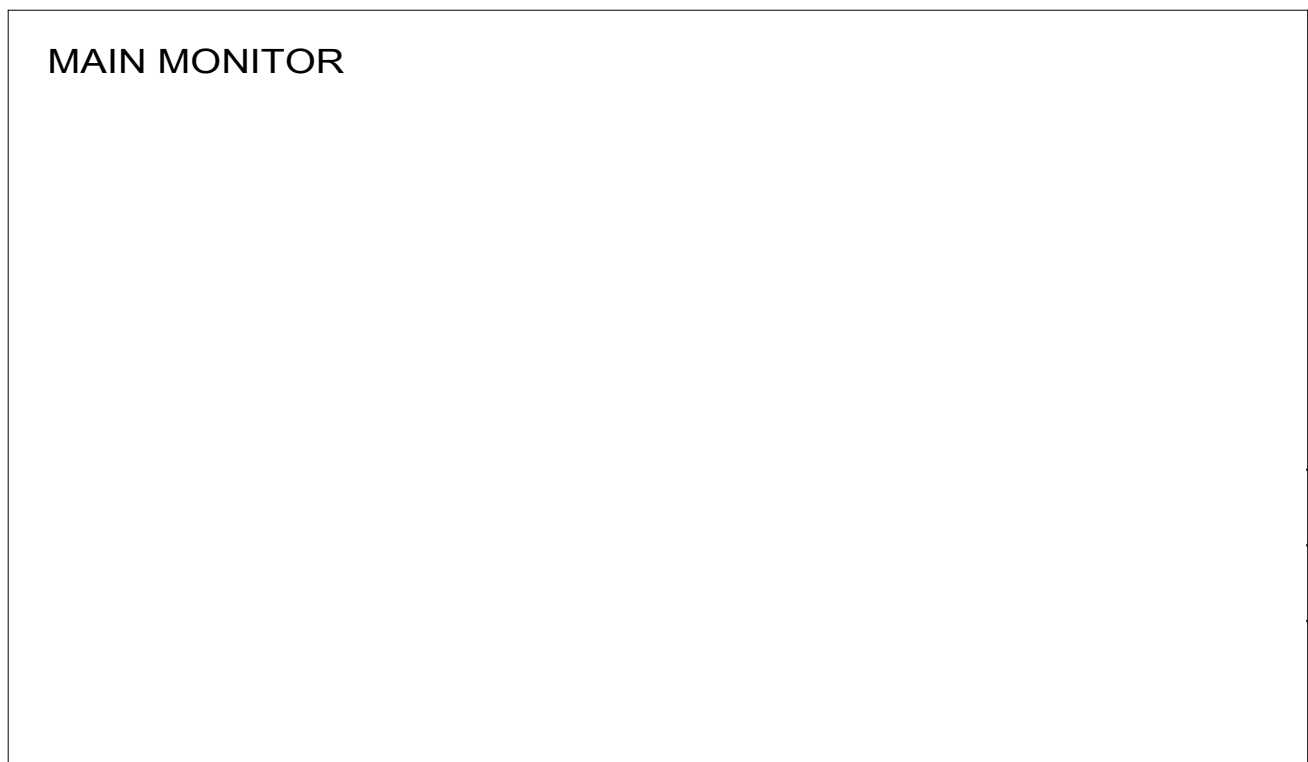

- RADIO-INFOTAINMENT, 9" 000025353 /315254-01-000
- REMOTE 176654-04-000
- RECEIVER-SAT RADIO 181908-05-000
- TEMP SENSOR 176654-13-000
- ADAPTOR-ANTENNA 114366-01-000

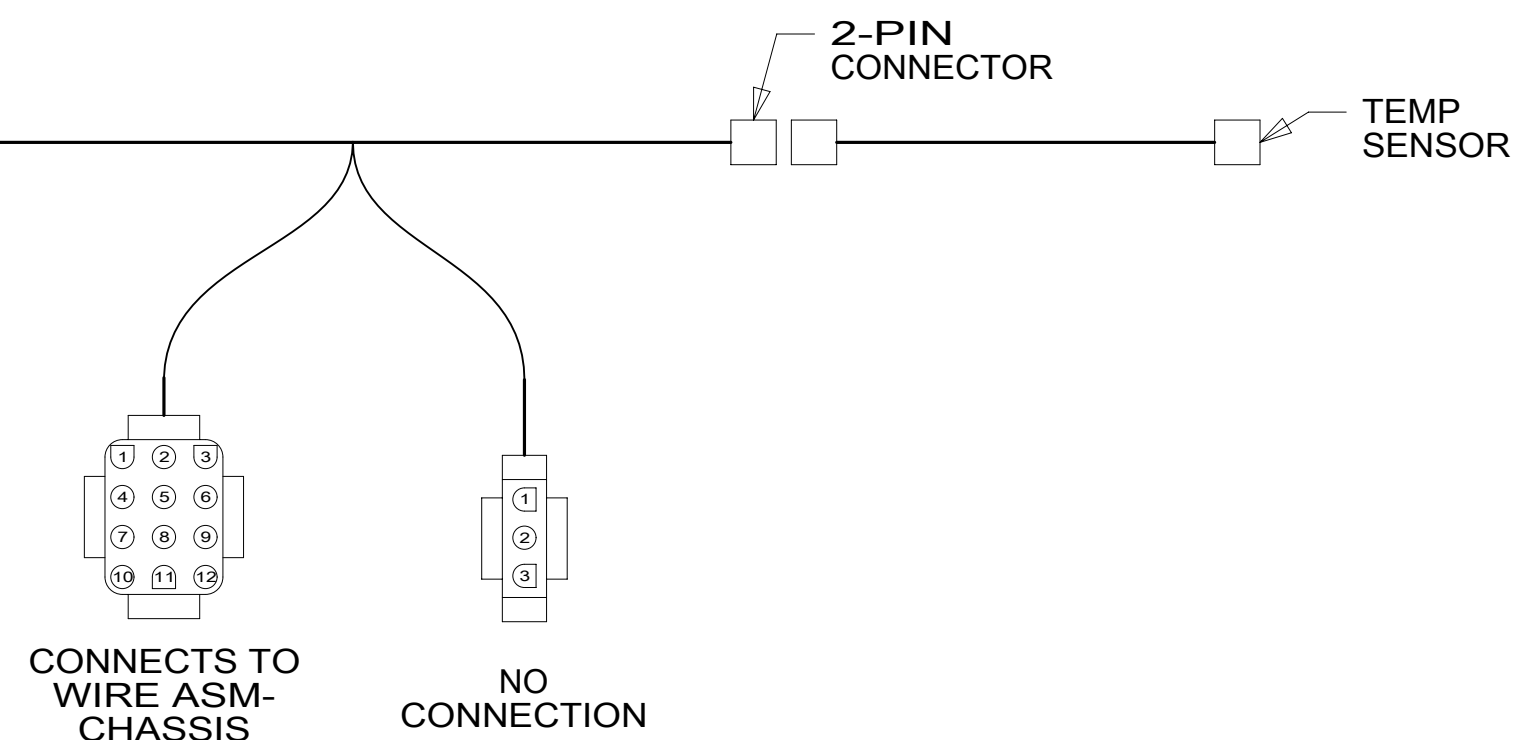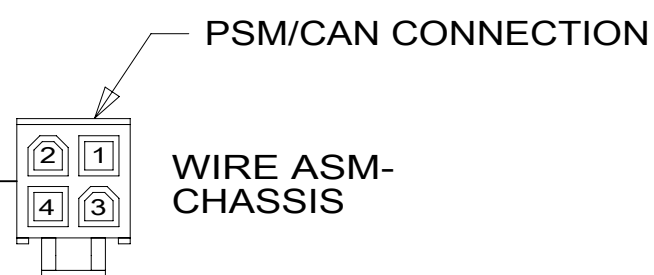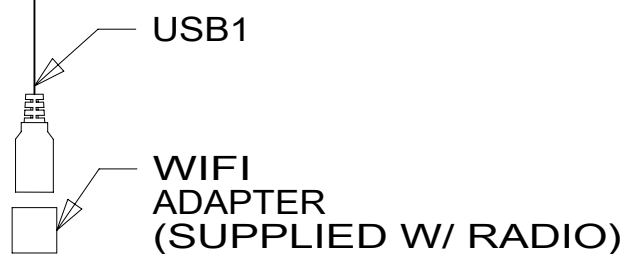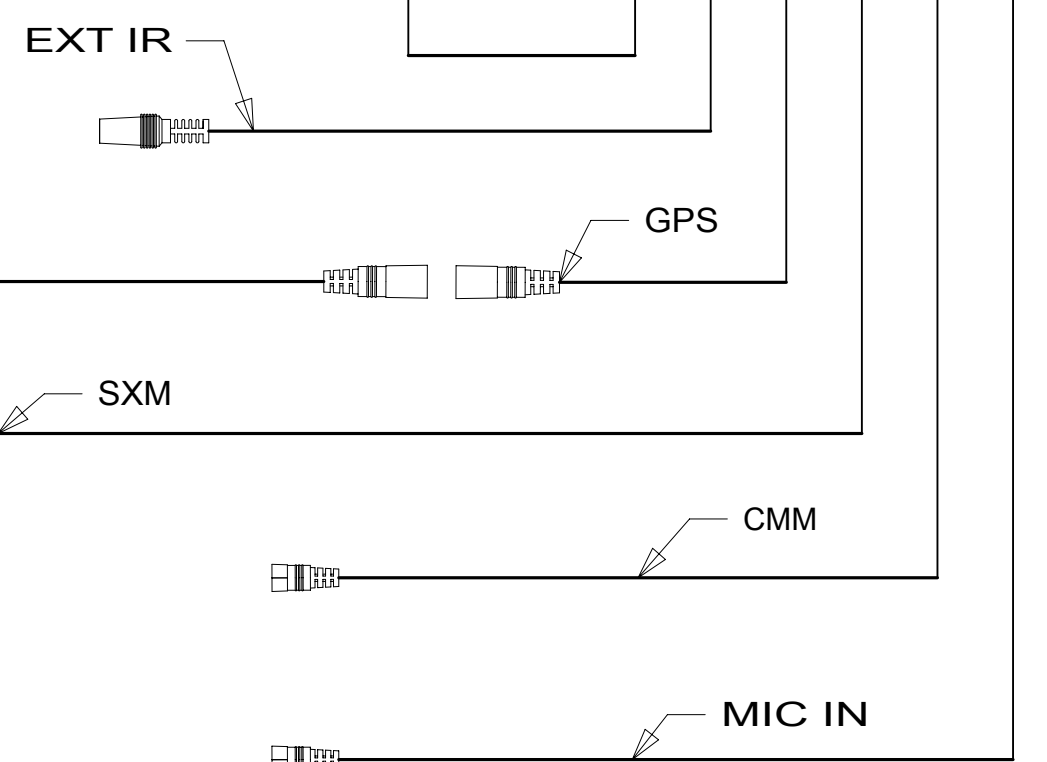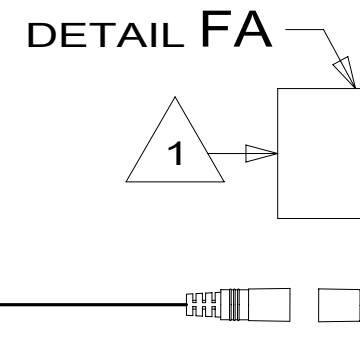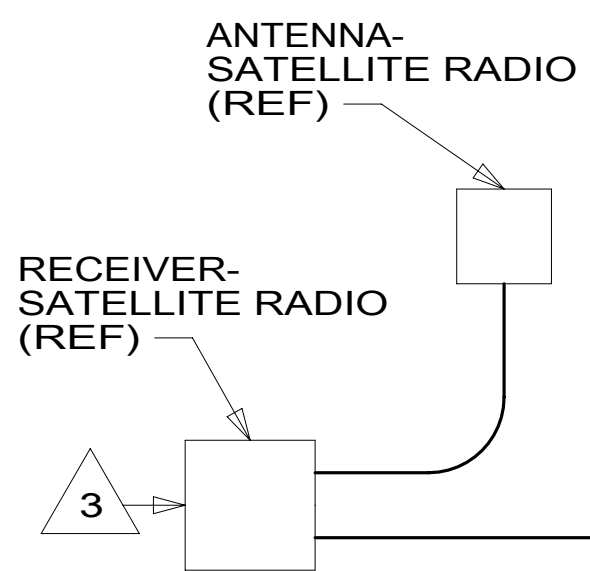

- NOTES:
- 4 WIRE TIE TO DASH RADIO WIRING BEHIND THE RADIO.
 - 3 PLUG CABLE INTO LEAD ON BACK OF RADIO.
 - 2 SEE SHT 2 FOR ADDITIONAL INFORMATION.
 - 1 MOUNT GPS ANTENNA TO TOP OF DEFROST PLENUM BEHIND RADIO.

- 152 LG SCREEN-INFOTAIN CTR/GPS
- 1MW MERCD-11030# DSL,D DOOR VAN
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 1B1 265 1MW 152

DESCRIPTION: WIRING INSTL-CHASSIS		
SHEET: 6 OF 6	ITEM/PART NO: 000180121 / 30029901000	REV