


- 6 WITHOUT 22W
 - 5 SEE RADIO/MONITOR INSTL FOR ADDITIONAL INFORMATION.
 - 4 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
 - 3 SEE WIRE ASM-CHASSIS FOR ADDITIONAL INFORMATION.
 - 2 SECURE WITH SOLENOID MOUNTING SCREW.
1. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000




FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

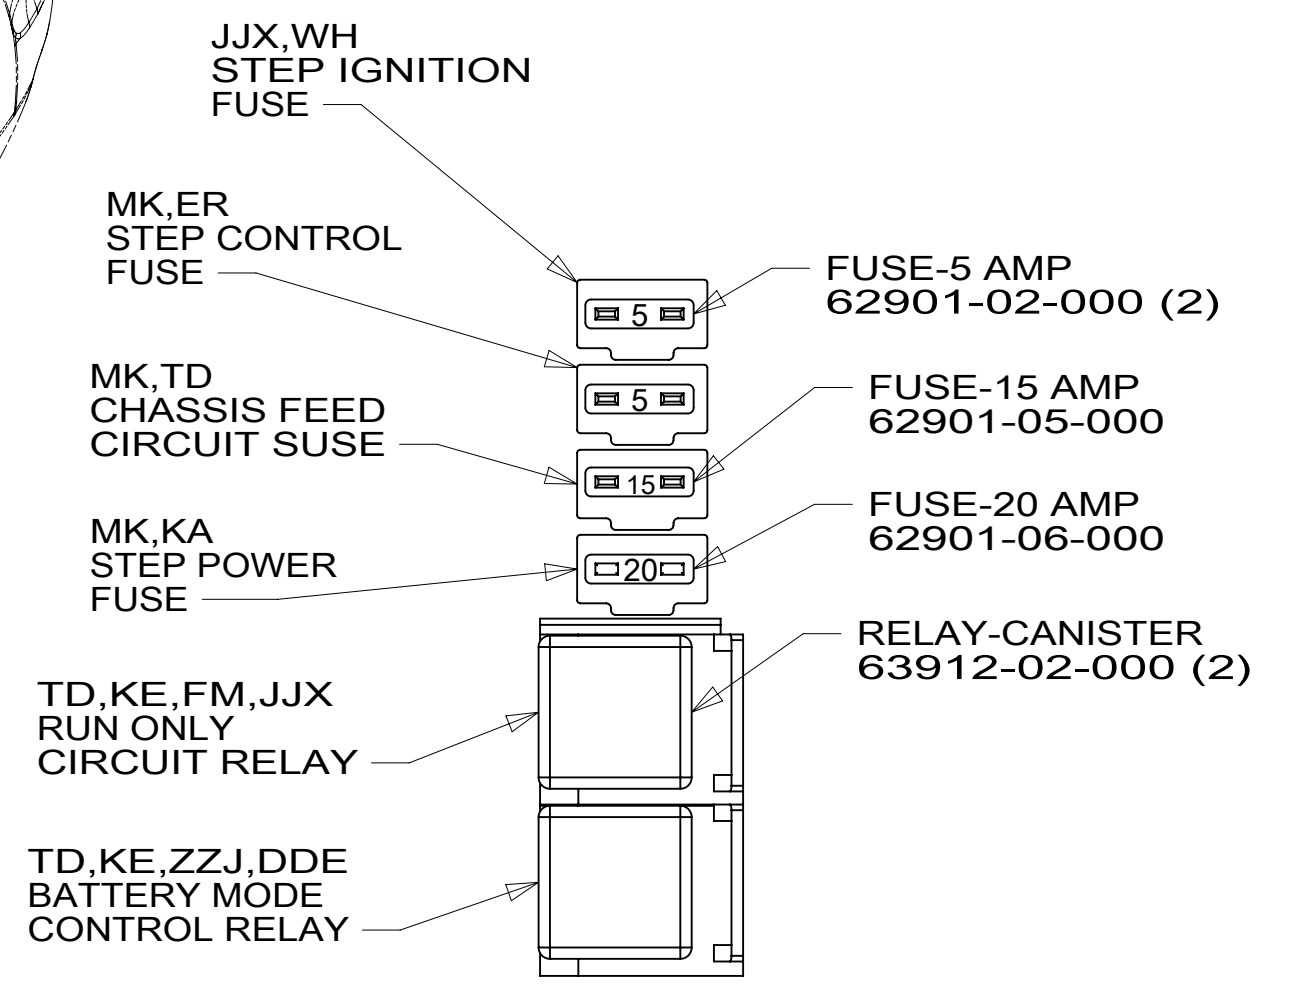

- 282 SOLAR PANEL - 100 WATT
- 22W BATTERY-SECOND
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

WINNEBAGO
COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.

DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS	
DIFTR:	MATERIAL:	
UNSPECIFIED TOLERANCES:		
WHOLE DIM (X)	: 3	
ONE-PLACE (X.X)	: 1.5	
TWO-PLACE (X.XX)	: 0.50	
ANGLE	: 1°	
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS)	FIRST USED:
		16 623L
DESCRIPTION:		
WIRING INSTL-CHASSIS		
SHEET:	ITEM/PART NO.:	REV:
1 OF 2	000180709 / 30154901000	
REF:		

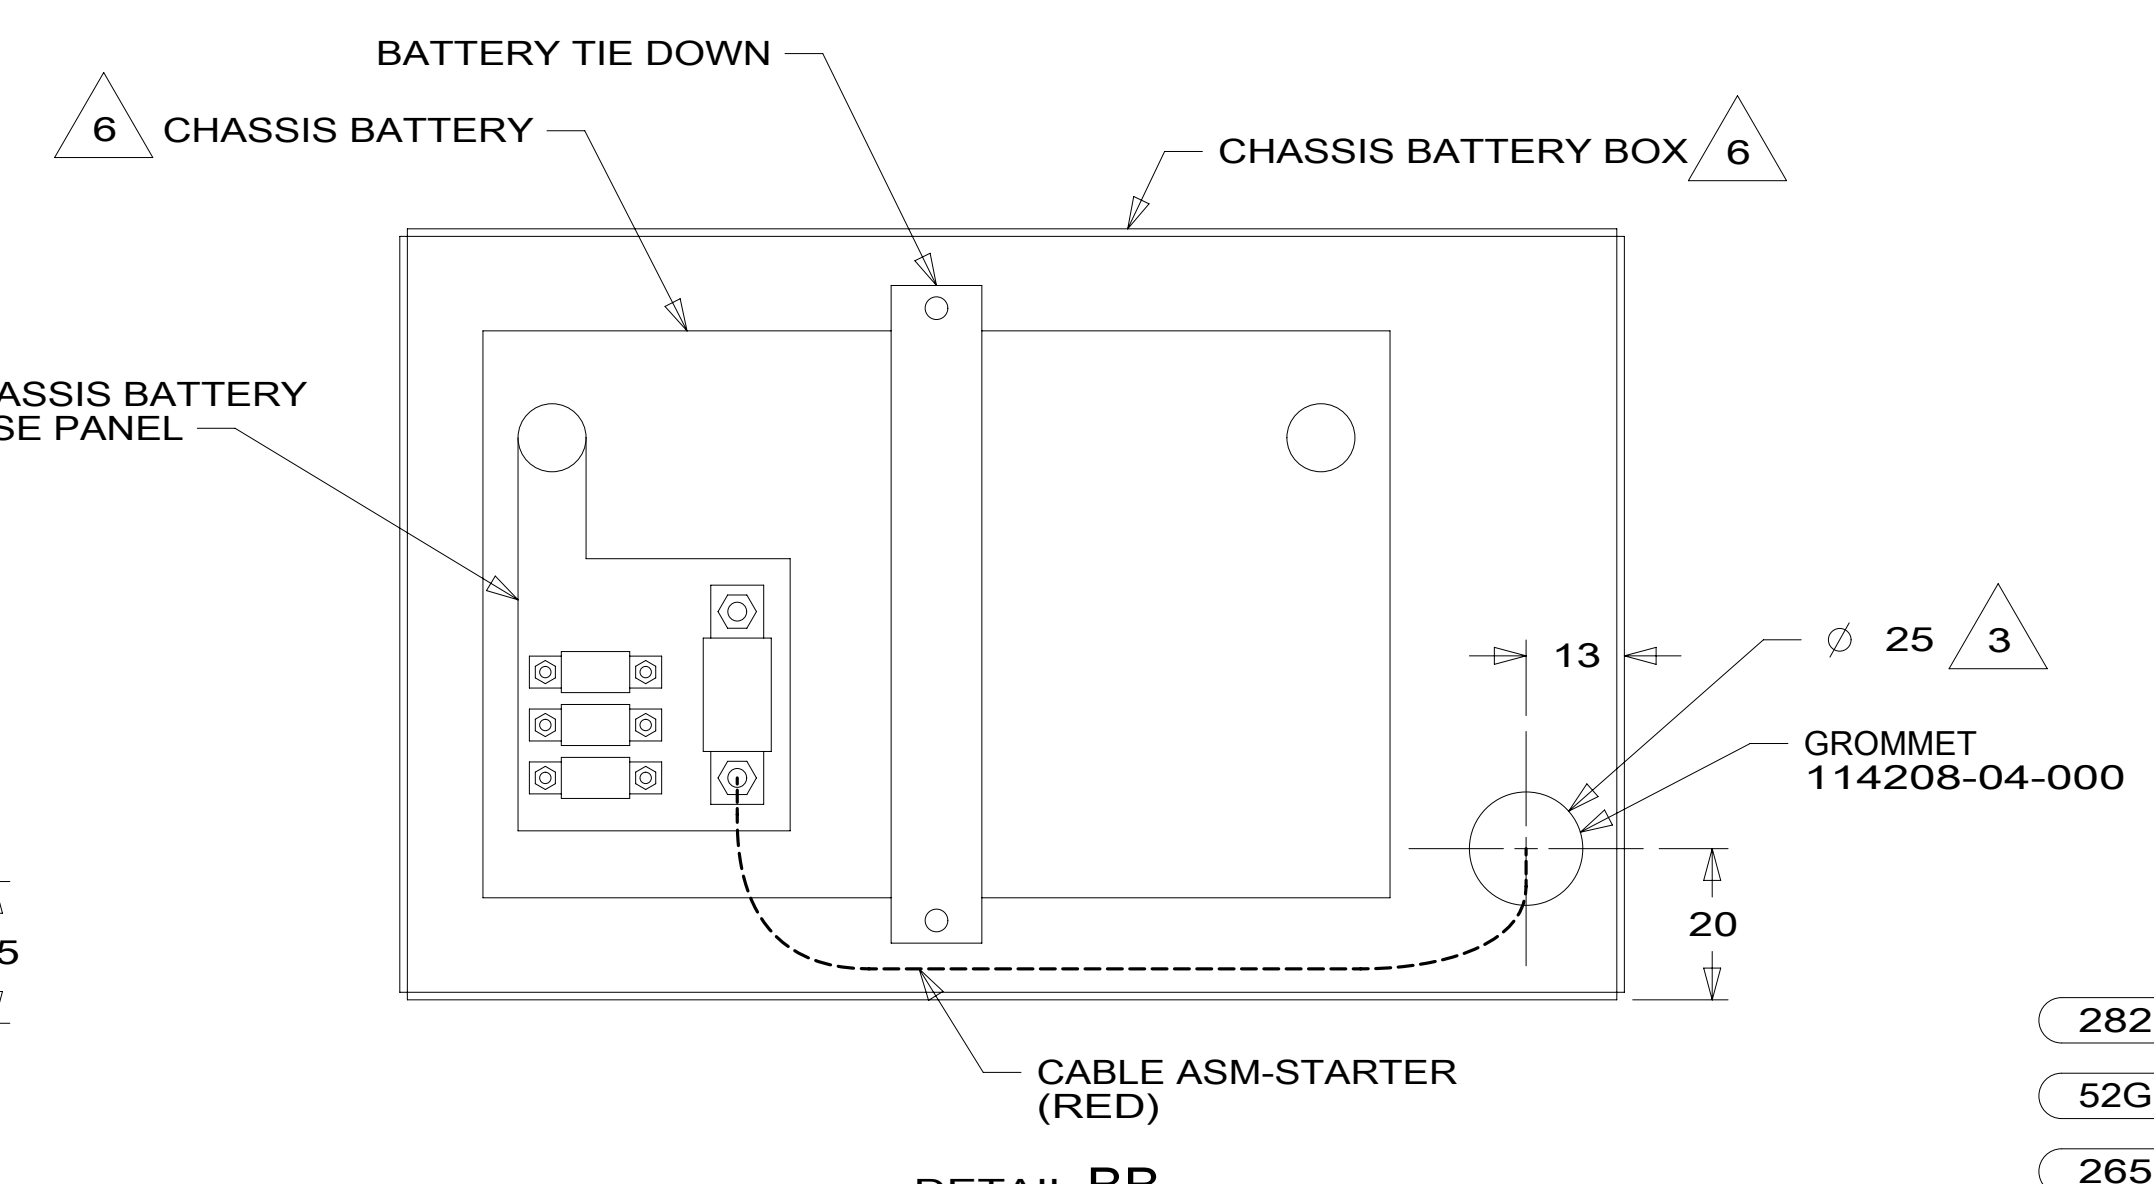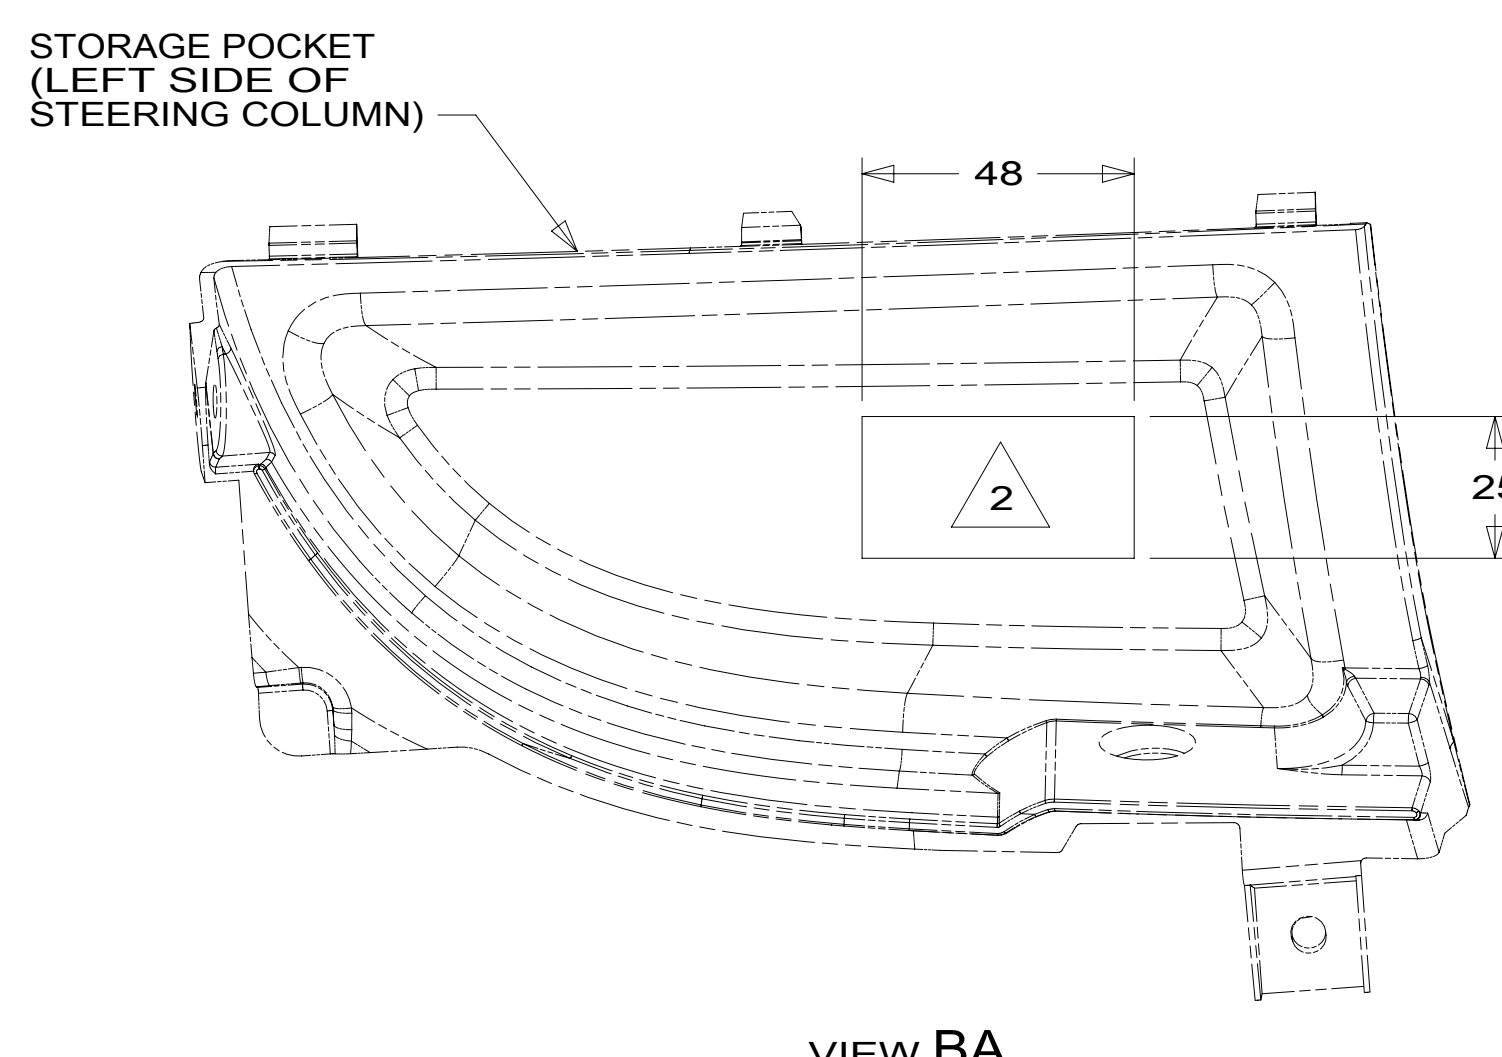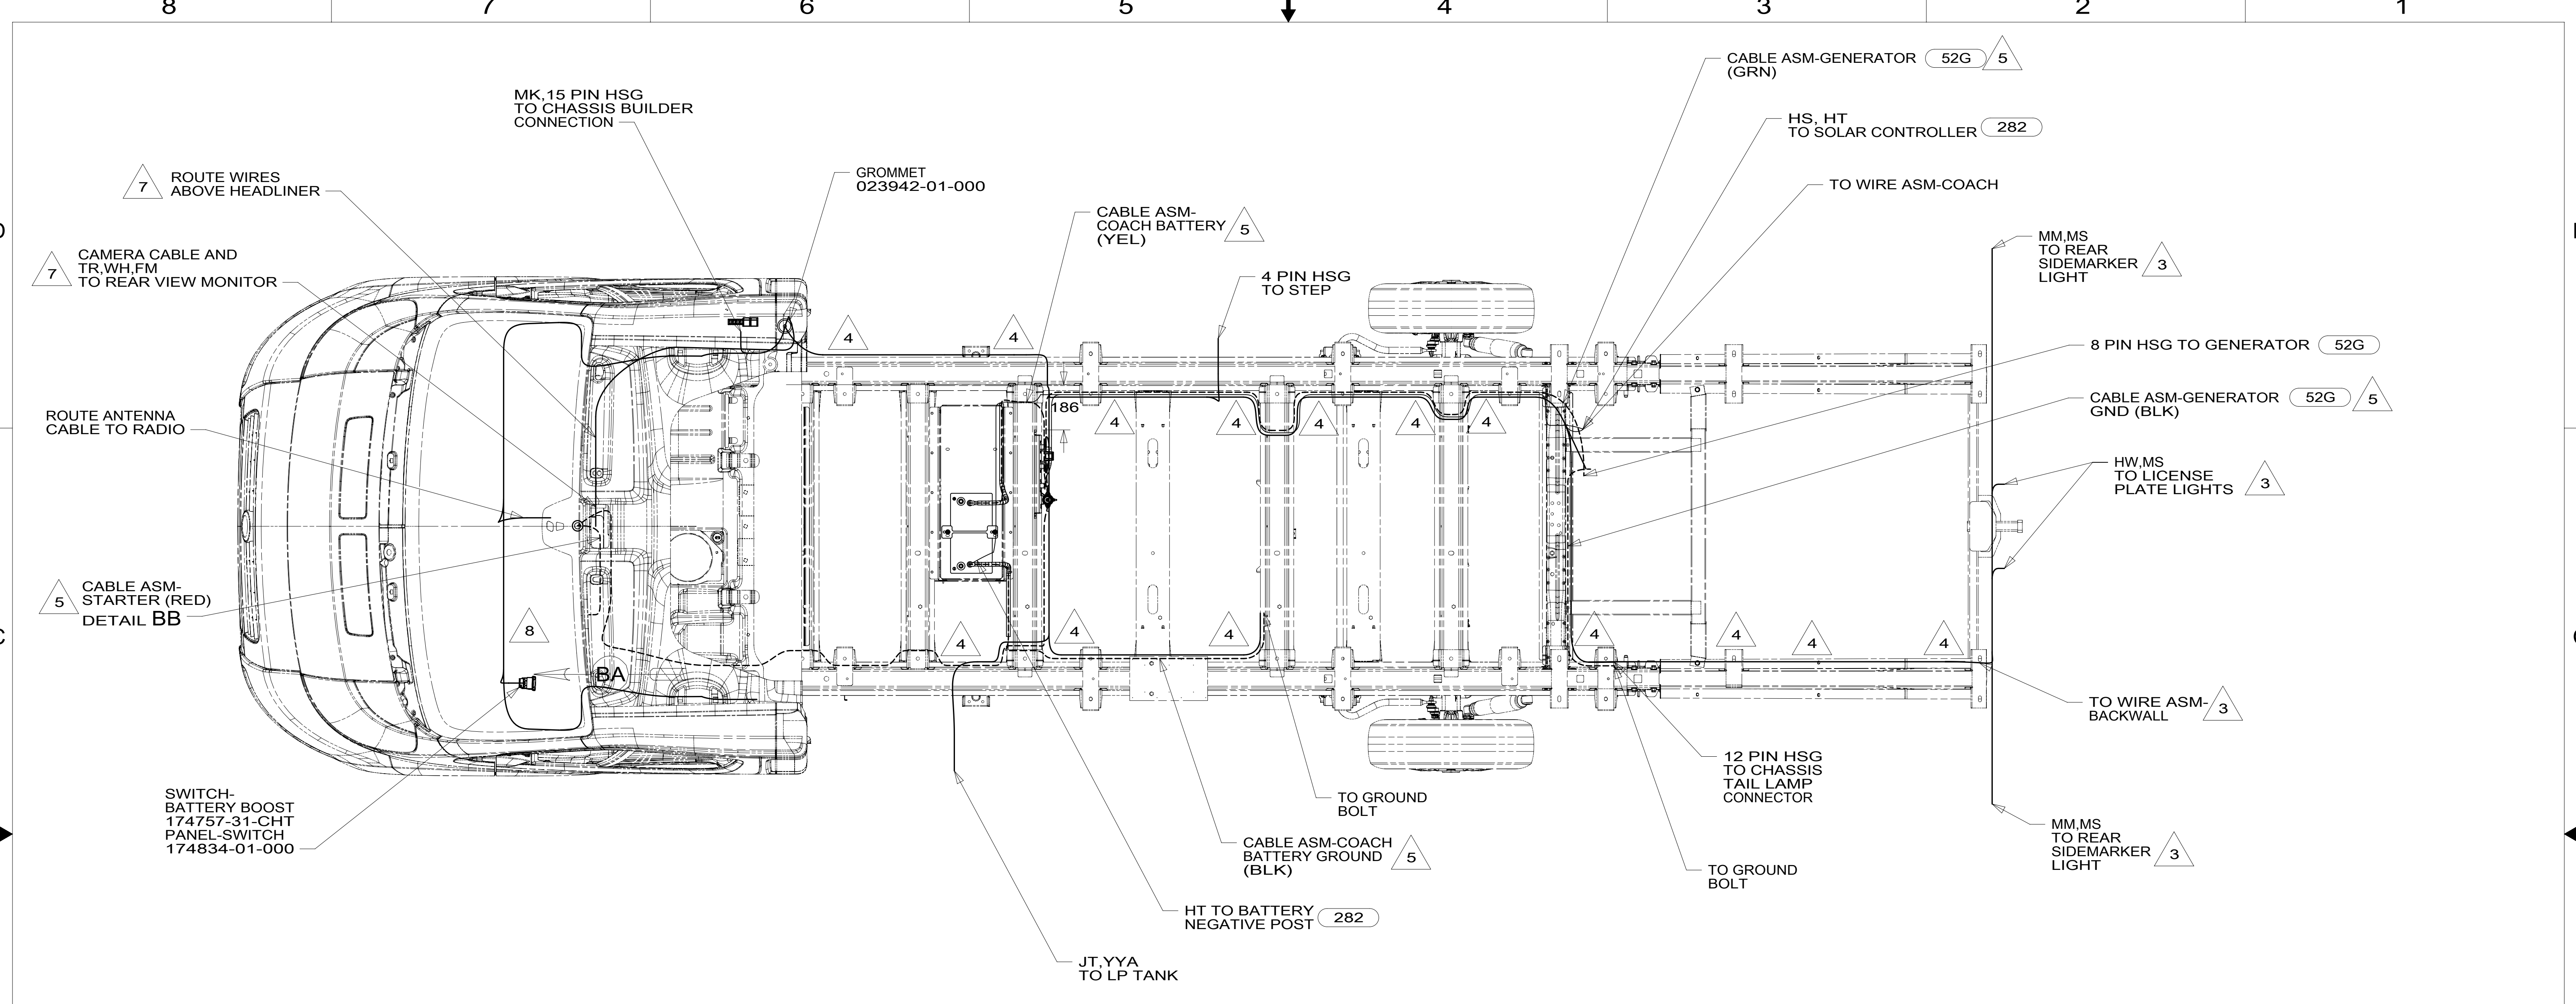

- 8 SECURE WIRE HARNESS WITH CABLE TIE 008343-02-000.
- 7 SEE RADIO/MONITOR INSTL FOR ADDITIONAL INFORMATION.
- 6 LOCATED IN CAB FLOOR.
- 5 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
- 4 CLAMP 83610-02-000, SCREW G39-08-12U.
- 3 SEE WIRING INSTL-EXTERIOR LAMPS FOR ADDITIONAL INFORMATION.
- 2 CUTOUT BACKSIDE OF POCKET TO DIMENSION SHOWN.

NOTES:
1. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 282 SOLAR PANEL - 100 WATT
- 52G GEN-3.6KW ONAN LP MICROQUIET
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION: WIRING INSTL-CHASSIS	
SHEET: 2 OF 2	ITEM/PART NO: 000180709 / 30154901000
REV 1 20-Sep-2016	