


- 8 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
- 7 REST WIRE IN FRAME RAIL WHEN APPLICABLE.
- 6 CLAMP 83610-01-000, SCREW G39-08-12B
- 5 CLAMP 10497-03-000, SCREW G39-08-12B
- 4 USE TIE-WIRE 8343-04-000 TO SECURE WIRES TO FLOOR SUPPORT FRAME AT LEAST ONCE EVERY 600MM.
- 3 SECURE CORD AWAY FROM ALL MOVING PARTS AND EXHAUST WITH WIRE-TIE 93147-01-000 AS REQUIRED
- 2 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.
- 1 SAME LOOM USED ON BOTH R40FD & R40KD.

NOTES:

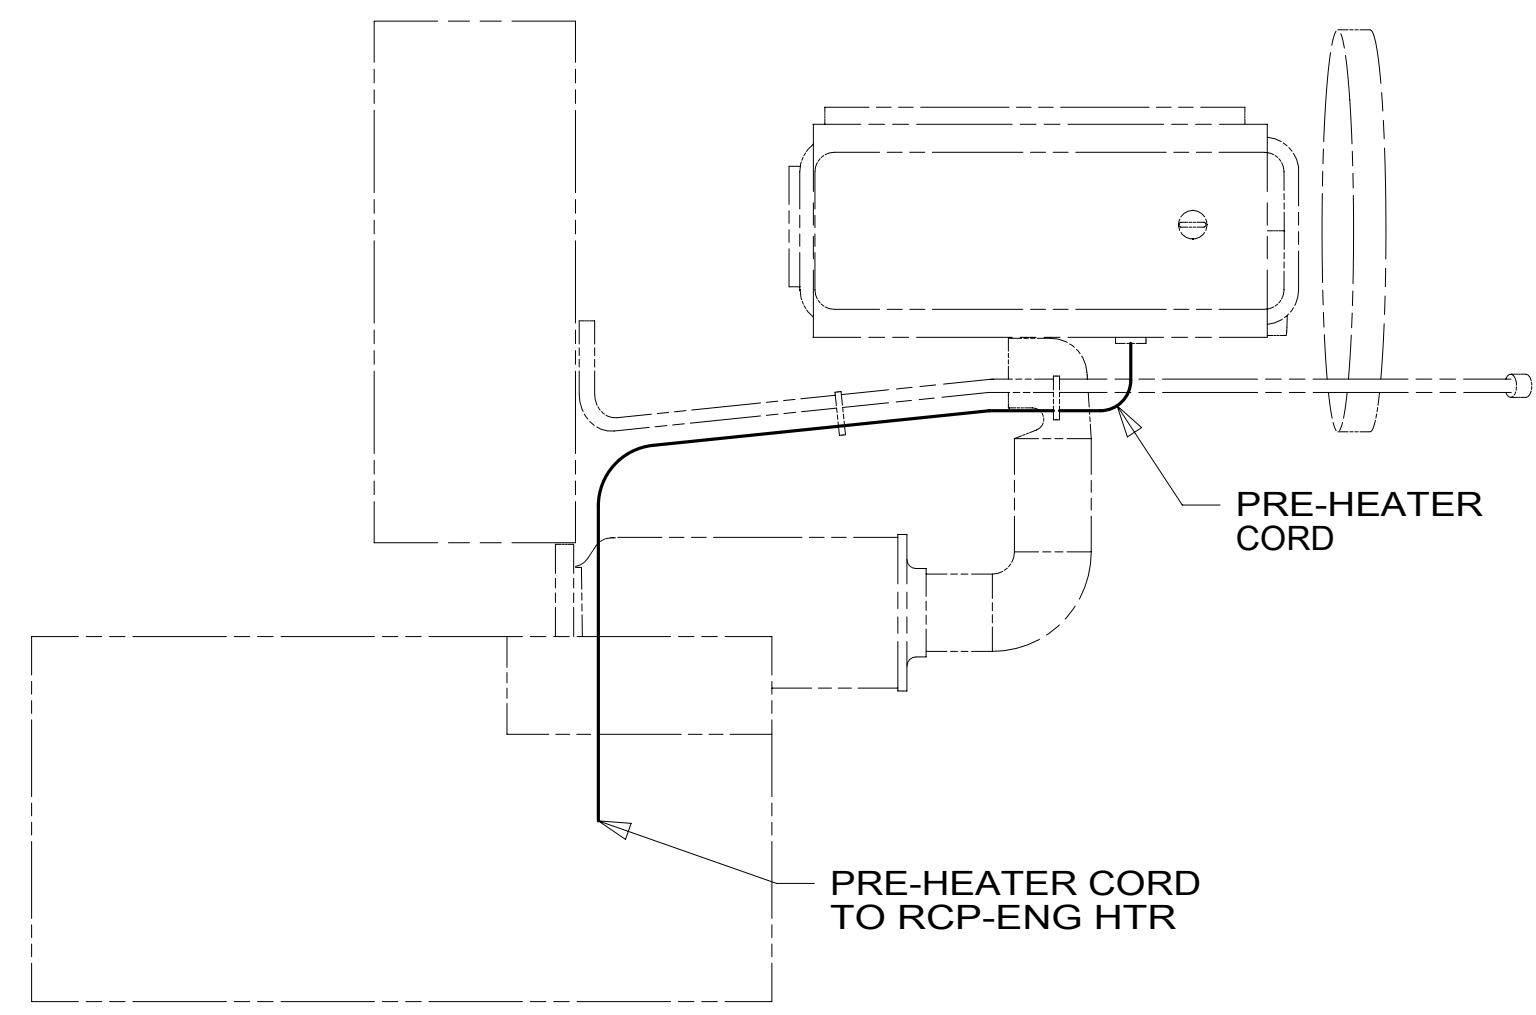

DETAIL AA 3

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

- 1B1 265



DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS
DFFR:	
UNSPECIFIED TOLERANCES:	MATERIAL:
WHOLE DIM (X) : 3	
ONE-PLACE (X.X) : 1.5	
TWO-PLACE (X.XX) : 0.50	
ANGLE : 1°	

REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES


WEIGHT: (LBS) FIRST USED: 16 L34T

DESCRIPTION: **WIRING INSTL-CHASSIS**

SHEET: 1 OF 4 ITEM/PART NO: 000201018 / 30138001000 REF: 1 20-Sep-2016

8 7 6 5 4 3 2 1

D  
C  
B  
A

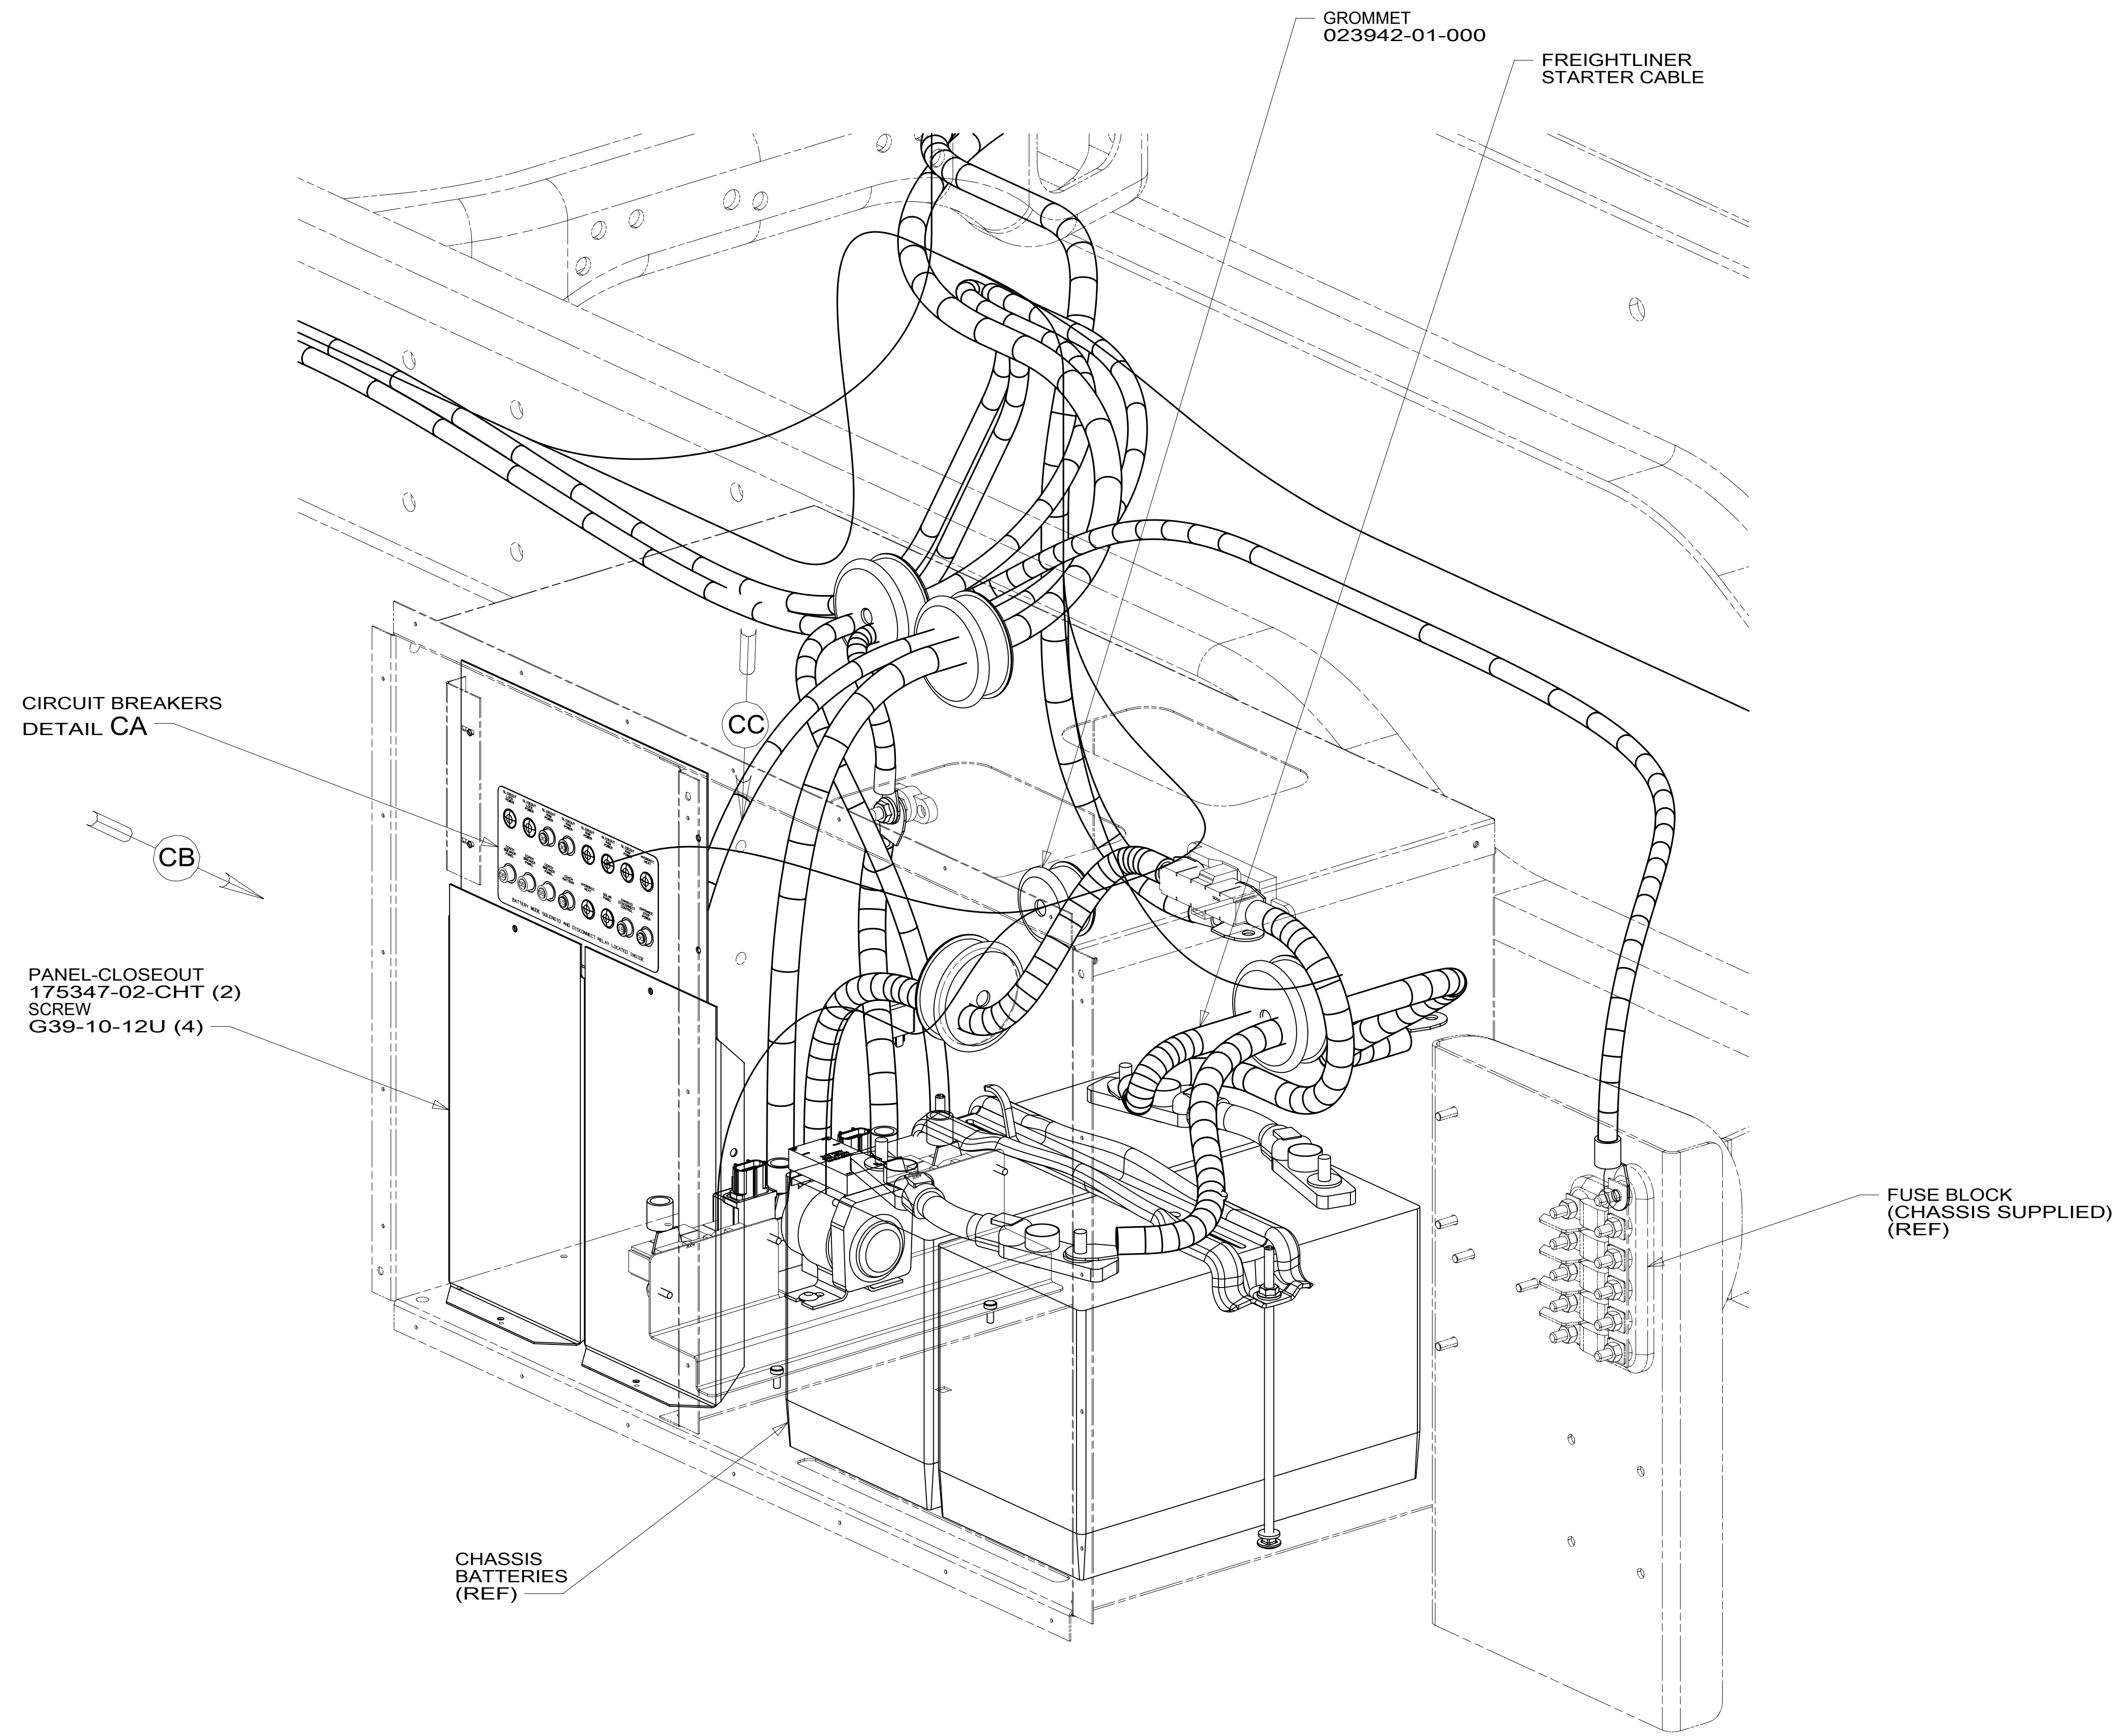

VIEW BA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


265 CODES/STANDARDS-CSA/CMVSS  
1B1 CODES/STANDARDS USA

DESCRIPTION:		1B1 265
<b>WIRING INSTL-CHASSIS</b>		
SHEET:	ITEM/PART NO.:	REV
2 OF 4	000201018 / 30138001000	

8 7 6 5 4 3 2 1 20-Sep-2016

8 7 6 5 4 3 2 1

D  
C  
B  
A

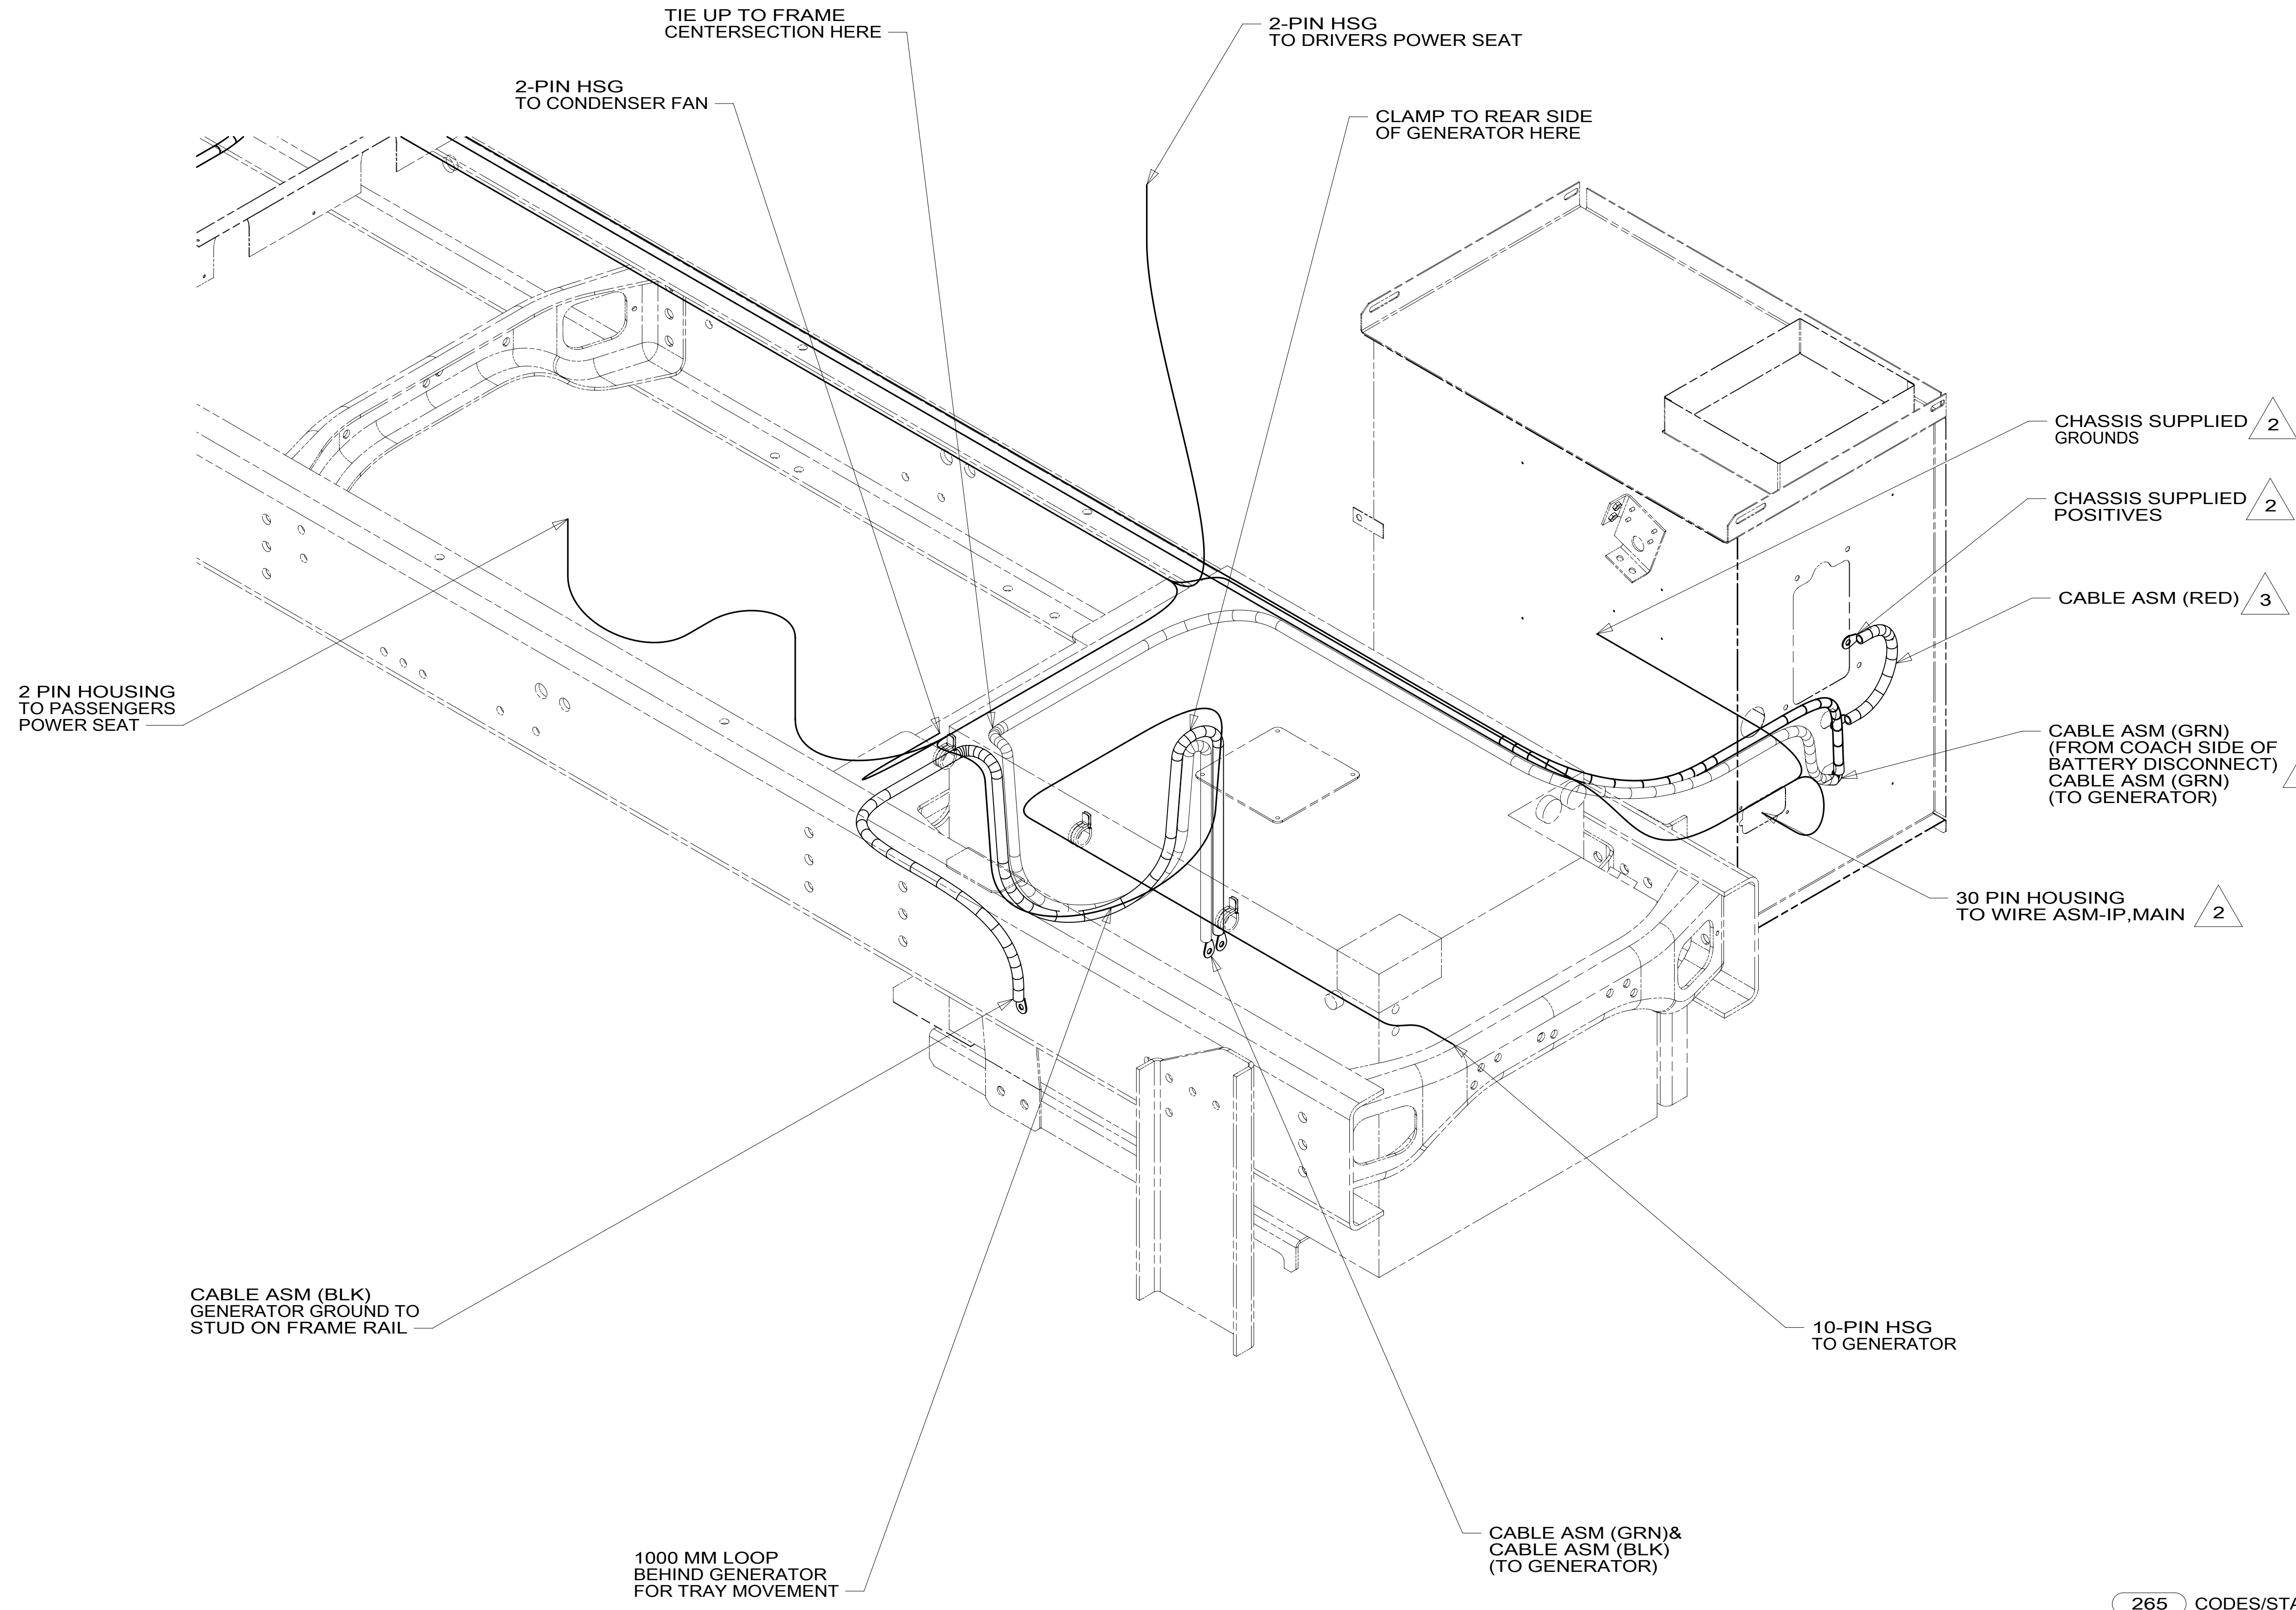

265 CODES/STANDARDS-CSA/CMVSS  
 1B1 CODES/STANDARDS USA

2 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.  
 1 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.

VIEW DA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION: <b>WIRING INSTL-CHASSIS</b>		
SHEET: 4 OF 4	ITEM/PART NO: 000201018 / 30138001000	REV

8 7 6 5 4 3 2 1 20-Sep-2016