


DRAWING NO.	FEATURE
301015-01	-----
301015-11	1B1 12D
301015-15	265 12D

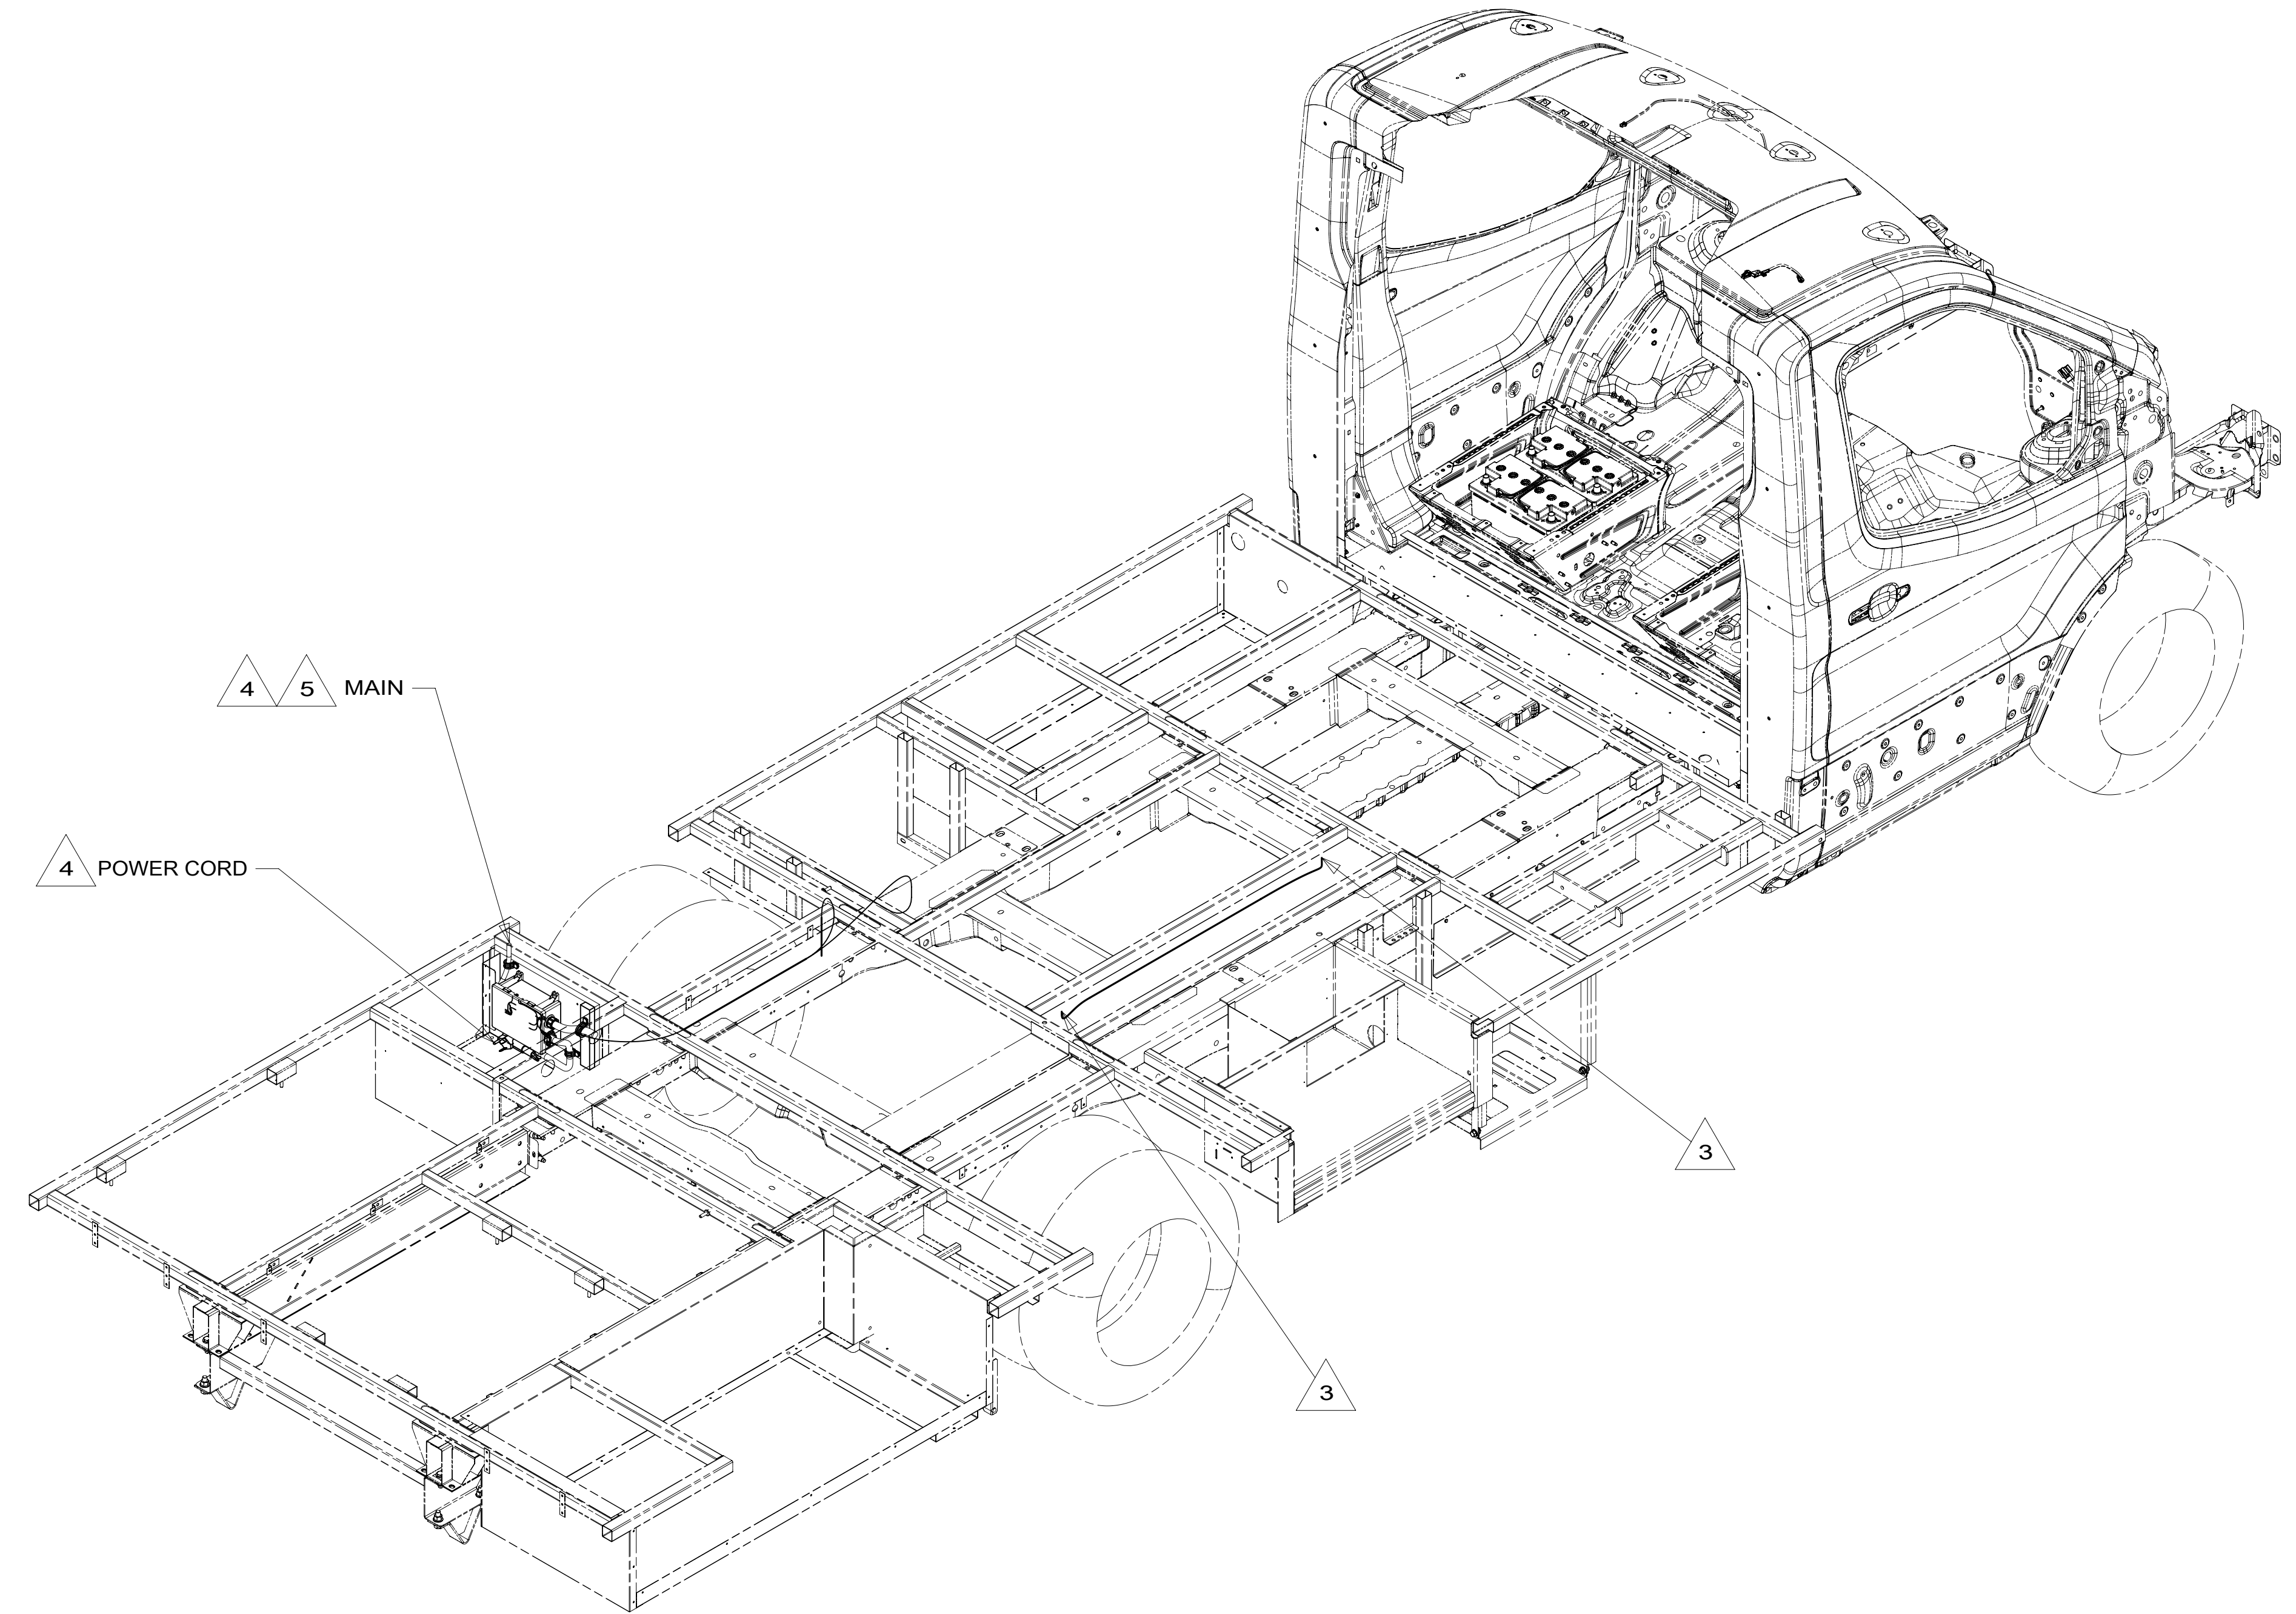

- 5 MAIN IS RUN UP THROUGH FLOOR, THEN IN FLOOR (WITH BLUE CIRCUIT) TO RIGHT SIDE TO LOAD CENTER.
  - 4 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.
  - 3 ROUTE WIRE THRU FLOOR.
2. ALL 110V WIRE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12B.
  1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

- 12D ELECTRICAL SYSTEM 30 AMP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265



DSNR:		ALL DIMENSIONS ARE IN MILLIMETERS	
DFFR:			
UNSPECIFIED TOLERANCES:		MATERIAL:	
WHOLE DIM (X)	: 3		
ONE-PLACE (X.X)	: 1.5		
TWO-PLACE (X.XX)	: 0.50		
ANGLE	: 1°		
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS)	FIRST USED:	
			16 423T

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION: <b>WIRING INSTL-BODY, 110V</b>		
SHEET: 1 OF 4	ITEM/PART NO: 000211436 / 30101501000	REV:
REF:		1 20-Sep-2016

D

C

B

A

RCP-2 (BRN)  
FRONT OVHD

BRACKET-ELECTRICAL  
192671-01-CHT  
SCREW  
G11-08-12U (4)  
CLAMP  
10497-01-000 (3)  
SCREW  
G39-08-08U (3)  
EDGE GUARD  
093305-01-CHT  
(225 MM)

RCP-B (BRN)  
REFRIG CABT

RCP-B (BLK)  
REFRIG CABT

RCP-B (RED)  
REFRIG CABT 38E

RCP-3 (YEL)  
REFRIGERATOR

RELAY-EMS 4

RCP-EXT (BLU-2)  
EXTERIOR 39A

THROW IN WIRE #3

CONVERTER 4

RCP-2 (BRN)  
DINETTE

TO WATER HEATER  
(WHT)

CLAMP  
010497-03-000 (2)  
SCREW  
G11-08-16U (2)

LOAD CENTER/ATS ASM  
000006445 / 310396-01-000

LOAD CENTER  
MAIN GROUND  
CONVERTER  
CASE GROUND 4

RCP-B (BRN)  
LOAD CENTER

TO LEFT SIDE  
(BLU)  
(MAIN)  
(THROW IN #3) 6

RCP-2 (BRN)  
BEDROOM

- 6 THRU ROUTED PATH IN FLOOR ASM.
- 5 WIRE ROUTED IN WIRING TROUGH BELOW FLOOR. (WHT, THROW-IN #1)
- 4 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.

- 3. ALL GROUND WIRE TO BE COVERED WITH TUBING 8041-02-000.
- 2. ALL 110V WIRE TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12B.
- 1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.


NOTES:

- 38E CONVENIENCE PACKAGE
- 39A EXT RECEPTACLE DPLX 120VAC
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL  
TORQUE  
SPECIFICATIONS  
SEE DWG NO.  
128783-01-000

FOR  
ELECTRICAL  
CALLOUTS  
SEE DWG NO.  
121339-01-000

DESCRIPTION:	1B1 265	
<b>WIRING INSTL-BODY, 110V</b>		
SHEET:	ITEM/PART NO:	REV
3 OF 4	000211436 / 30101501000	

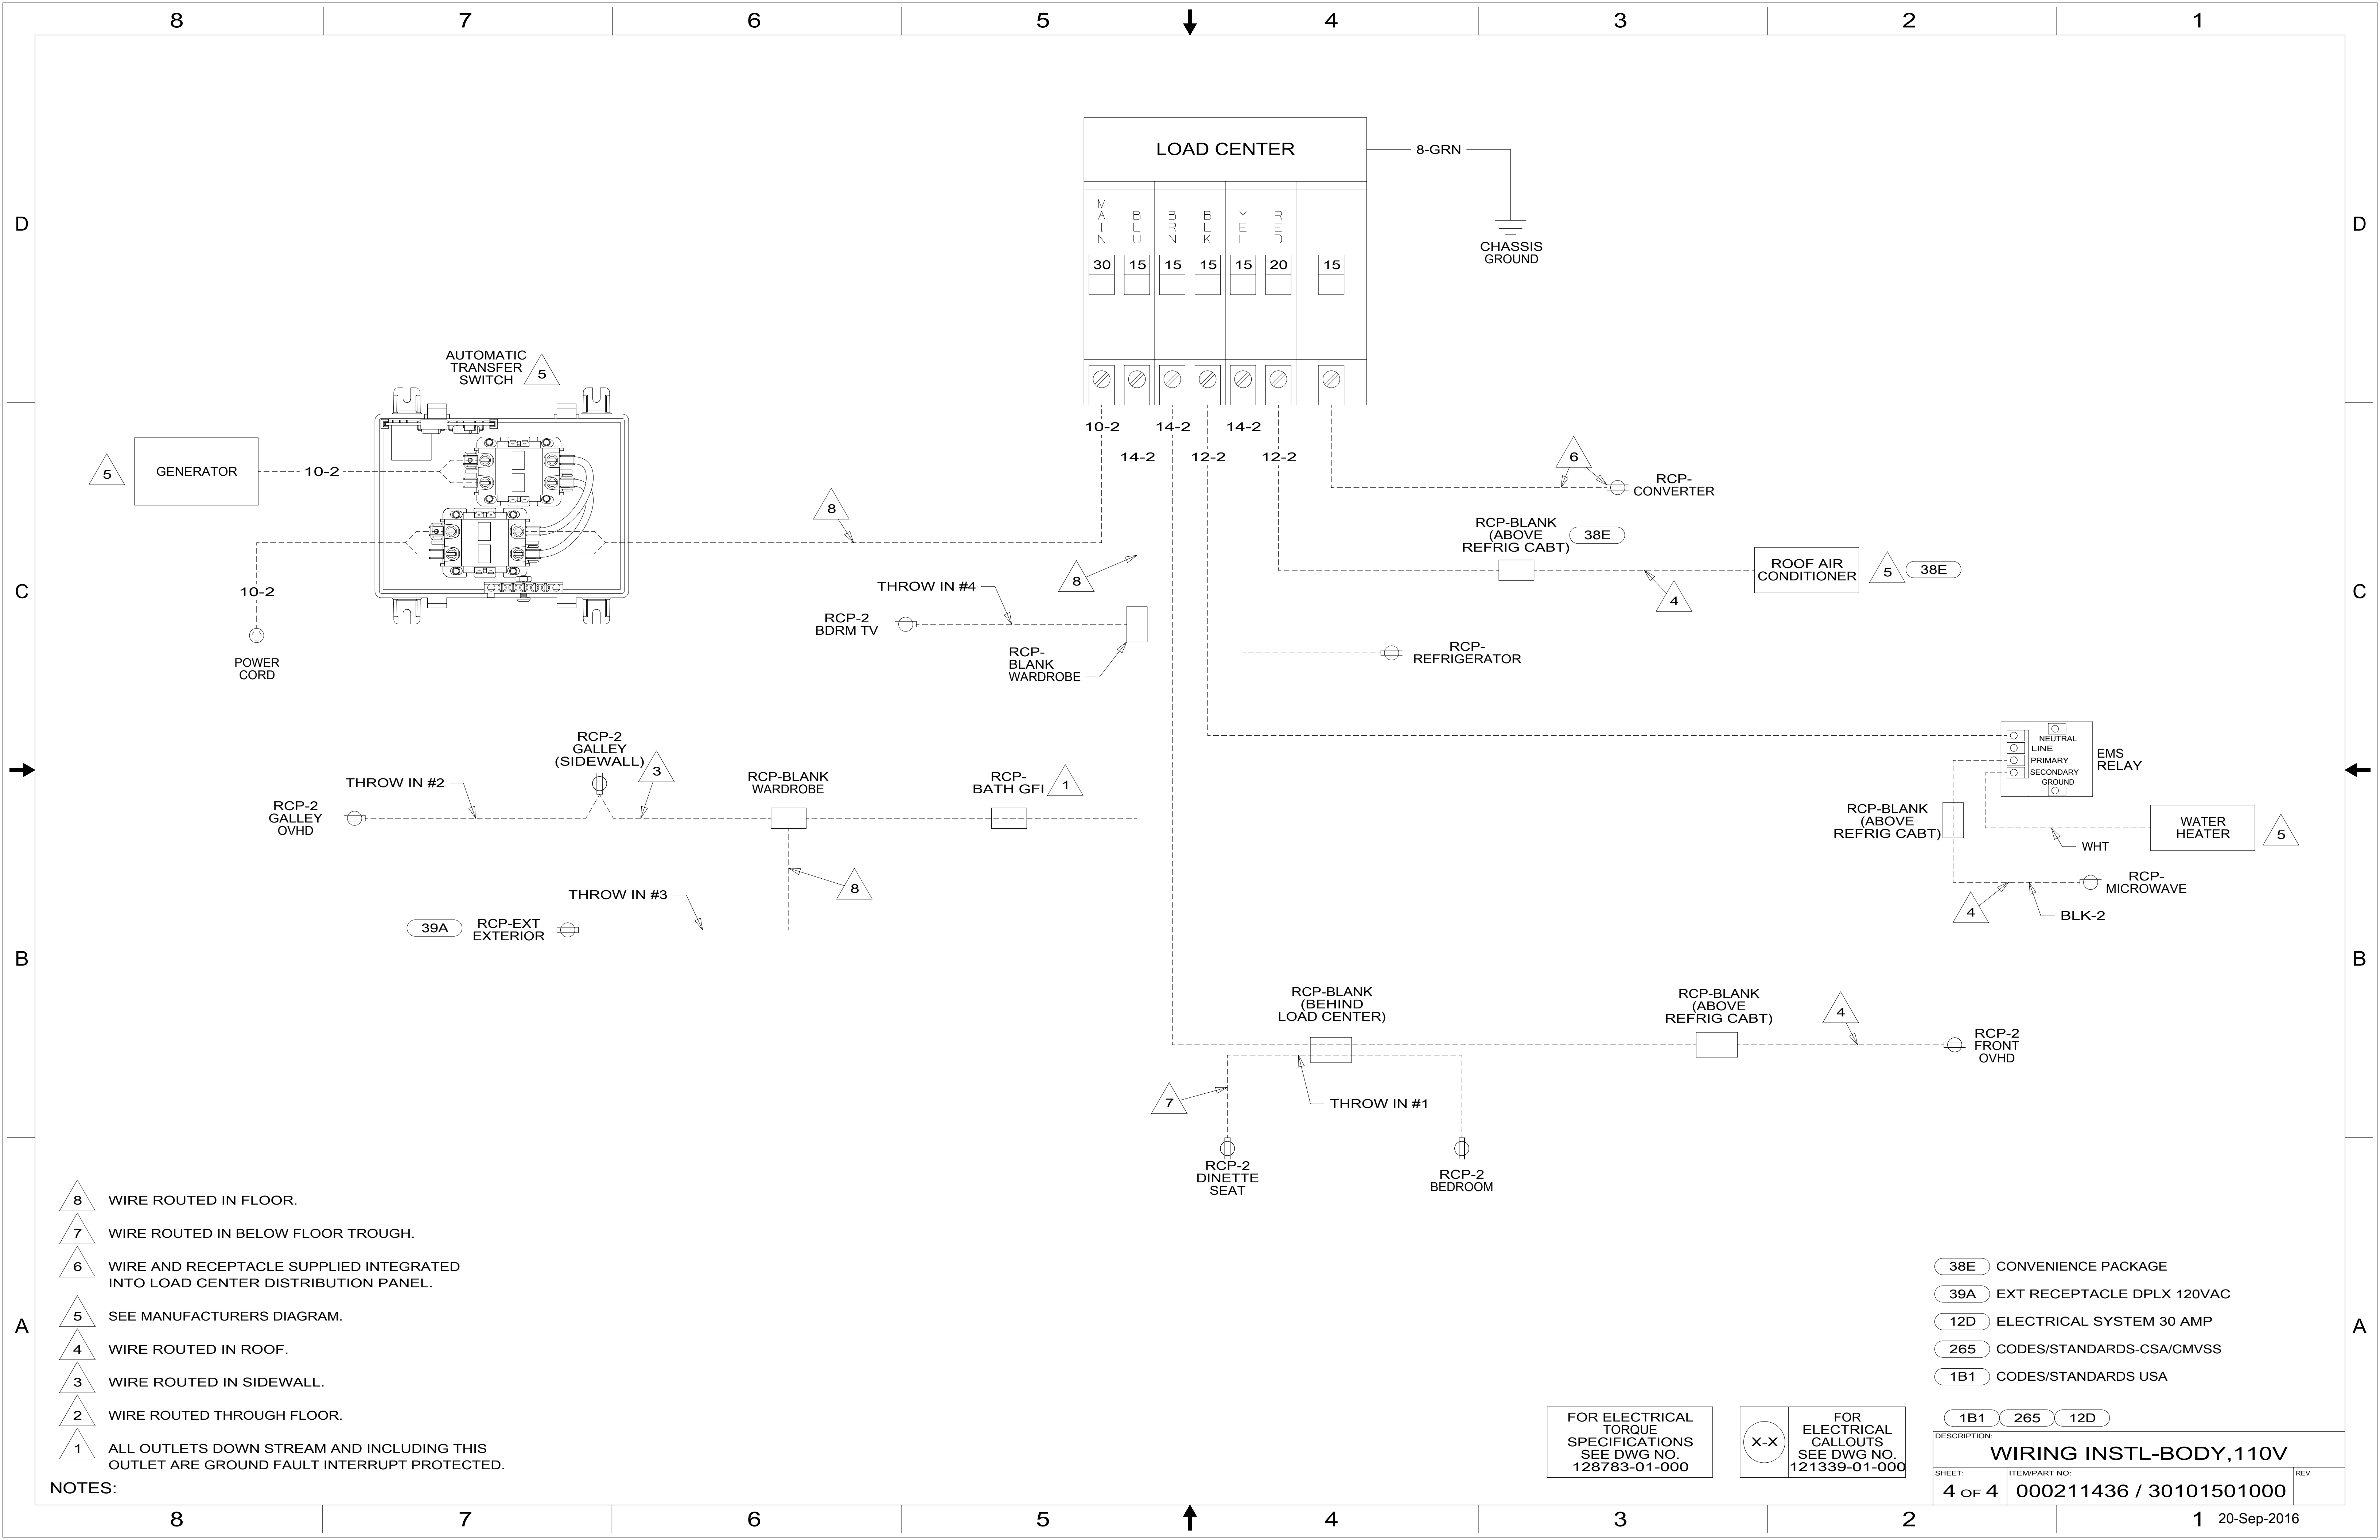

- NOTES:**
- 8 WIRE ROUTED IN FLOOR.
  - 7 WIRE ROUTED IN BELOW FLOOR TROUGH.
  - 6 WIRE AND RECEPTACLE SUPPLIED INTEGRATED INTO LOAD CENTER DISTRIBUTION PANEL.
  - 5 SEE MANUFACTURERS DIAGRAM.
  - 4 WIRE ROUTED IN ROOF.
  - 3 WIRE ROUTED IN SIDEWALL.
  - 2 WIRE ROUTED THROUGH FLOOR.
  - 1 ALL OUTLETS DOWN STREAM AND INCLUDING THIS OUTLET ARE GROUND FAULT INTERRUPT PROTECTED.

- 38E CONVENIENCE PACKAGE
- 39A EXT RECEPTACLE DPLX 120VAC
- 12D ELECTRICAL SYSTEM 30 AMP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:	1B1 265 12D	
<b>WIRING INSTL-BODY, 110V</b>		
SHEET:	ITEM/PART NO.:	REV
4 OF 4	000211436 / 30101501000	