



8 7 6 5 4 3 2 1

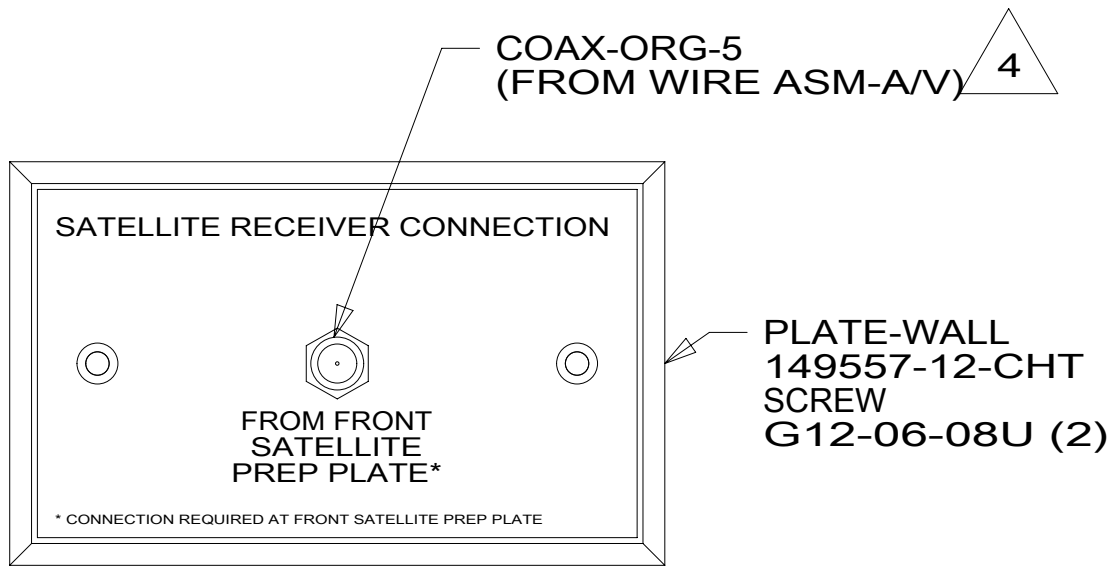

DETAIL BA

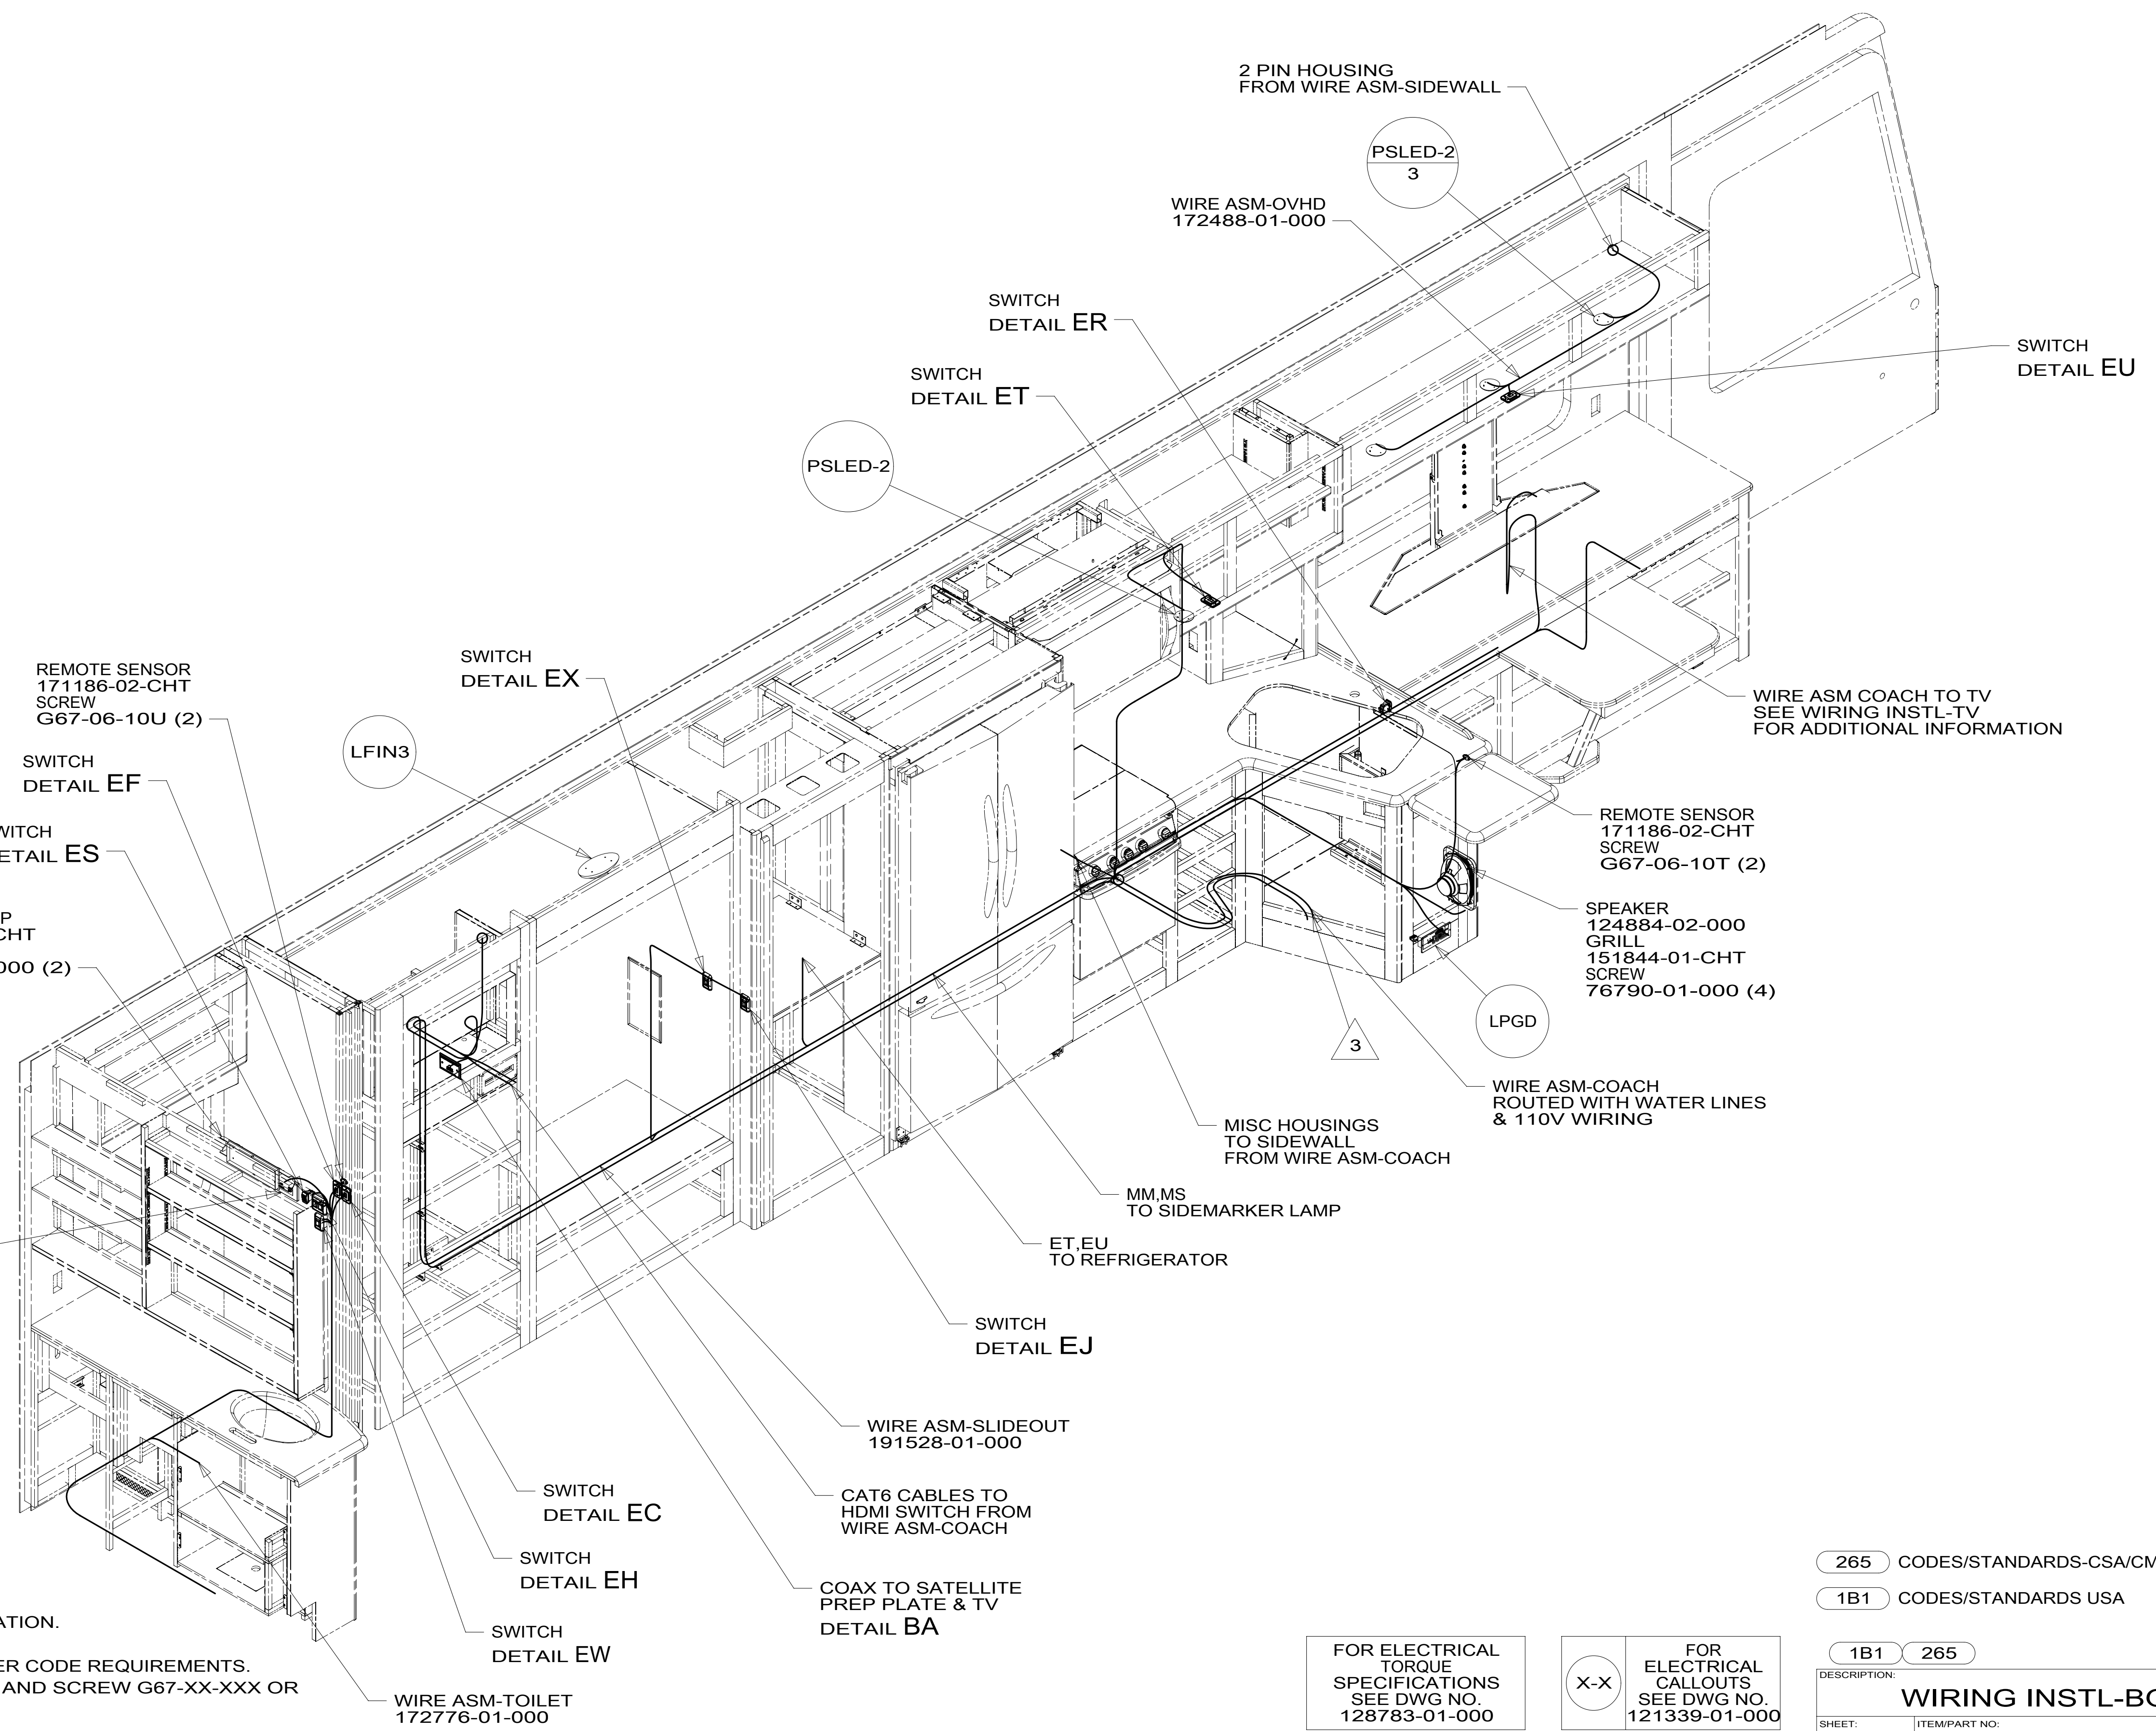

- 4 CONNECTS TO REAR OF SATELLITE PREP PLATE.
- 3 WIRE PASSES THROUGH FLOOR AT THIS POINT.

2. SEE WIRING DIAGRAM-BODY, 12V FOR ADDITIONAL INFORMATION.

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:






FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

DESCRIPTION:		1B1	265
WIRING INSTL-BODY, 12V			
SHEET:	ITEM/PART NO.:	REV	
2 OF 9	000211588 / 30169901000		

8 7 6 5 4 3 2 1 20-Sep-2016

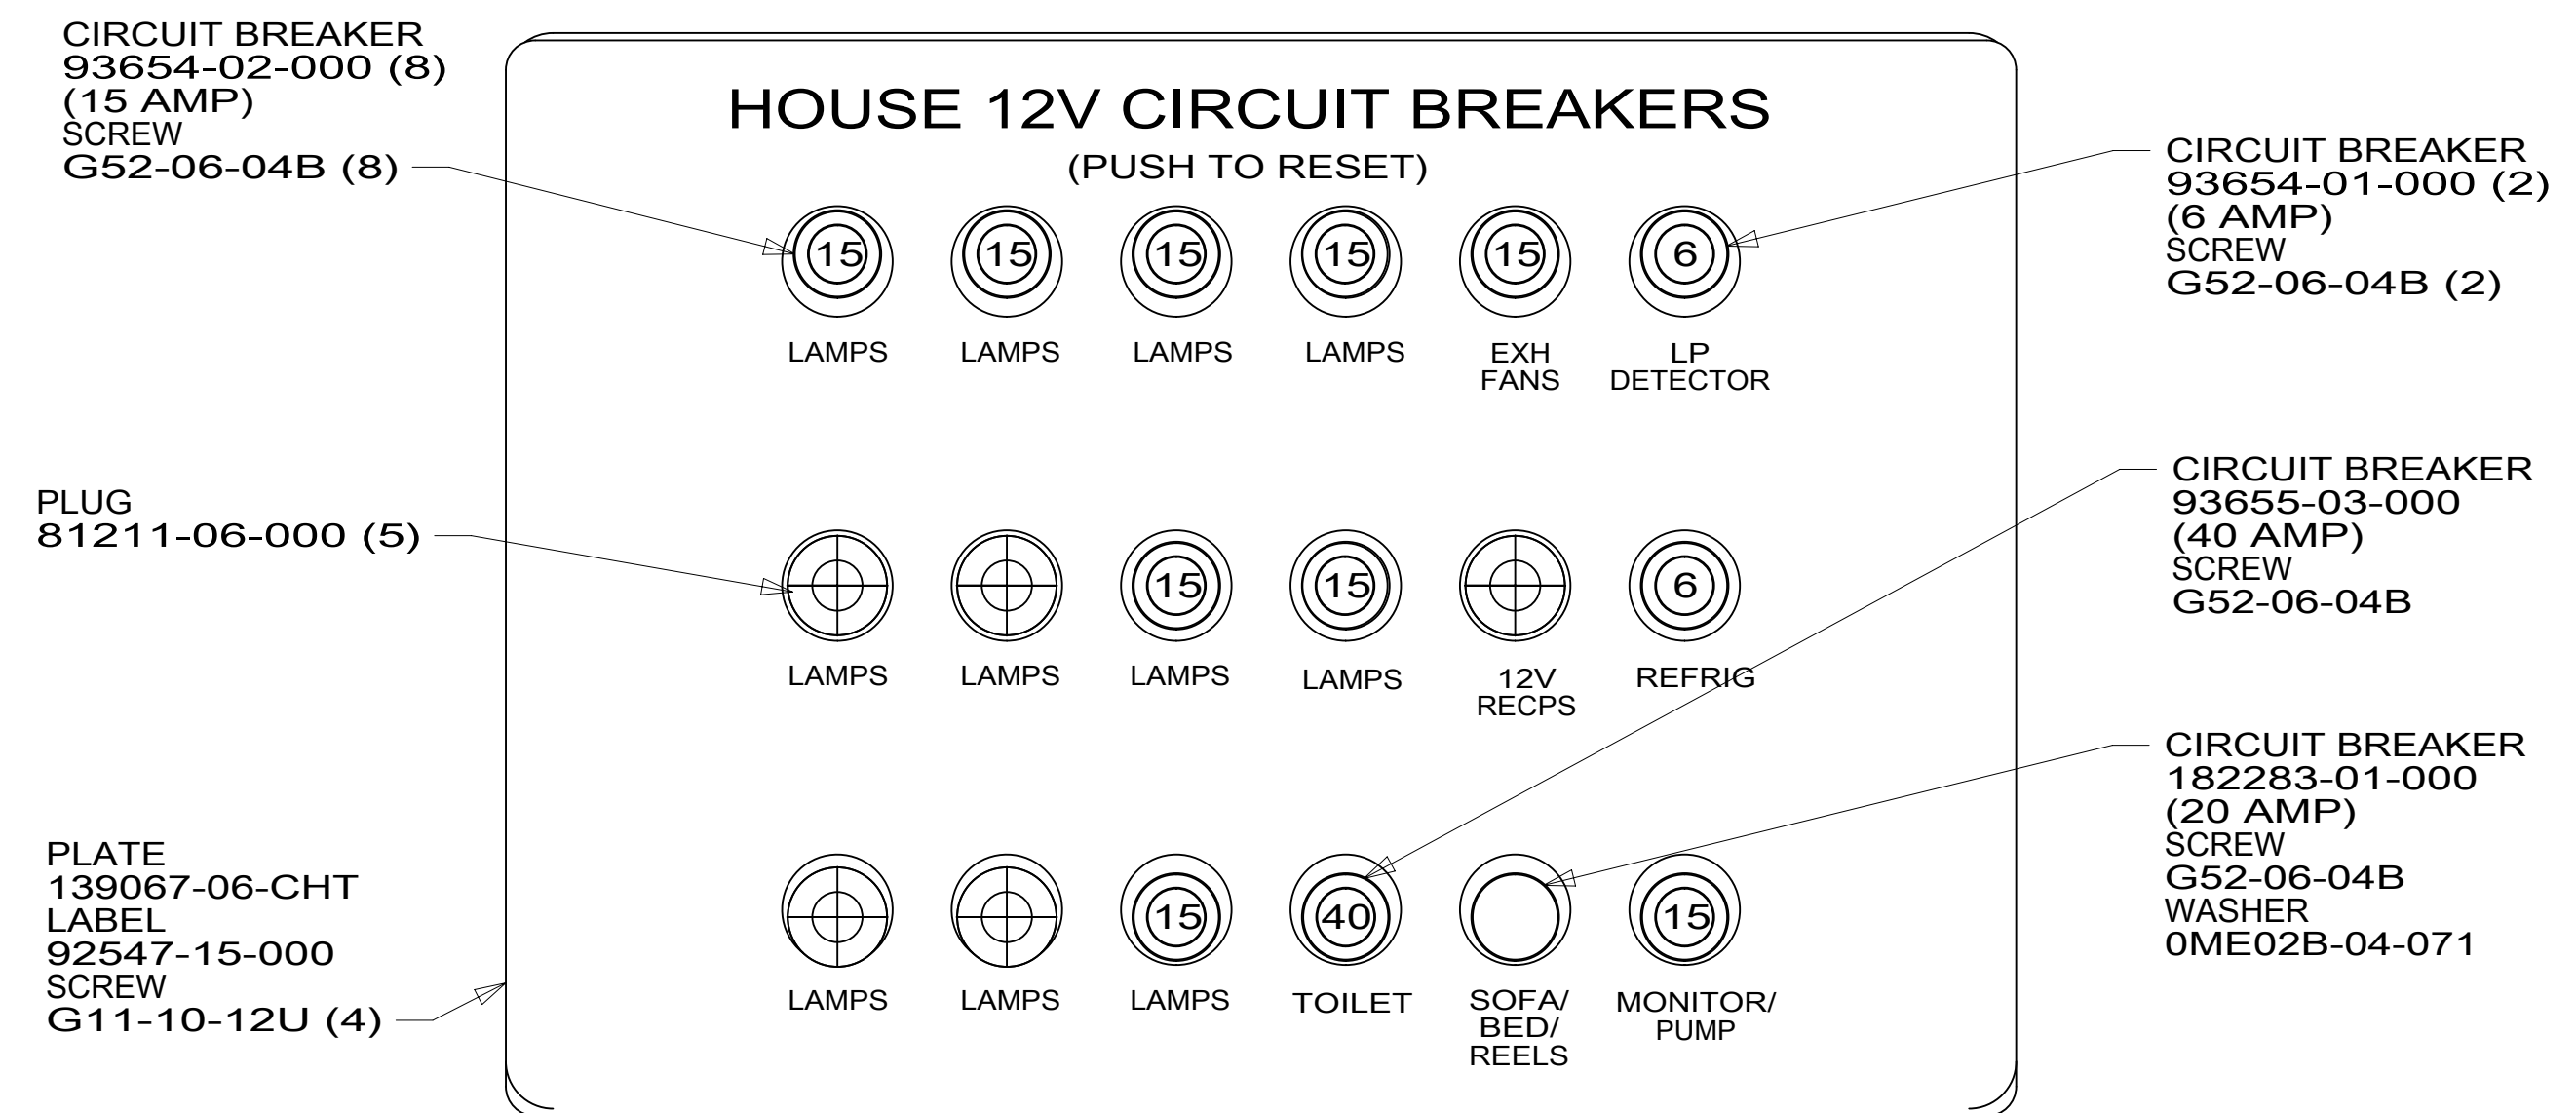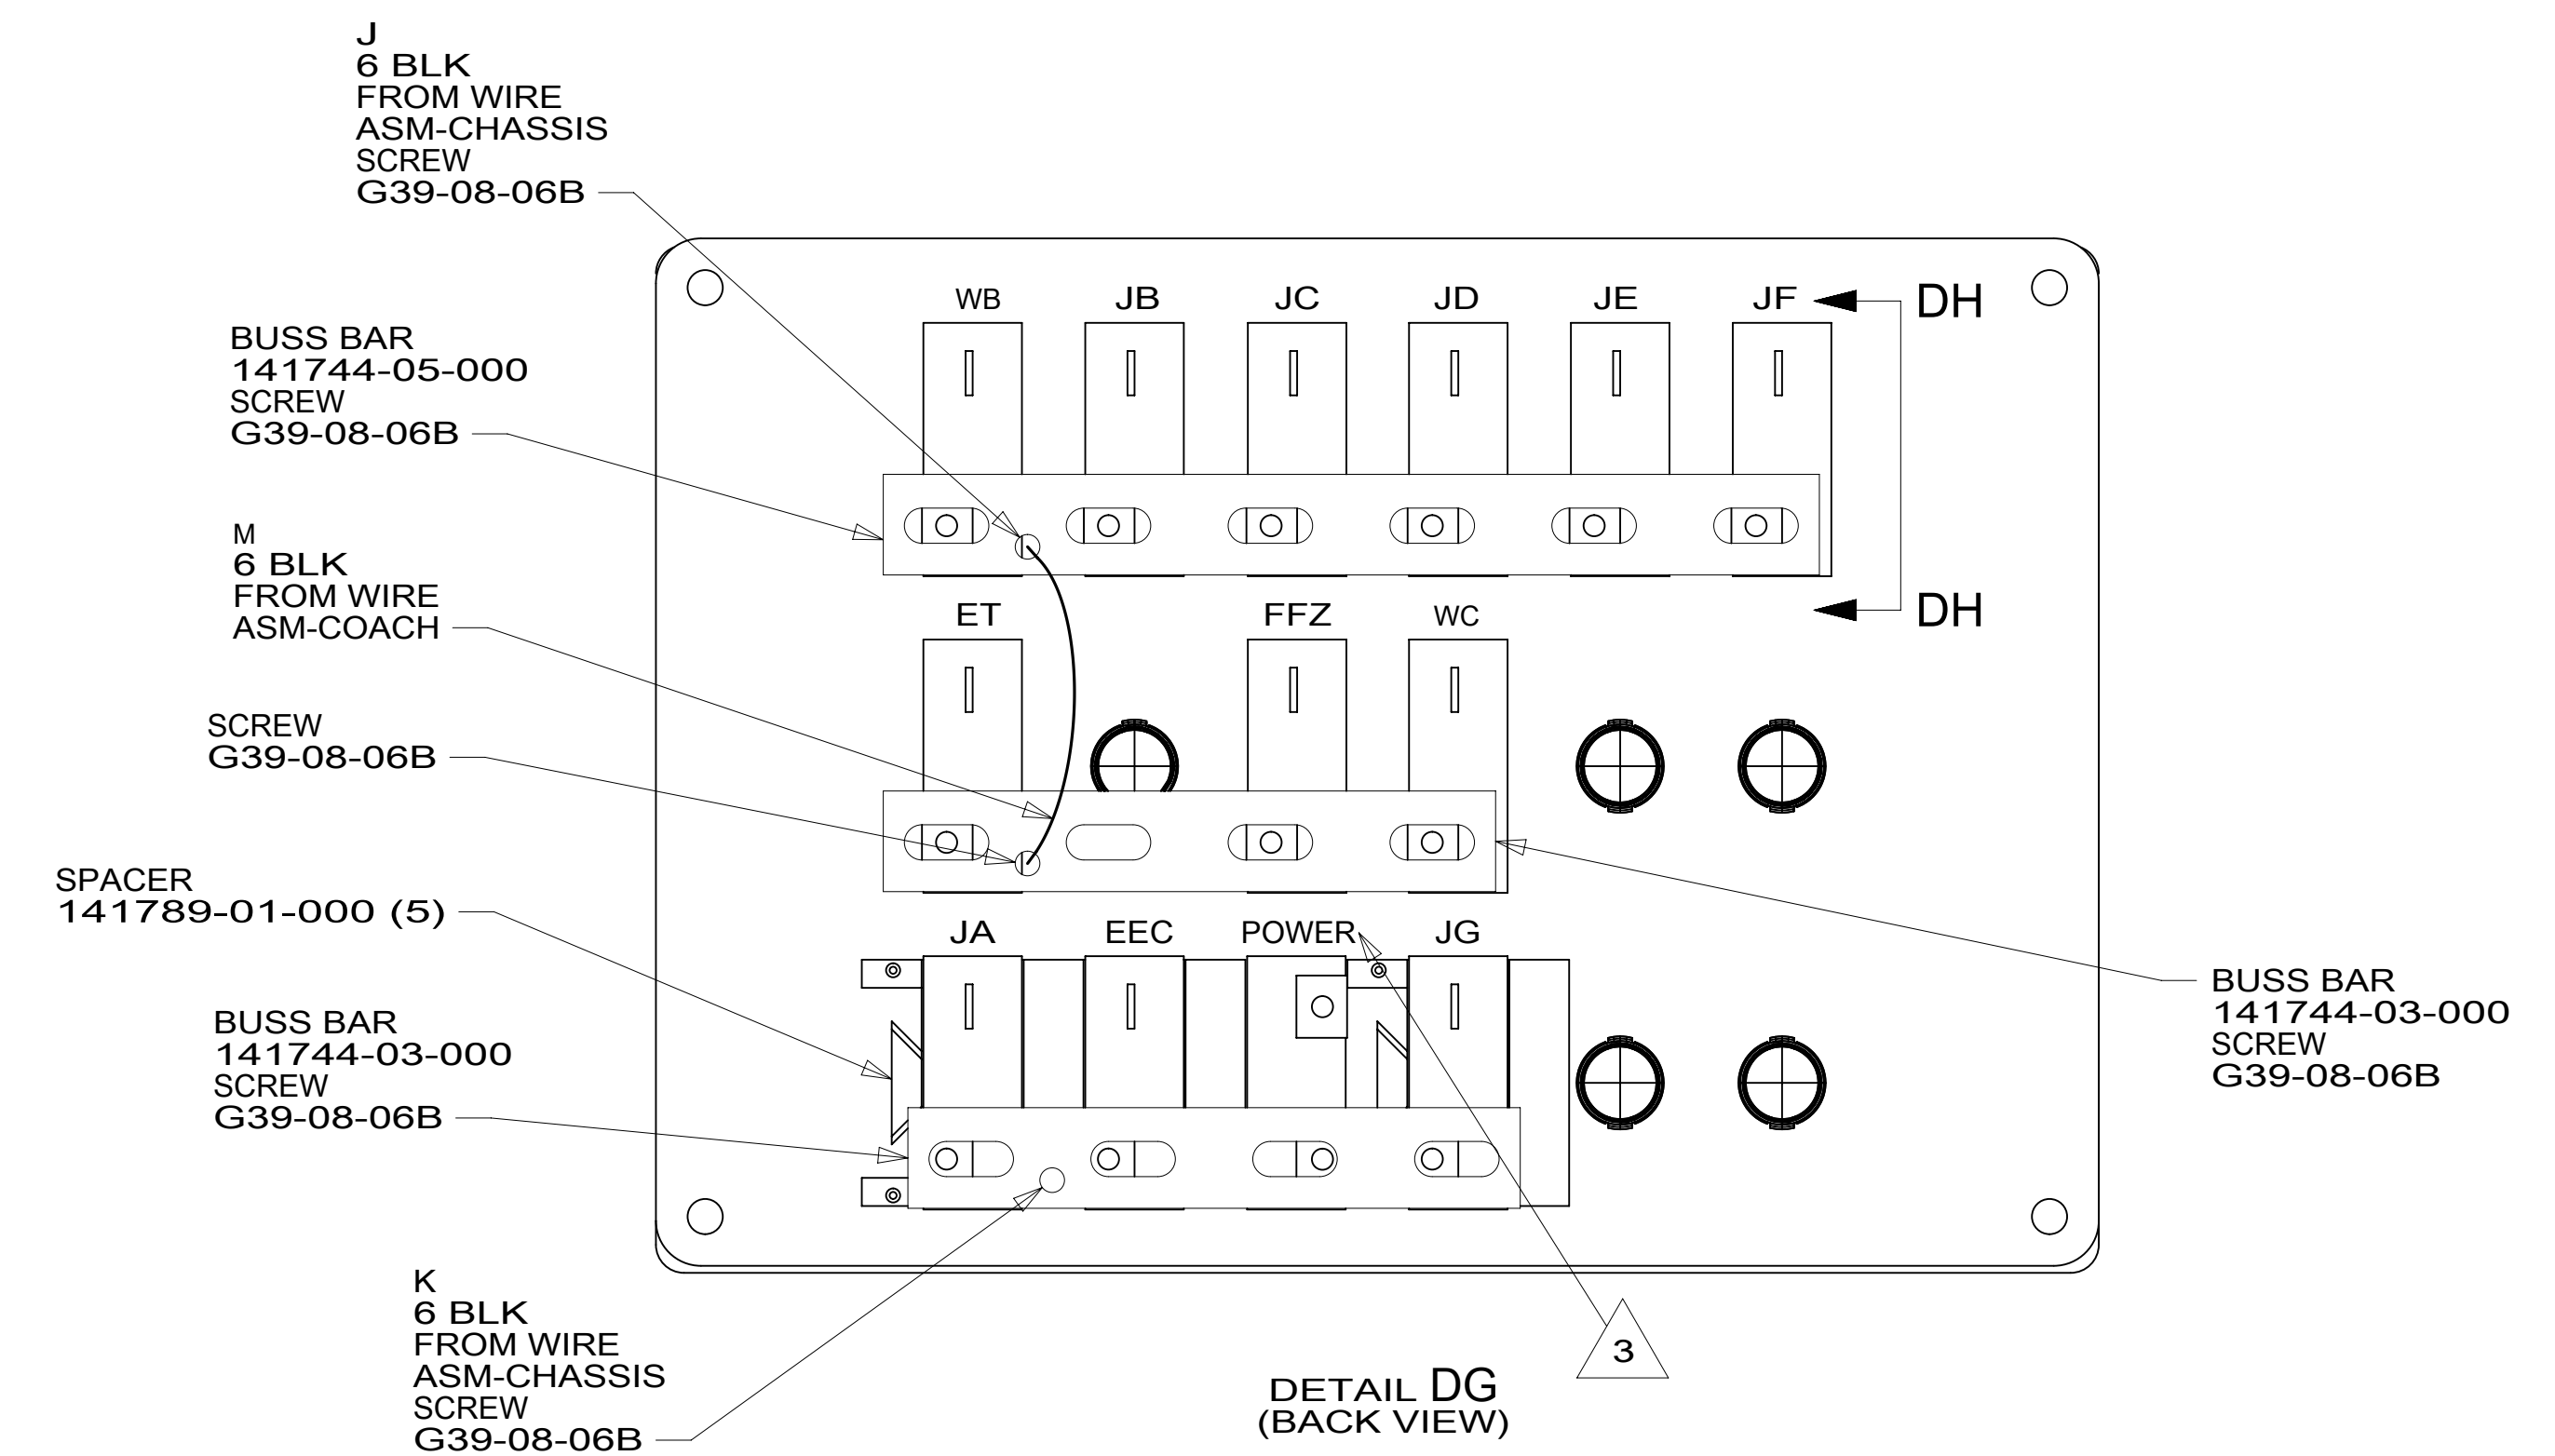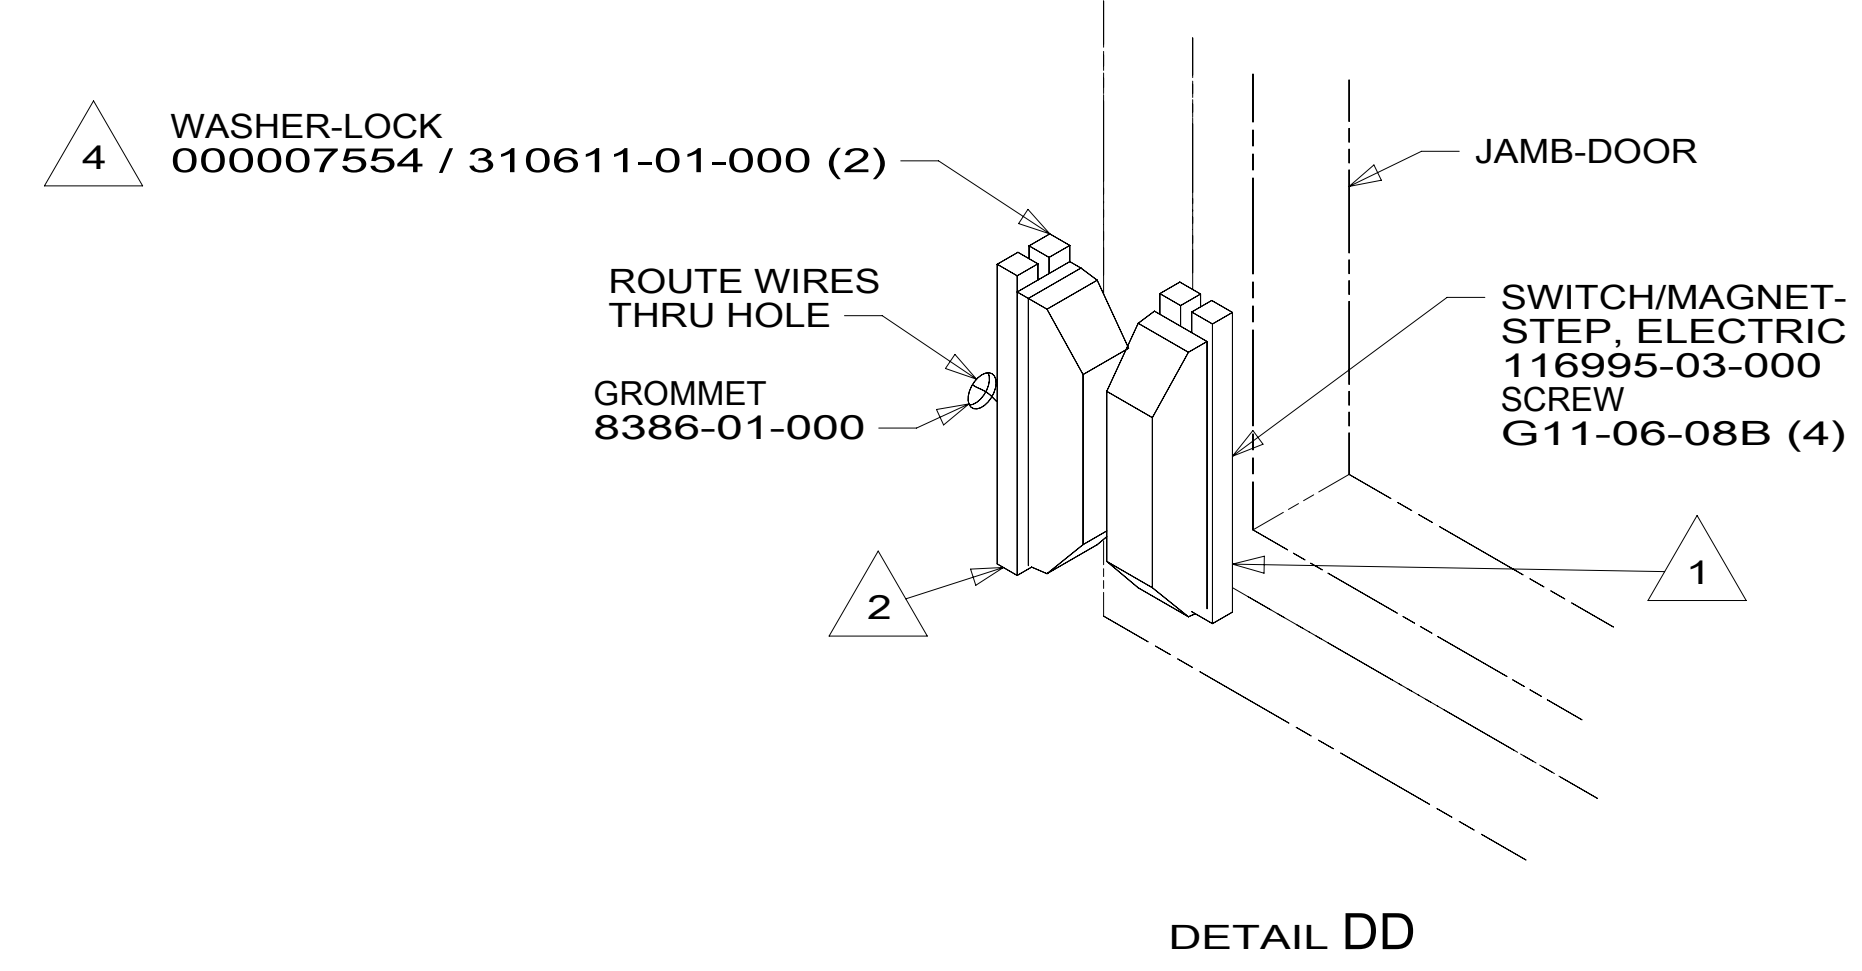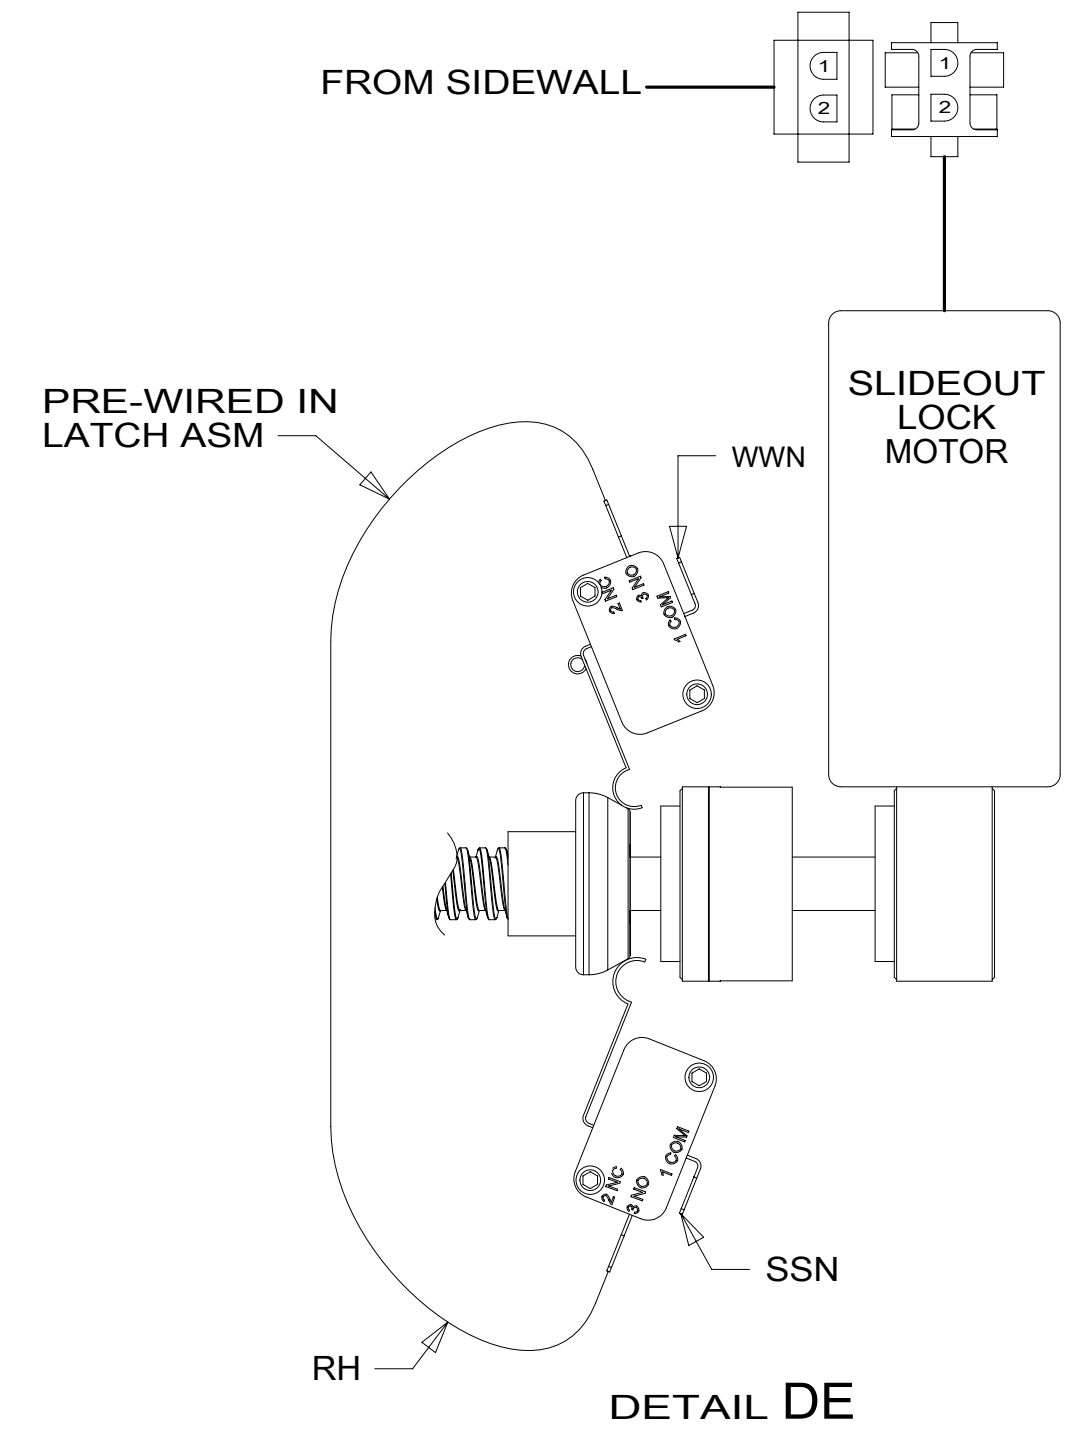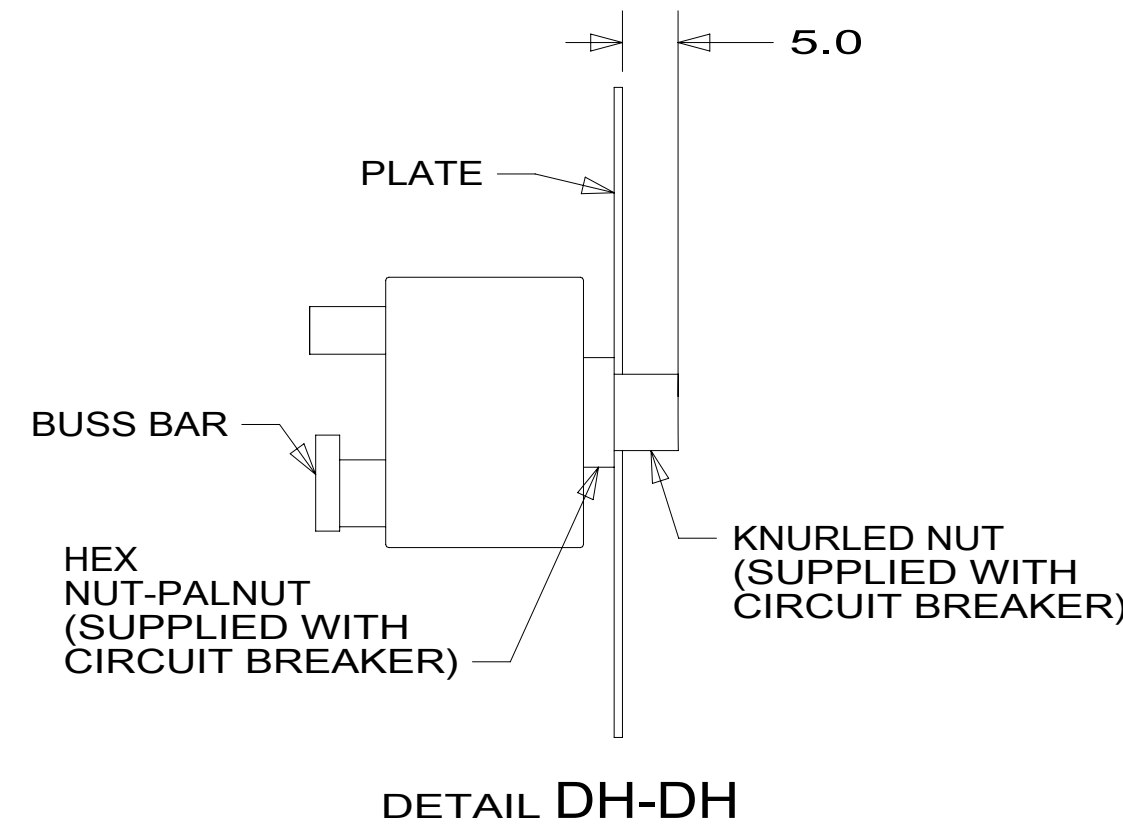

- NOTES:**
- 4 REMOVE SCREWS FROM MAGNET SWITCH TO INSTALL LOCK WASHER AND RING TERMINALS.
 - 3 CIRCUIT IS MARKED WITH YELLOW TAPE.
 - 2 MOUNT SWITCH AND SPACER TO BLOCK ON JAMB ADJUST HEIGHT TO MATCH MAGNET.
 - 1 MOUNT MAGNET USING PILOT HOLES IN SCREEN DOOR FRAME. MOUNT WITH MAGNET TOWARD SWITCH.

265 CODES/STANDARDS-CSA/CMVSS
 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION: WIRING INSTL-BODY, 12V		
SHEET: 4 OF 9	ITEM/PART NO: 000211588 / 30169901000	REV

SWITCH-AWNING LIGHT
108357-14-000
ACTUATOR-SWITCH
108356-28-CHT
(CIRCUITS ZZK,WC,WE)

SWITCH-AUTO LEVEL
108357-18-000
ACTUATOR-SWITCH
108356-15-CHT
CIRCUITS SSD,SSE,
SSC,SSE,SSF

SWITCH-COMPT LIGHTS
108357-01-000
ACTUATOR-SWITCH
108356-14-CHT
CIRCUITS WC,WA

SWITCH-TV-LIFT
108357-16-000
ACTUATOR
108356-26-CHT
PLATE
98351-07-CHT
SCREW
G11-06-10U (2)

SWITCH-ROCKER
135740-01-CHT
SWITCH-BASE
135741-01-CHT
SWITCH-BEZEL
135742-01-CHT
SCREW
G11-08-08U (2)

SWITCH-PUMP
108357-21-000
ACTUATOR
108356-03-CHT
(XXZ,JA,JY,YYF)

SWITCH-SERVICE LAMP
108357-01-000
ACTUATOR
108356-01-CHT
WC,WA

SWITCH-AUTO LEVEL
108357-18-000
ACTUATOR-SWITCH
108356-03-CHT
SSD,SSE,SSC,SSF,SSE

SWITCH-AWNING
108357-06-000
ACTUATOR
108356-12-CHT
(CIRCUITS FFR,FFP,FFN)

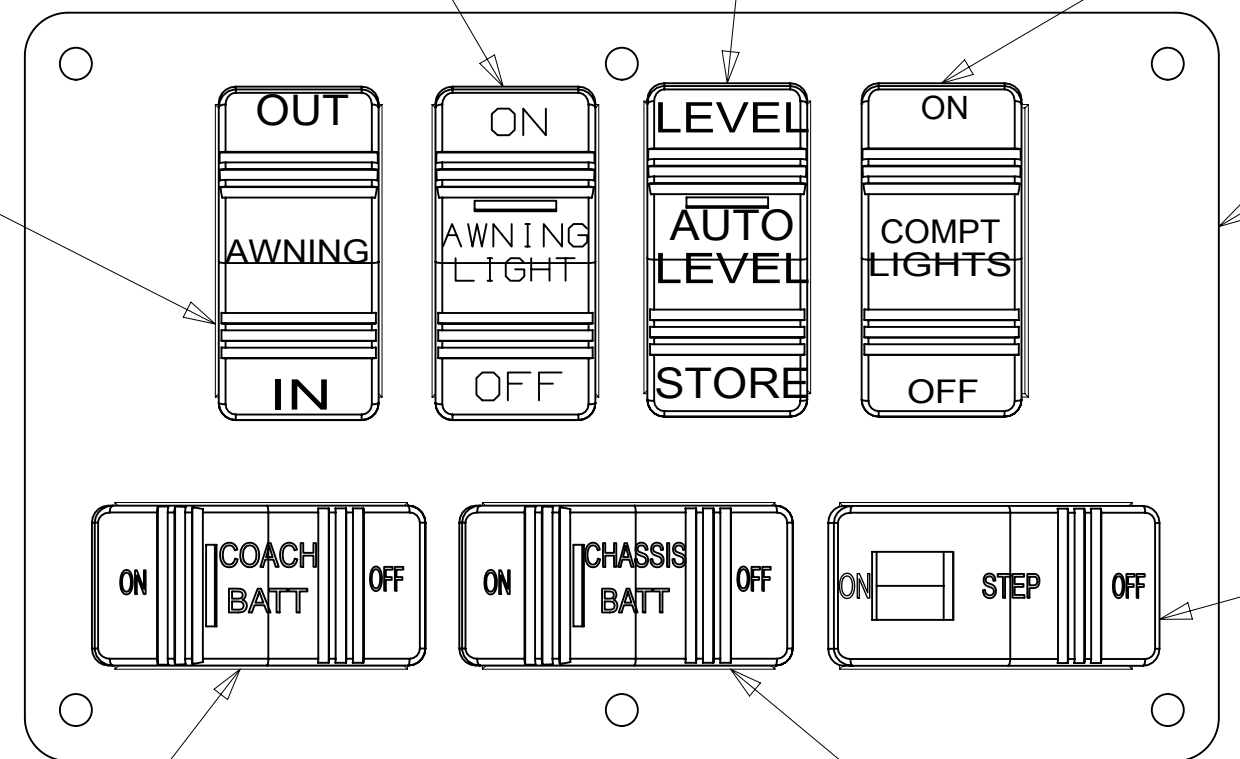


PLATE-SWITCH
158431-18-CHT
SCREW
G11-06-10U (6)


SWITCH-STEP
108357-19-000
CIRCUITS ER,ES

SWITCH-COACH BATT
108357-18-000
ACTUATOR-SWITCH
108356-19-CHT
CIRCUITS KF,LG,
LJ,LJ,LH,KF,KF,LK
WIRE ASM-THERM
186796-01-000

VIEW EA

SWITCH-CHASSIS BATT
108357-18-000
ACTUATOR-SWITCH
108356-20-CHT
CIRCUITS UUC,TTY,UUB,
UUB,TTZ,UUC,UUA
WIRE ASM-THERM
186796-01-000


DETAIL ER (2 PLACES)

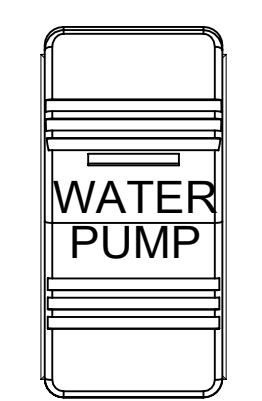


DETAIL ES (2 PLACES)




DETAIL ET

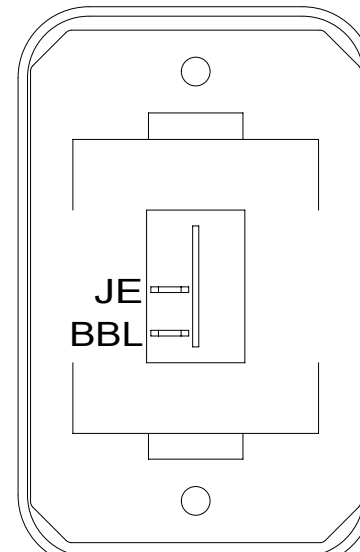


DETAIL EU (21R)

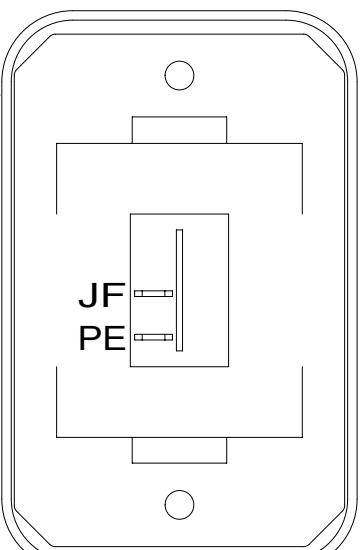


DETAIL EM



DETAIL EV

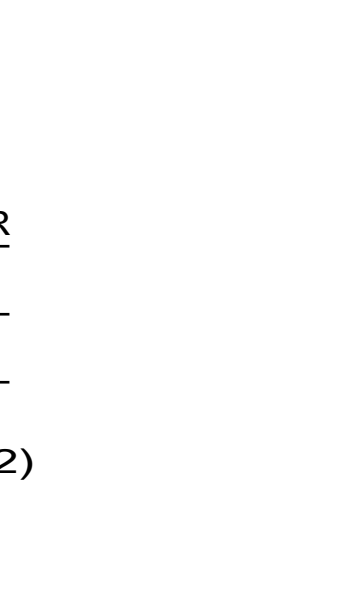



DETAIL EN

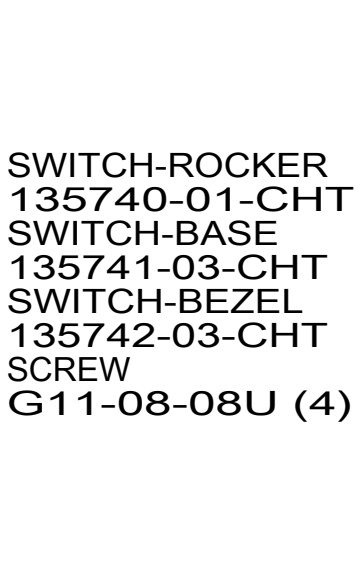


DETAIL EL




DETAIL EB

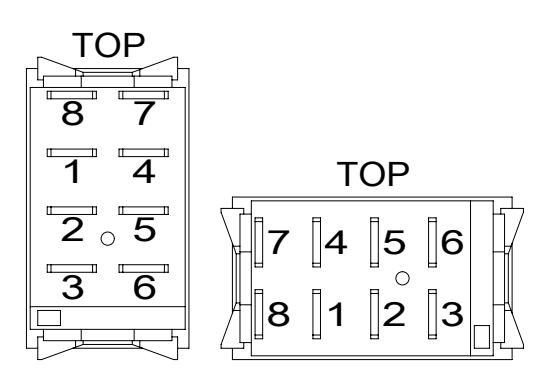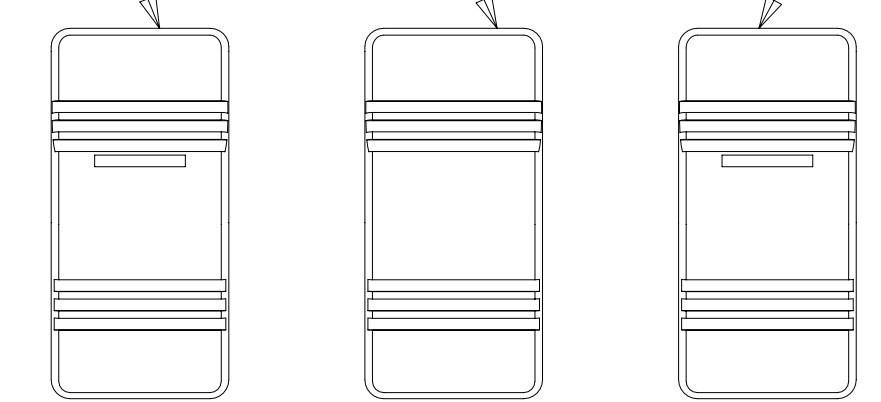


DETAIL EK

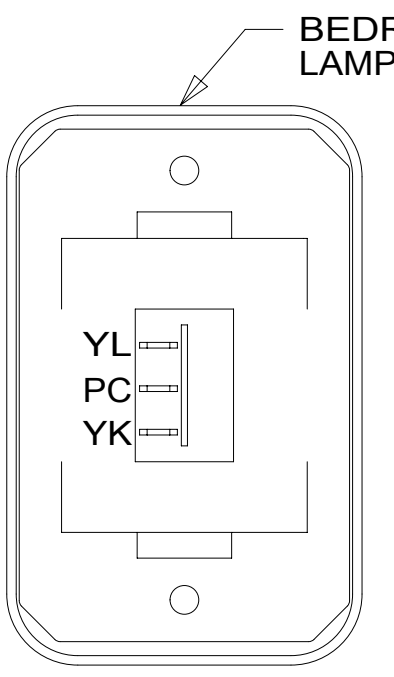


DETAIL EC

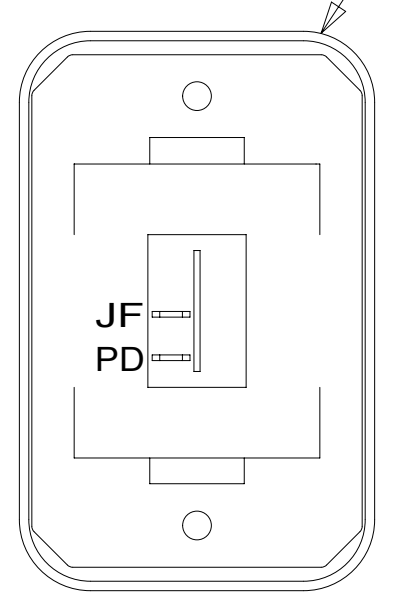


DETAIL EE

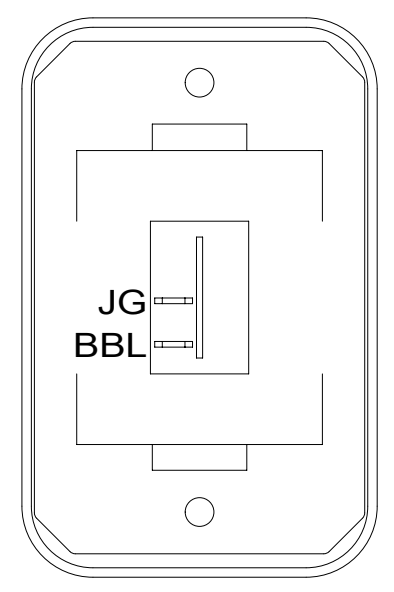


DETAIL ED

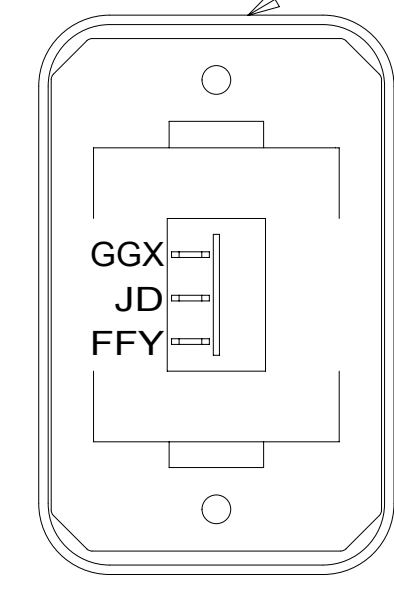


DETAIL EF

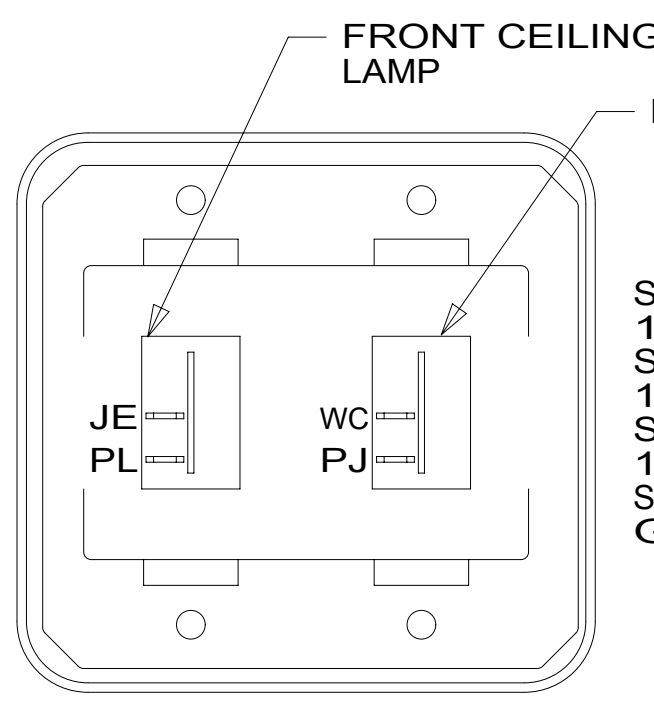


DETAIL EG

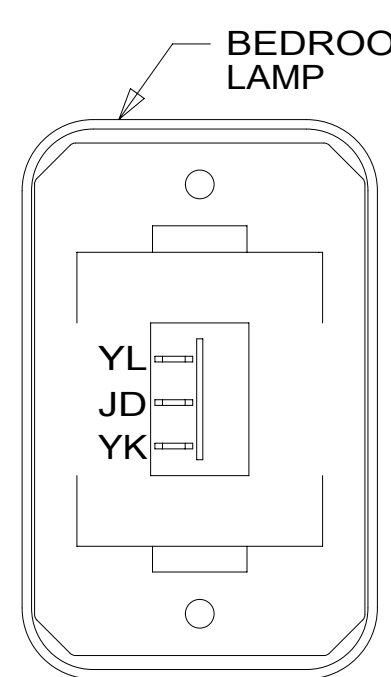


DETAIL EJ

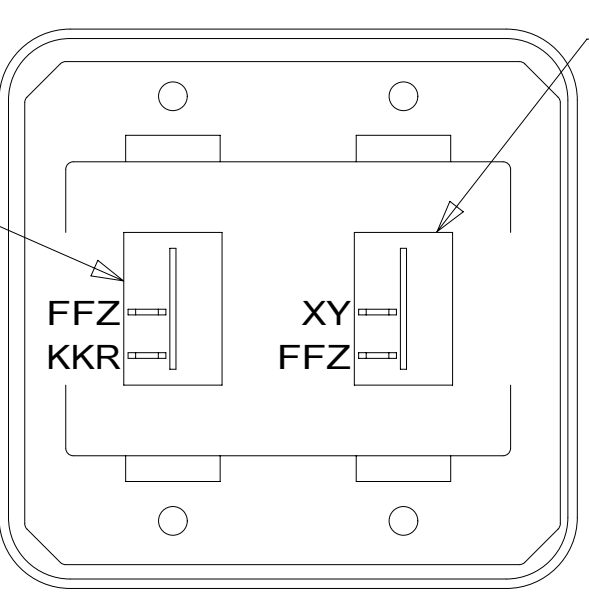


DETAIL EH

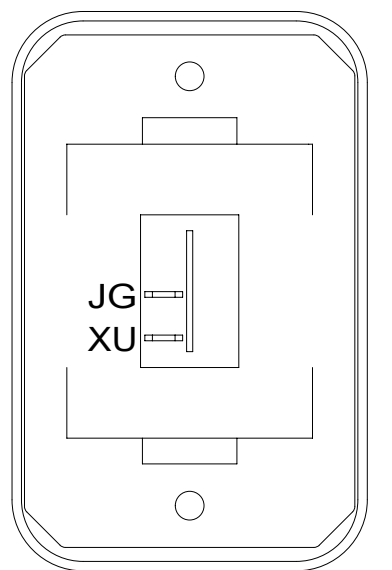


DETAIL EV

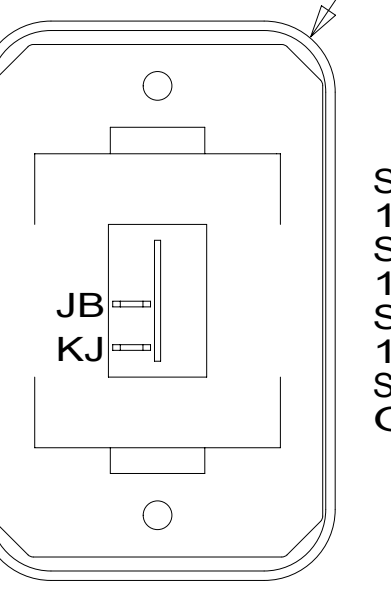


DETAIL EN

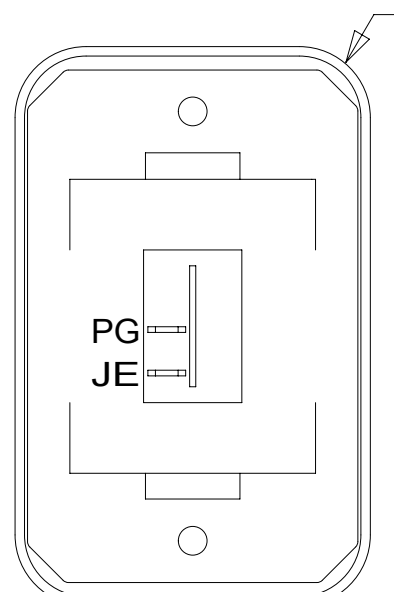

DETAIL EX

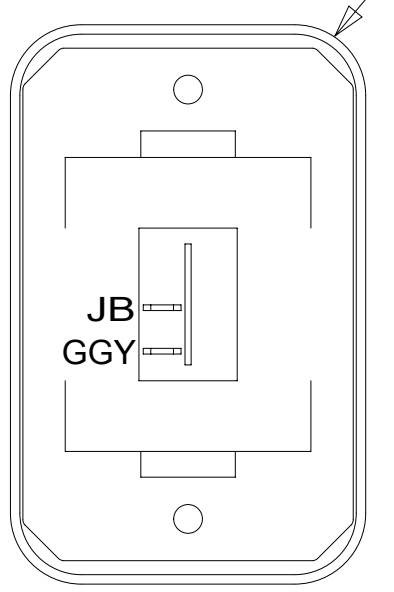

DETAIL EW

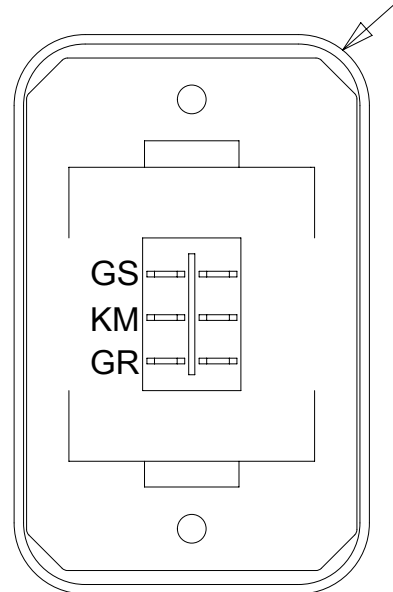

DETAIL EP

FOR SWITCH ORIENTATION SEE DETAIL EK

CONNECT WIRE ASM-RESISTOR FAN TO 2-PIN HOUSING ON WIRE ASM LOCATED BY SWITCHES.

NOTES:
1. SWITCHES ARE TO BE INSTALLED AS SHOWN ON THIS DRAWING.


- DINING/BUFFET/POWERED TV
- FAN - CEILING_BEDROOM
- CODES/STANDARDS-CSA/CMVSS
- CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION: WIRING INSTL-BODY, 12V	
SHEET: 5 OF 9	ITEM/PART NO: 000211588 / 30169901000
REV 1 20-Sep-2016	


8 7 6 5 4 3 2 1

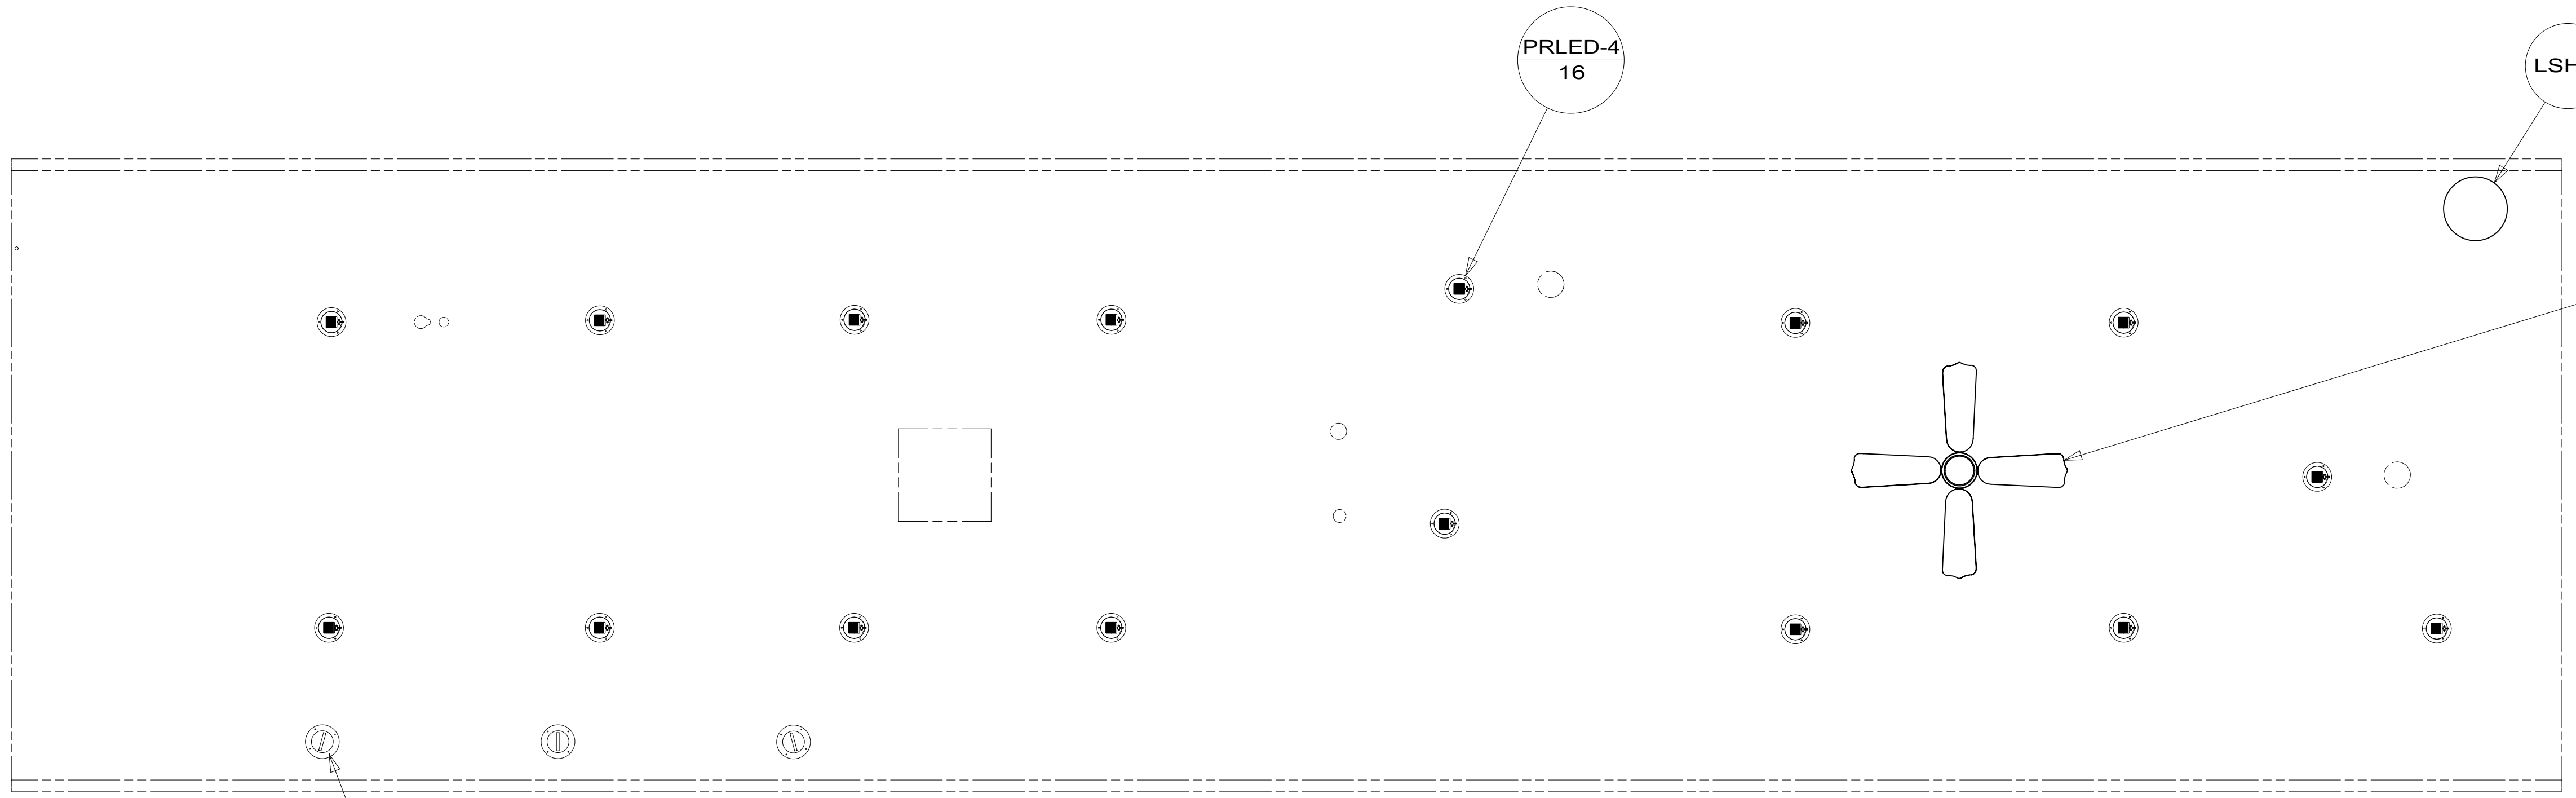


FAN-CEILING
 139134-01-CHT
 SCREW
 G11-10-16B (3)
 CONNECTOR
 58028-01-000 (2)
 DETAIL FA

41Y 3 4

SPEAKER-ROUND, CEILING
 160867-01-CHT (3)
 SCREW
 000G12-08-12U (12)

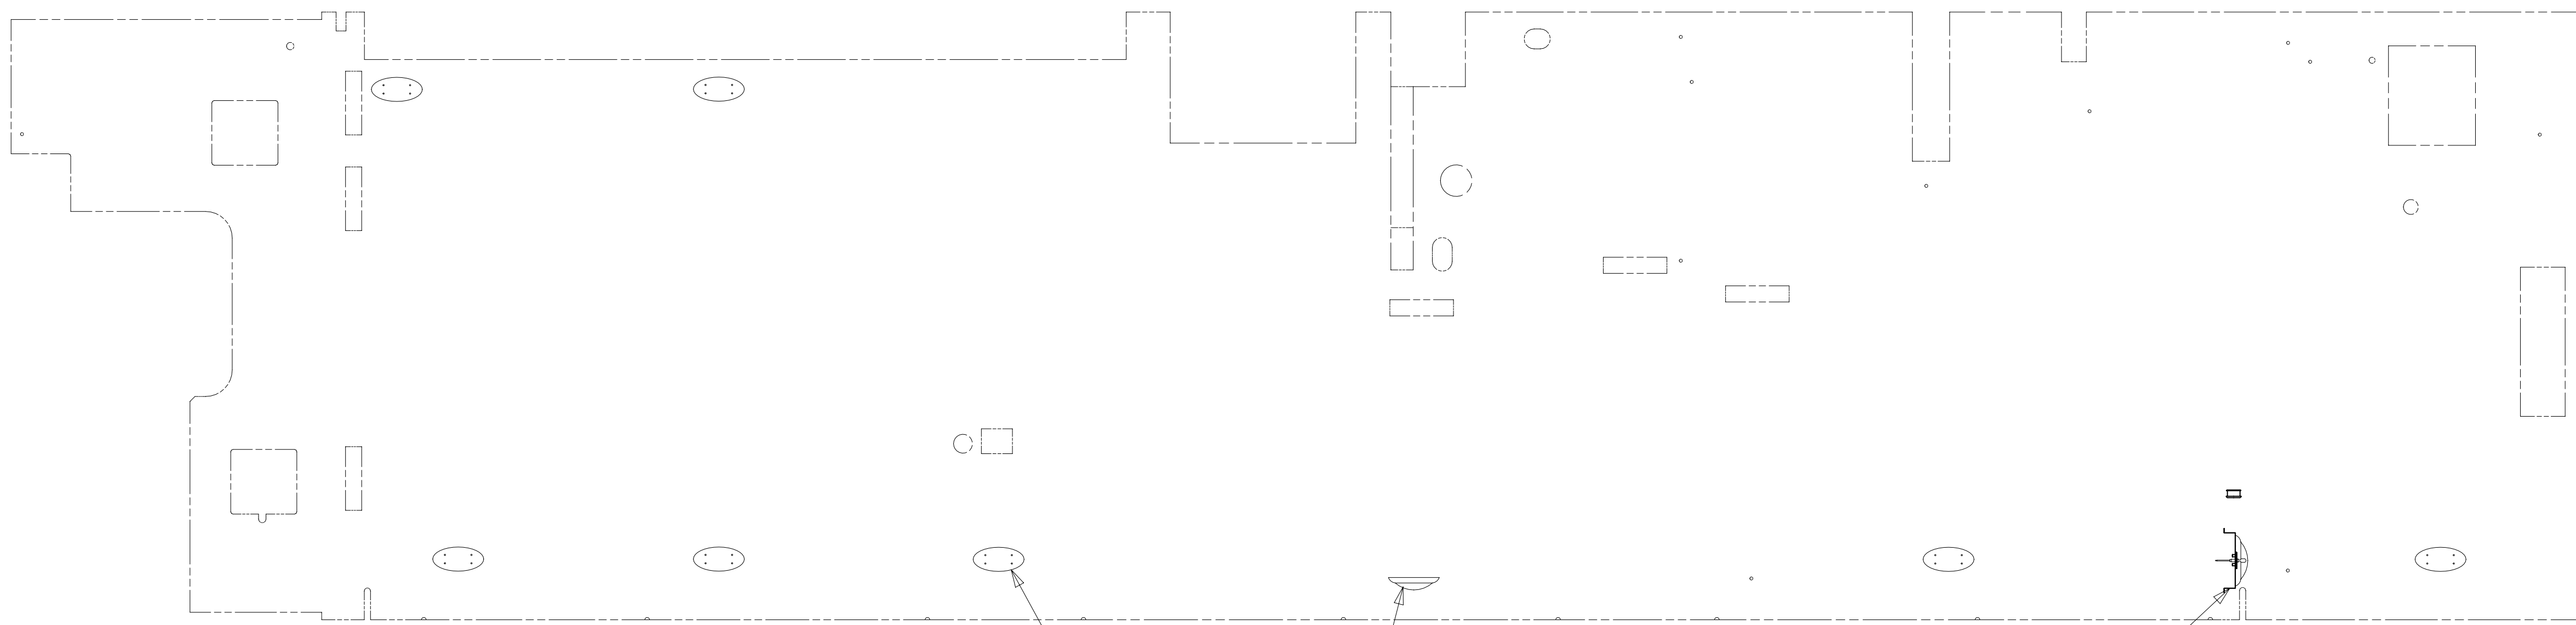

LO1-3
 9
 WASHER-PLASTIC
 180671-02-CHT
 SCREW
 G11-08-08U (9)

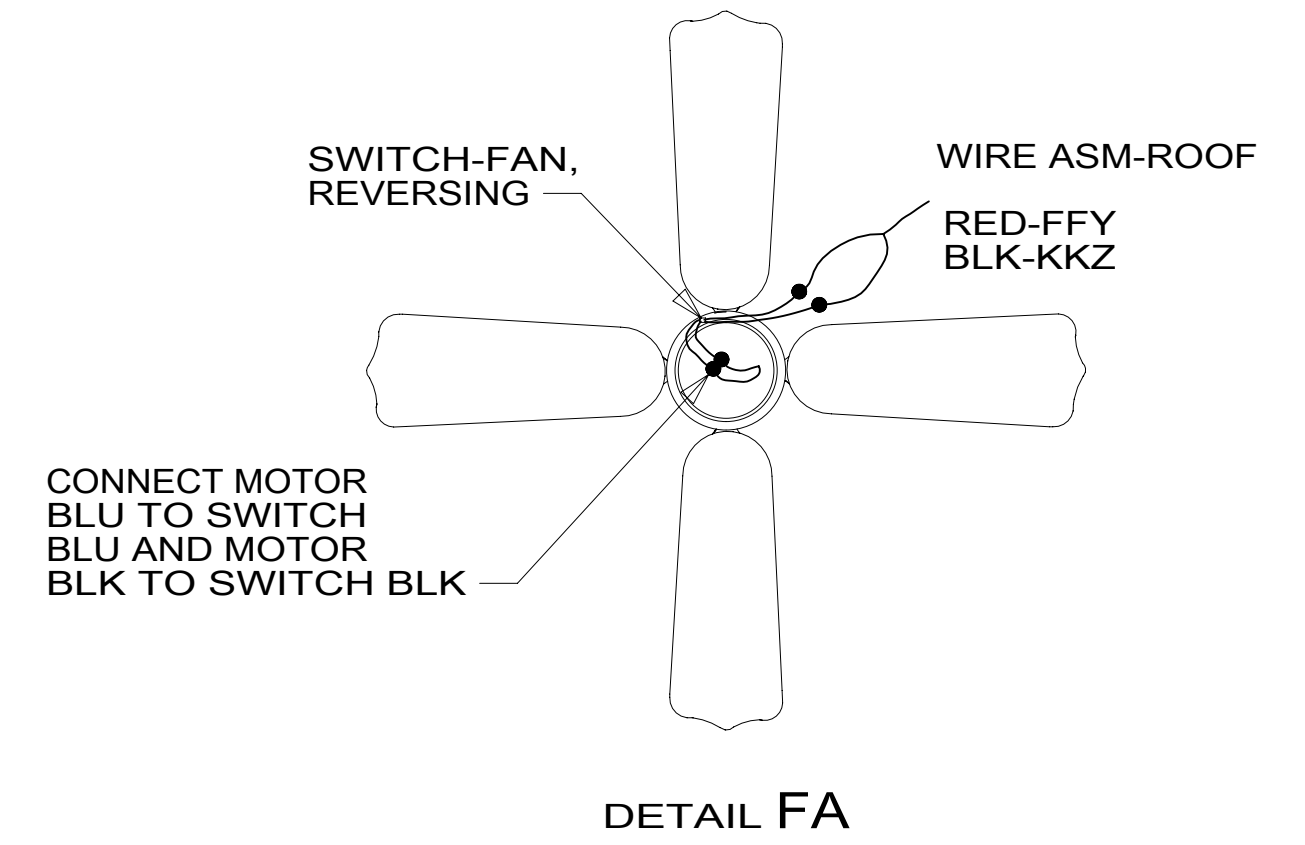

- NOTES:
- 4 CENTER FAN OVER 25MM HOLE IN ROOF.
 - 3 APPLY LOCTITE P/N 62917-06-000 TO FAN BLADE MOUNTING NUT THREADS.
 - 2 LAMP LOCATED IN SERVICE COMPARTMENT.
 - 1 LAMP LOCATED IN POWER CORD COMPARTMENT.


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 41Y FAN - CEILING_BEDROOM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION:		1B1 265	
WIRING INSTL-BODY, 12V			
SHEET:	ITEM/PART NO.:	REV:	
6 OF 9	000211588 / 30169901000		

8 7 6 5 4 3 2 1

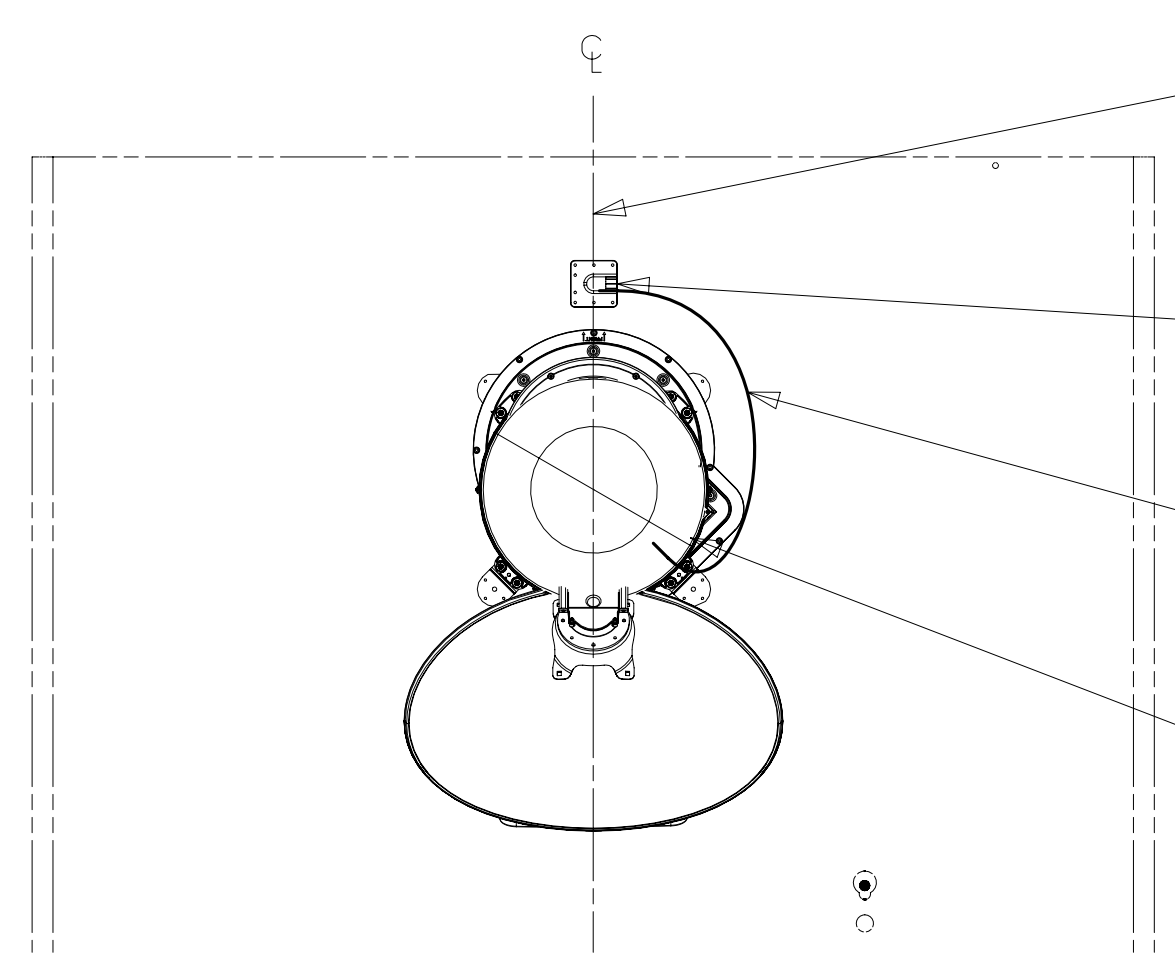


THE SATELLITE DISH AND WIRE CONNECTIONS ARE TO BE PLACED ON THE CENTERLINE OF THE MOTORHOME FACING FORWARD.

SEPARATE CABLES AND INSTALL WIRE COVER OVER HOLE IN ROOF ASM WITH CABLES EXITING ON PASSENGERS SIDE.

WHEN APPLYING ROOF SEALANT TO SATELLITE DISH, PLACE ROOF SEALANT HERE (APPROX. 75MM WIDE) AND PUSH THE CABLES INTO THE SEALANT TO STABILIZE THEM.

CONNECT CABLE ASM-COAX FROM ROOF ASM TO COAX CABLES ON SATELLITE DISH AND CONNECT 10' CABLE-DATA FROM ROOF ASM TO DATA CABLE FROM SATELLITE DISH AND PLACE ALL CONNECTIONS BACK INTO ROOF ASM.

DETAIL GB

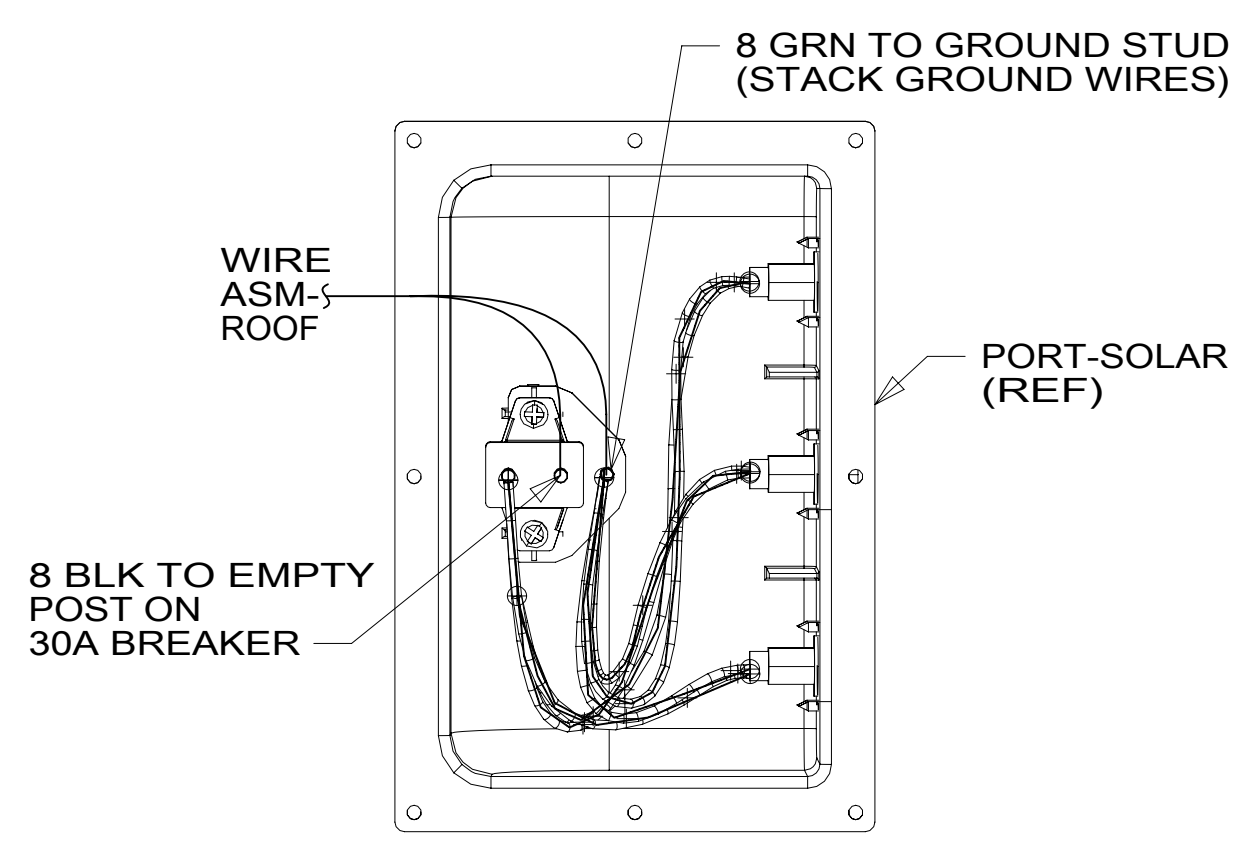


8 GRN TO GROUND STUD (STACK GROUND WIRES)

WIRE ASM-ROOF

PORT-SOLAR (REF)

8 BLK TO EMPTY POST ON 30A BREAKER

DETAIL GH

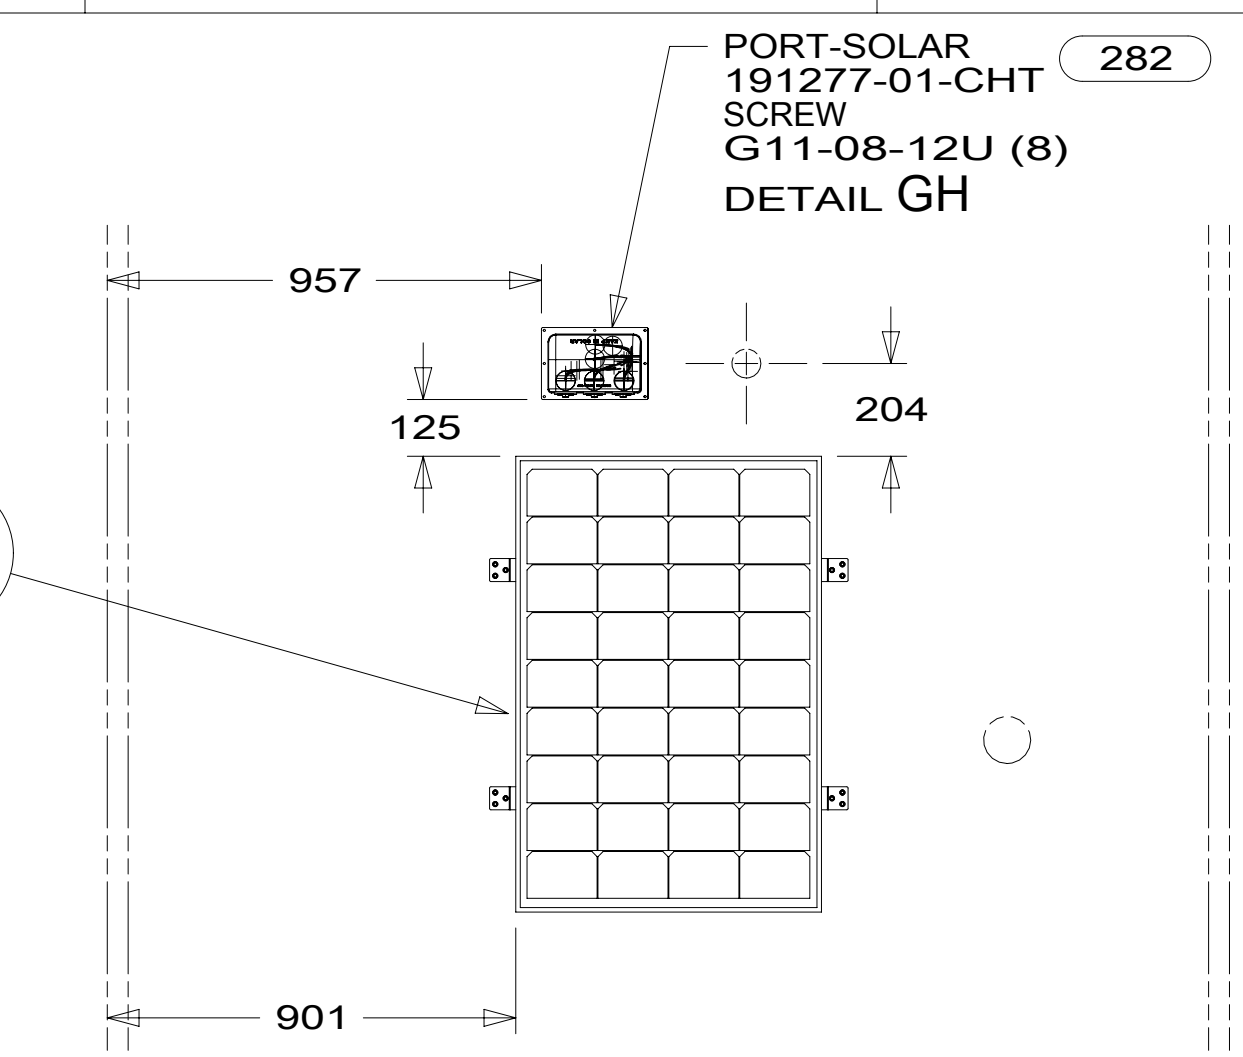

PORT-SOLAR 191277-01-CHT SCREW G11-08-12U (8) DETAIL GH

957


125

204

282 SOL-2


901

DETAIL GD

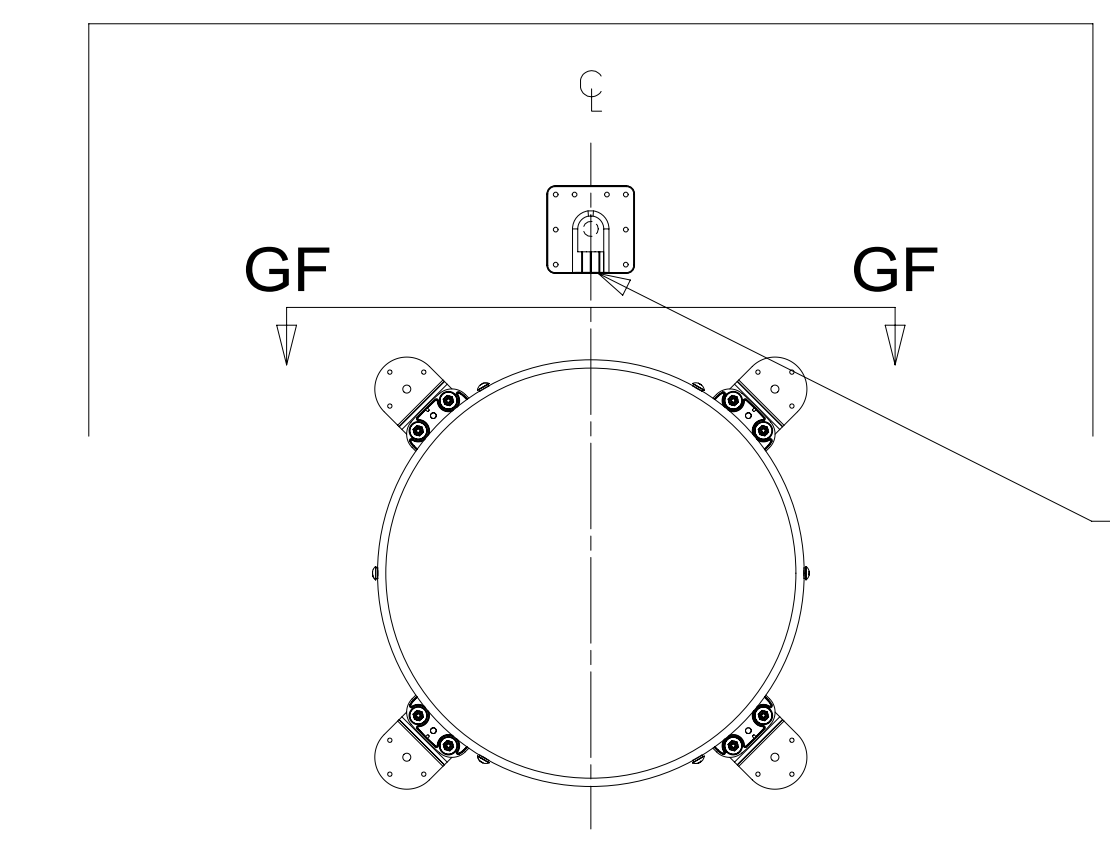


THE SATELLITE DISH WIRE CONNECTIONS ARE TO BE PLACED ON THE CENTERLINE OF THE MOTORHOME FACING FORWARD


DETAIL GE

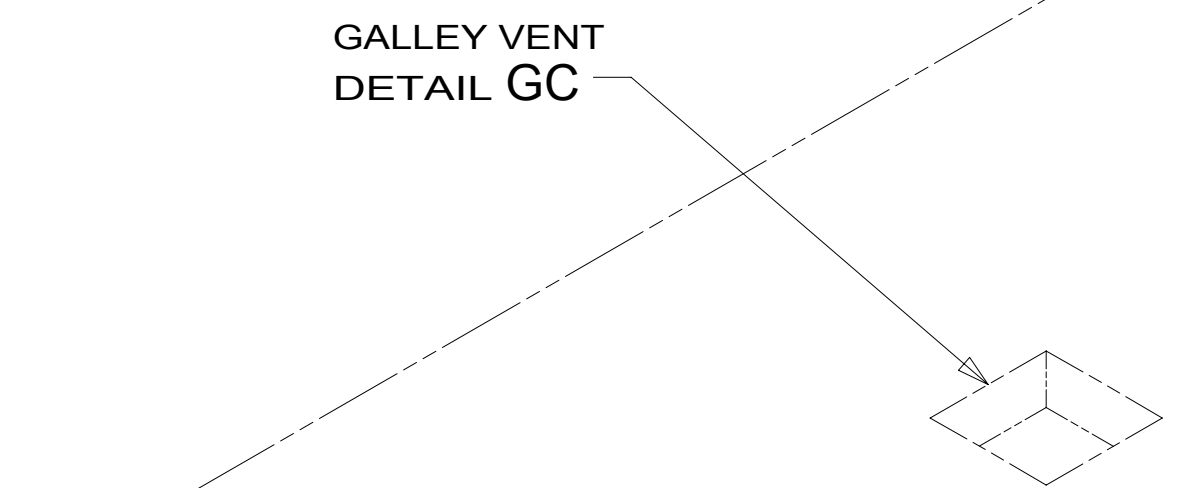


GALLEY VENT DETAIL GC

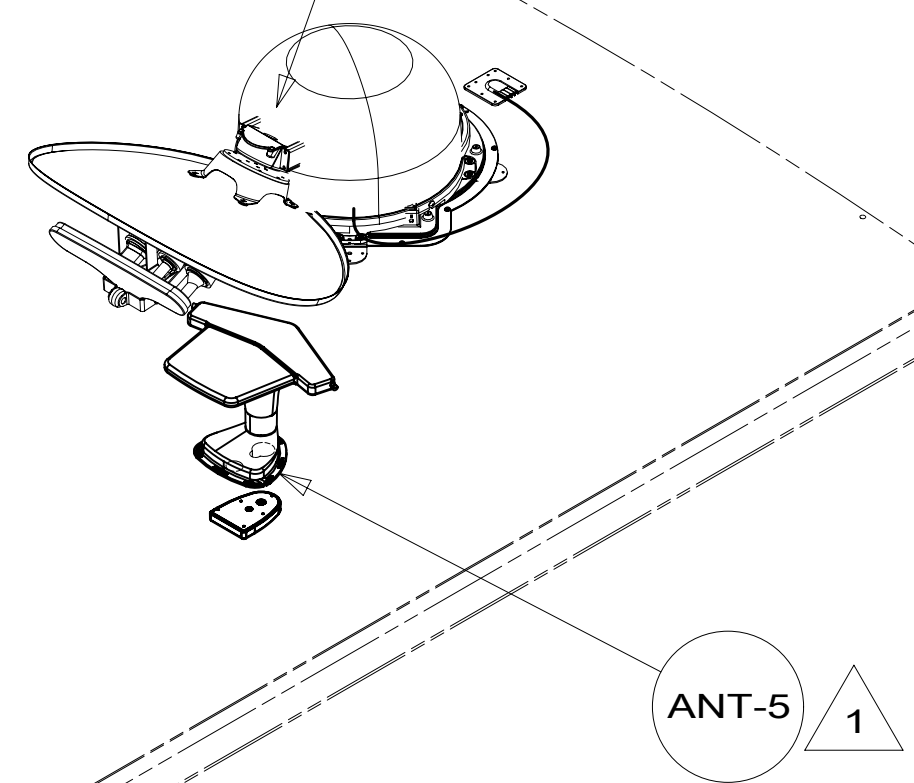

ANT-5 1

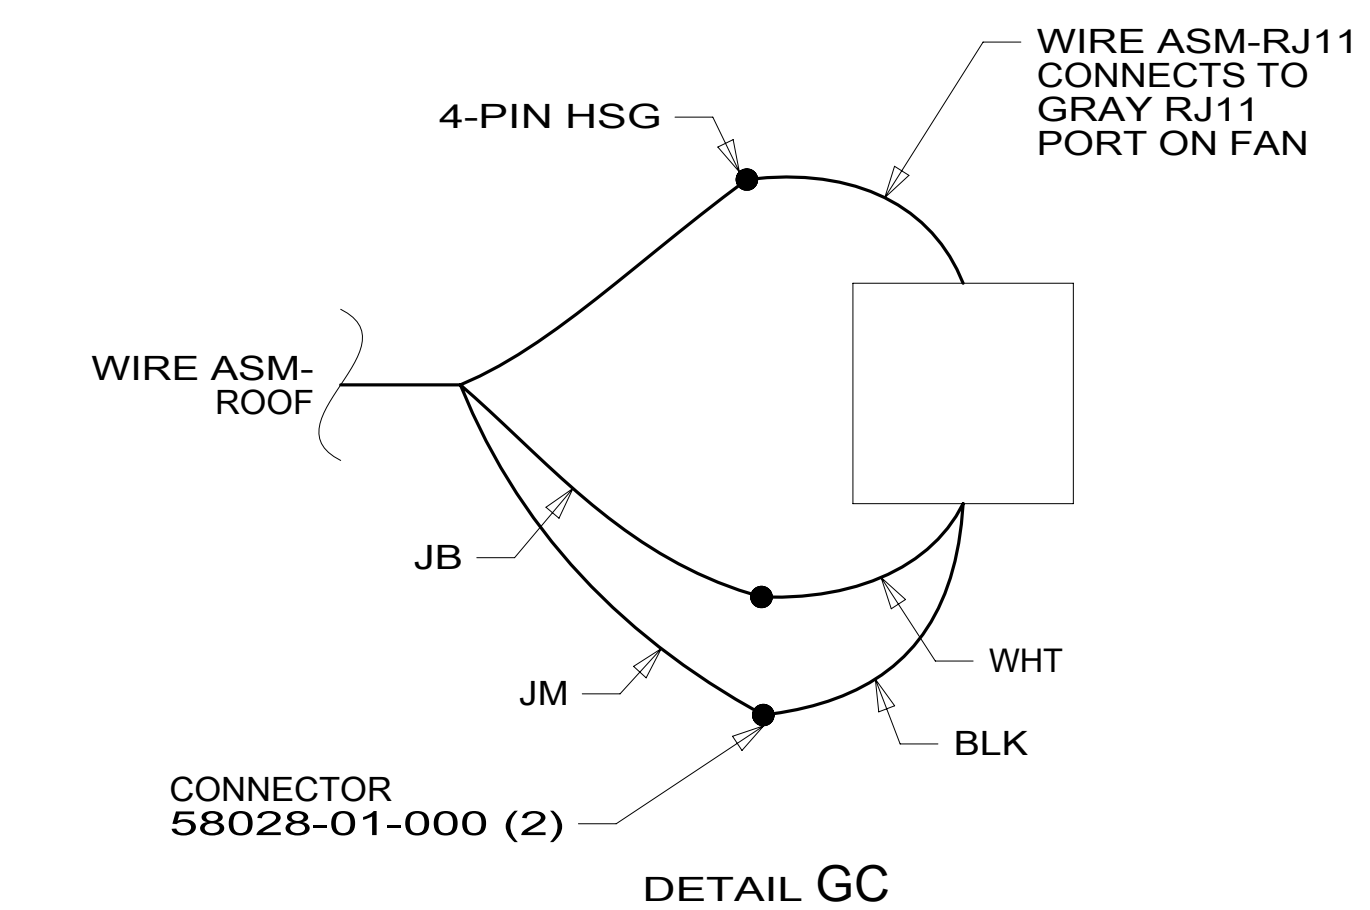


DETAIL GC

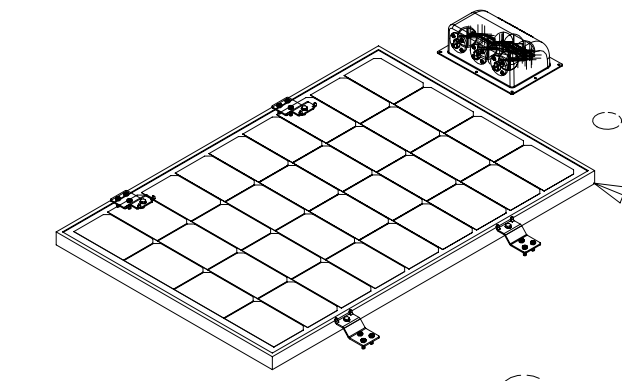


SOLAR PANEL DETAIL GD

BATH VENT DETAIL GG

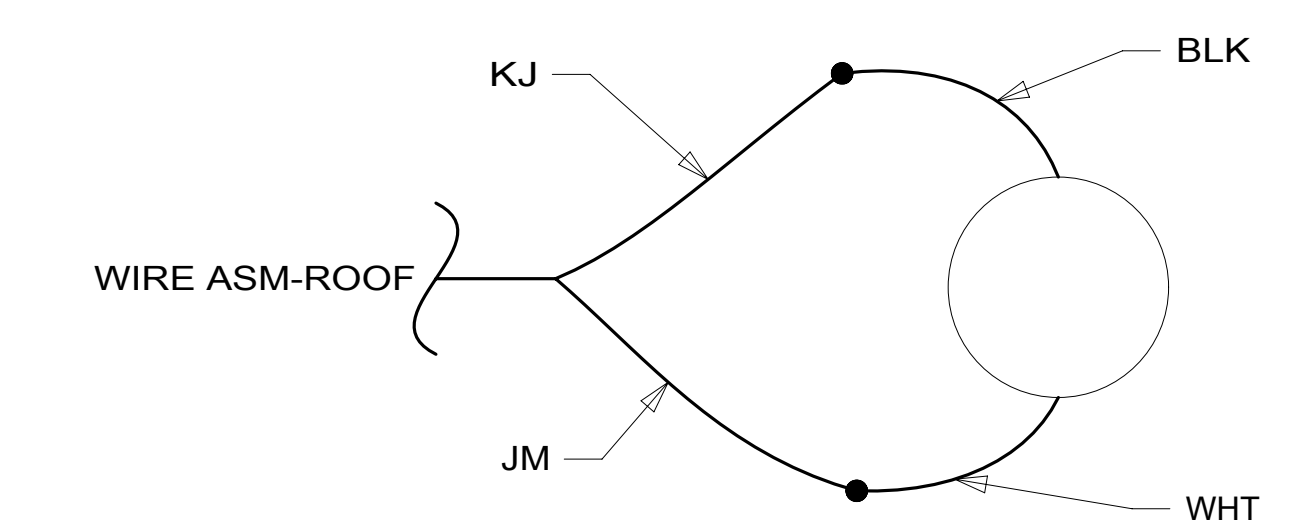

DETAIL GG

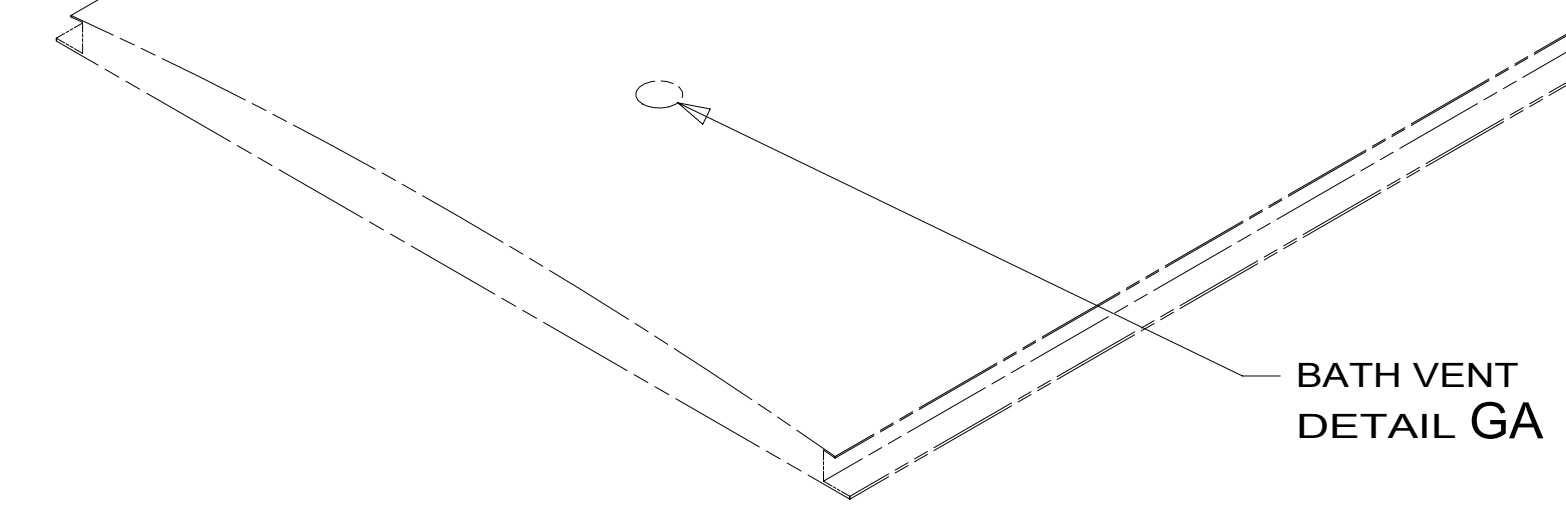


BATH VENT DETAIL GA


CONNECT 2-PIN HOUSING FROM ROOF ASM TO SATELLITE DISH HERE AND ADD CONVOLUTED TUBING

CONNECT CABLE ASM COAX (ORG-2) FROM ROOF ASM TO SEC INPUT ON SATELLITE DISH

CONNECT CABLE ASM COAX (ORG) FROM ROOF ASM TO MAIN INPUT ON SATELLITE DISH

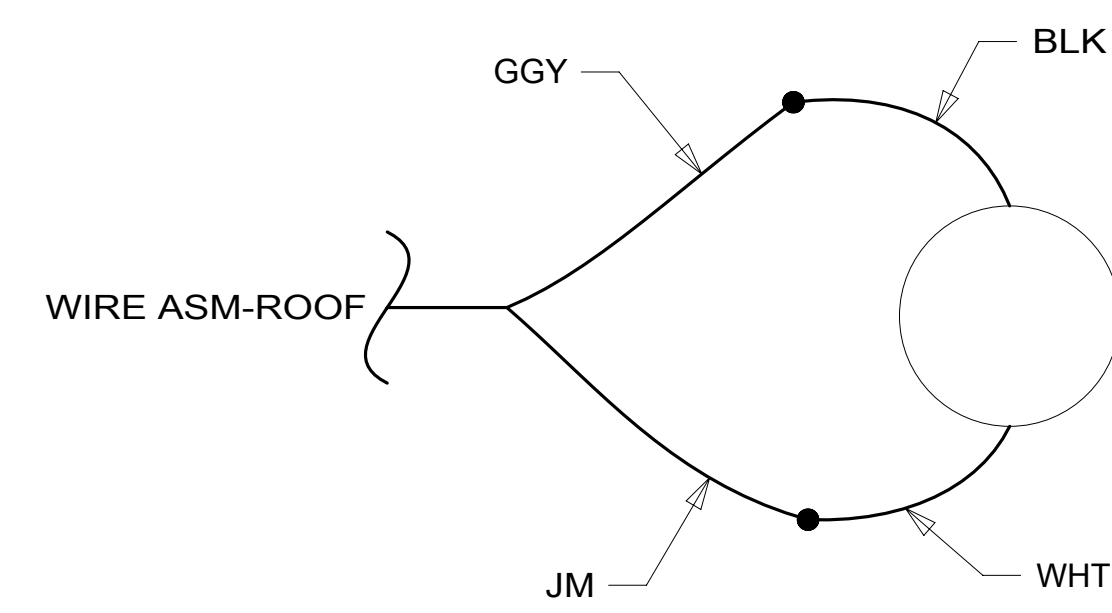

DETAIL GA

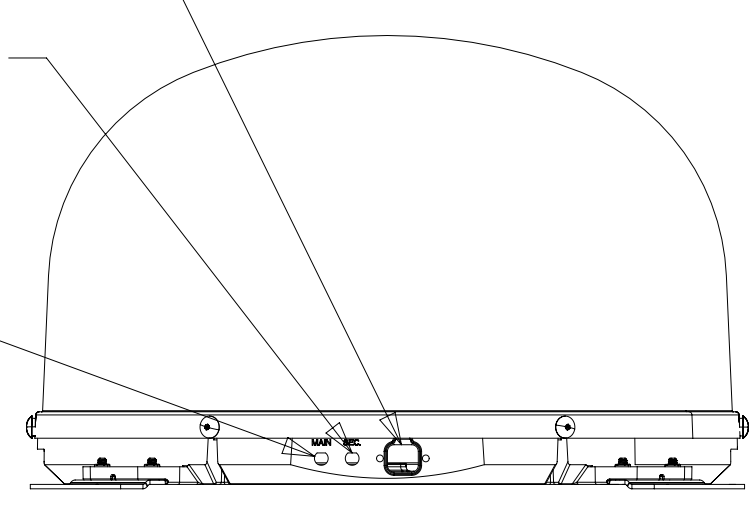

VIEW GF-GF

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


- 282 SOLAR PANEL - 100 WATT
- 783 SATELLITE HD TV SYSTEM AUTOC
- 48P SAT TV SYSTEM IN-MOTION
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1 SEE ANTENNA INSTALLATION MANUAL FOR CORRECT INSTALLATION PROCEDURE.


NOTES:

DESCRIPTION:		1B1 265	
WIRING INSTL-BODY, 12V			
SHEET:	ITEM/PART NO.:	REV	
7 OF 9	000211588 / 30169901000		



8 7 6 5 4 3 2 1 20-Sep-2016

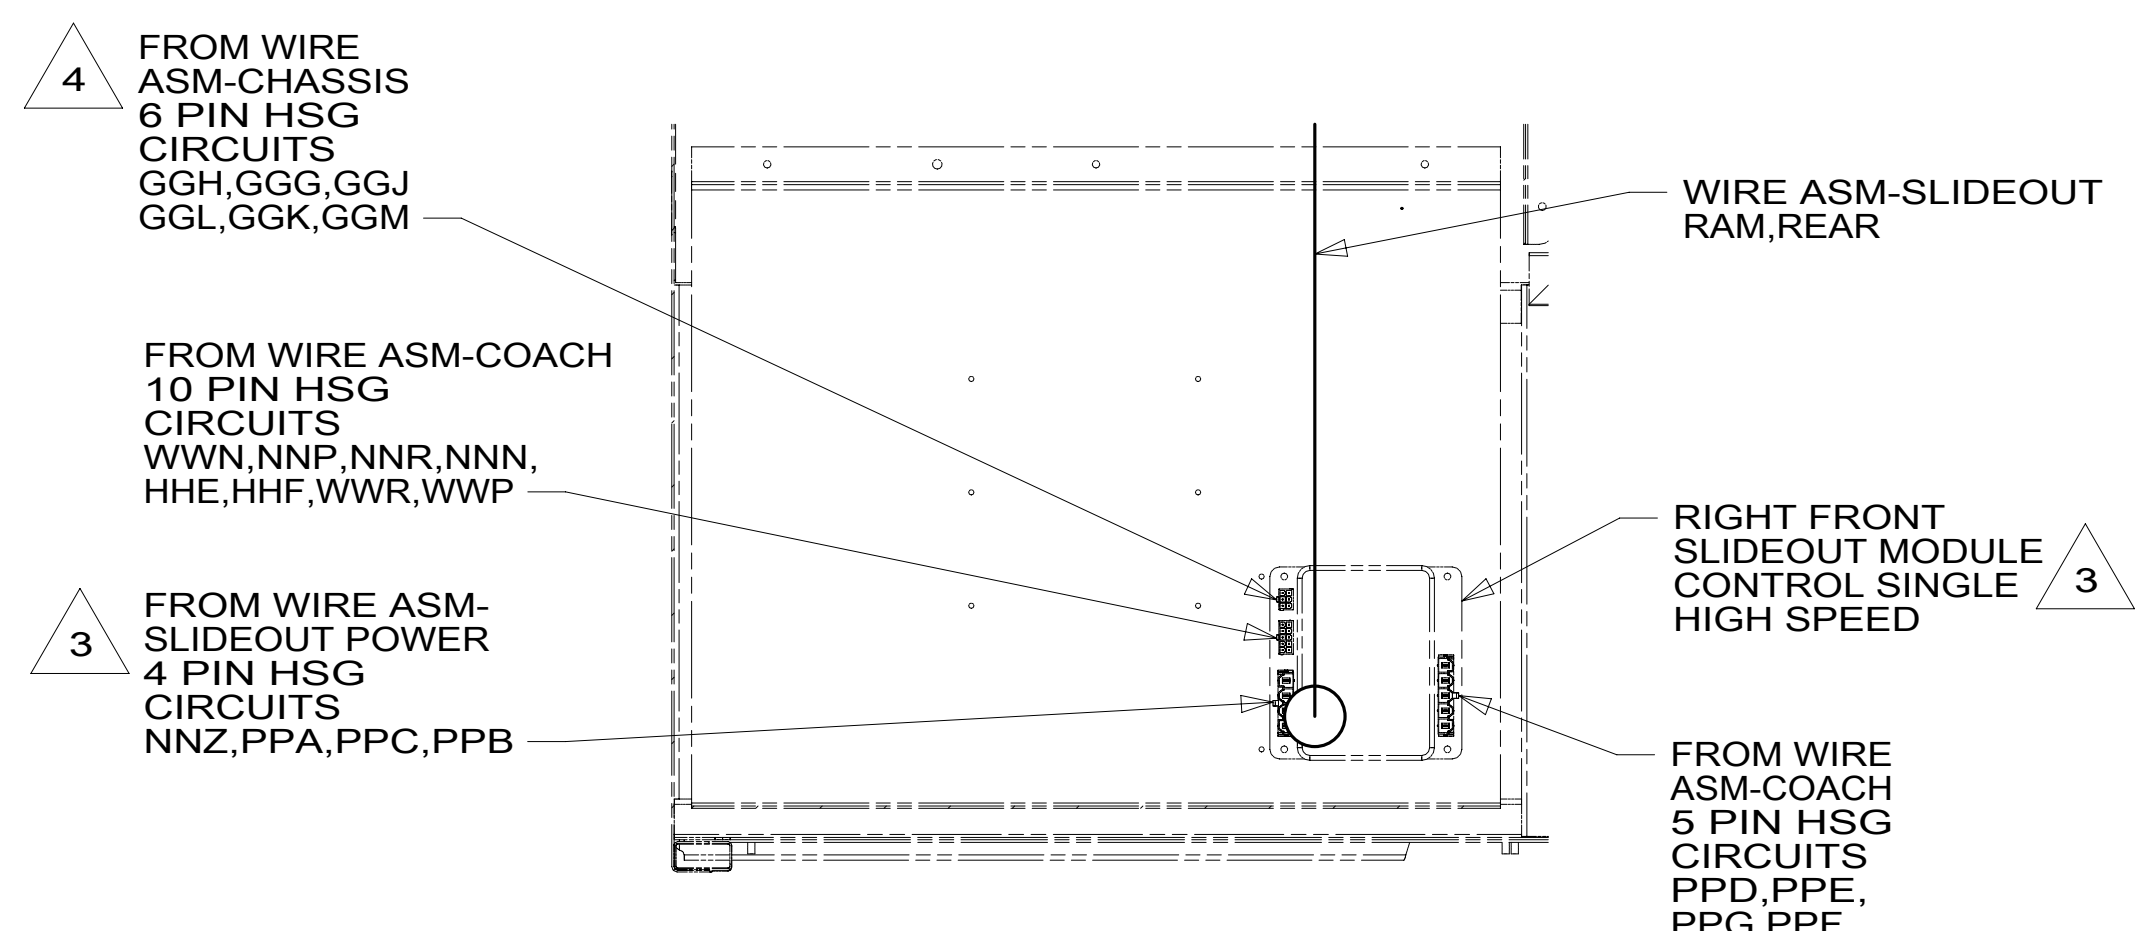


DETAIL HA

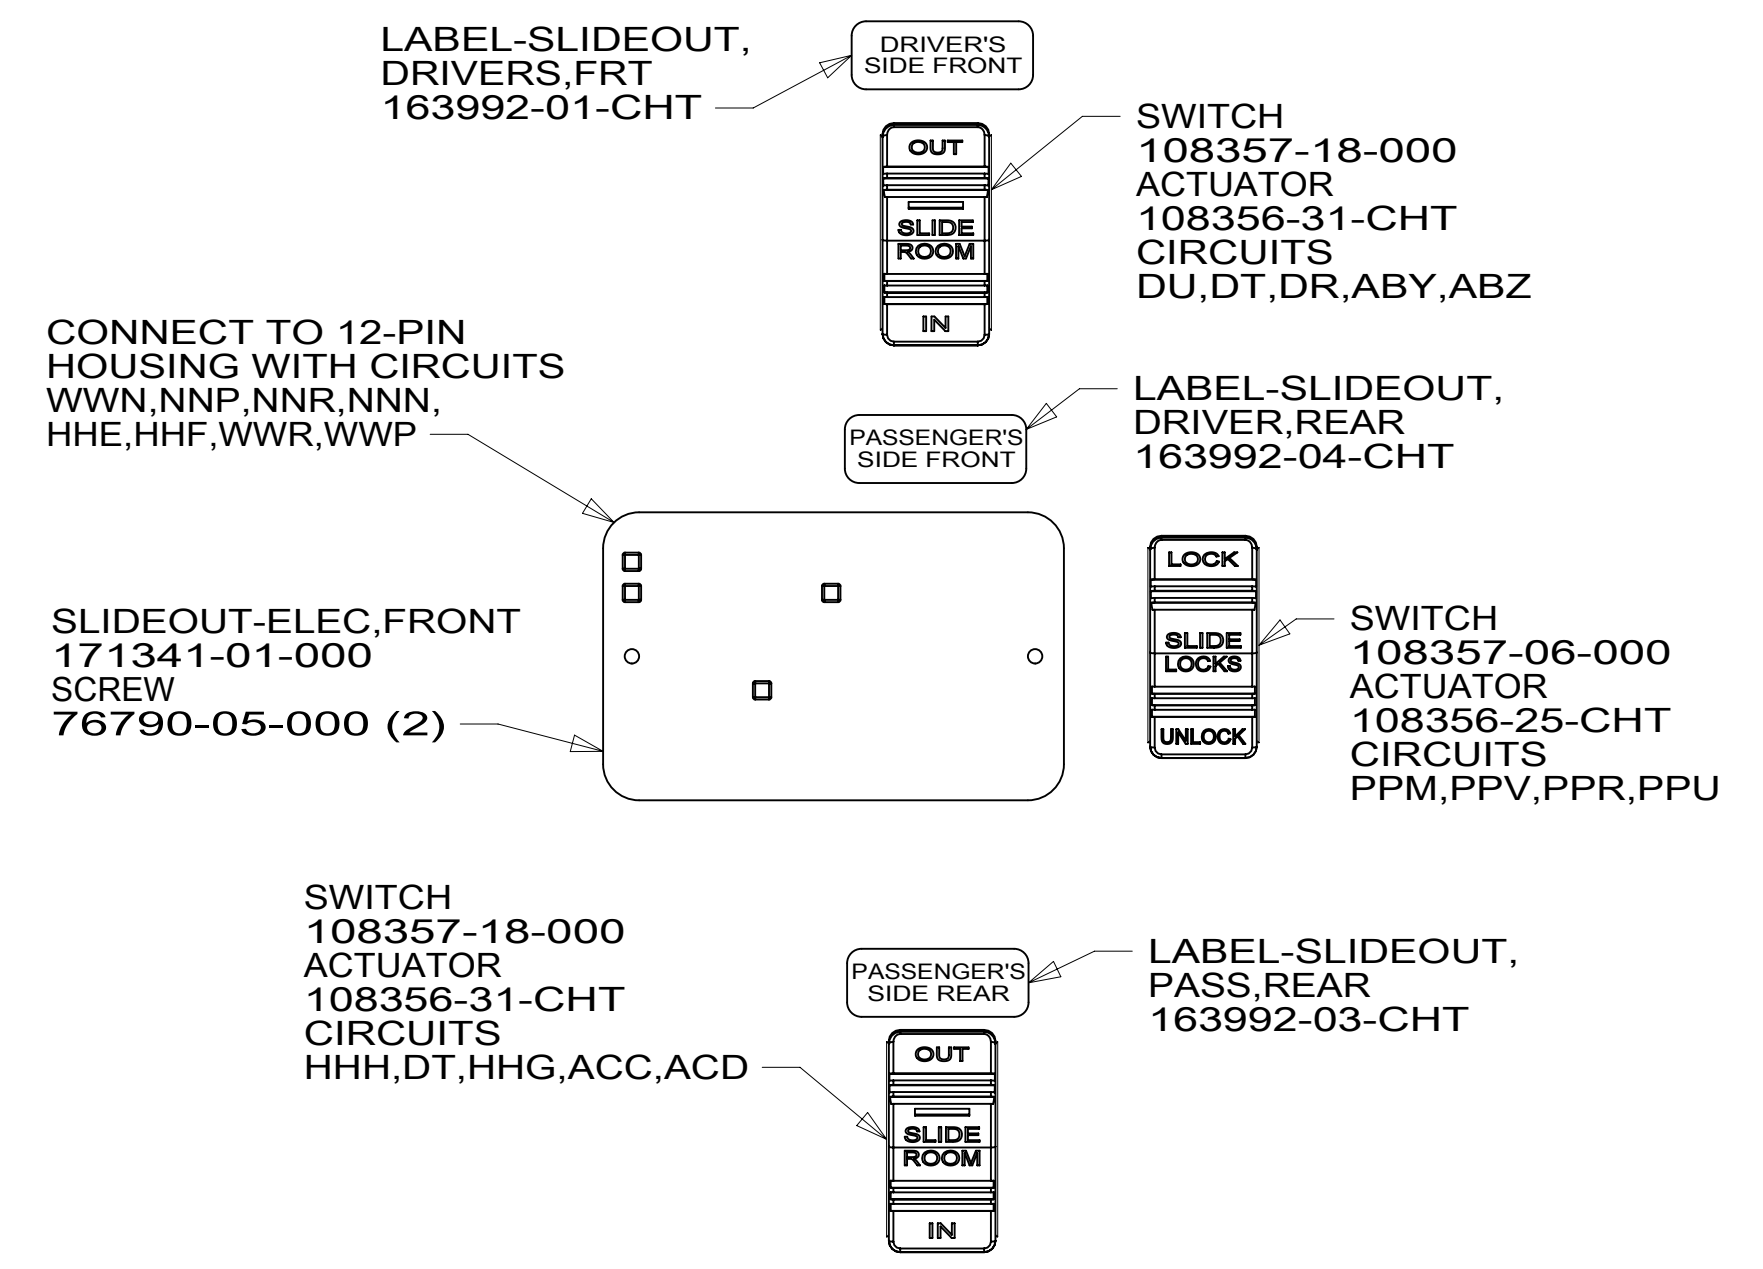

DETAIL HD

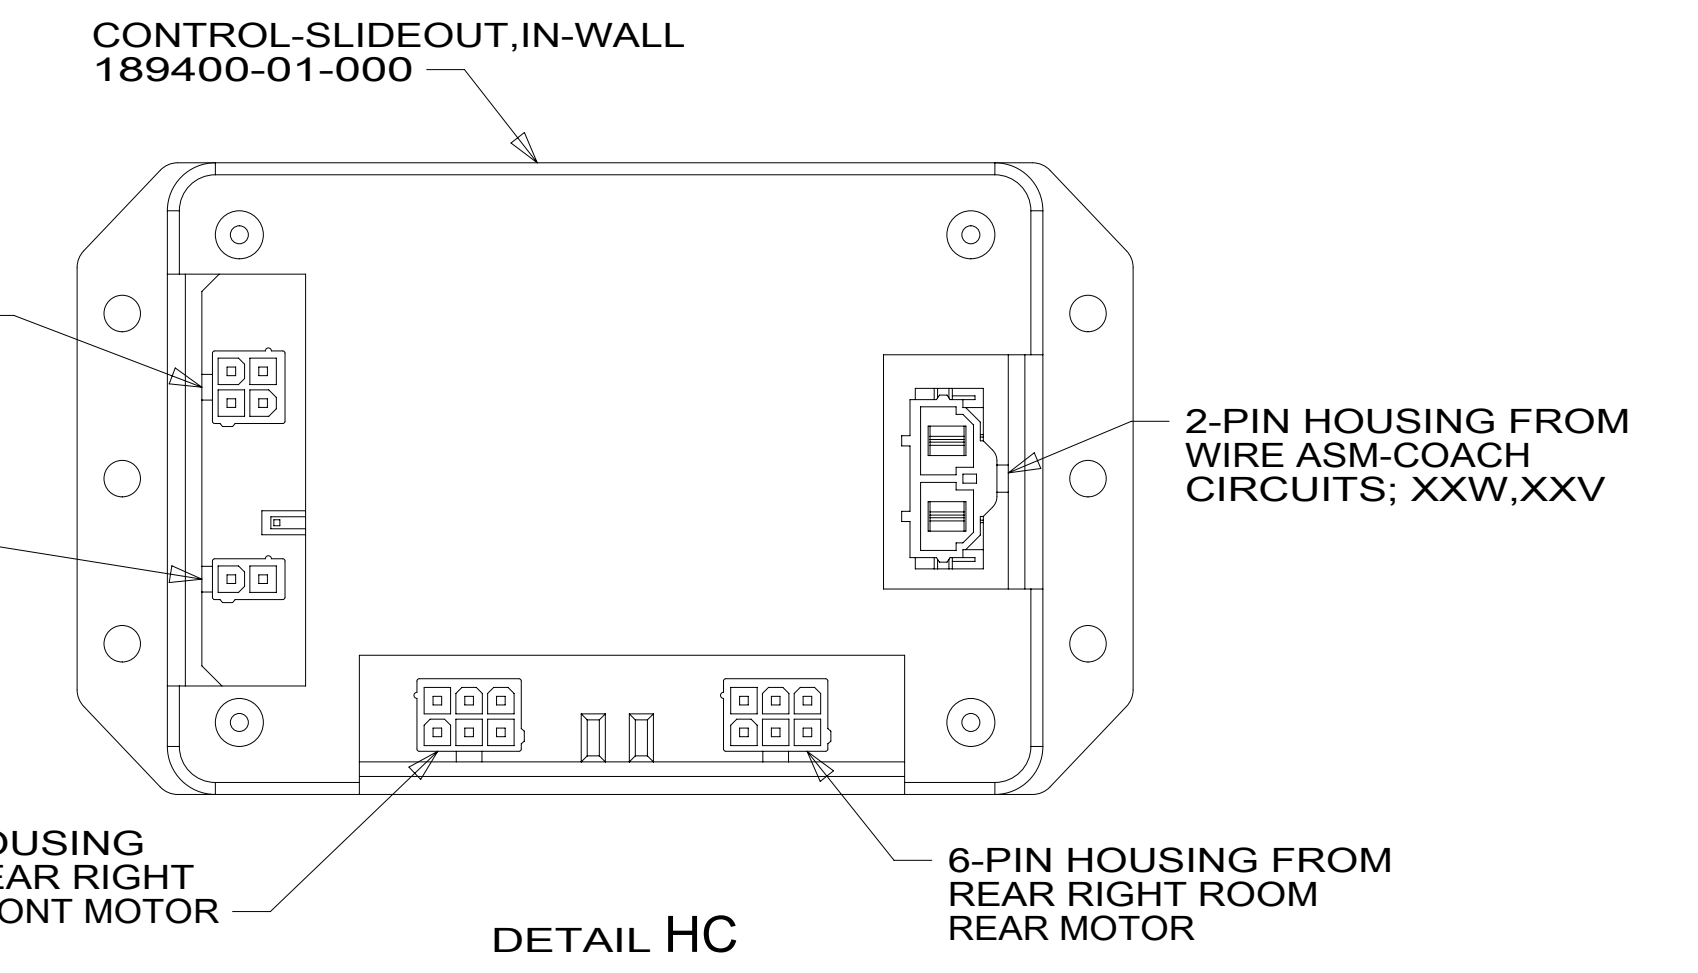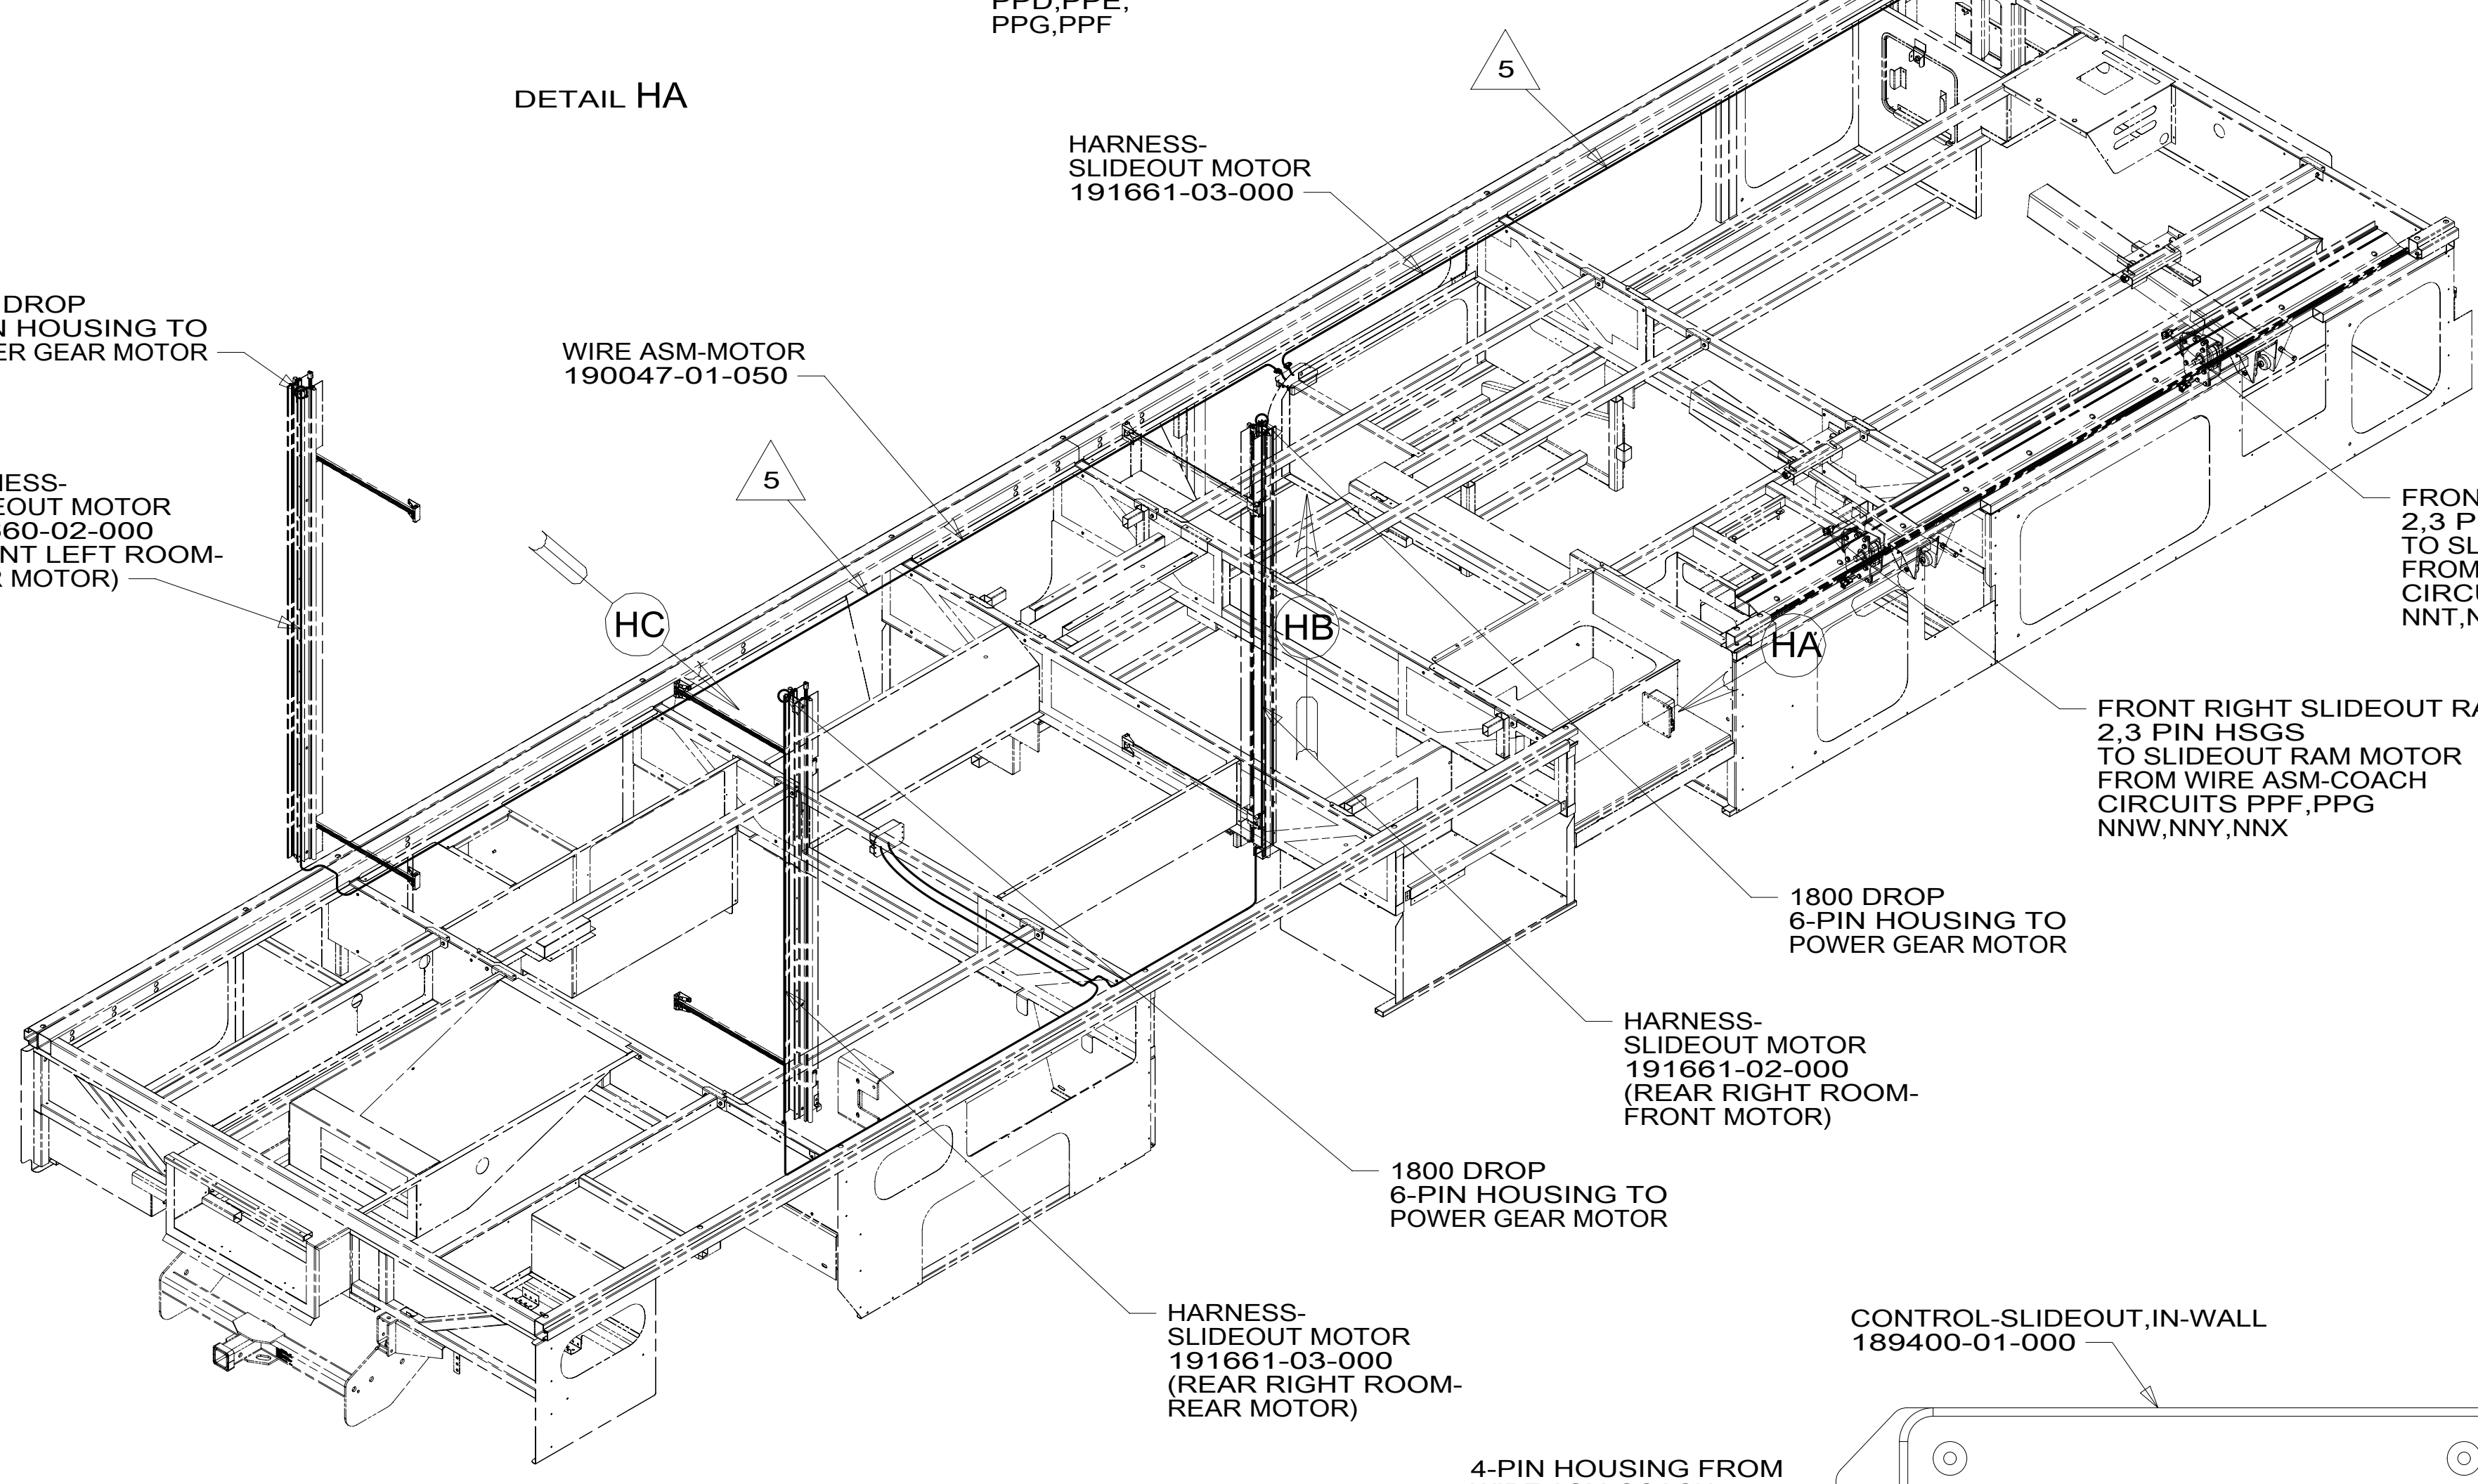

DETAIL HC

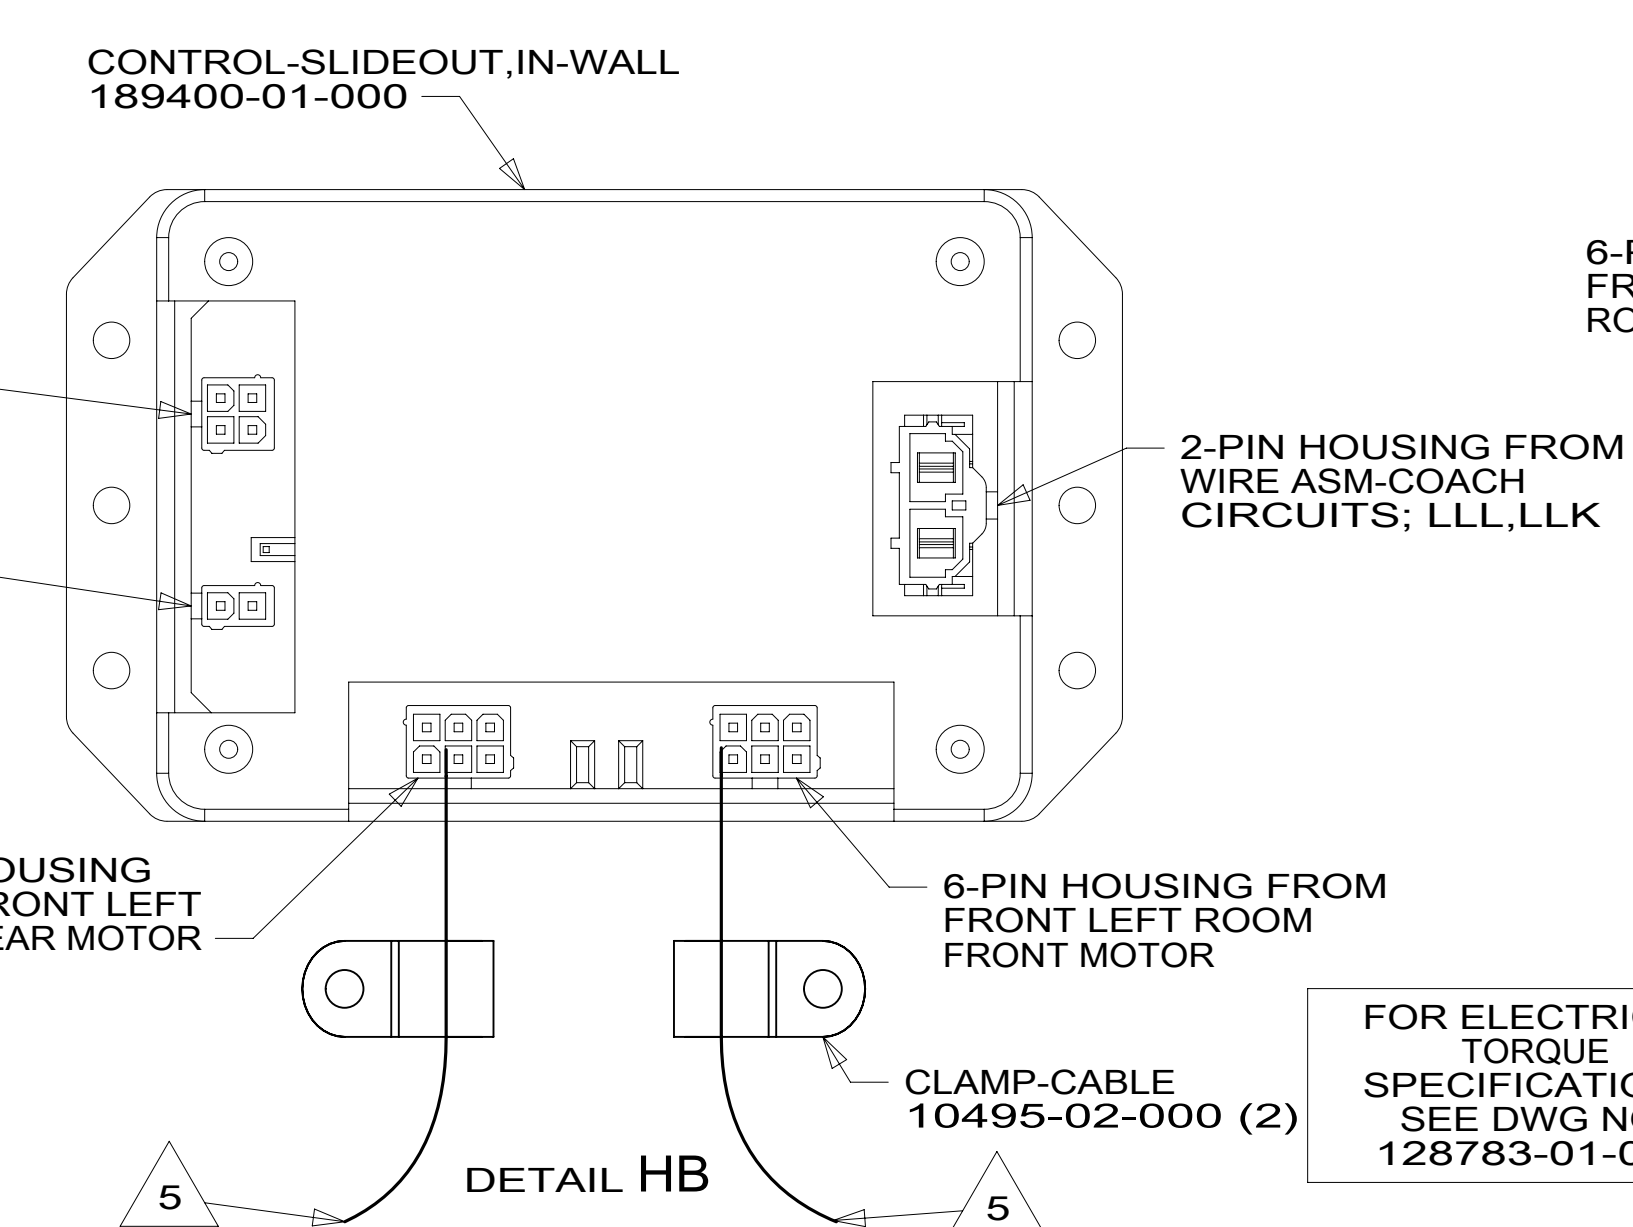

DETAIL HB

- NOTES:
- 5 ROUTE WIRE IN CHANNEL ON BOTTOM OF FLOOR AND COVER WITH TAPE-ALUMINUM 088479-01-000 AS NEEDED.
 - 4 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
 - 3 SEE CHASSIS ELECTRICAL BOX ASM FOR ADDITIONAL INFORMATION.
 2. SEE WIRING DIAGRAM-BODY,12V FOR ADDITIONAL INFORMATION.
 1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION:		1B1 265	
WIRING INSTL-BODY, 12V			
SHEET:	ITEM/PART NO.:	REV	
8 OF 9	000211588 / 30169901000		


8 7 6 5 4 3 2 1

D

D

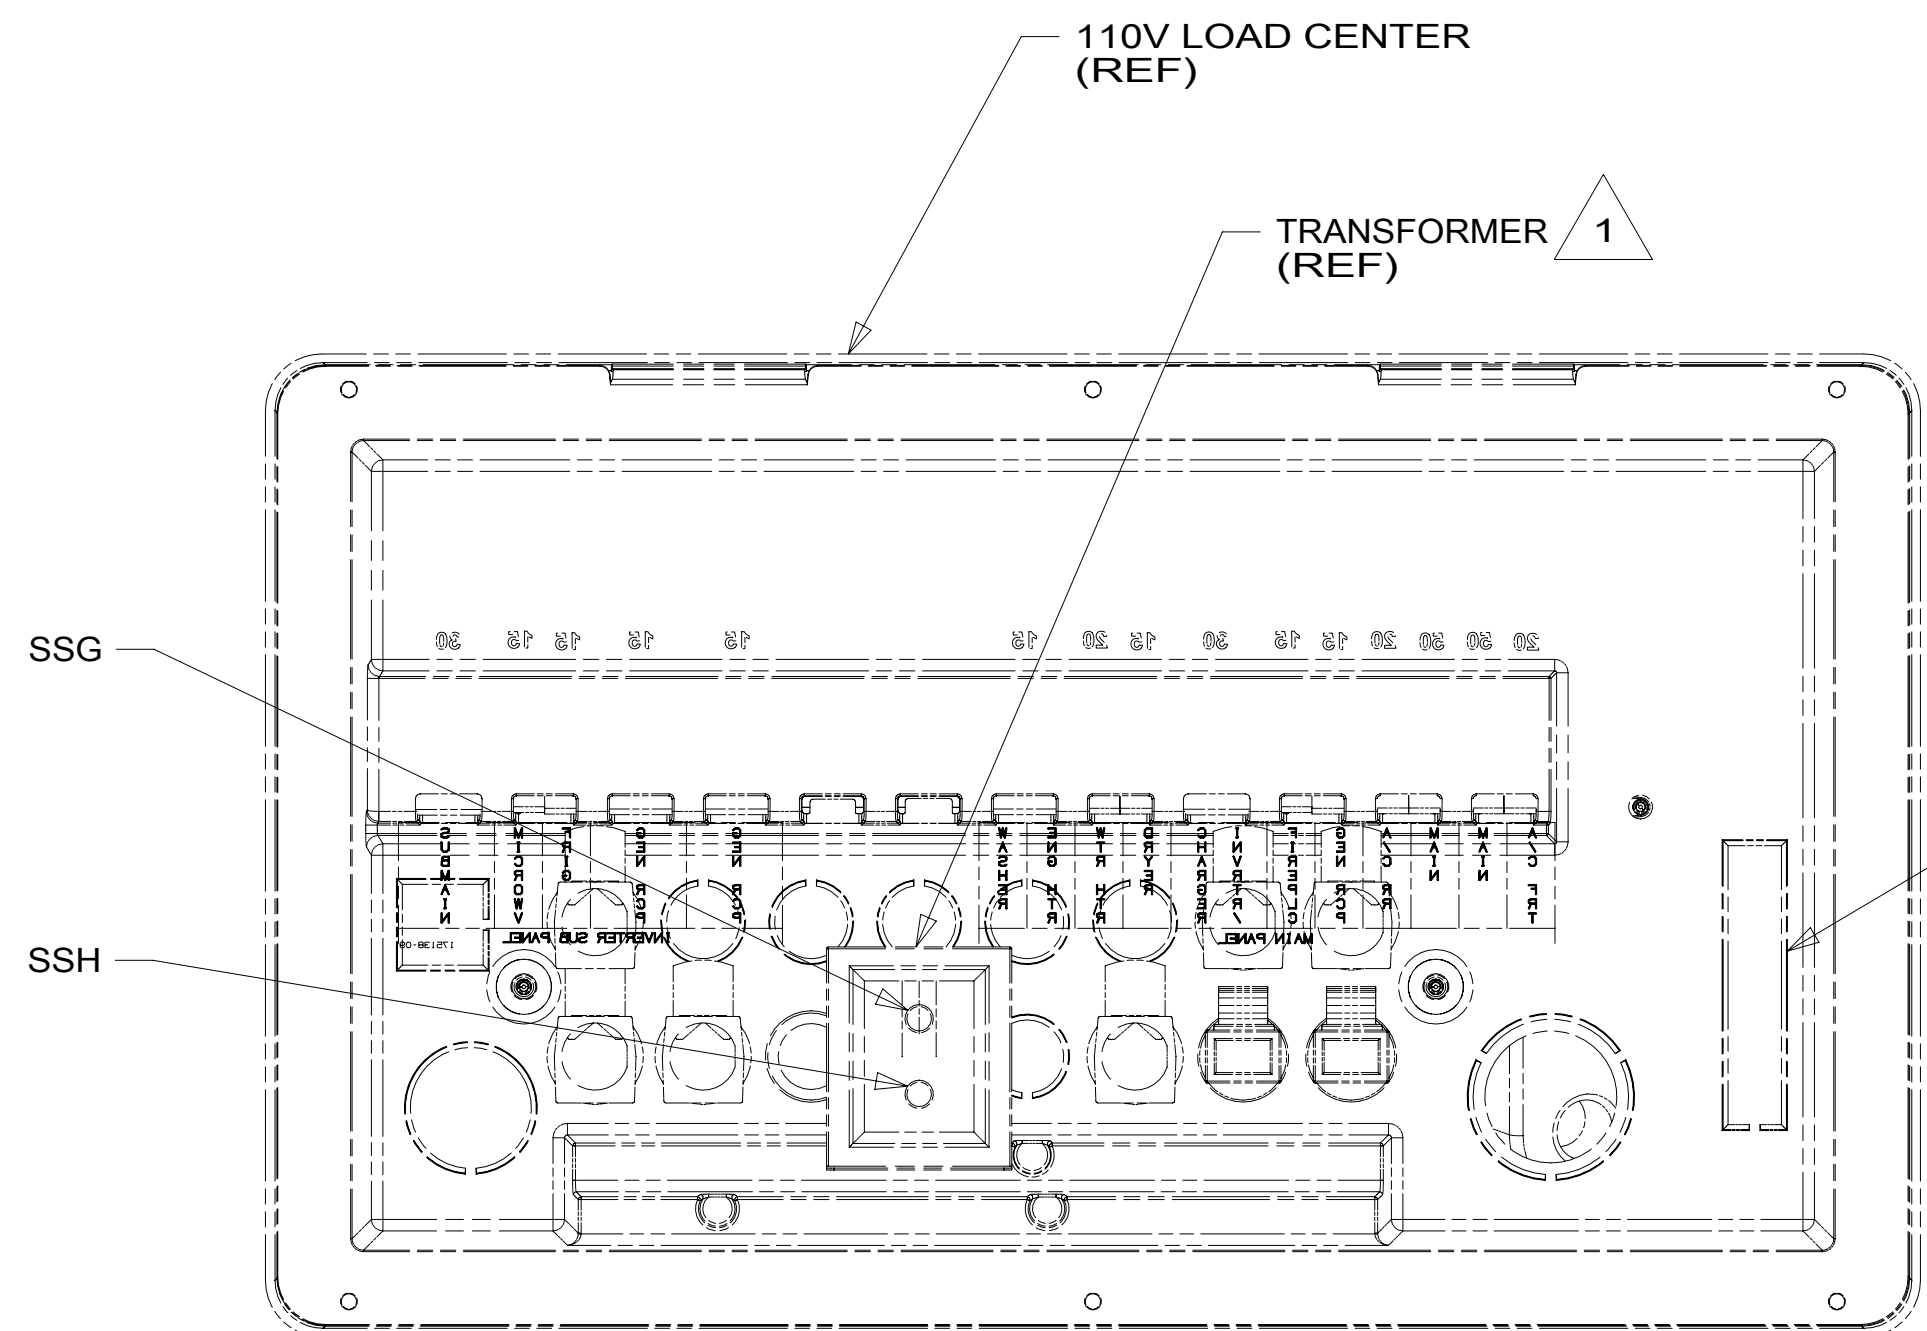

VIEW JA

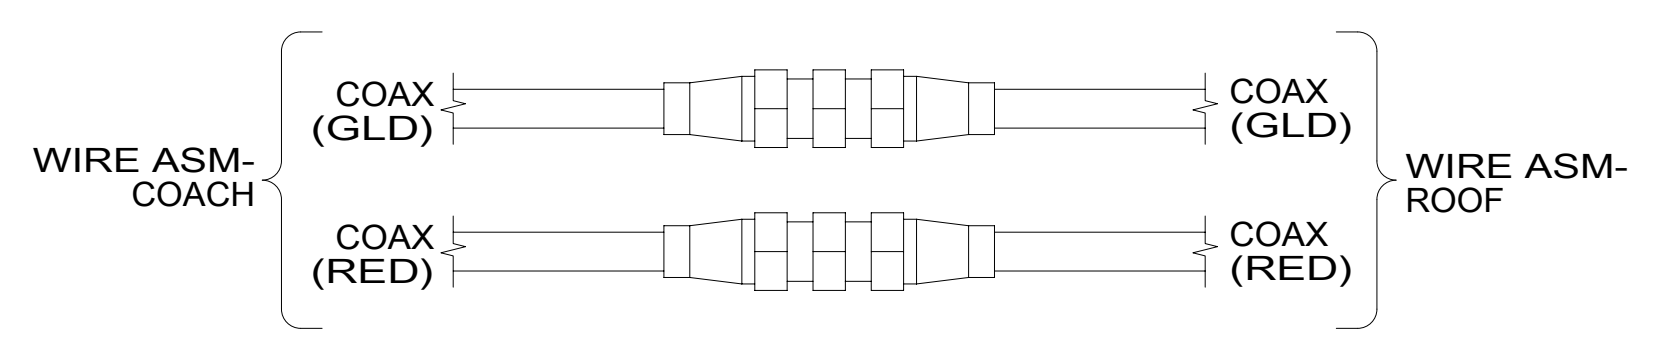

DETAIL JC

C


C

→

←

B

B

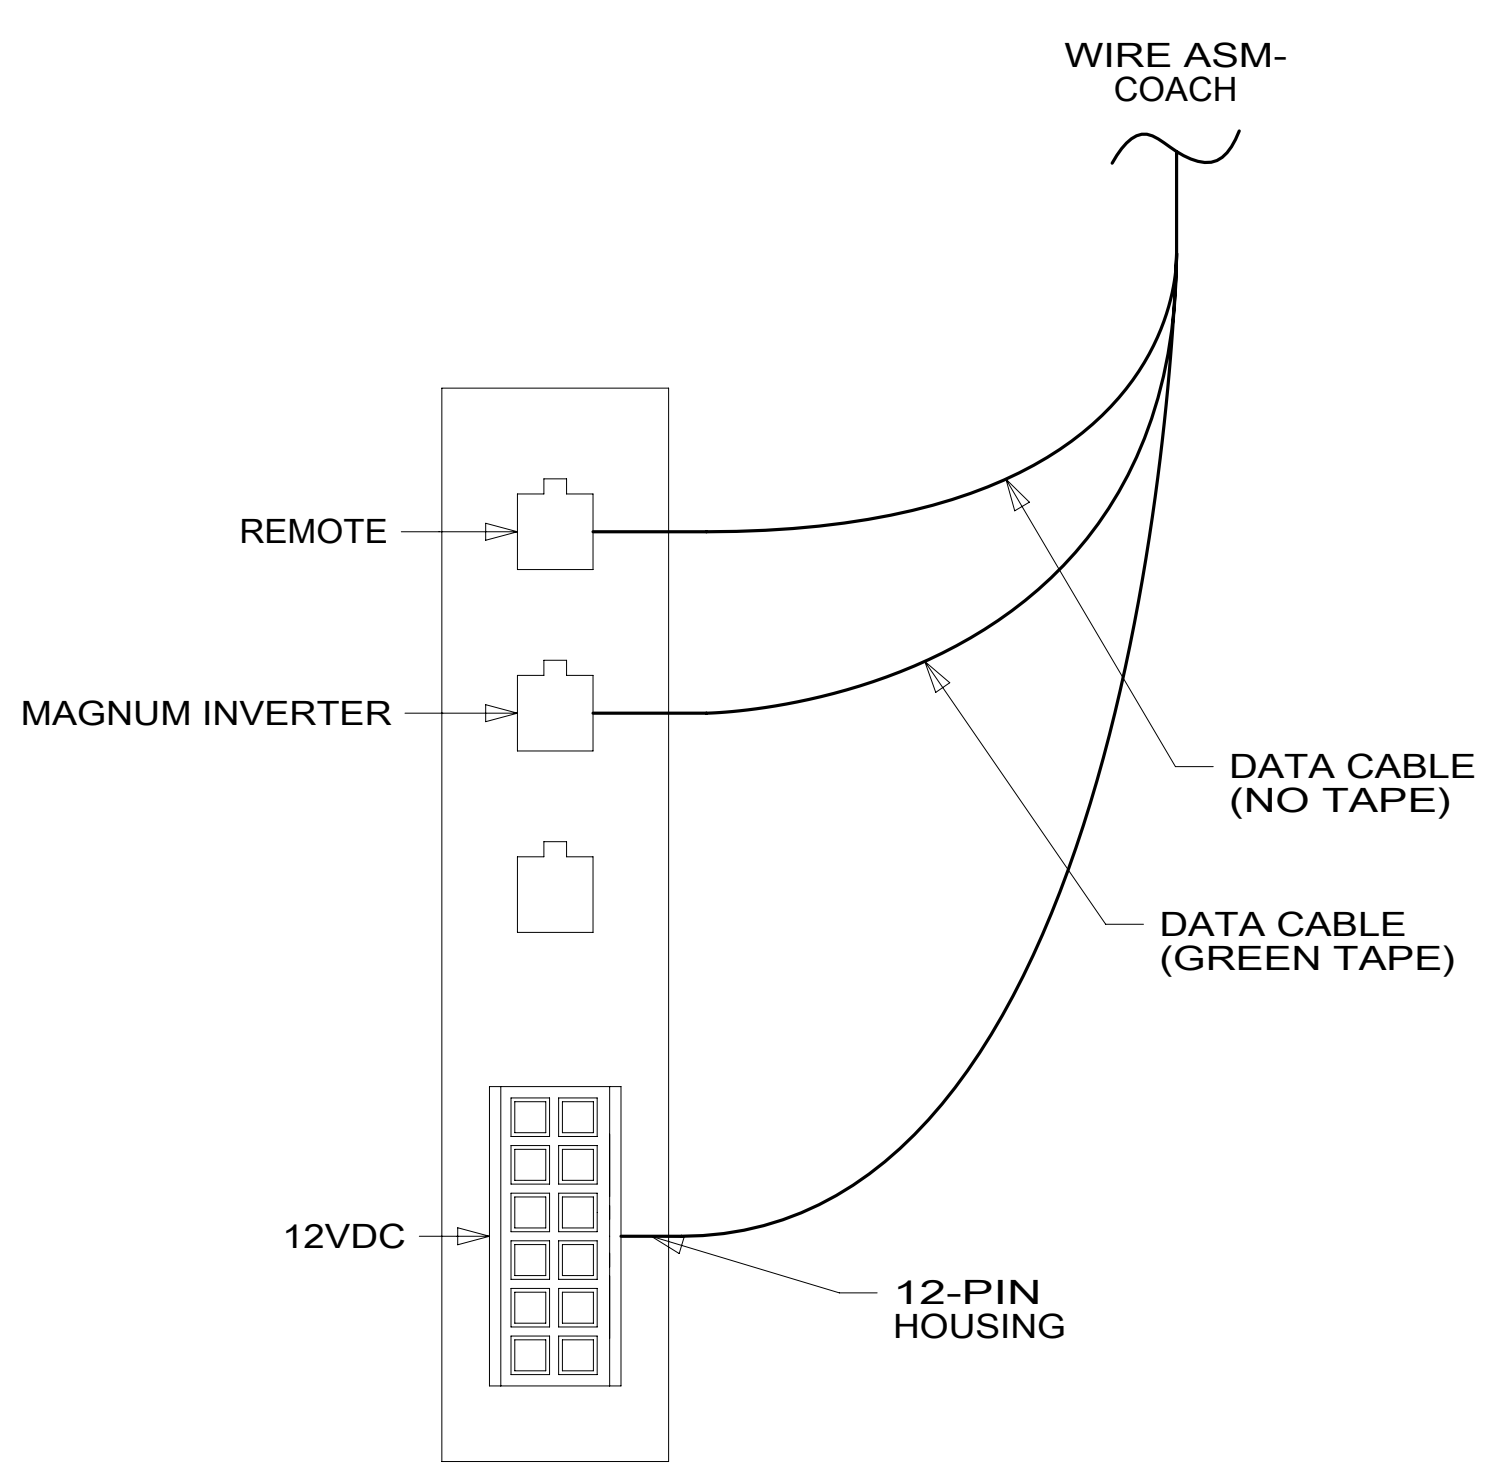

DETAIL JB

A

A

1 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

DESCRIPTION:	
1B1 265	
WIRING INSTL-BODY, 12V	
SHEET:	ITEM/PART NO. REV
9 OF 9	000211588 / 30169901000

8 7 6 5 4 3 2 1 20-Sep-2016