

3 70C RECEIVER-SATELLITE RADIO
181908-05-000

GROMMET
23942-01-000 (2)

FA

ALARM-JACKS DOWN
160876-01-000
BRACKET-BUZZER
173102-01-CHT
SCREW
G39-10-12U (2)

WIRE ASM-IP.MAIN
000022769 / 314544-01-000

6 PIN HOUSING
TO LEFT MIRROR

WIRE ASM-EXTENSION
300886-01-000


RECEPTACLE-12V
111414-01-000
DETAIL AA

BRACKET-RELAY PANEL
145448-01-CHT
SCREW
G67-10-08U (4)

12V BREAKER PANEL
DETAIL CA

PANEL ASM
145063-08-CHT
SCREW
G67-06-10U (6)

DOOR ASM
145066-03-CHT
SCREW
G67-06-10U (6)
SCREW
G67-10-08U (4)

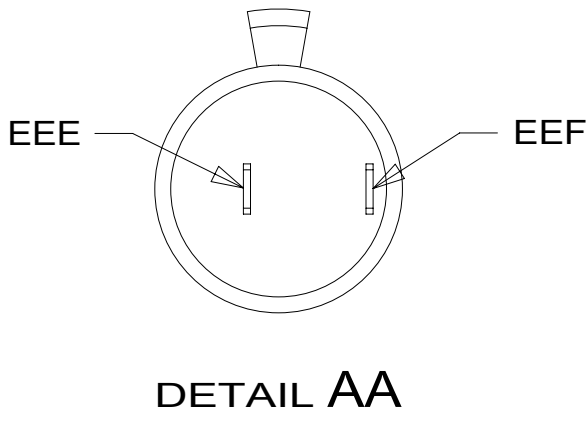

- NOTES:
- 5 CUT VISOR WIRING TO 300MM BEFORE CONNECTING.
 - 4 USE TAPE 136748-01-000 TO SECURE WIRES IN A-POST.
 - 3 WIRE TIE TO RADIO WIRING.
 - 2. USE SEAL-TRIM 113452-01-000 TO PROTECT WIRES FROM SHARP EDGES.
 - 1. SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

- 70C RADIO - SATELLITE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

WINNEBAGO COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.	
DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS
DFFR:	
UNSPECIFIED TOLERANCES:	MATERIAL:
WHOLE DIM (X) : 3	
ONE-PLACE (X.X) : 1.5	
TWO-PLACE (X.XX) : 0.50	
ANGLE : 1°	
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS) FIRST USED: 16 L36G
DESCRIPTION: WIRING INSTL-FRONT END	
SHEET: 1 OF 9	ITEM/PART NO.: 000211893 / 30320201000
REF:	REV:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

303202

WIRE ASM-IP,MAIN

LABEL-CB PREP OPTION
104678-01-000

CB POWER PROVISION
YELLOW +12V
WHITE GROUND
COAX ANTENNA
(SEE REVERSE SIDE ALSO)

WHT YEL
TO CUSTOMERS
CB RADIO

DETAIL BB 579

1 2 PIN HOUSING
(2) BUTT SPLICES

RING TERMINALS
TO GROUND STUD

(2) BUTT SPLICES
TO CB PREP
DETAIL BB

TO WIRE ASM-RADIO
DETAIL JA

2 & 6 PIN HOUSINGS
TO LEFT MIRROR

BUTT SPLICE
SPADE TERMINAL
TO 12V RCP

TO SWITCHES
DETAIL DB

2 & 6 PIN HOUSINGS
TO HEATER/AC CONTROLS

TO SWITCHES

DETAIL BA

579 RADIO - CB WIRE PREP

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

DESCRIPTION:
WIRING INSTL-FRONT END

SHEET: 2 OF 9 ITEM/PART NO: 000211893 / 30320201000 REV


2 EDGE OF LABEL TO HANG JUST BELOW BOTTOM OF DASH.

1 ROUTE WIRES UP LEFT A-PILLAR.


NOTES:

303202

HEADLAMP MODULE
(CHASSIS SUPPLIED)
SCREW
G1108-08B (2)

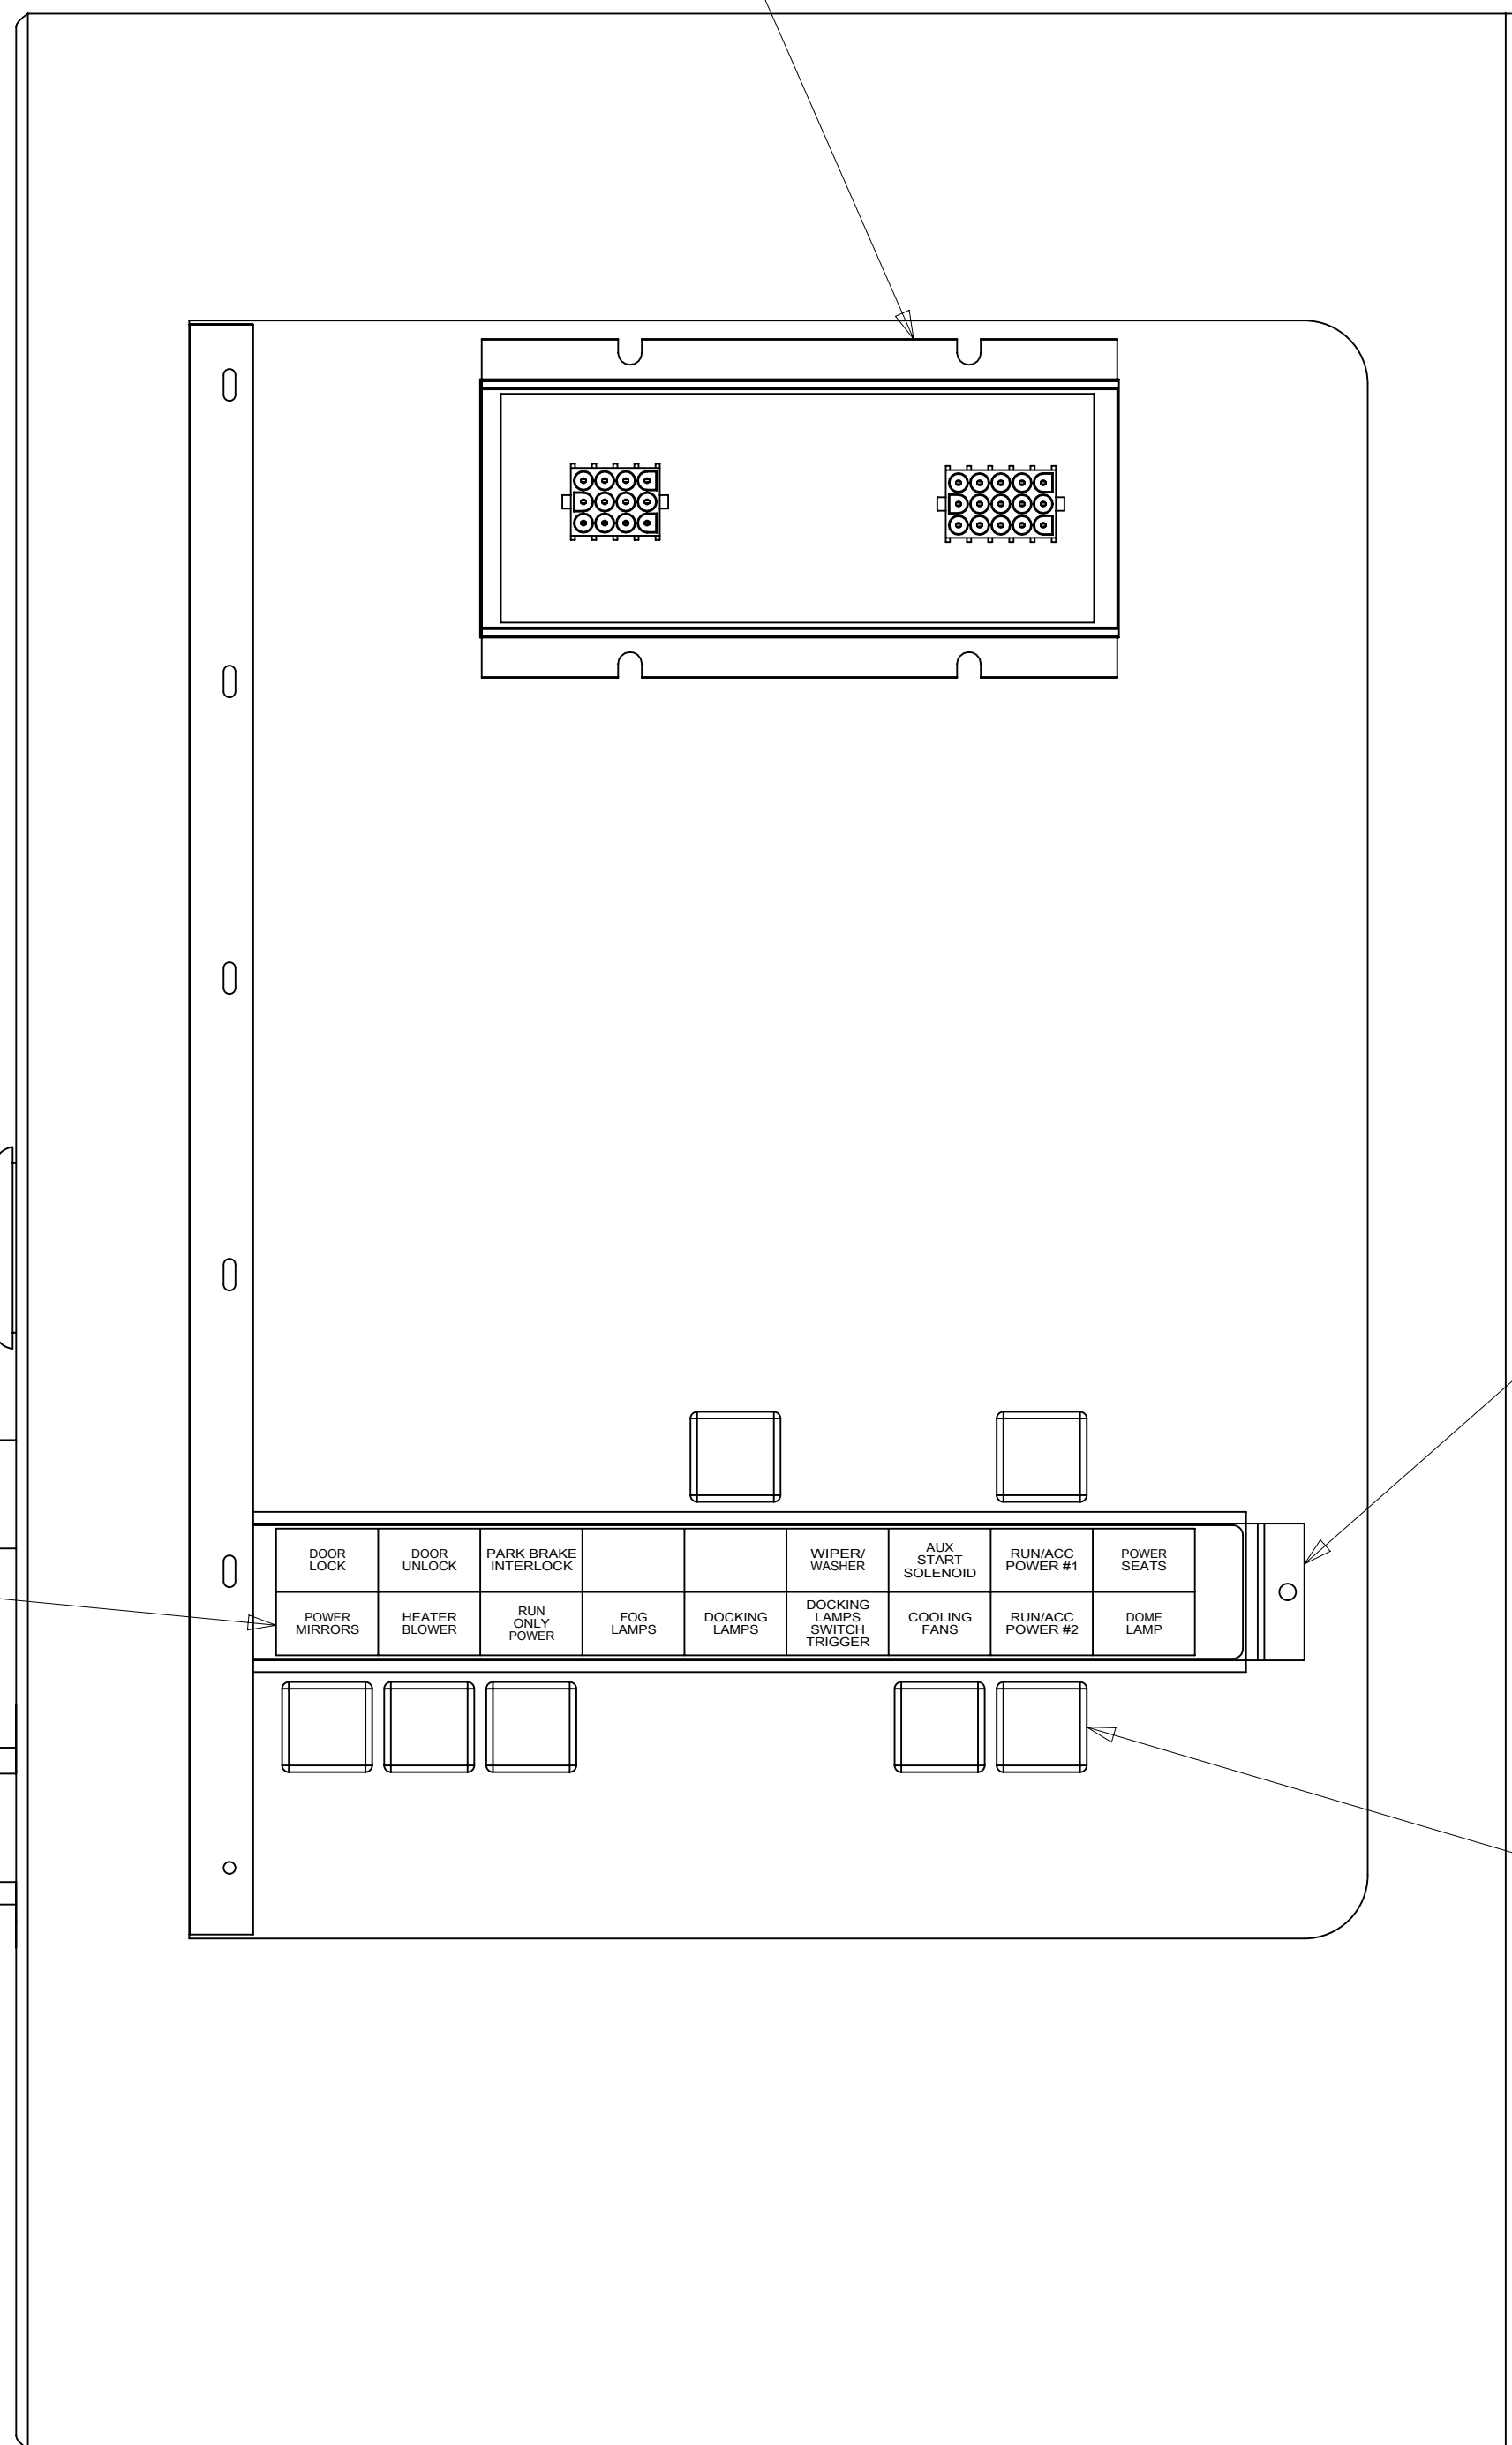

VIEW CB
(WITH COVER REMOVED) 3

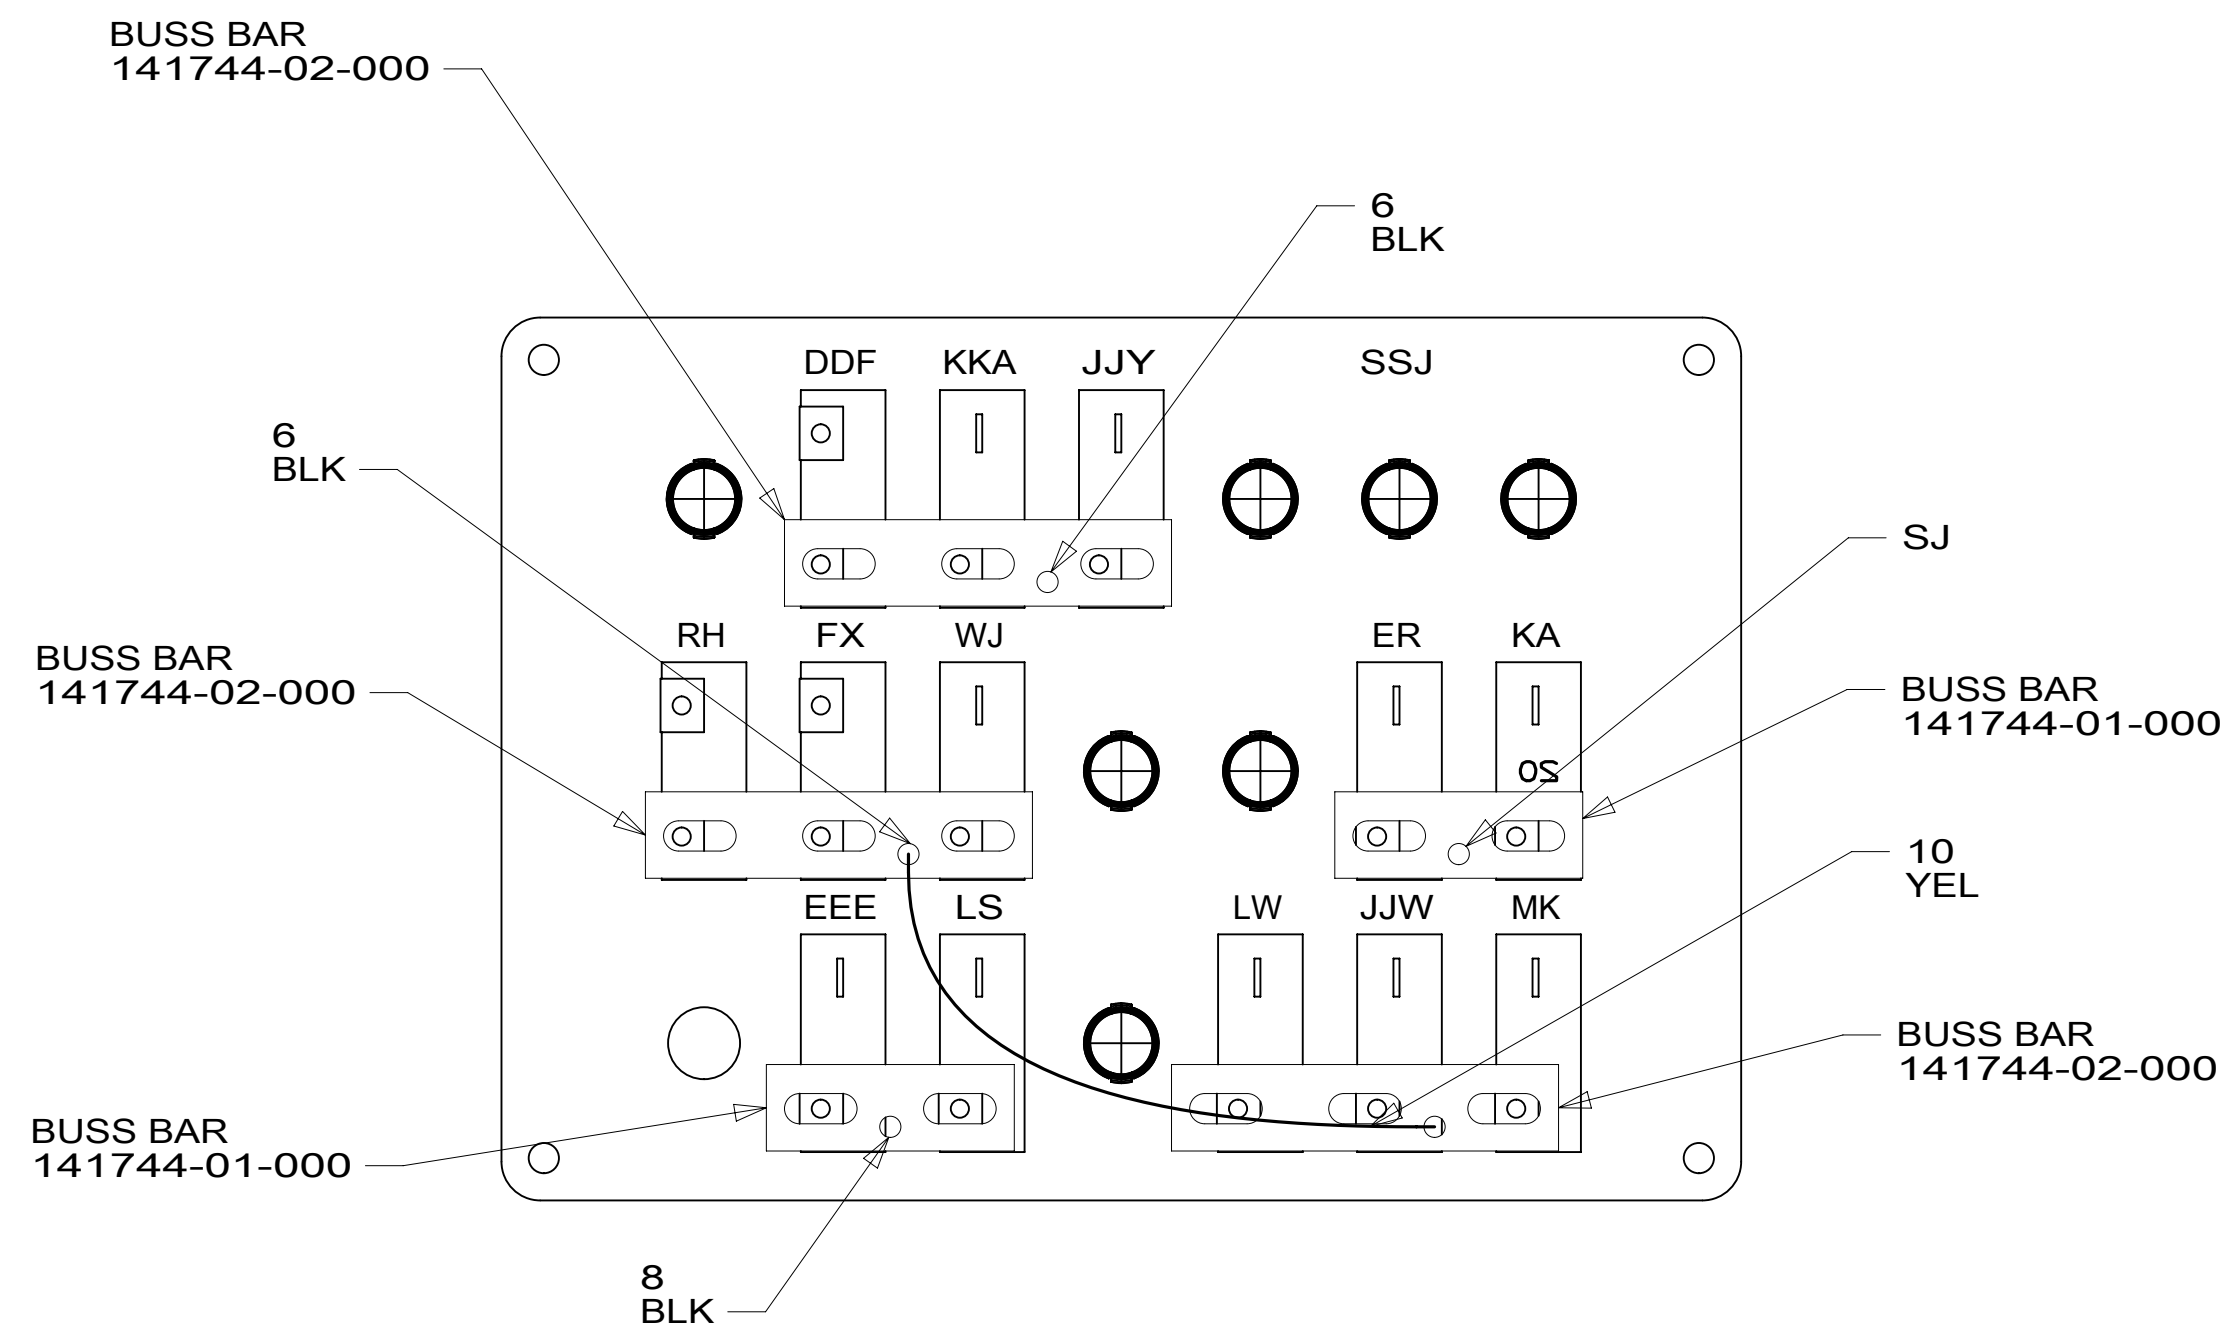


DETAIL CA
(BACK VIEW) 1

CIRCUIT BREAKER-20 AMP
093654-03-000
SCREW
G52-06-04B

CIRCUIT BREAKER-6 AMP
93654-01-000
SCREW
G52-06-04B

CIRCUIT BREAKER-15 AMP
93654-02-000 (8)
SCREW
G52-06-04B (8)

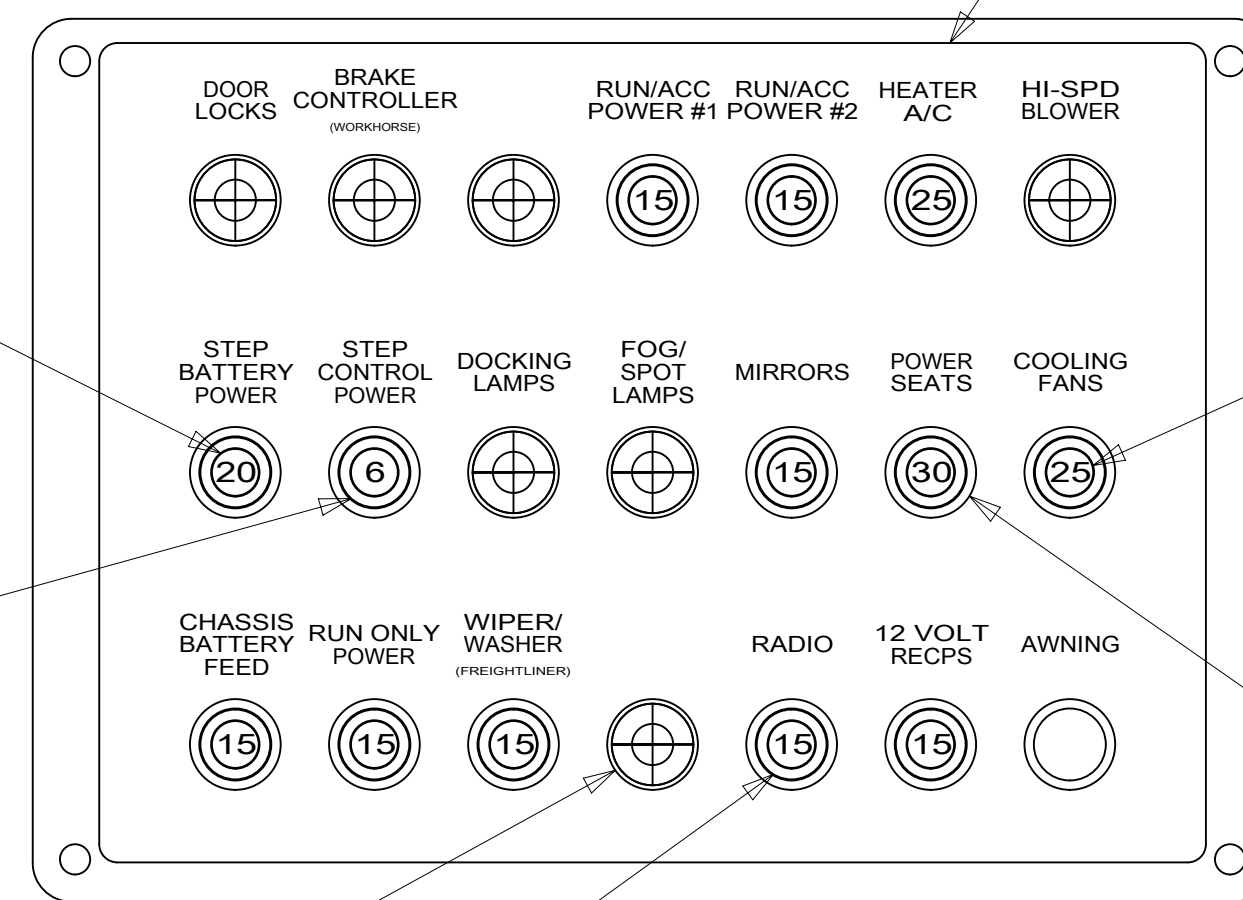

DETAIL CA
(FRONT VIEW)

LABEL-CIRCUIT
BREAKER-MAIN
93236-48-000

PLATE-CIRCUIT BREAKER
139067-07-CHT
SCREW
G11-08-08U (4)

CIRCUIT BREAKER-25 AMP
93655-01-000 (2)
SCREW
G52-06-04B (2)

CIRCUIT BREAKER-30 AMP
93655-02-000)
SCREW
G52-06-04B

PLUG
81211-06-000 (7)

- NOTES:
- 3 SEAL ALL SCREWS ON EXTERIOR SIDE OF COMPARTMENT. REFER TO SEALANT MANUAL.
 - 2 CIRCUIT FFD IS PART OF WIRE ASM-CHASSIS.
 - 1 CIRCUITS LABELED ON BREAKER ARE FROM WIRE ASM-IP, MAIN, UNLESS OTHERWISE SPECIFIED.

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

X-X

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

DESCRIPTION:
WIRING INSTL-FRONT END

SHEET: 3 OF 9 ITEM/PART NO: 000211893 / 30320201000 REV

D

C

B

A

8

SWITCH-HEADLAMP
(CHASSIS SUPPLIED)
PLATE-MOUNTING
189004-02-CHT
CLAMP-MOUNTING
189009-01-CHT
NUT
D65-08-08U (4)

8

LABEL-JACKS DOWN
133533-01-CHT

1 LIGHT ASM-INDICATOR,RED
190682-01-000

4 CLUSTER
(CHASSIS SUPPLIED)

SWITCH-AIR HORN
174757-13-CHT

SWITCH-RADIO POWER
174757-12-CHT

SWITCH-GEN SET
174757-05-CHT

RADIO
00014453 / 311897-01-000
DETAIL JA

5 6

SWITCH-WIPER
174663-01-000

PANEL-SWITCH
MOUNTING,3-WAY
174834-02-CHT

SWITCH-FRONT AUX
174757-35-CHT

SWITCH-
BATTERY BOOST
174757-31-CHT

DETAIL DA

SWITCH-IGNITION
185422-01-000

9

PANEL-SWITCH
MOUNTING,3-WAY
174834-02-CHT

- NOTES:
- 9 REPLACE CHASSIS SUPPLIED IGNITION SWITCH.
 - 8 CHASSIS SUPPLIED ROCKER SWITCHES. DOME LAMP SWITCH NOT USED. SEE DETAIL DC FOR SWITCH POSITION.
 - 7. APPLY TAPE 8363-01-000 AS NECESSARY TO SECURE NON-LOCKING CONNECTIONS.
 - 6 ATTACH TO RADIO WITH SCREW SUPPLIED WITH RADIO.
 - 5 PLUG USB CABLE INTO LEAD ON BACK OF RADIO MARKED 'USB' ROUTE CABLE TO DASH POCKET BELOW RADIO.
 - 4 SEE SHEET 5 FOR GAUGE PLACEMENT.
 - 3 MOUNT SWITCH SO WHEN ACTUATOR IS PUSHED LEFT, THE LETTER L IS SHOWING.
 - 2 CONNECT TO MATING LABELED CONNECTOR ON CHASSIS SUPPLIED WIRING.
 - 1 CONNECT POSITIVE WIRE TO TERMINAL MARKED WITH A "+", YEL-WINNEBAGO WIRING RED-HWH WIRING

SWITCH-MIRROR HEAT
174757-25-CHT

2 SWITCH-EXHAUST BRAKE
174757-29-CHT
DETAIL EA

PANEL-SWITCH
MOUNTING,4-WAY
174834-03-CHT

INFORMATION
BAR SWITCH
(CHASSIS SUPPLIED)

SWITCH-MIRROR
CONTROLS
88246-01-000
SPACER-SWITCH,MIRROR
184039-01-CHT

3

PLATE ASM-SWITCH
118662-29-CHT
NUT
D27-08-00B (2)

SWITCH-SOLAR SHADE
174757-10-CHT

SWITCH-DOME LIGHT
145638-01-CHT

DETAIL DB



DETAIL DC

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


X-X
FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 1LE FRTL 44,320 400HP 6SPD TAG
- 1AH FRTL 34,320 380HP 8.3L 6 SPD
- 1AC FRTL 32,350 360HP 6.7L 6 SPD
- 1AB FRTL 27,910 340 6.7L 10 EMM
- 15D GPS-NAVIGATION SYSTEM
- 15C GPS-NAVIGATION SYSTEM W/O
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


DESCRIPTION:	1B1 265
WIRING INSTL-FRONT END	
SHEET:	ITEM/PART NO:
4 OF 9	000211893 / 30320201000
REV	

303202

8 7 6 5 4 3 2 1

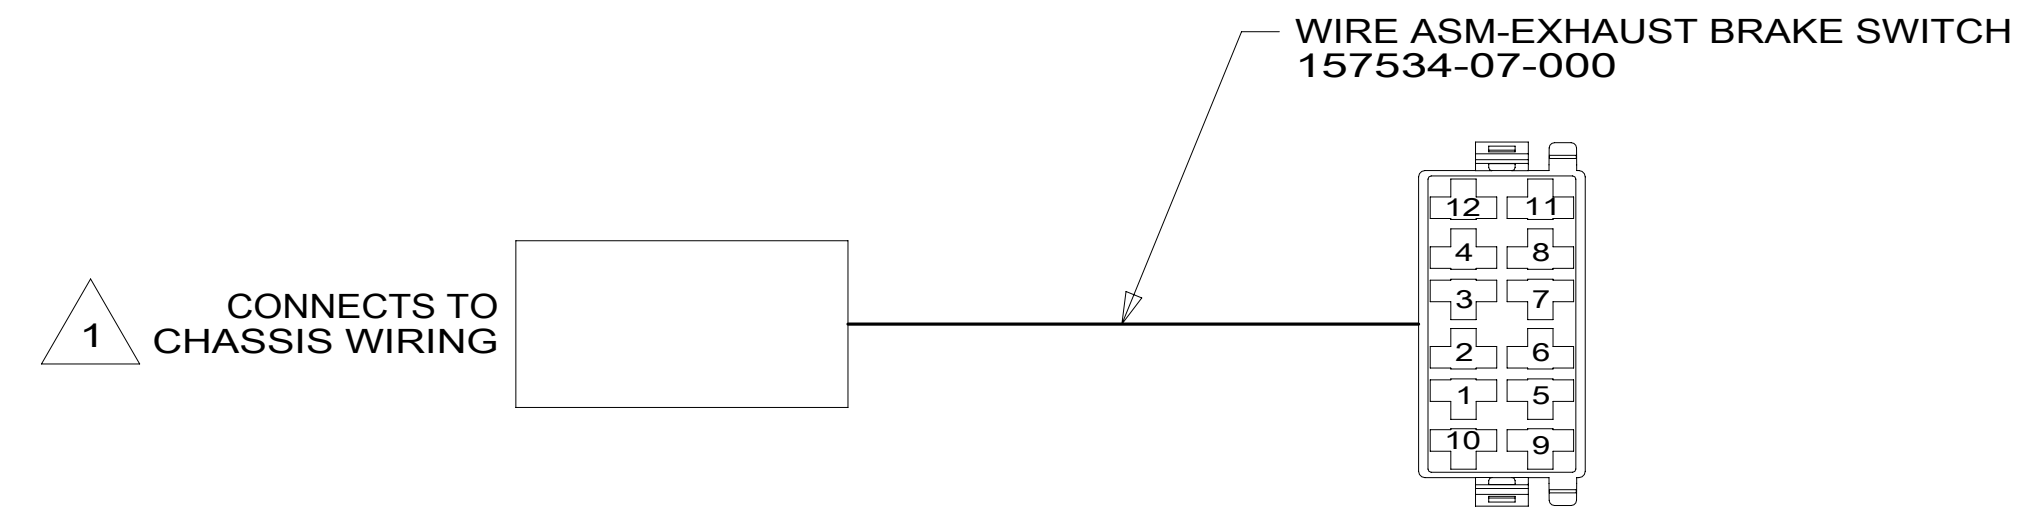

DETAIL EA

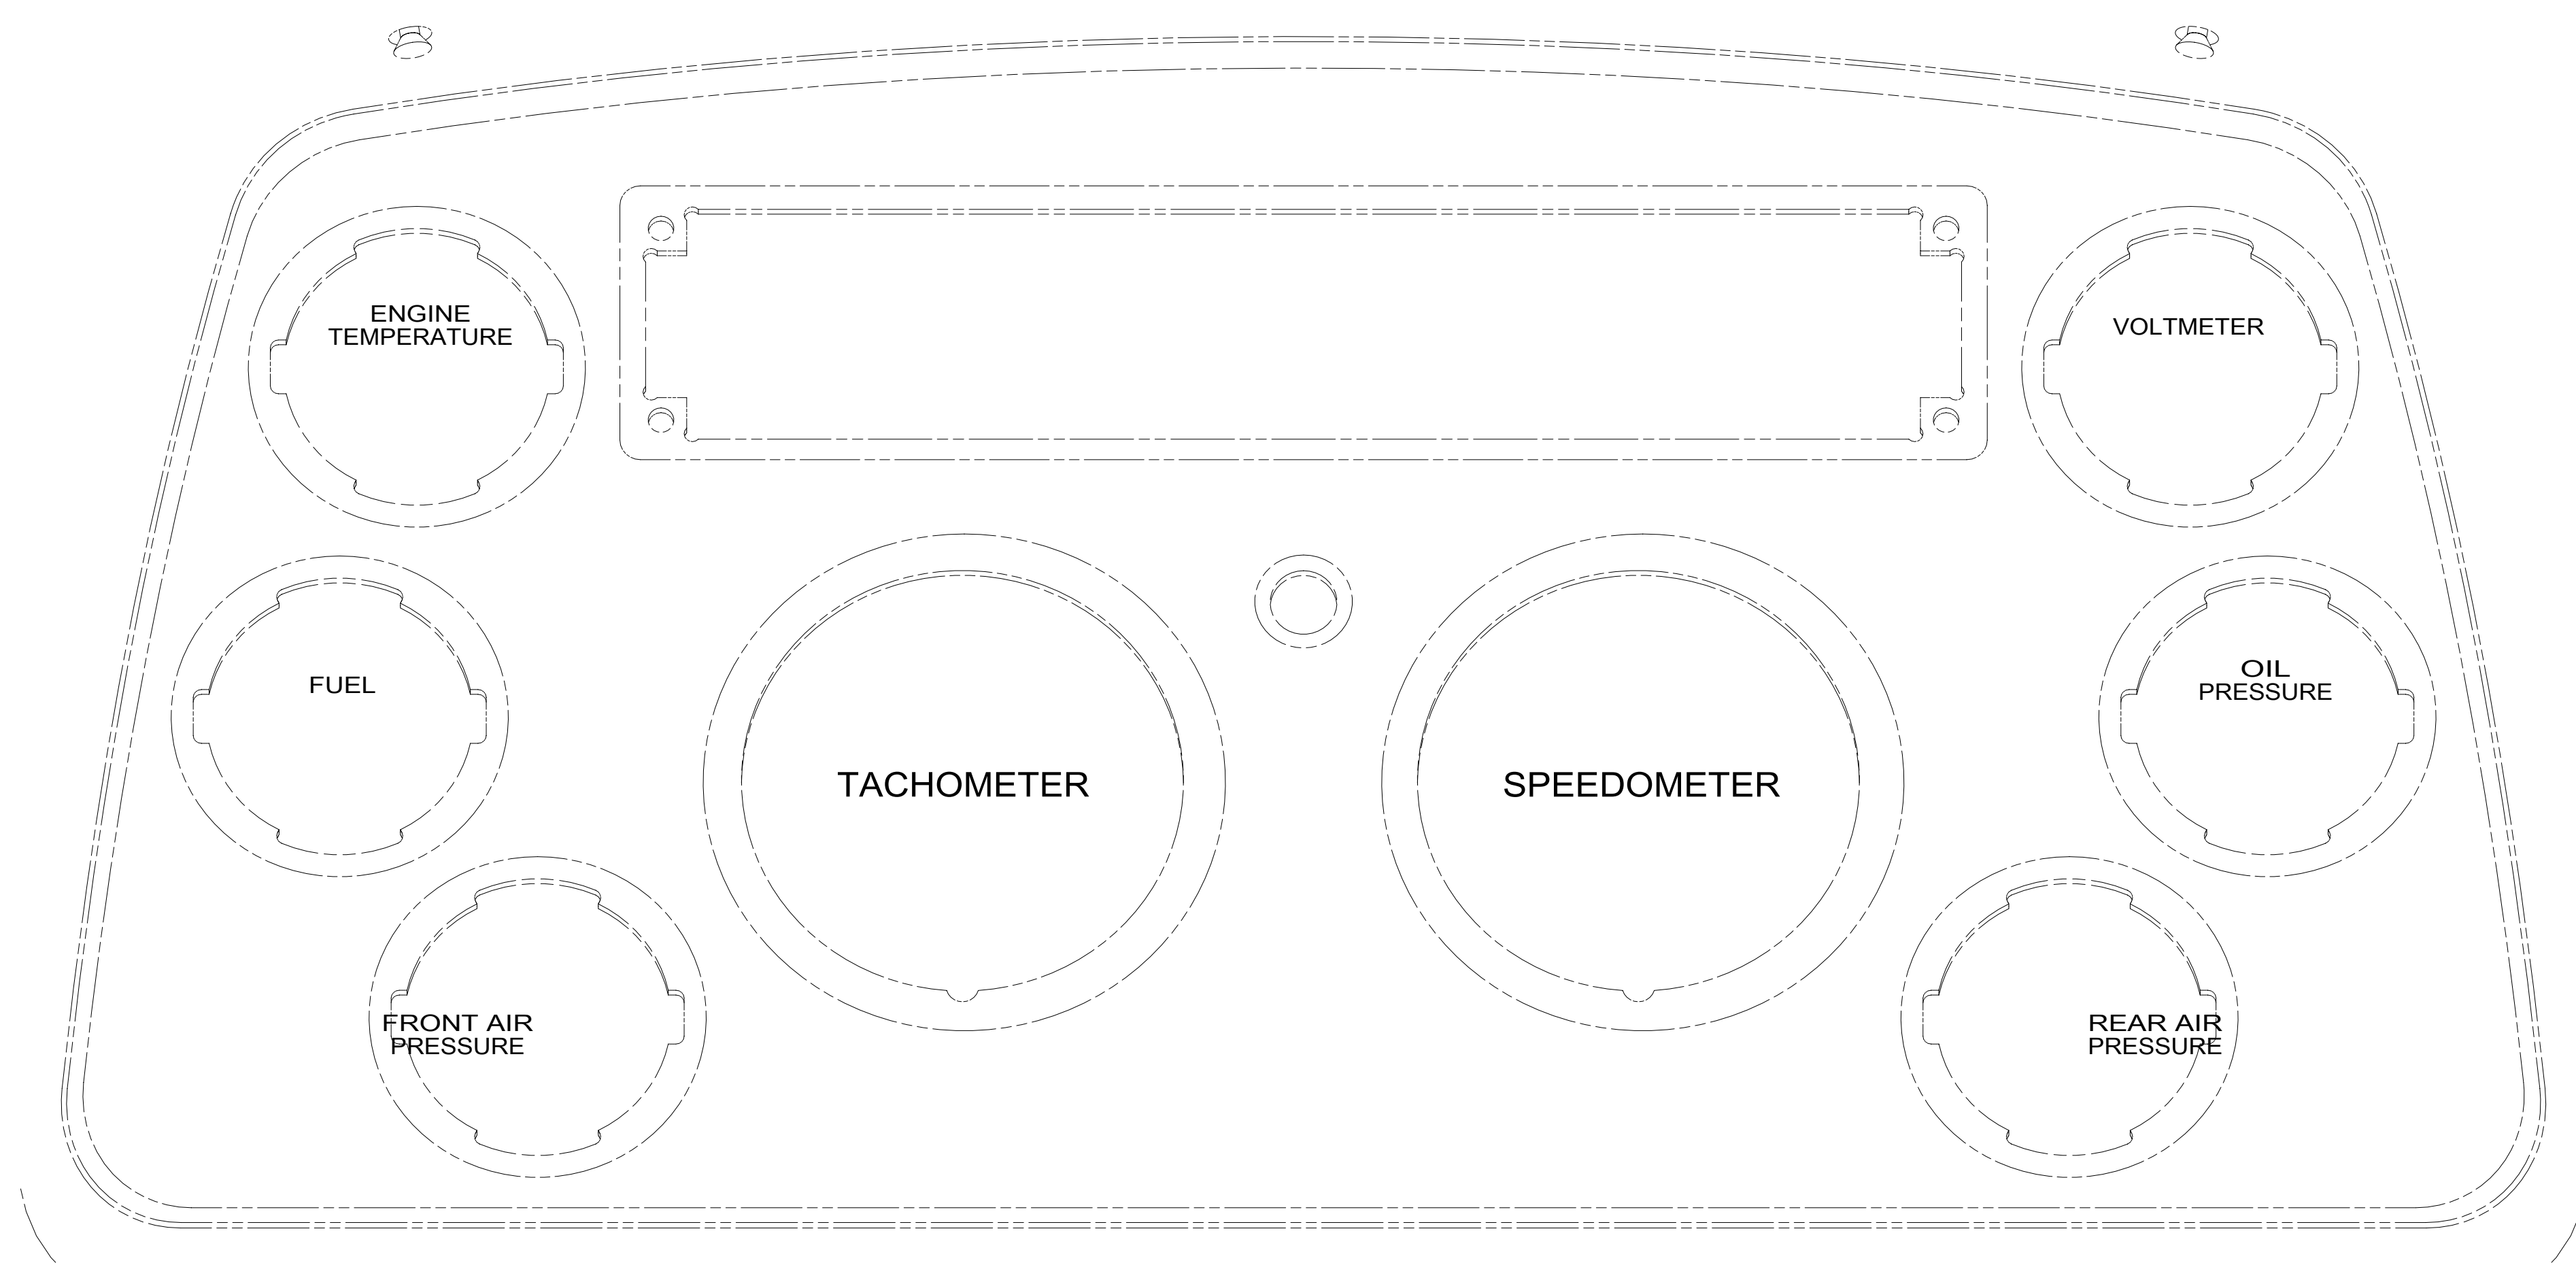

FREIGHTLINER CLUSTER LOCATION

1 CHASSIS WIRING HAS MATING CONNECTOR AND IS LABELED "ENGINE BRAKE SWITCH"

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION:		1B1 265
WIRING INSTL-FRONT END		
SHEET:	ITEM/PART NO:	REV
5 OF 9	000211893 / 30320201000	


8 7 6 5 4 3 2 1 20-Sep-2016

303202

8 7 6 5 4 3 2 1

D
C
B
A

D
C
B
A

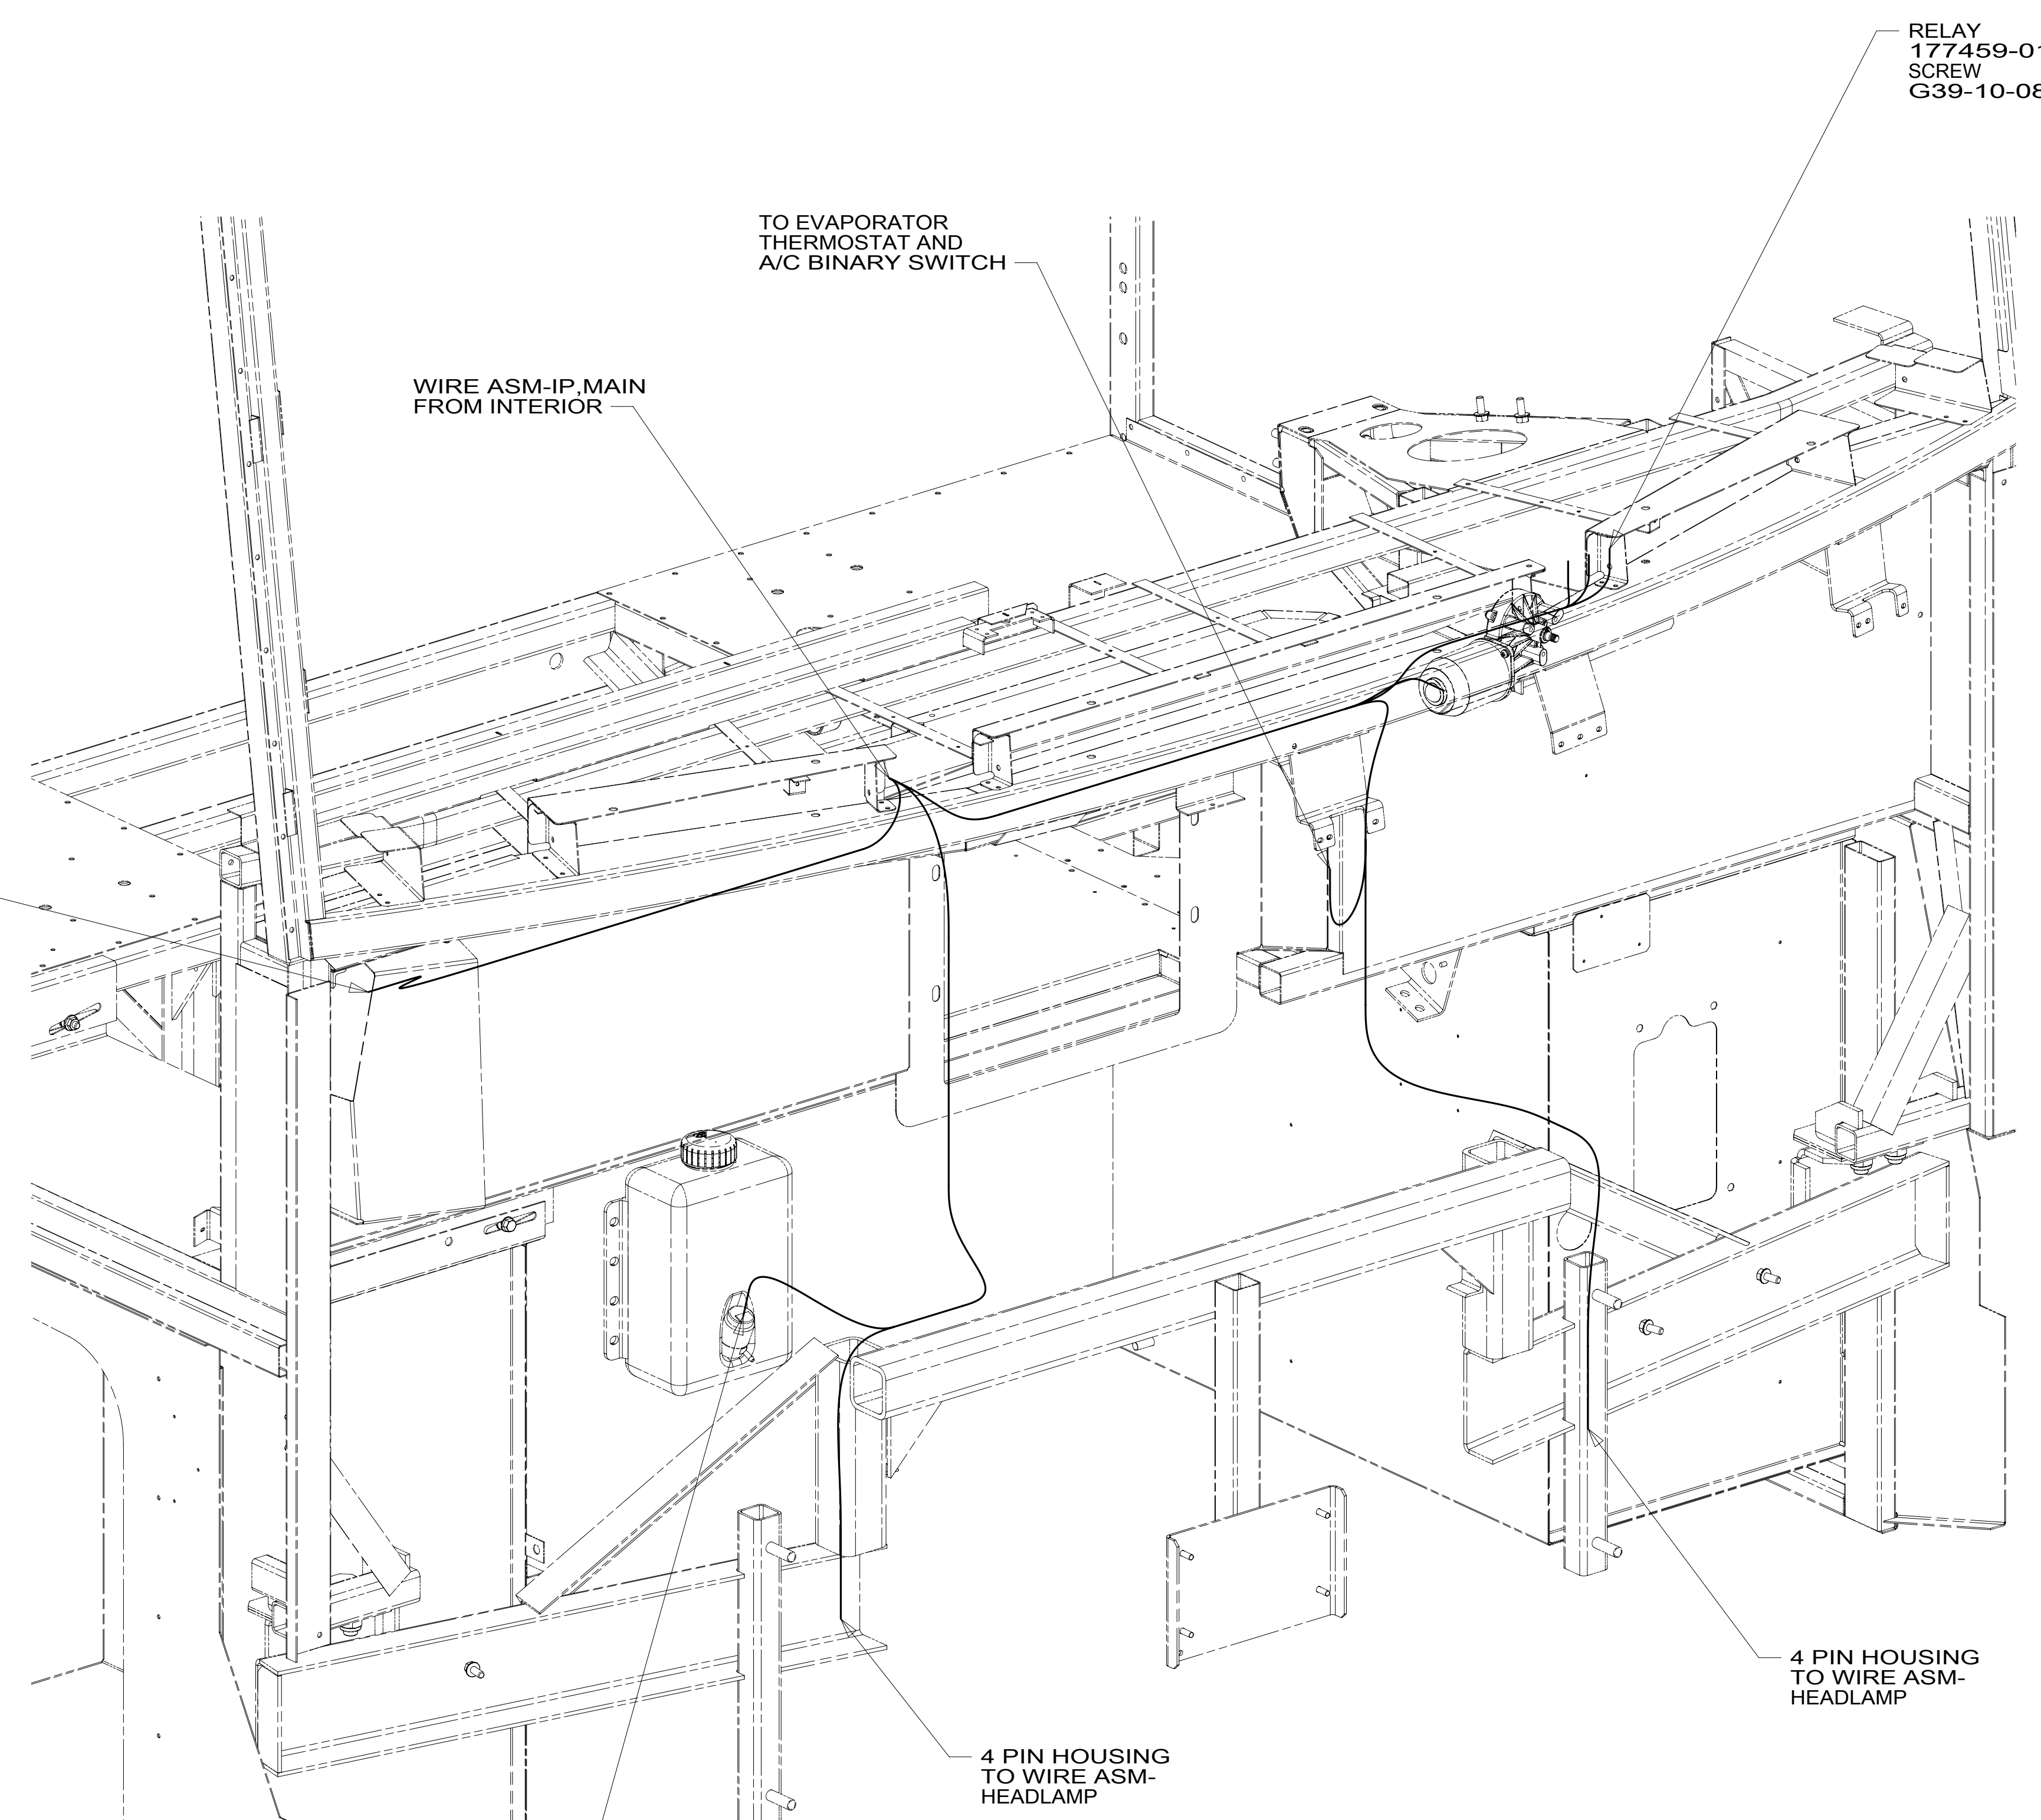

2 PIN HOUSING TO WASHER BOTTLE

4 PIN HOUSING TO WIRE ASM-HEADLAMP

4 PIN HOUSING TO WIRE ASM-HEADLAMP

6 PIN HOUSING TO RIGHT MIRROR

TO EVAPORATOR THERMOSTAT AND A/C BINARY SWITCH

WIRE ASM-IP, MAIN FROM INTERIOR

RELAY 177459-01-000 (3)
SCREW G39-10-08U (3)

VIEW FA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA


1B1 265

DESCRIPTION:
WIRING INSTL-FRONT END

SHEET: 6 OF 9 ITEM/PART NO.: 000211893 / 30320201000 REV

8 7 6 5 4 3 2 1 20-Sep-2016

303202

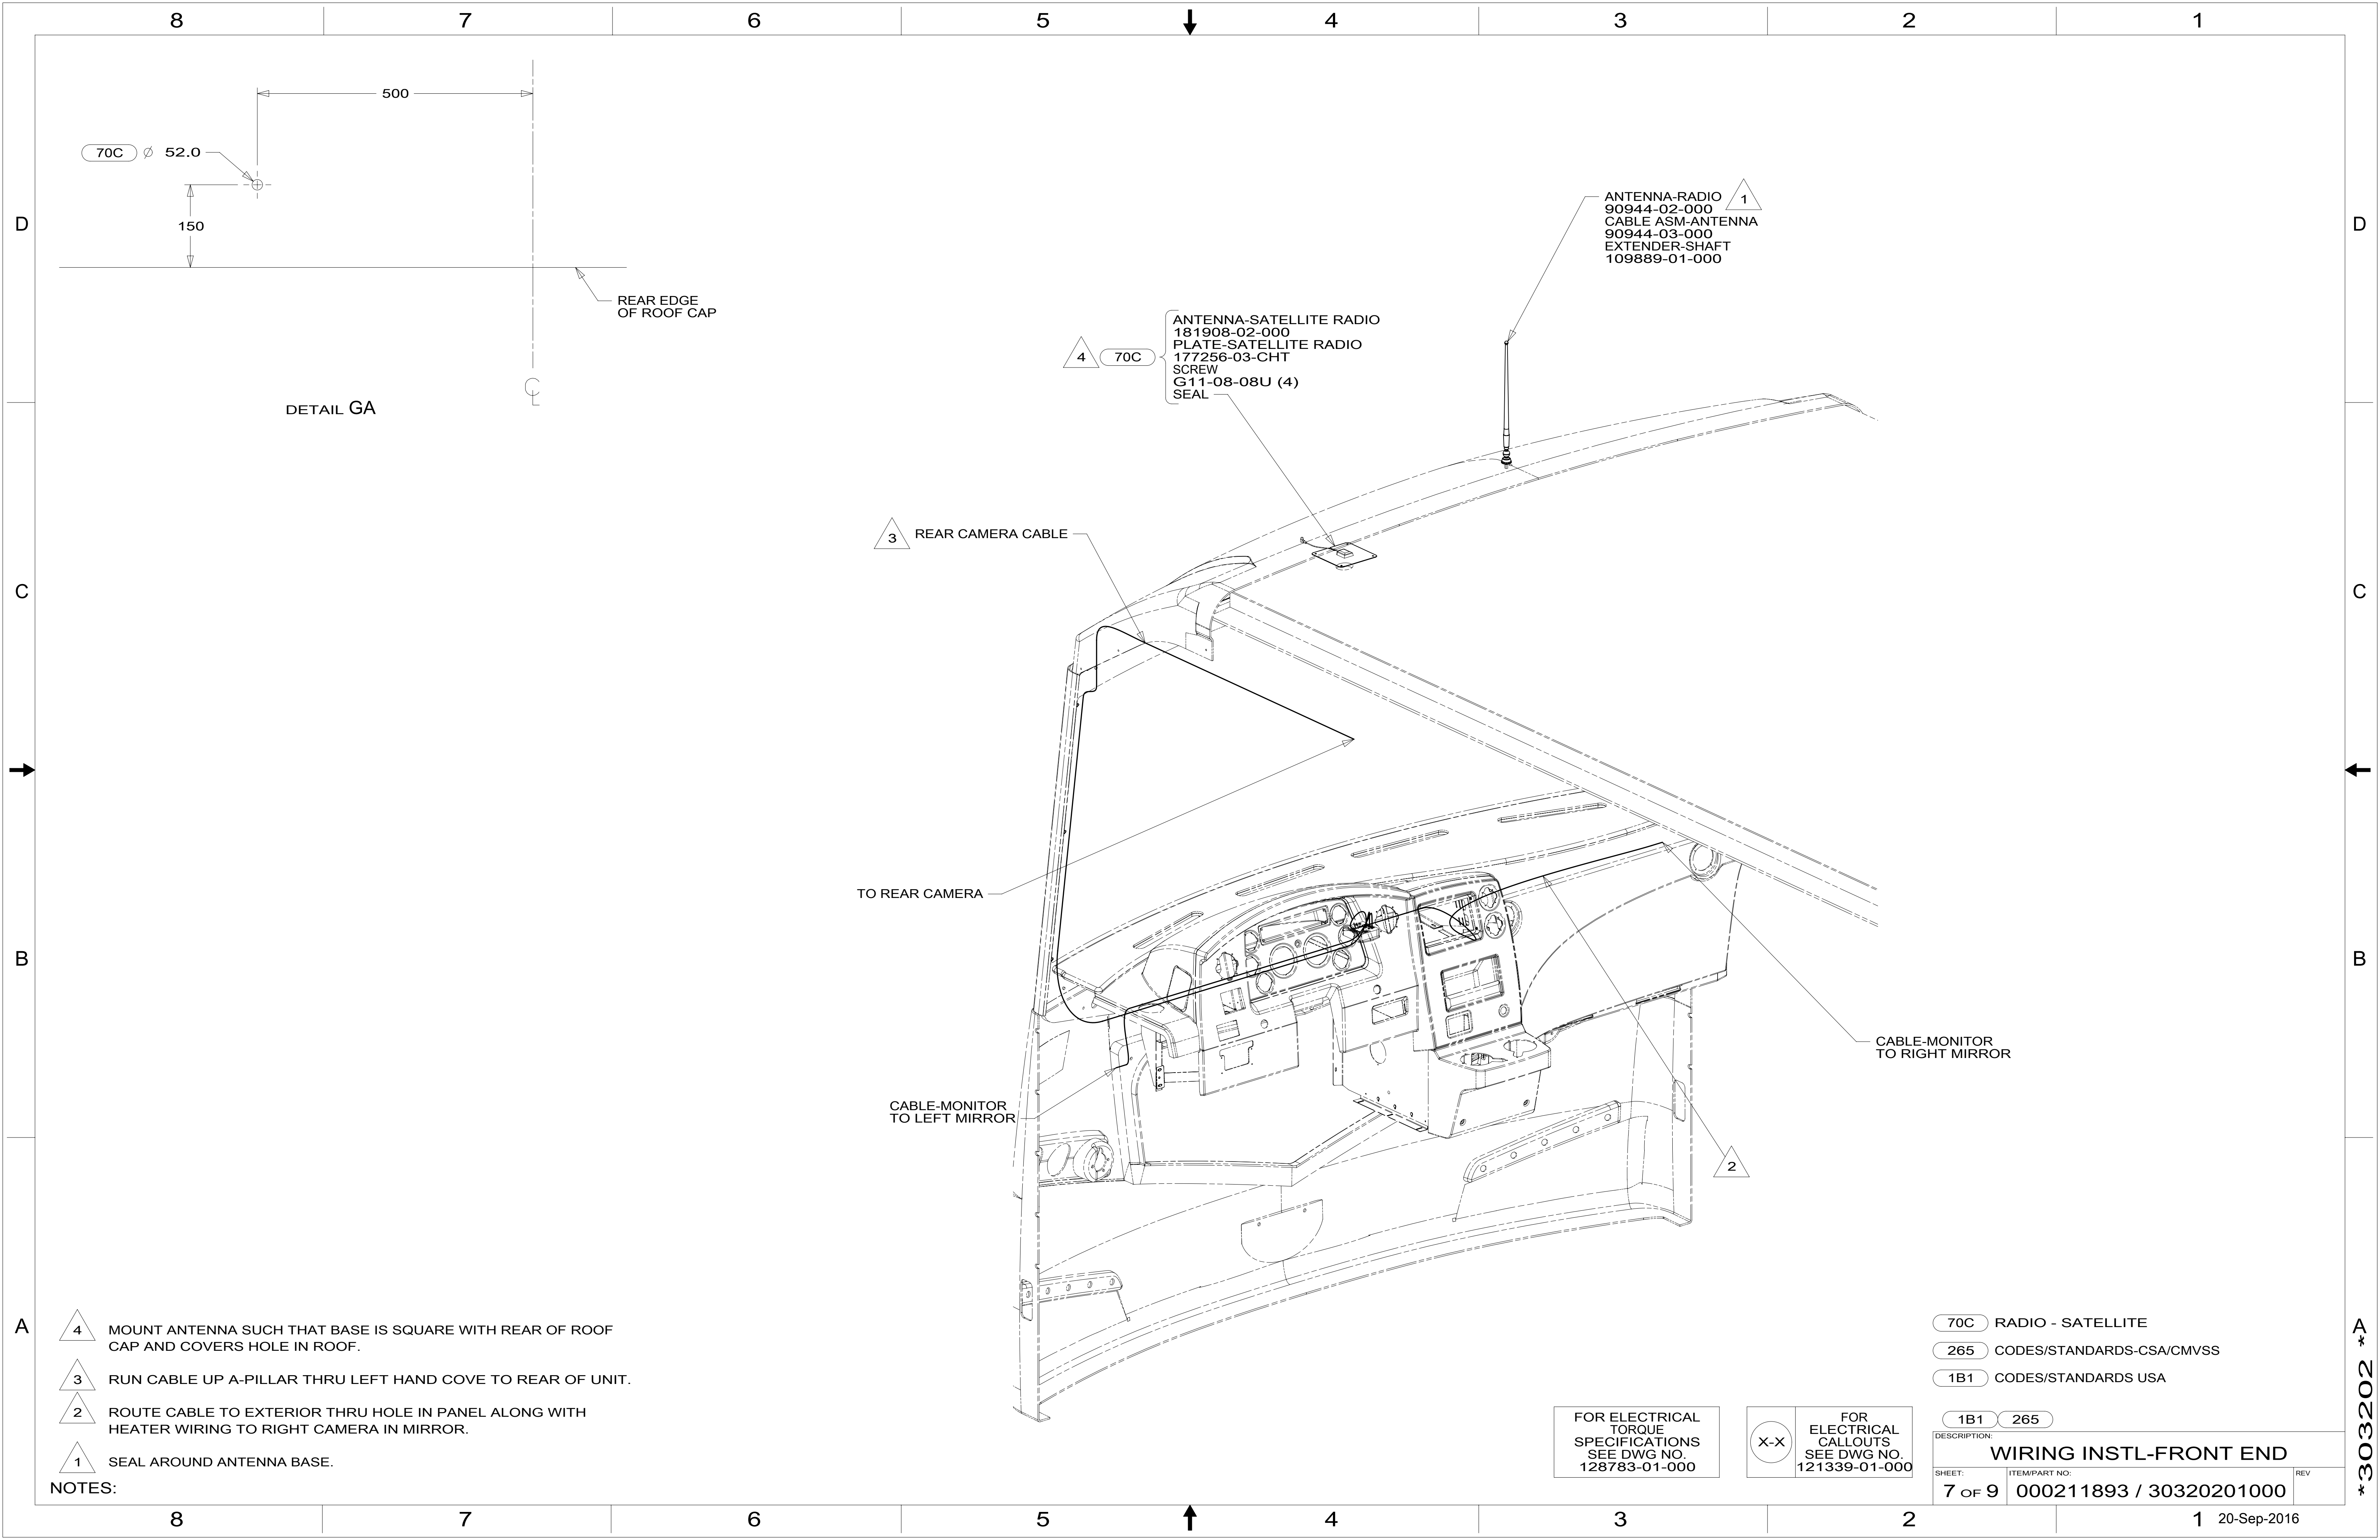

DETAIL GA

70C Ø 52.0
150

REAR EDGE OF ROOF CAP

4 70C
ANTENNA-SATELLITE RADIO
181908-02-000
PLATE-SATELLITE RADIO
177256-03-CHT
SCREW
G11-08-08U (4)
SEAL

1
ANTENNA-RADIO
90944-02-000
CABLE ASM-ANTENNA
90944-03-000
EXTENDER-SHAFT
109889-01-000

3 REAR CAMERA CABLE

TO REAR CAMERA

CABLE-MONITOR TO LEFT MIRROR

CABLE-MONITOR TO RIGHT MIRROR

2

- NOTES:
- 4 MOUNT ANTENNA SUCH THAT BASE IS SQUARE WITH REAR OF ROOF CAP AND COVERS HOLE IN ROOF.
 - 3 RUN CABLE UP A-PILLAR THRU LEFT HAND COVE TO REAR OF UNIT.
 - 2 ROUTE CABLE TO EXTERIOR THRU HOLE IN PANEL ALONG WITH HEATER WIRING TO RIGHT CAMERA IN MIRROR.
 - 1 SEAL AROUND ANTENNA BASE.

- 70C RADIO - SATELLITE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


X-X FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:		1B1 265
WIRING INSTL-FRONT END		
SHEET:	ITEM/PART NO.:	REV
7 OF 9	000211893 / 30320201000	

303202

8 7 6 5 4 3 2 1

D
C
B
A

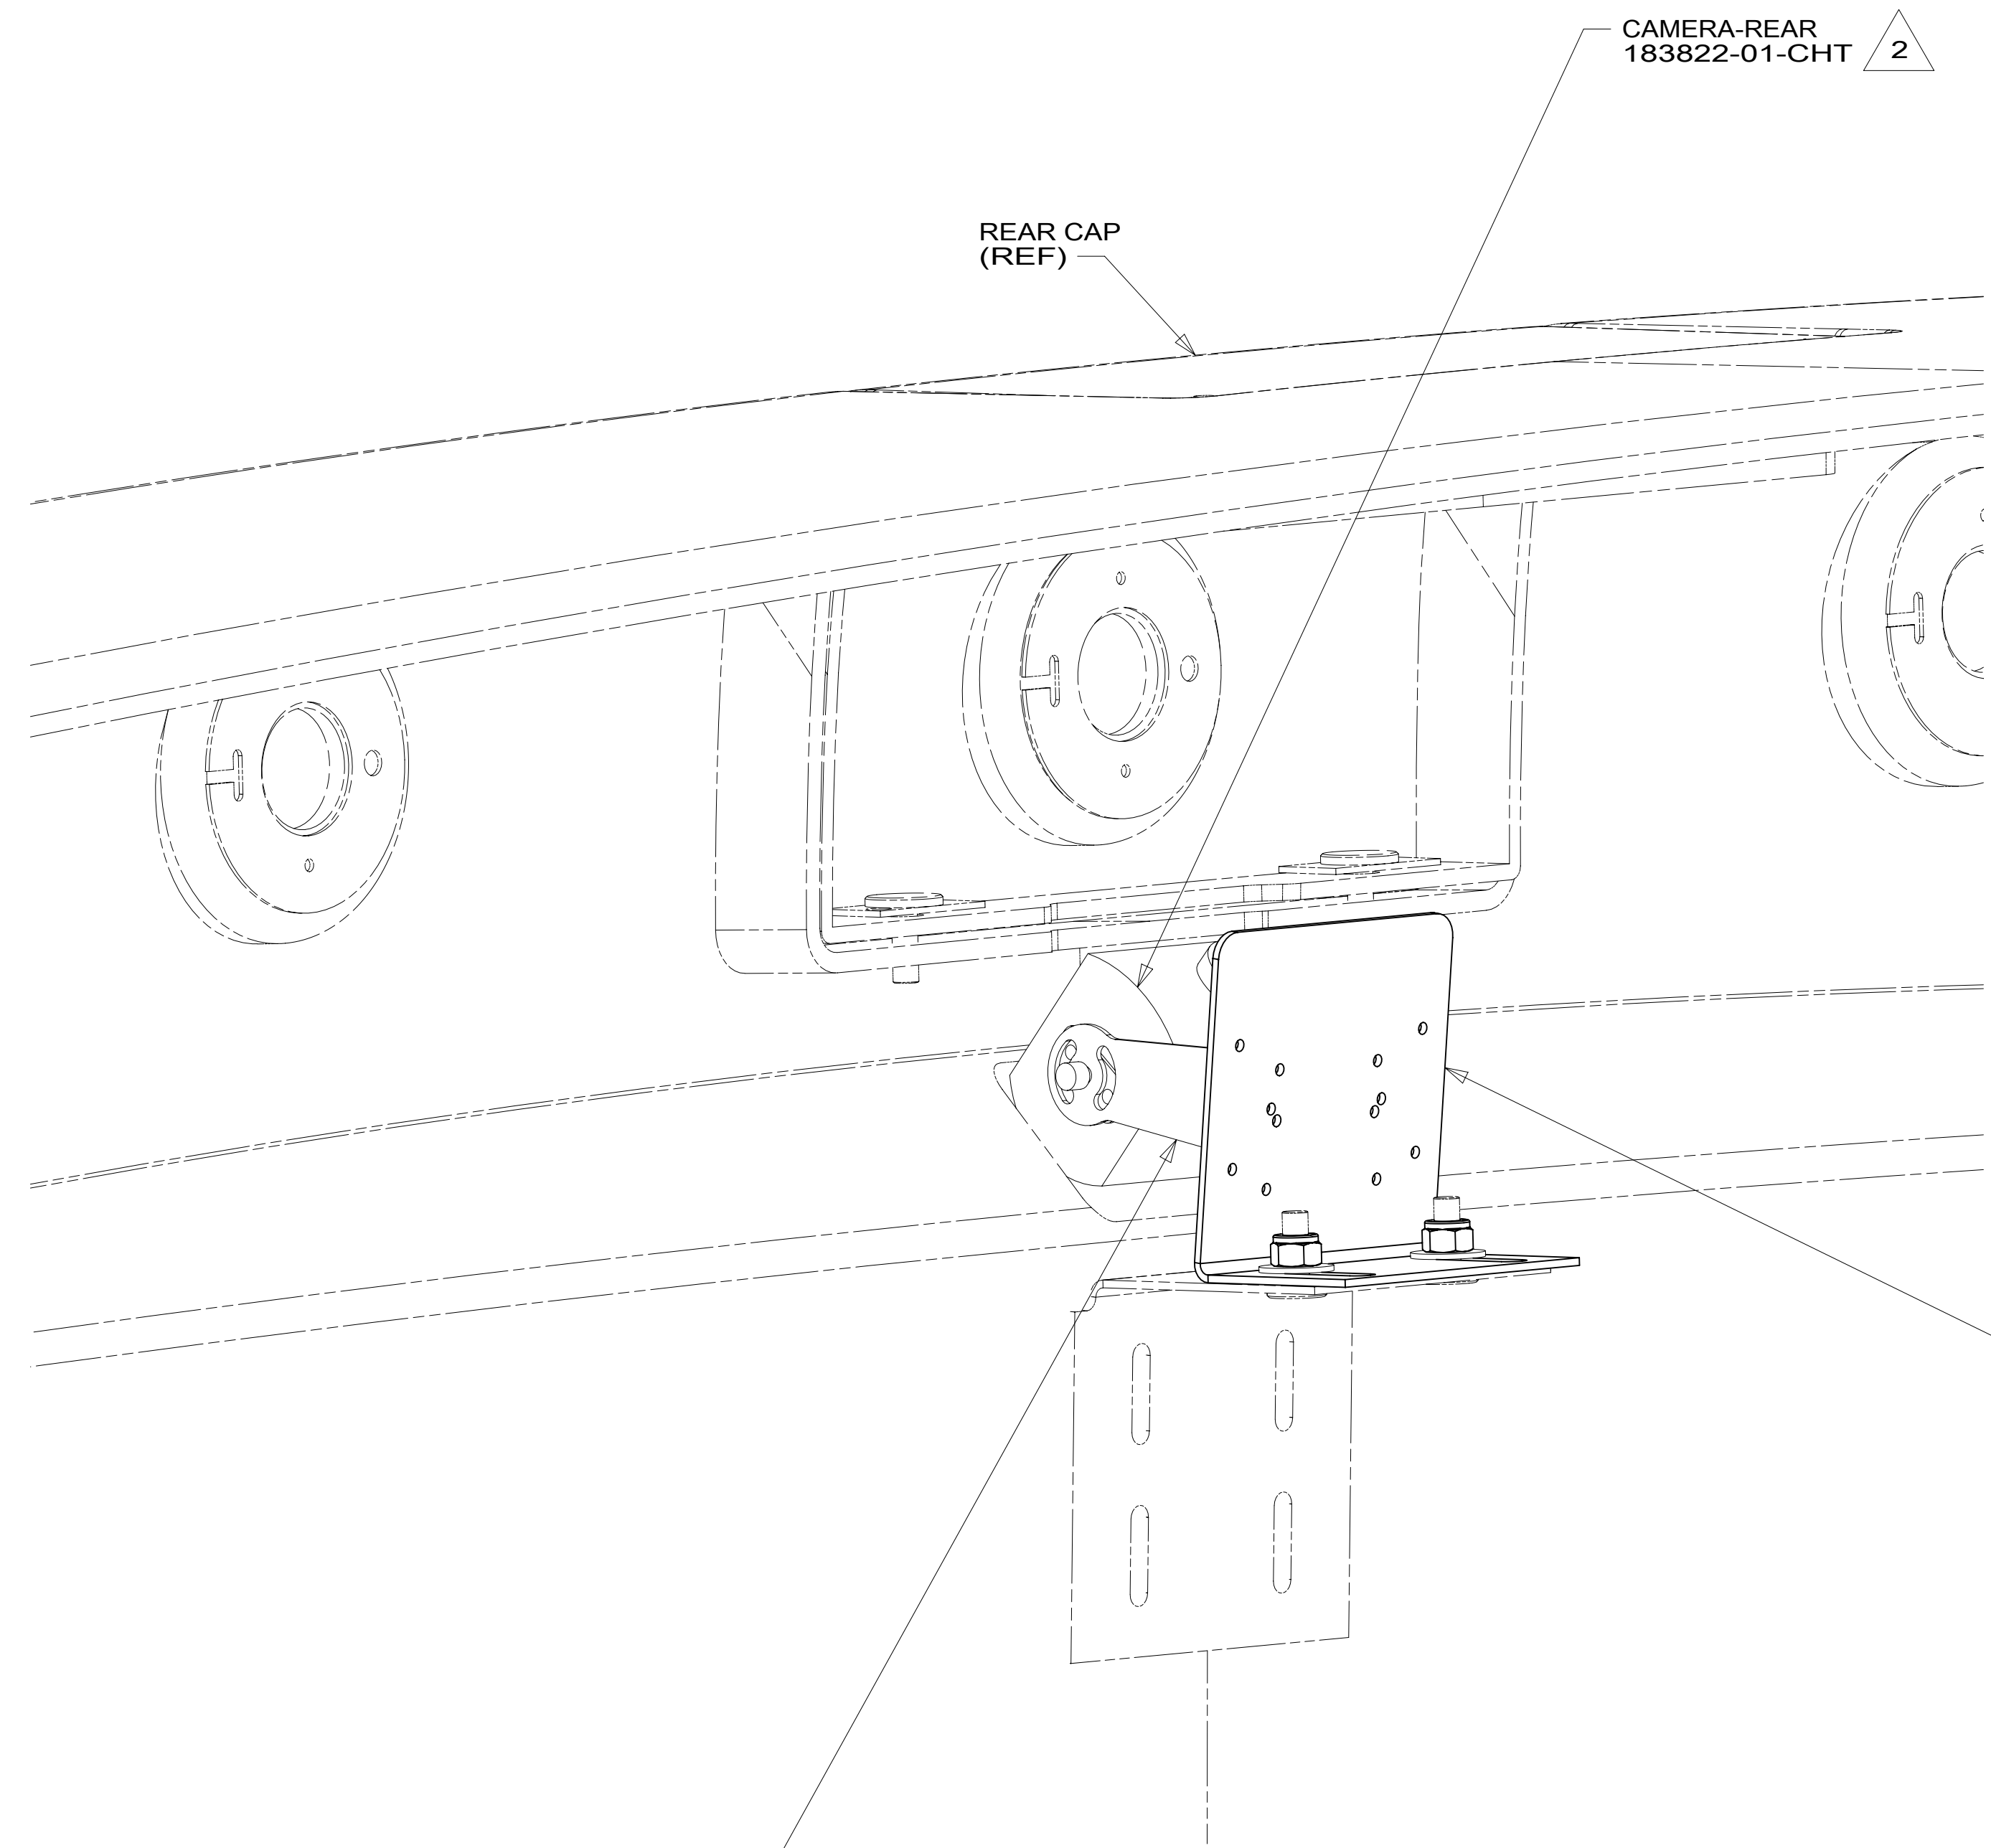

BRACKET-MOUNT, CAMERA
 152022-05-CHT
 WASHER
 E13-14-00U (2)
 NUT
 D29-04-00U (2)

1 BRACKET-CAMERA

CAMERA-REAR
 183822-01-CHT 2

REAR CAP
 (REF)

2 ALIGN CAMERA IN CENTER OF SHROUD OPENING AND ADJUST SO BACKWALL IS JUST VISIBLE.
 1 PARTS SUPPLIED WITH REAR CAMERA, VISOR NOT USED.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


X-X FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS
 1B1 CODES/STANDARDS USA


DESCRIPTION:		1B1 265
WIRING INSTL-FRONT END		
SHEET:	ITEM/PART NO.:	REV
8 OF 9	000211893 / 30320201000	

8 7 6 5 4 3 2 1 20-Sep-2016

303202

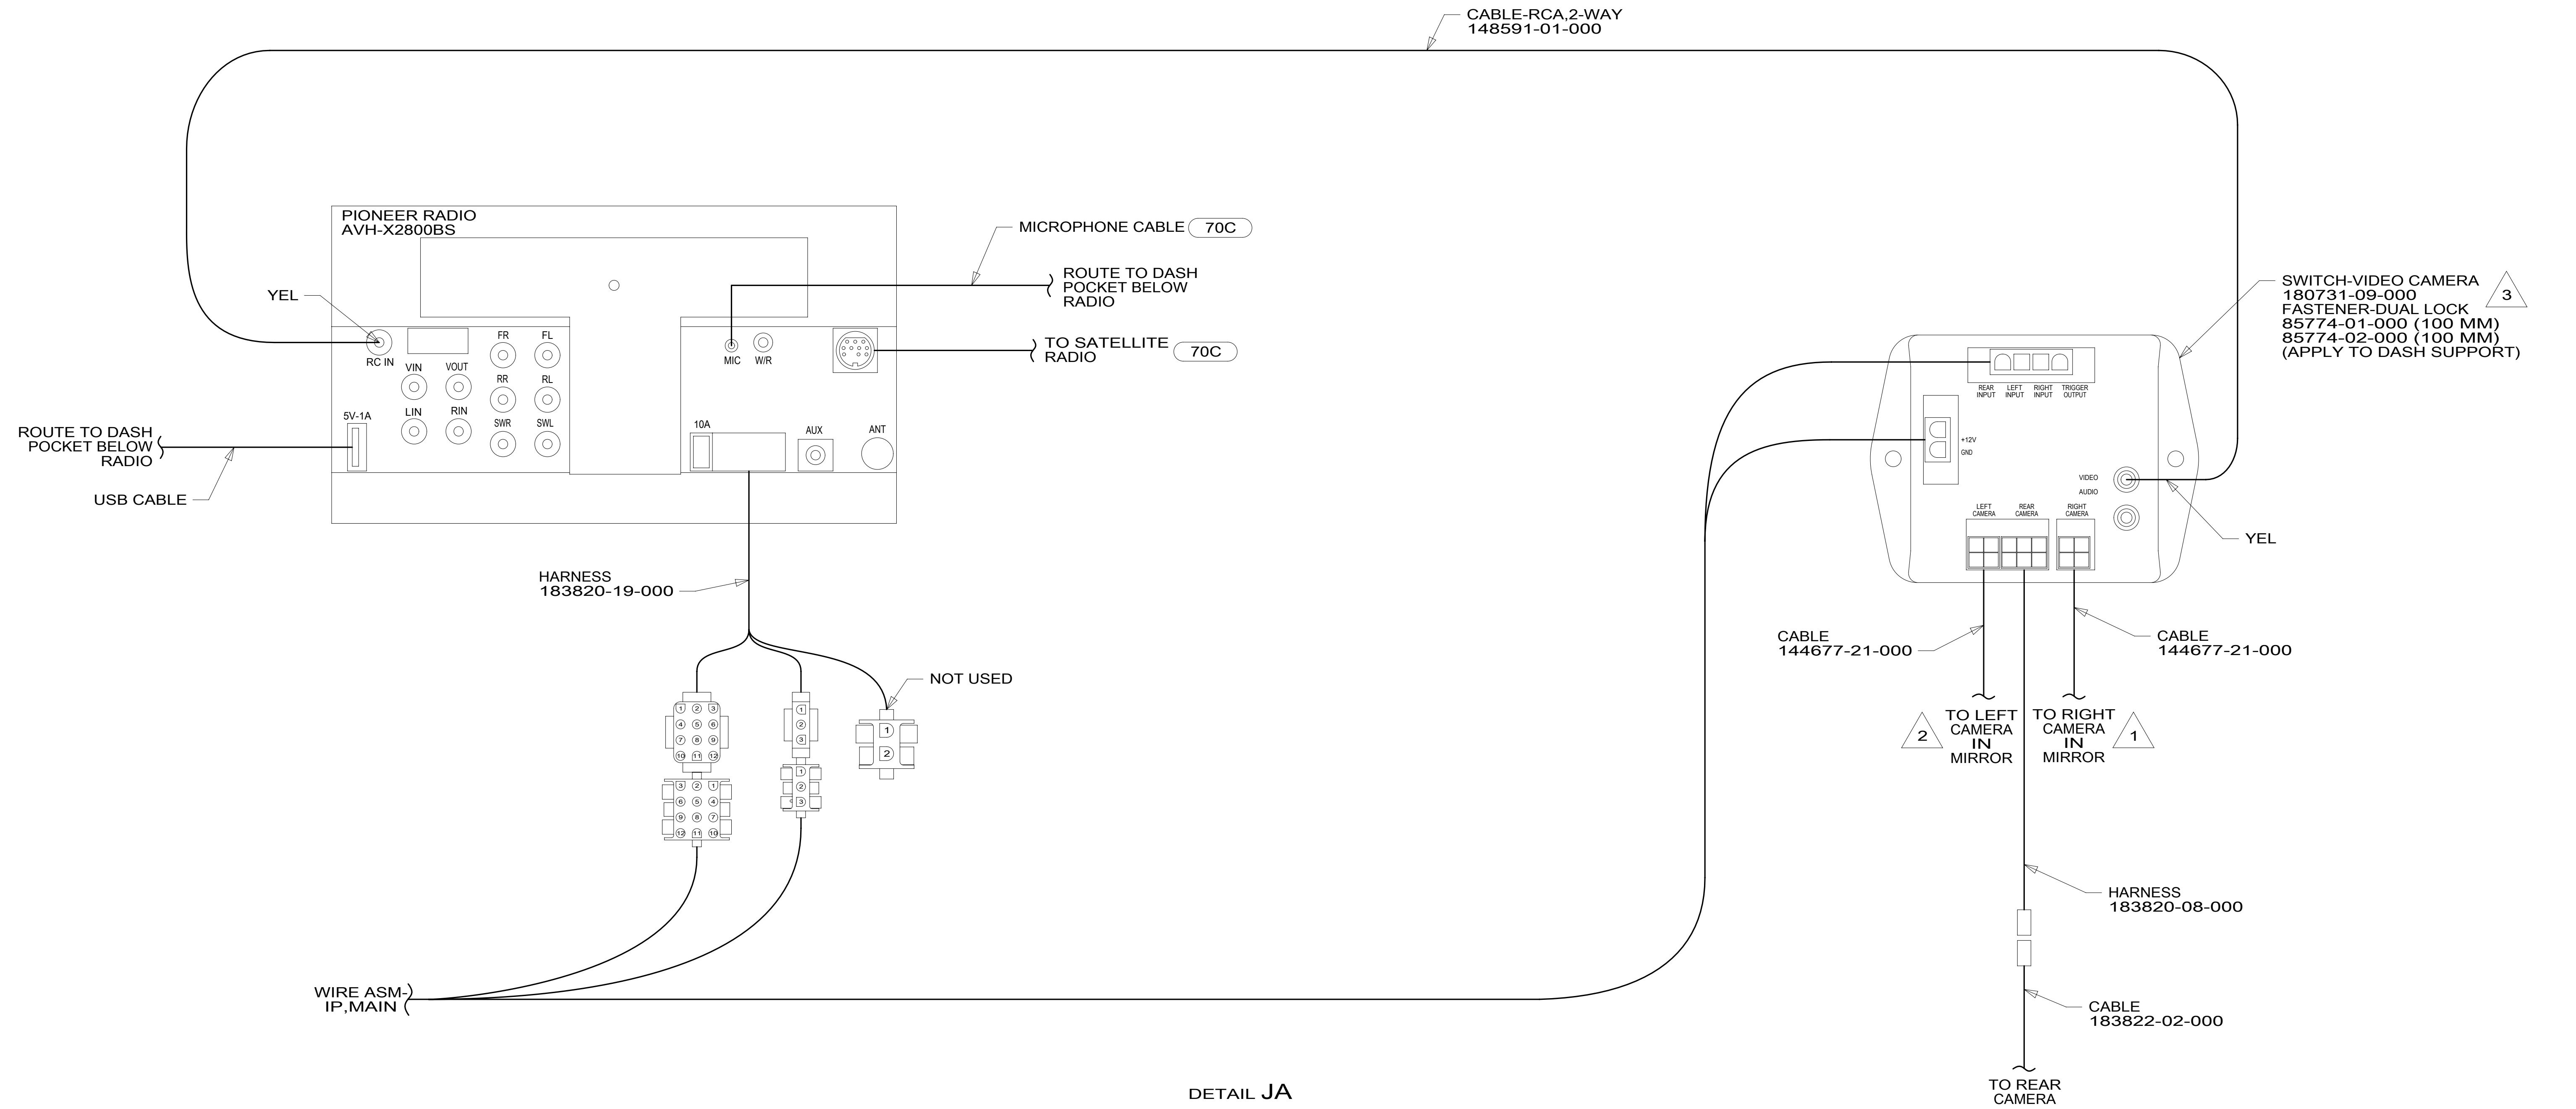

DETAIL JA

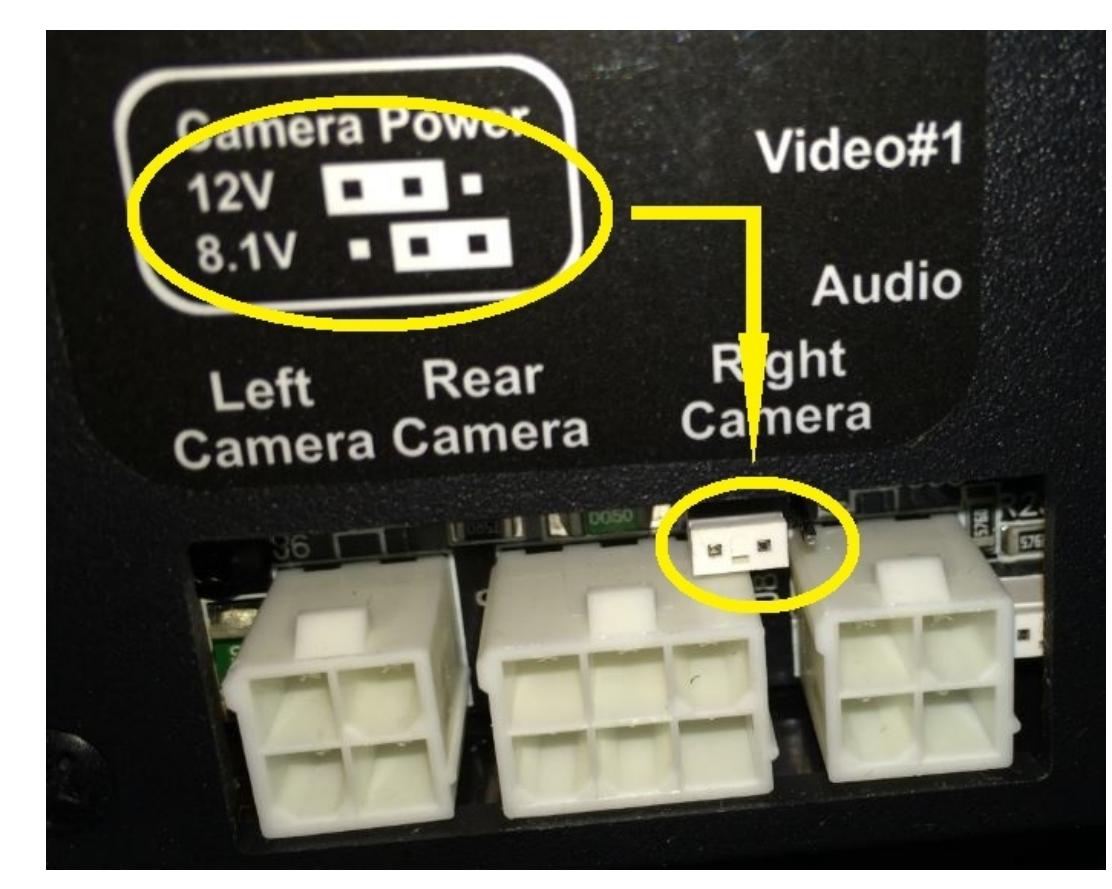

DETAIL JB

- NOTES:**
- 3 ENSURE CAMERA POWER JUMPER IS IN 12V POSITION. MOVE TO 12V POSITION IF NECESSARY. SEE DETAIL JB.
 - 2 MARK LEFT CABLE WITH YELLOW TAPE 900000-07-000 NEXT TO CONNECTOR.
 - 1 MARK RIGHT CABLE WITH WHITE TAPE 900000-08-000 NEXT TO CONNECTOR.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 70C RADIO - SATELLITE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION:		1B1 265	
WIRING INSTL-FRONT END			
SHEET:	ITEM/PART NO.:	REV	
9 OF 9	000211893 / 30320201000		

303202