

DRAWING NO.	MODEL
182740-01	H25P
182740-02	H25Q/H25T
182740-03	---

RELEASE	REV/DATE A	DWG NO 182740
REV ZONE	REVISION RECORD	DATE DFR-ORIG

		H25P	H25Q/H25T	
CABLE ASM-STARTER (RED)		141415-37-013	141415-37-013	3
CABLE ASM-COACH BATTERY (YEL)		141415-52-073	141415-52-050	
CABLE ASM-COACH BATTERY GND (BLK)		133567-12-009	133567-12-009	
CABLE ASM-GENERATOR (GRN)	33F	141416-42-070	141416-42-070	3
CABLE ASM-GENERATOR GND (BLK)	33F	133567-12-006	133567-12-006	3
CABLE ASM-GENERATOR (GRN)	52G	141415-42-075	141415-42-075	3
CABLE ASM-GENERATOR GND (BLK)	52G	133566-12-017	133566-12-017	3
CABLE ASM-INVERTER FUSE (ORG)		141415-62-003	141415-62-003	
CABLE ASM-INVERTER GND (BLK)		133566-12-011	133566-12-011	
CABLE ASM-INVERTER (ORG)		141415-62-023	141415-62-023	

- 52G GEN-3.6KW ONAN LP MICROQUIET
- 33F GEN-3.2 KW ONAN DIESEL
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

WINNEBAGO COPYRIGHT 2014 WINNEBAGO INDUSTRIES, INC.


DFTR	ORIG. DATE
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	FIRST USED
DSNR	14 H-SERIES
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	MATERIAL:
ONE-PLACE (X.X)	
TWO-PLACE (X.XX)	
ANGLE	
THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING	REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES
TITLE: BATTERY INSTL	
SHEET 1 OF 2	PART NO 182740 REV

- 3 ROUTING OF CABLE SHOWN ON WIRING INSTL-CHASSIS ONLY.
2. BATTERY CABLES ARE NOT TO BE ROUTED OVER BATTERY FILL CAPS.
1. SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION FOR ROUTING CABLES.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

* 182740 * * A

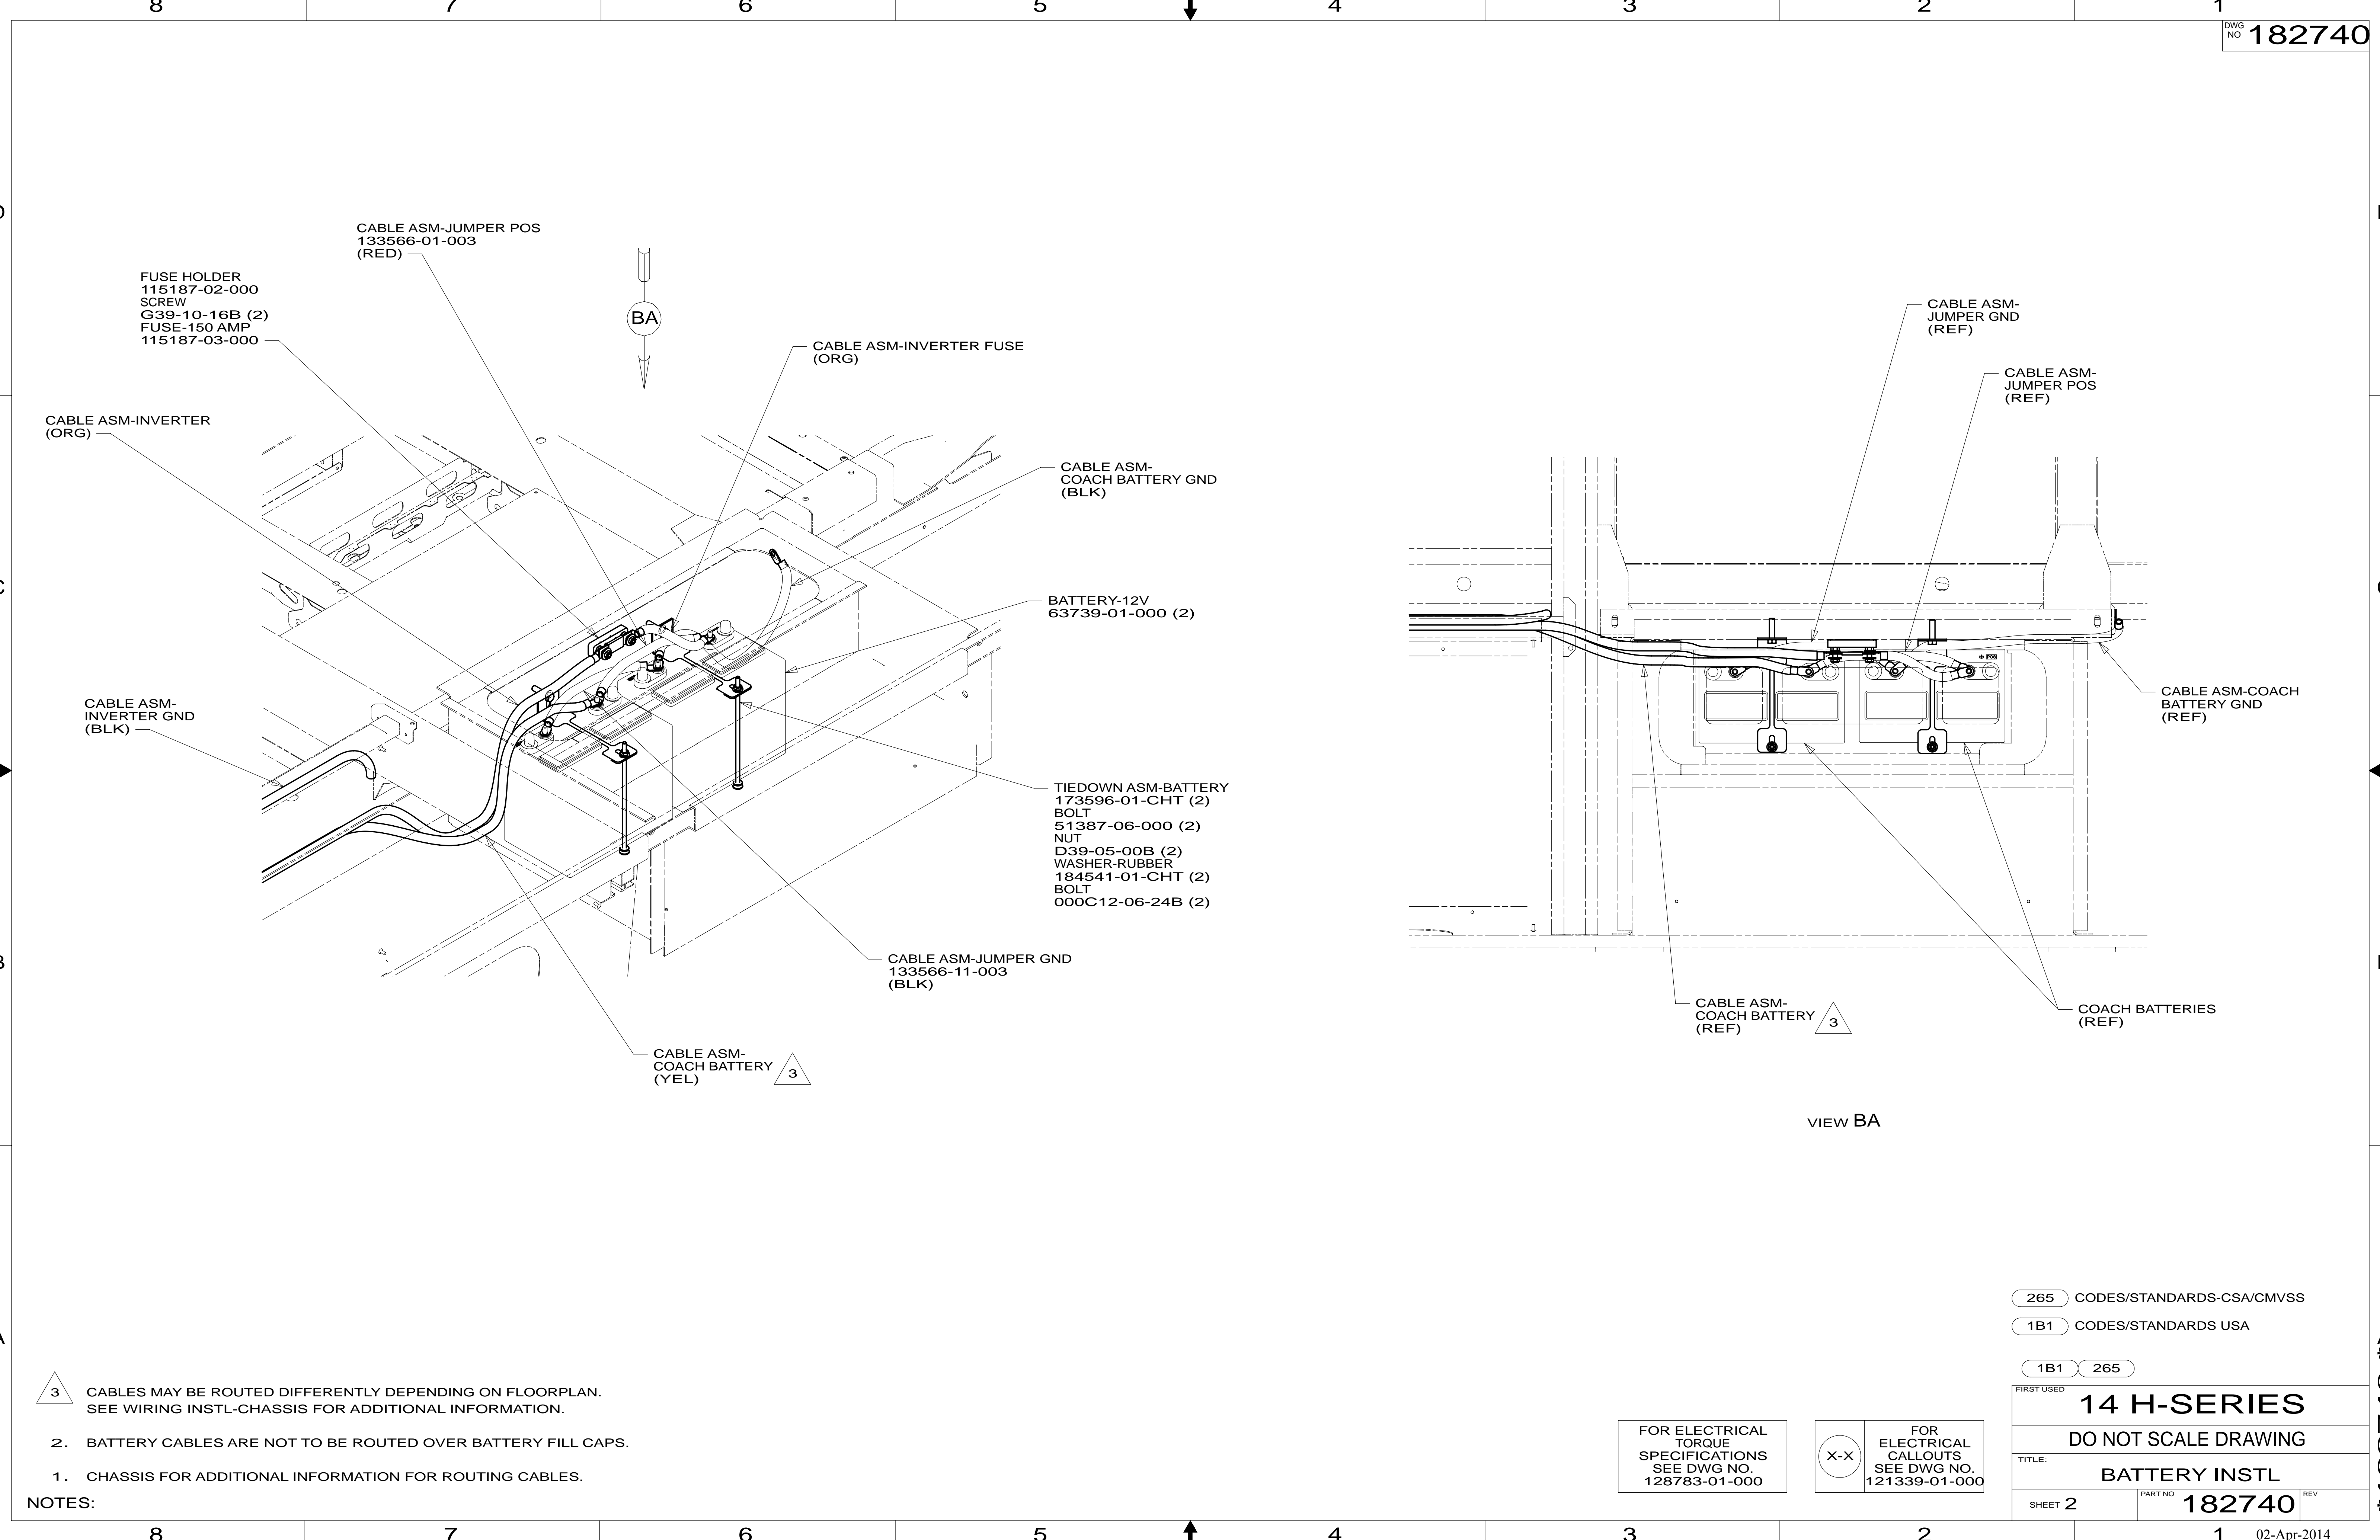

FUSE HOLDER
115187-02-000
SCREW
G39-10-16B (2)
FUSE-150 AMP
115187-03-000

CABLE ASM-JUMPER POS
133566-01-003
(RED)

BA

CABLE ASM-INVERTER FUSE
(ORG)

CABLE ASM-COACH BATTERY GND
(BLK)

BATTERY-12V
63739-01-000 (2)

TIEDOWN ASM-BATTERY
173596-01-CHT (2)
BOLT
51387-06-000 (2)
NUT
D39-05-00B (2)
WASHER-RUBBER
184541-01-CHT (2)
BOLT
000C12-06-24B (2)

CABLE ASM-JUMPER GND
133566-11-003
(BLK)

CABLE ASM-COACH BATTERY
(YEL) 3

CABLE ASM-JUMPER GND
(REF)

CABLE ASM-JUMPER POS
(REF)

CABLE ASM-COACH BATTERY GND
(REF)

CABLE ASM-COACH BATTERY
(REF) 3

COACH BATTERIES
(REF)

VIEW BA

3 CABLES MAY BE ROUTED DIFFERENTLY DEPENDING ON FLOORPLAN.
SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

2. BATTERY CABLES ARE NOT TO BE ROUTED OVER BATTERY FILL CAPS.

1. CHASSIS FOR ADDITIONAL INFORMATION FOR ROUTING CABLES.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED **14 H-SERIES**

DO NOT SCALE DRAWING

TITLE: **BATTERY INSTL**

SHEET 2 PART NO **182740** REV