

DRAWING NO.	MODEL	SHEET
187790-01	A26A	1,2
187790-02	A27B	1,2
187790-03	A31C	3,4

RELEASE	REV/DATE	DWG NO	187790
REV ZONE	REVISION RECORD	DATE	DFT-ORIG

D

D

C

C

B

B

A

A

CIRCUIT BREAKER-15 AMP
093654-02-000
SPACER
141789-01-000
SCREW
G52-06-05U

CIRCUIT BREAKER-6 AMP
093654-01-000
SPACER
141789-01-000
SCREW
G52-06-04U
G52-06-05U

CIRCUIT BREAKER-20 AMP
093654-03-000
SPACER
141789-01-000
SCREW
G52-06-04U
G52-06-05U

CIRCUIT BREAKER-6 AMP
093654-01-000
SPACER
141789-01-000
SCREW
G52-06-04U
G52-06-05U

PLATE-CIRCUIT BREAKER
118531-10-CHT
SCREW
G39-08-08U (2)

CIRCUIT BREAKER-55 AMP
113482-01-000
SCREW
G19-10-08U



LABEL-CIRCUIT BREAKER
093236-79-000

CIRCUIT BREAKER-55 AMP
113482-01-000
SCREW
G19-10-08U

CIRCUIT BREAKER-30 AMP
093655-02-000
SPACER
141789-01-000
SCREW
G52-06-05U (2)

CIRCUIT BREAKER-30 AMP
093655-02-000
SPACER
141789-01-000
SCREW
G52-06-04U
G52-06-05U

BA

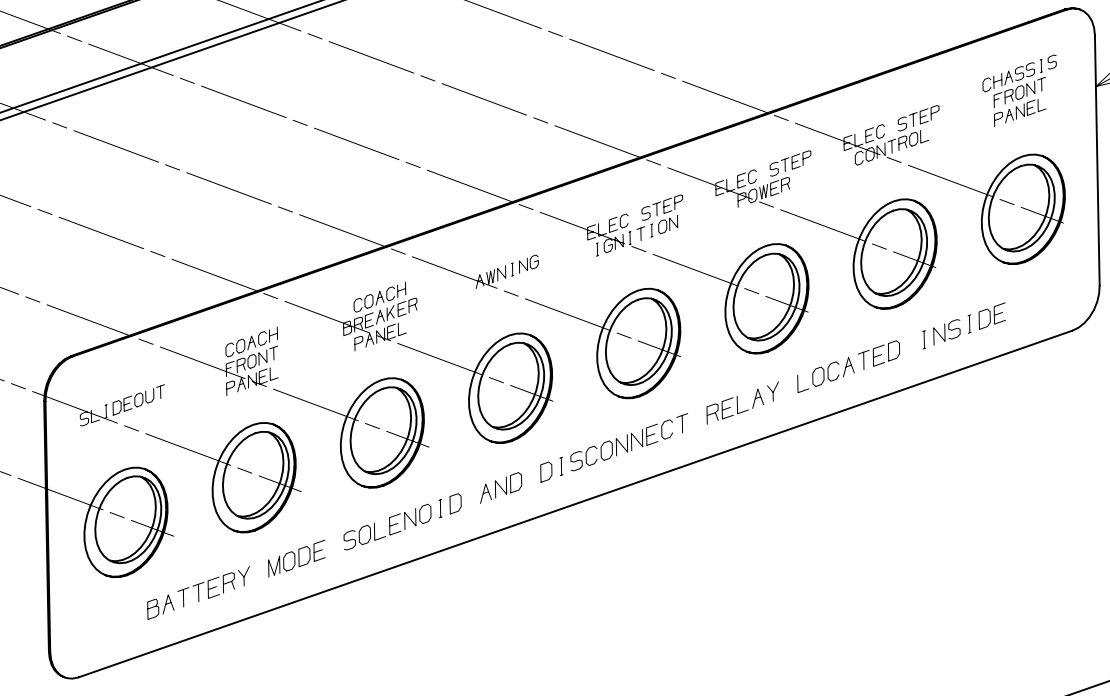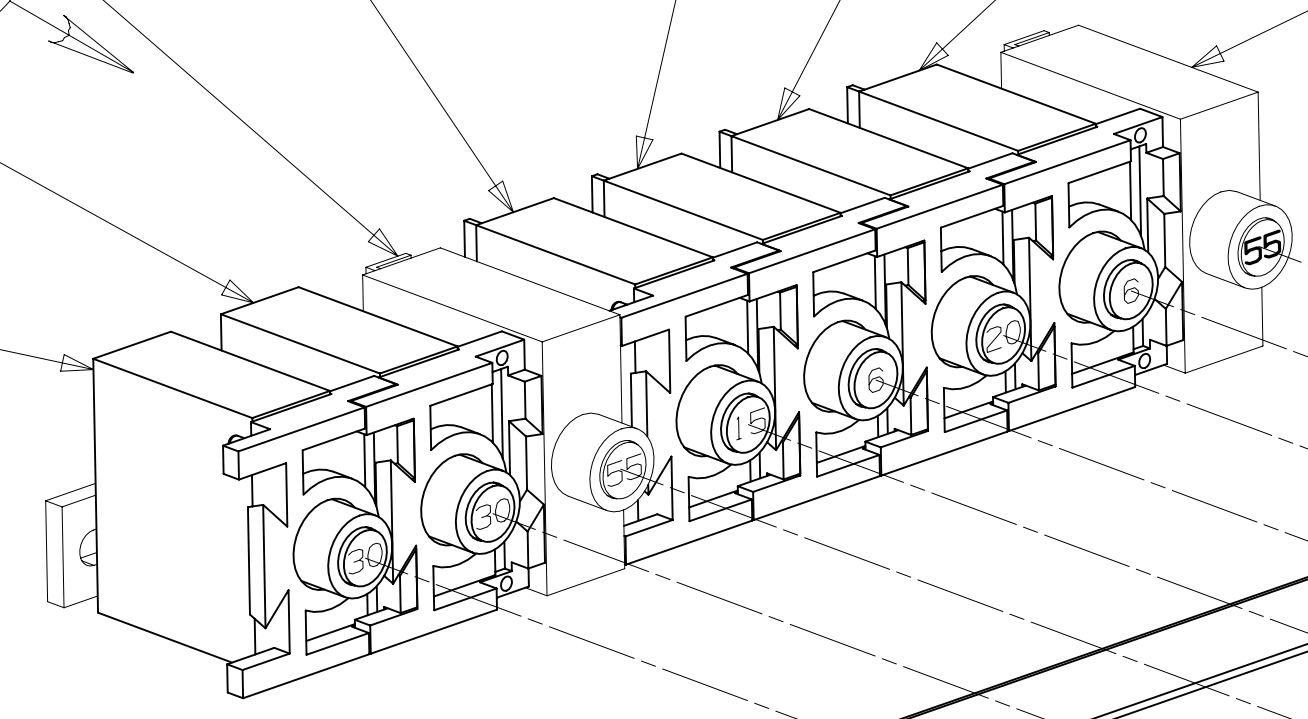

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265

WINNEBAGO COPYRIGHT 2014
WINNEBAGO
INDUSTRIES, INC.

DFT-ORIG	ORIG. DATE
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	FIRST USED
DSNR	15 A-SERIES
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	: 3
ONE-PLACE (X.X)	: 1.5
TWO-PLACE (X.XX)	: 0.50
ANGLE	: 1°
THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING	REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES
TITLE: CHASSIS ELECTRICAL BOX ASM	
SHEET 1 OF 4	PART NO 187790 REV

- NOTES:
- 3 NOT USED ON A26A.
 - 2 USE THE LONGER SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.
 - 1 REPLACE EXISTING SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

187790

WIRE ASM-ELECTRICAL BOX
124125-16-000
FUSE-5 AMP
62901-02-000 (2)

TIE-WIRE
8343-03-000

RELAY-BATTERY
DISCONNECT (COACH)
180722-01-000
SCREW
G50-04-08U (2)

RELAY-BATTERY
DISCONNECT (CHASSIS)
180722-01-000
SCREW
G50-04-08U (2)

TO CIRCUIT
BREAKERS

4 PIN HSG
WITH CIRCUITS
LG,FM,FM,LH
(MARKED WITH
YELLOW TAPE)

CABLE ASM-6 GA
140228-01-006
(6 GA SINGLE CABLE)
(CIRCUIT K)

FUSE HOLDER
188460-01-000
FUSE-300 AMP
188461-02-000
SCREW
G39-10-12U (2)

PLATE ASM-
SOLENOID,
MOUNTING
188472-02-CHT
SCREW
G39-10-08U (3)

15 PIN HOUSING
2 PIN HOUSING (3)

WIRE ASM-
CHASSIS

CABLE ASM-
GENERATOR
(GRN)

CABLE ASM (YEL)
(COACH BATTERY
DISCONNECT SUPPLY)

TO GENERATOR

TO COACH
BATTERY FUSE

GJ
SJ

4 PIN HSG
WITH CIRCUITS
TTY,FM,FM,TTZ
(MARKED WITH
PURPLE TAPE)

KKG

FUSE HOLDER
188460-01-000
FUSE-200 AMP
188461-05-000
SCREW
G39-10-12U (2)

LP

SCREW
G55-08-12U (2)

LR

CABLE ASM (BLU)
(LEVELING SYSTEM
POWER CABLE)

CABLE ASM (PUR)
(CHASSIS BATTERY
DISCONNECT RETURN)


CABLE ASM (RED)
(CHASSIS BATTERY
DISCONNECT SUPPLY)

SOLENOID-BATTERY
174291-01-000

TO LEVELING
SYSTEM

TO ISOLATED
STUD

TO CHASSIS
BATTERY FUSE

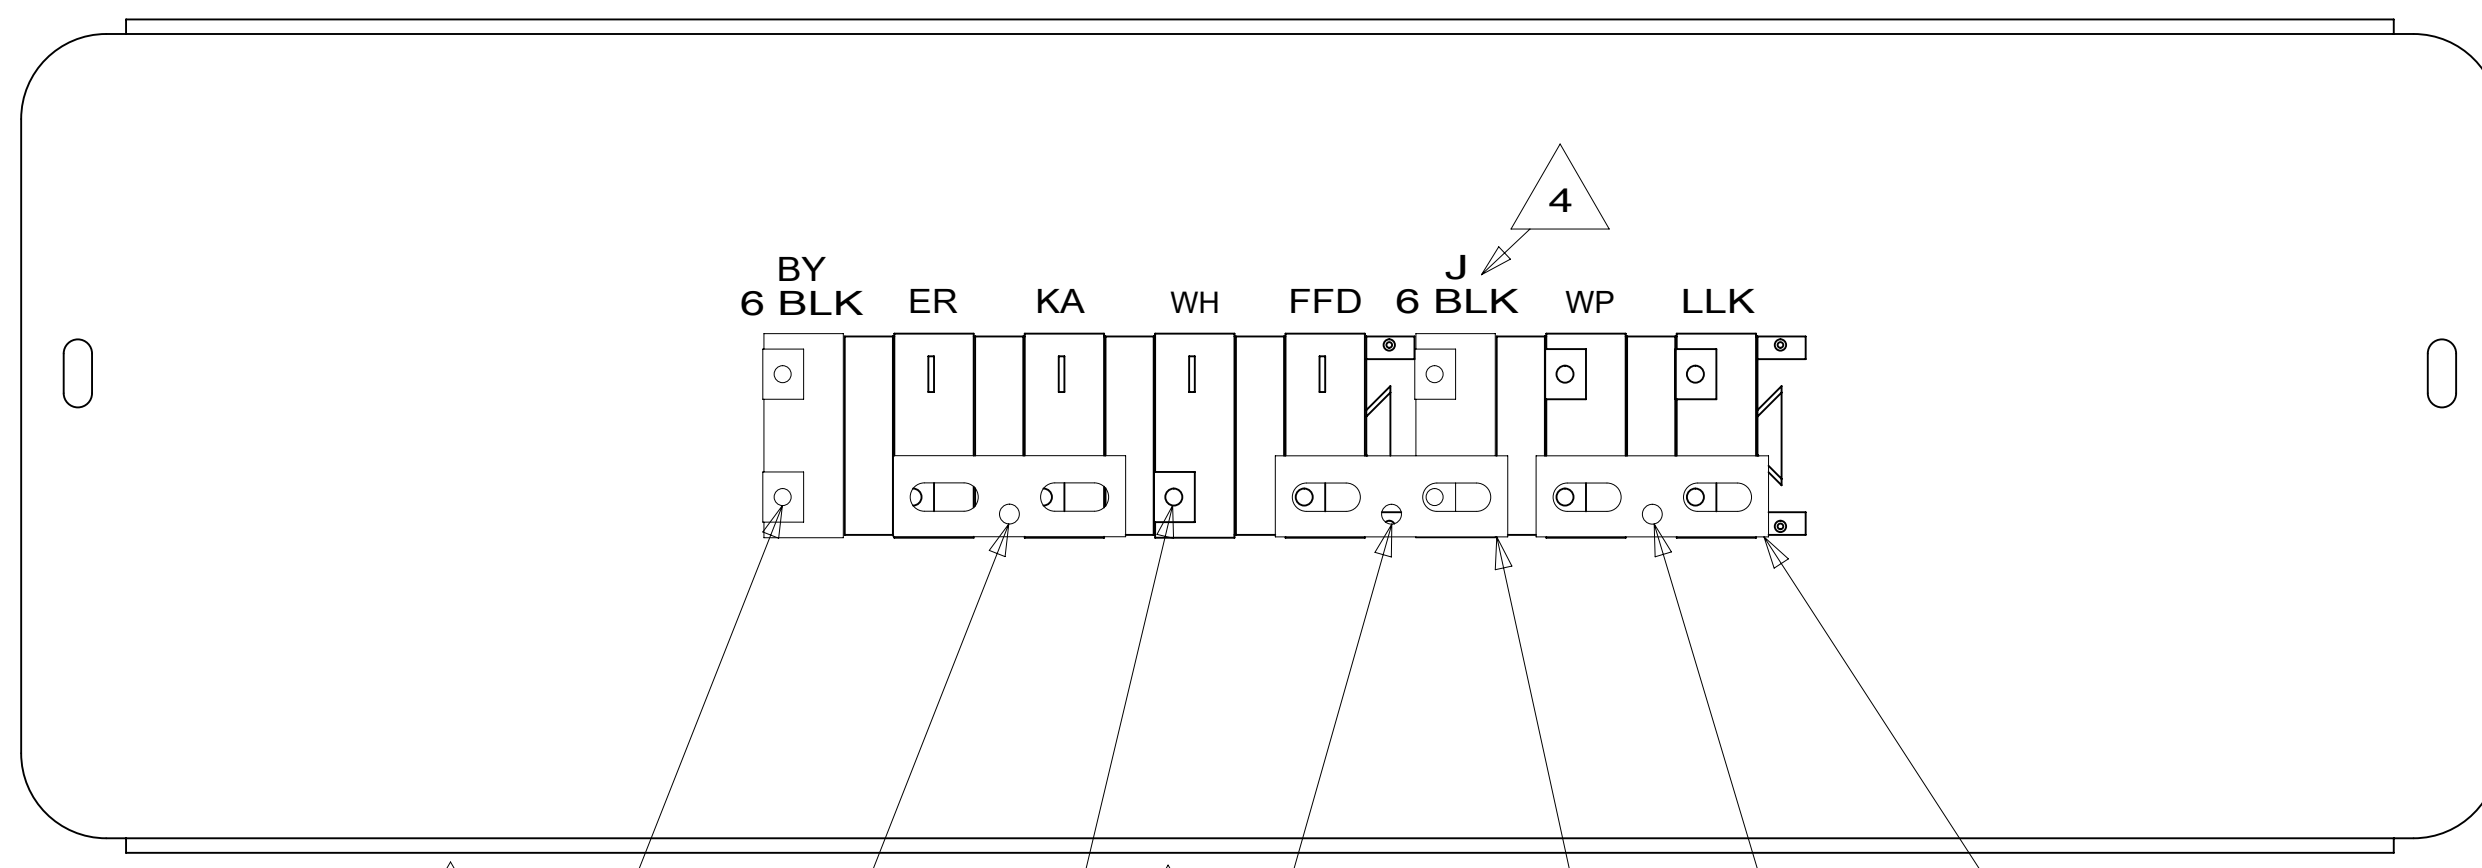

VIEW BA

- 10 NOT USED ON A26A.
- 9 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
- 8 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 7 IF CIRCUIT NOT USED, TAPE BACK TO HARNESS.
- 6 WIRE MARKED WITH RED TAPE.
- 5 WIRE MARKED WITH PURPLE TAPE.
- 4 WIRE MARKED WITH YELLOW TAPE.
- 3 WIRE MARKED WITH 2 WRAPS OF YELLOW TAPE.

2. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

1. LEGEND: — WINNEBAGO: - - - - - CABLE: - - - - - CHASSIS SUPPLIED WIRING.

NOTES:

265 CODES/STANDARDS - CSA/CMVSS
1B1 CODES/STANDARDS - USA

1B1 265

FIRST USED
15 A-SERIES

DO NOT SCALE DRAWING

TITLE:
CHASSIS ELECTRICAL BOX ASM


SHEET 2 PART NO **187790** REV

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

187790

8 7 6 5 4 3 2 1

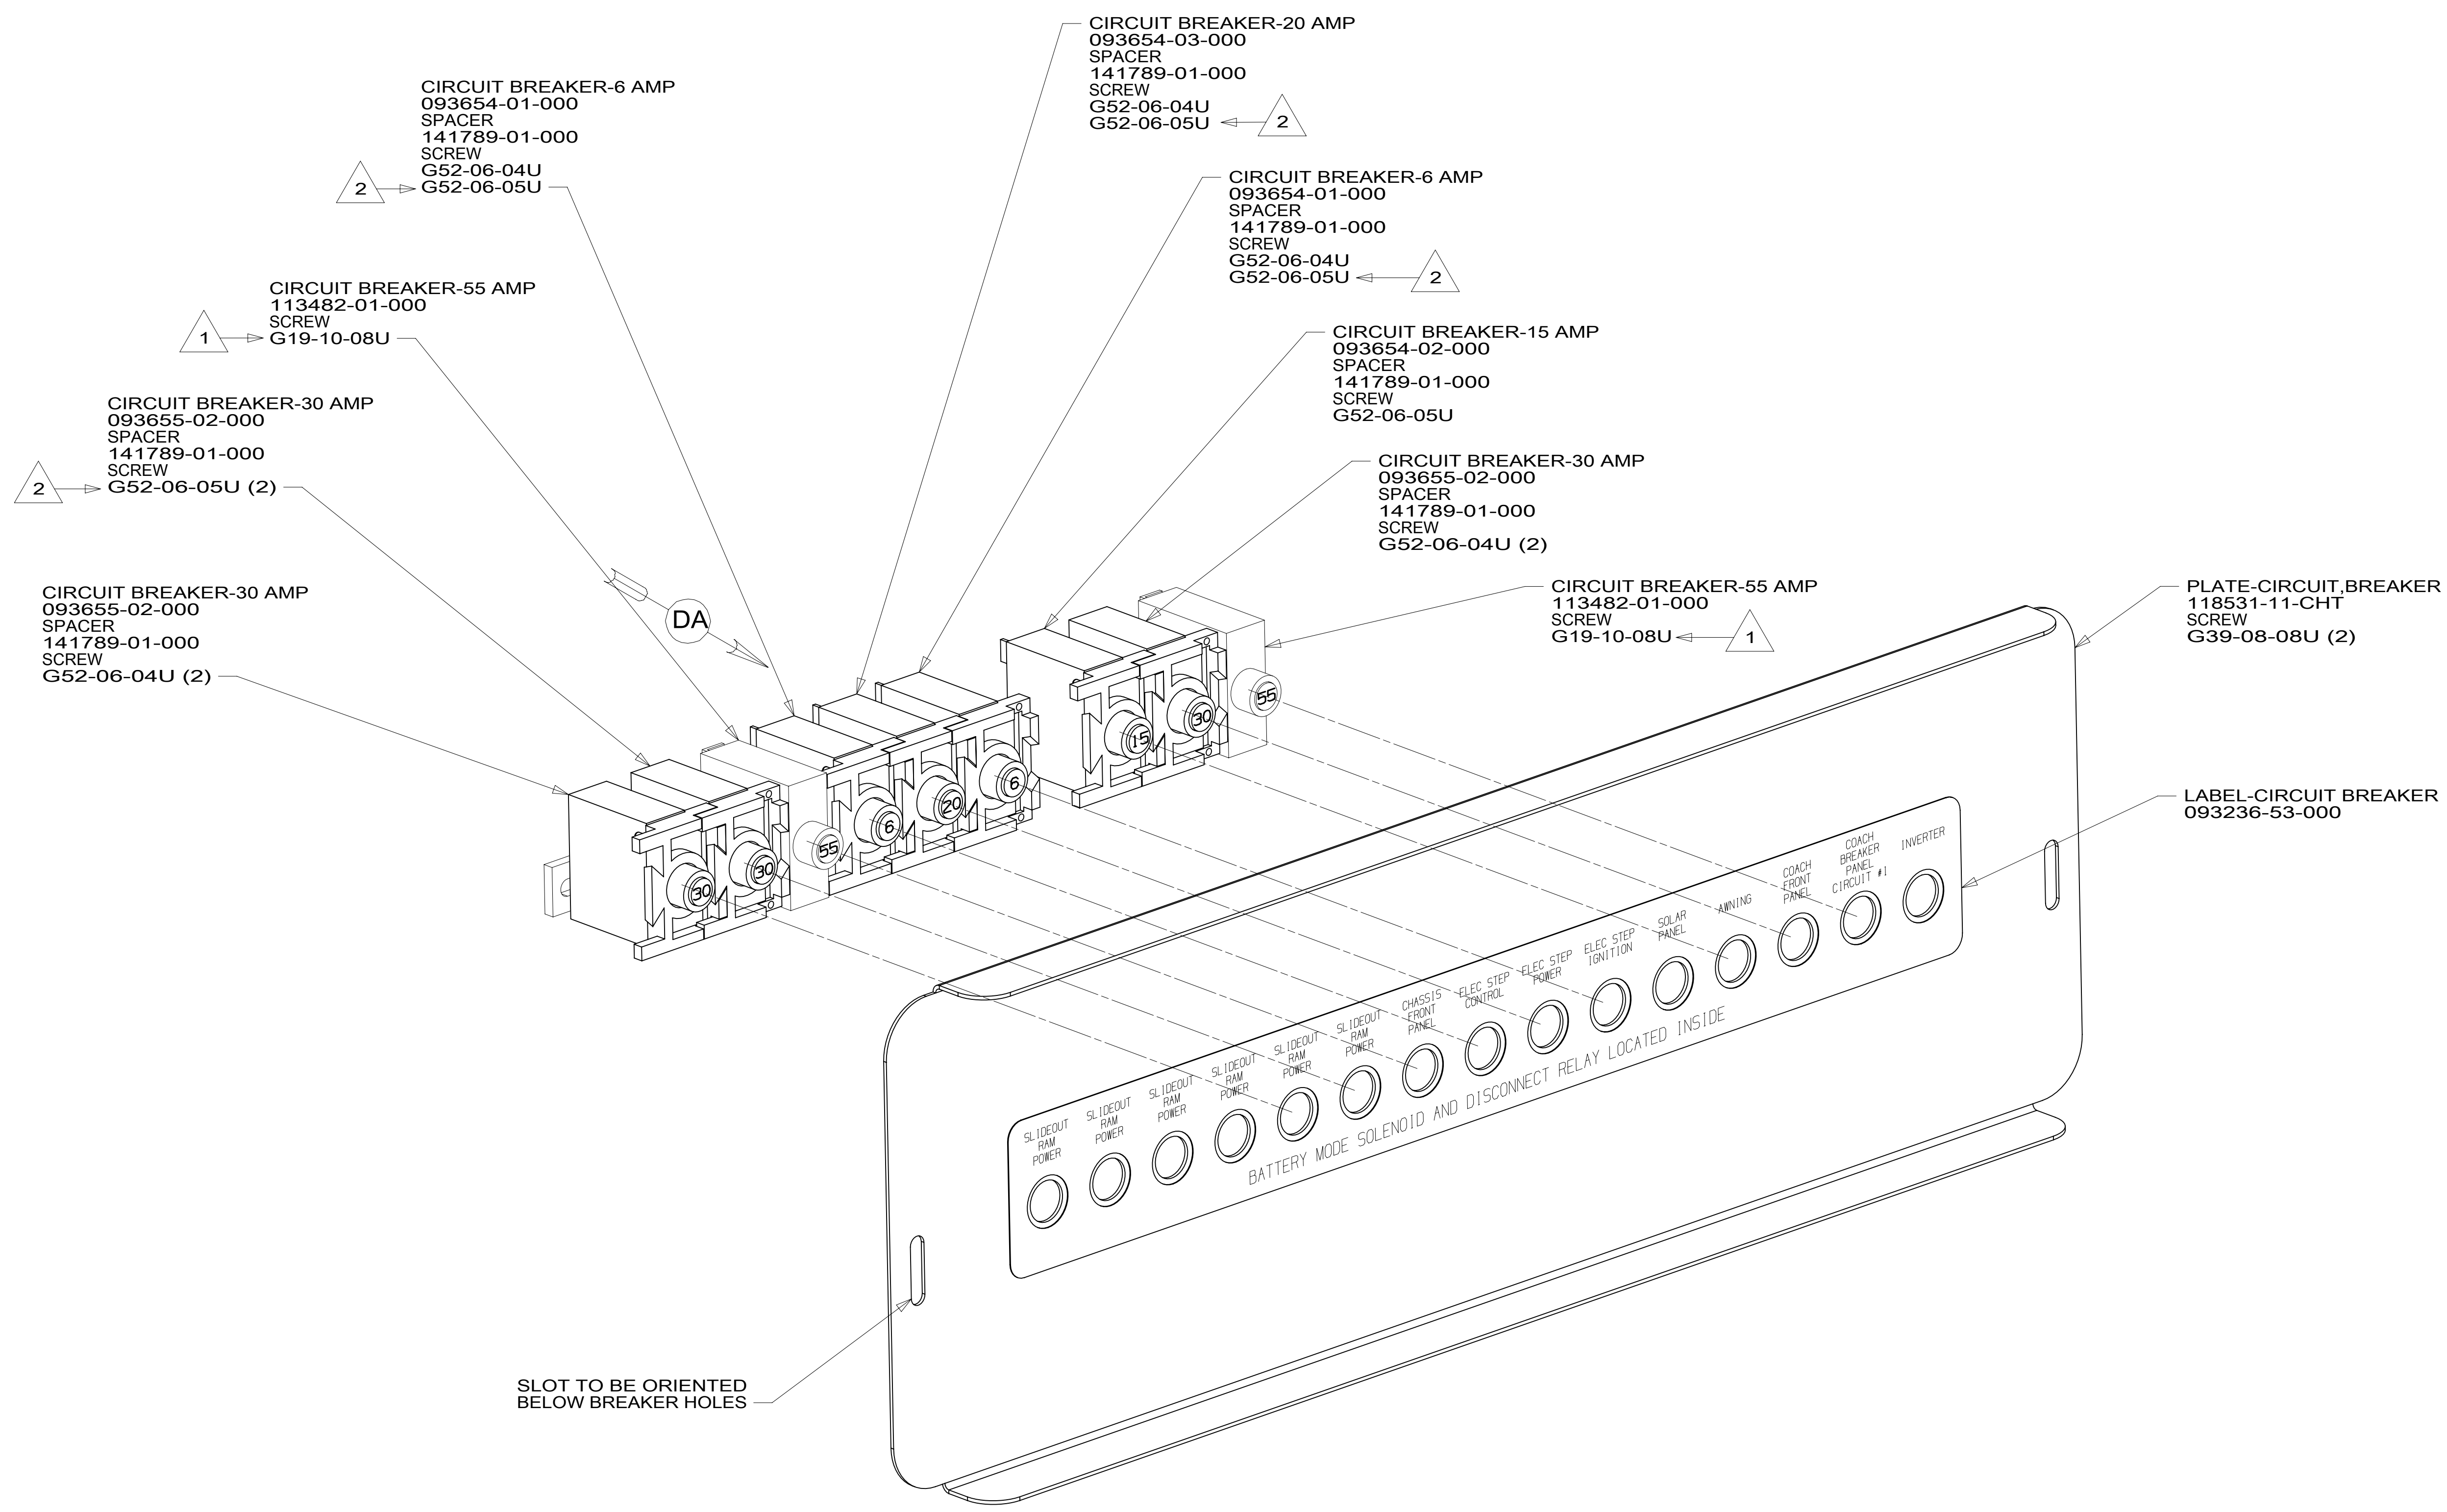

2 USE THE LONGER SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.
1 REPLACE EXISTING SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.



FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265	CODES/STANDARDS-CSA/CMVSS
1B1	CODES/STANDARDS USA
1B1	265

FIRST USED	
15 A-SERIES	
DO NOT SCALE DRAWING	
TITLE: CHASSIS ELECTRICAL BOX ASM	
SHEET 3	PART NO 187790

187790

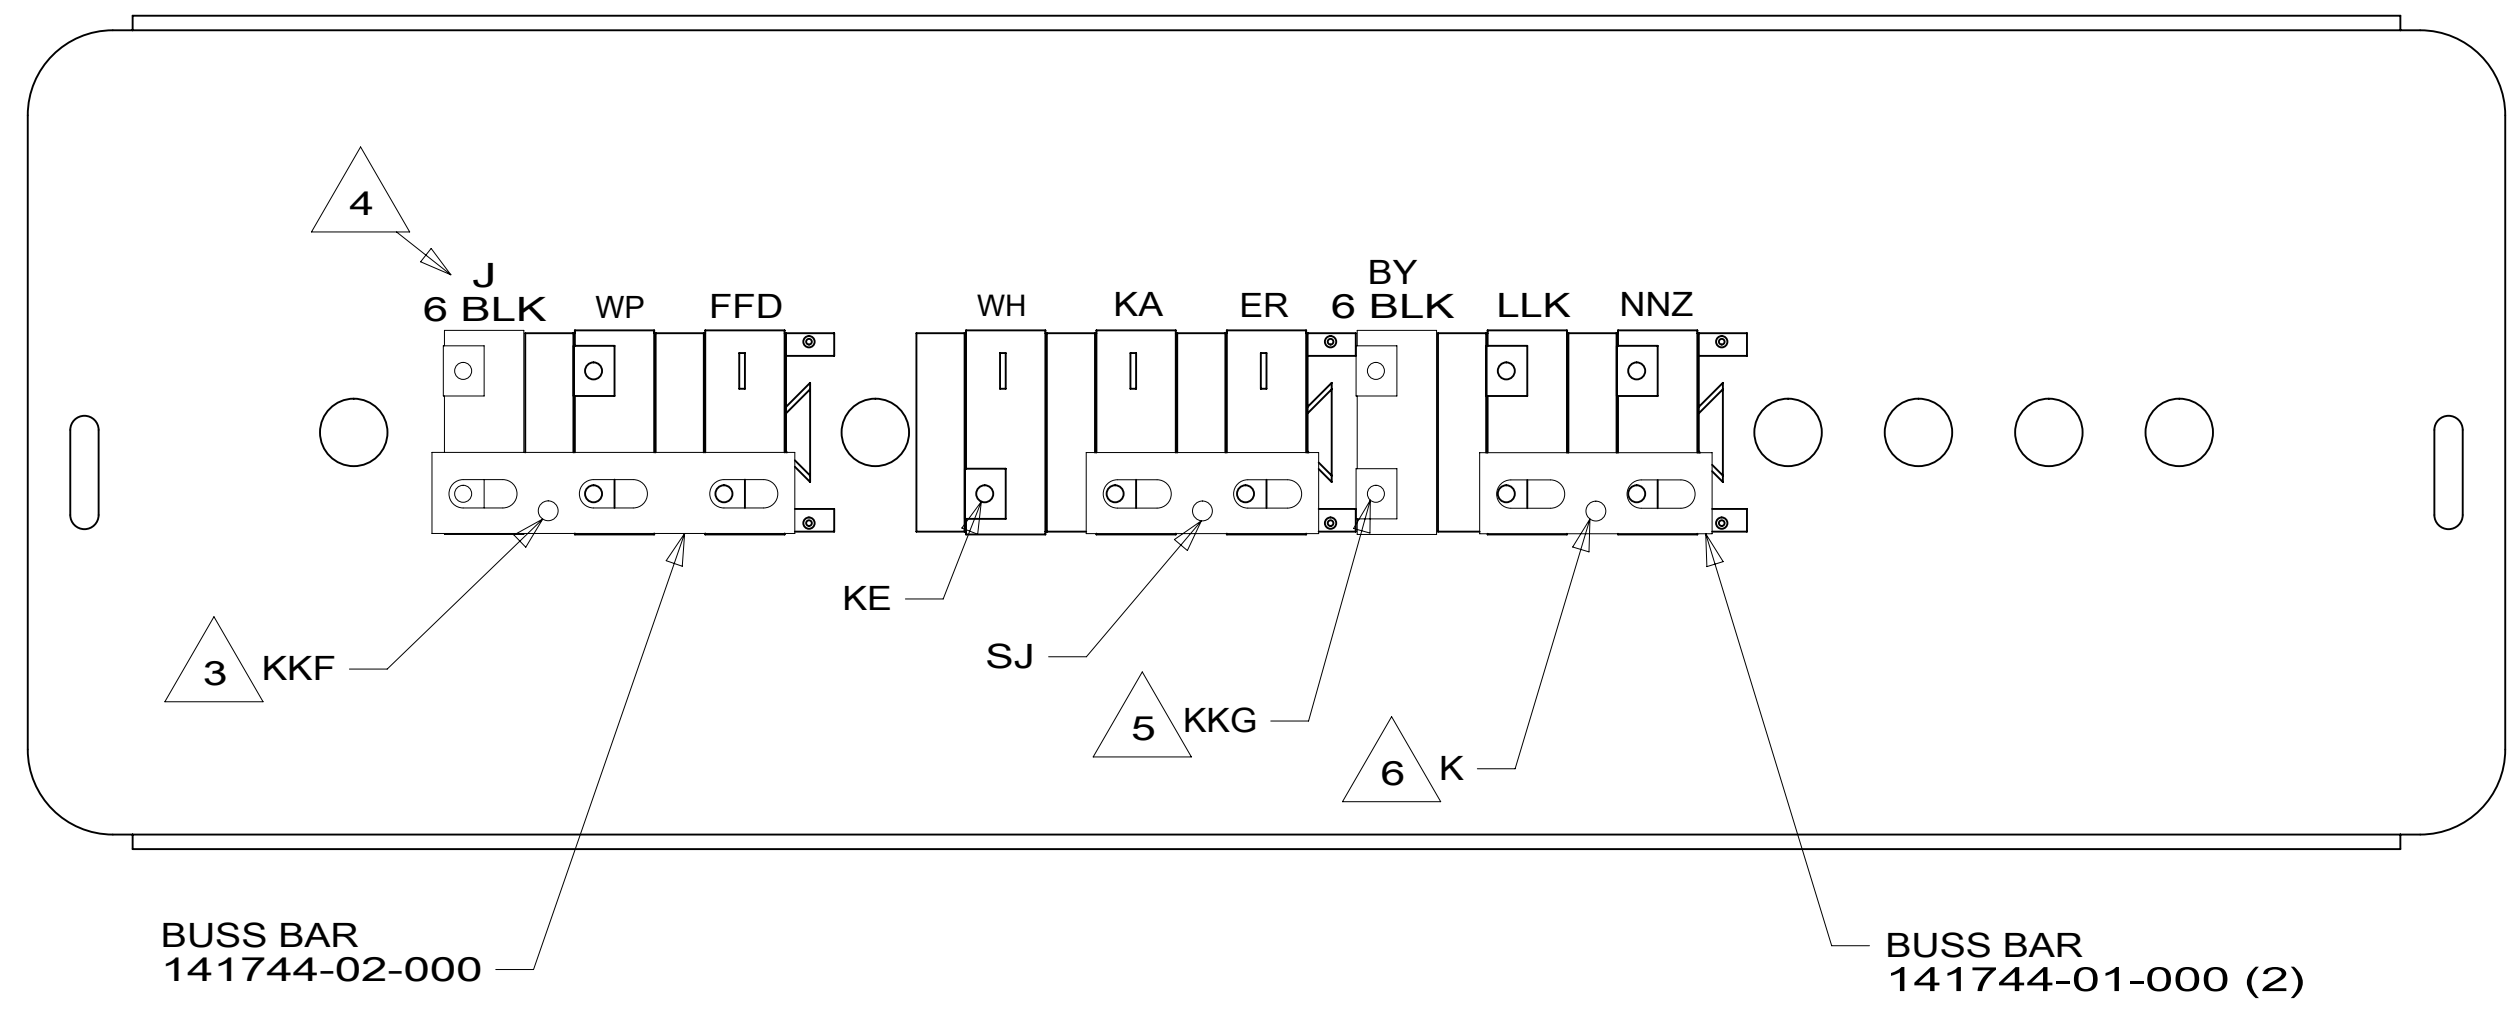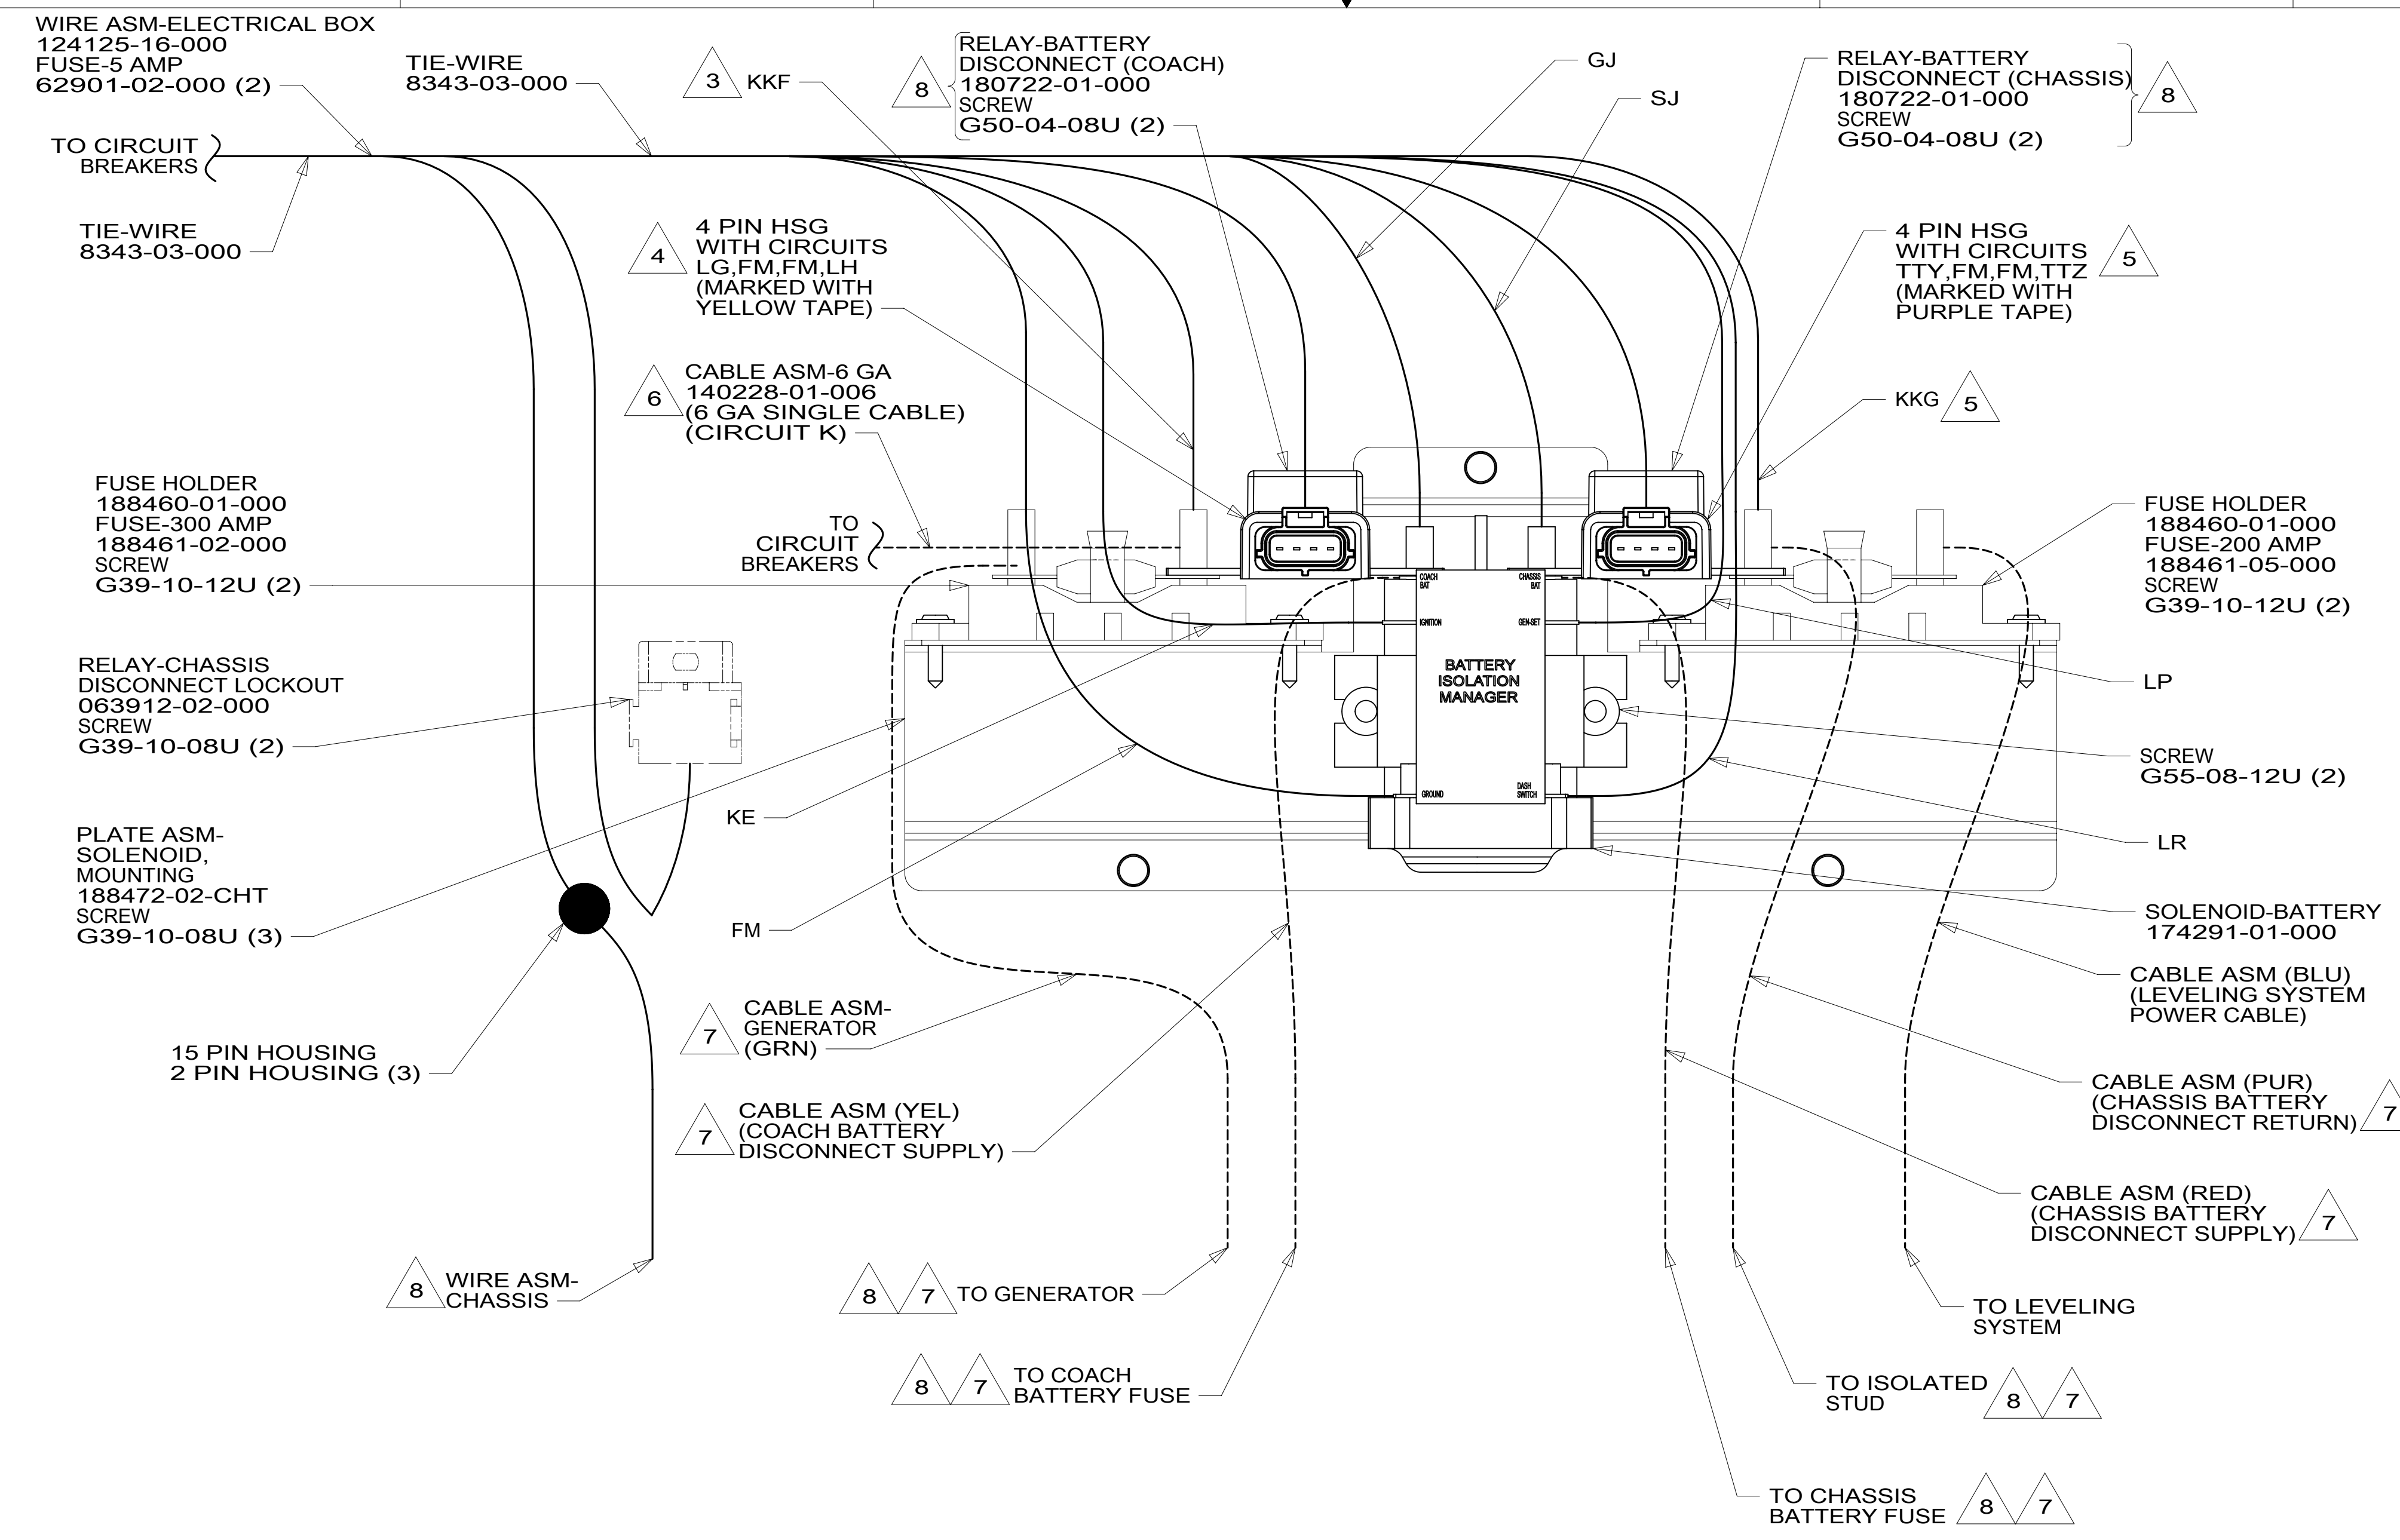

- 10 NOT USED ON A26A.
- 9 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
- 8 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 7 IF CIRCUIT NOT USED, TAPE BACK TO HARNESS.
- 6 WIRE MARKED WITH RED TAPE.
- 5 WIRE MARKED WITH PURPLE TAPE.
- 4 WIRE MARKED WITH YELLOW TAPE.
- 3 WIRE MARKED WITH 2 WRAPS OF YELLOW TAPE.

2. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
1. LEGEND: — WINNEBAGO: - - - - - CABLE: - - - - - CHASSIS SUPPLIED WIRING.

- 265 CODES/STANDARDS - CSA/CMVSS
- 1B1 CODES/STANDARDS - USA

1B1 265

FIRST USED

15 A-SERIES

DO NOT SCALE DRAWING

TITLE: CHASSIS ELECTRICAL BOX ASM

SHEET 4 PART NO 187790 REV

1 27-Aug-2015

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

187790