

DRAWING NO.	MODEL	SHEET
187791-01	A26A	1,2,3,4,7
187791-02	A27B	1,2,3,4,7
187791-03	A31C	1,2,4,5,6,7

RELEASE	REV/DATE	DWG NO	187791
REV ZONE	REVISION RECORD	DATE	DFT-ORIG

		A26A	A27B	A31C
RED	1B1	136135-07-070	136135-07-060	136135-07-081
	265	136136-07-070	136136-07-060	136136-07-081
YEL	1B1	136131-05-046	136131-05-013	136131-05-050
	265	136134-05-046	136134-05-013	136134-05-050
BRN	1B1	136131-03-140	136131-03-084	136131-03-026
	265	136134-03-140	136134-03-084	136134-03-026
BLU	1B1	136131-02-012	136131-02-074	136131-02-021
	265	136134-02-012	136134-02-074	136134-02-021
MAIN	1B1	136137-01-013	136137-01-013	176841-01-042
	265	136138-01-013	136138-01-013	176841-01-042
BLK	1B1	136135-06-013	136135-06-060	136131-06-020
	265	136136-06-013	136136-06-060	136134-06-020
GRN	1B1			136135-08-078
	265			136136-08-078
PUR	1B1			136131-04-035
	265			136134-04-035
GROUND ATS				136145-01-020
GROUND MAIN		178545-01-022	178545-01-033	136145-01-030
CASE GROUND CONVERTER		136145-05-022	136145-05-030	
MAIN EXTENSION	1B1	8022-01-000 (4500)	8022-01-000 (6300)	
	265	24743-01-000 (4500)	24743-01-000 (6300)	
MAIN EXT CONDUIT		91234-01-000 (4100)	91234-01-000 (5900)	

CODES/STANDARDS-CSA/CMVSS
 CODES/STANDARDS USA



DFT-ORIG	ORIG. DATE
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	FIRST USED
DSNR	15 A-SERIES
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	: 3
ONE-PLACE (X.X)	: 1.5
TWO-PLACE (X.XX)	: 0.50
ANGLE	: 1°
THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING	REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES



























TITLE: LOAD CENTER/ATS ASM	
SHEET 1 OF 7	PART NO 187791 REV





SEE DETAIL GB FOR ADDITIONAL INFORMATION.
 1. ALL GROUNDS WIRES TO BE COVERED WITH TUBING 8041-02-000.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000



FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

187791

		A26A	A27B	A31C
THROW IN WIRE #1	1B1	136131-02-137 	136131-03-008 	136131-06-038 
	265	136134-02-137 	136134-03-008 	136134-06-038 
THROW IN WIRE #2	1B1	136135-06-004 	136131-03-007 	136131-04-072
	265	136136-06-004 	136134-03-007 	136134-04-072
THROW IN WIRE #3	1B1		136131-03-042 	136131-02-022 
	265		136134-03-042 	136134-02-022 
THROW IN WIRE #4	1B1		136131-03-009 	136131-04-021 
	265		136134-03-009 	136134-04-021 
THROW IN WIRE #5	1B1		136131-05-009 	136131-02-009 
	265		136134-05-009 	136134-02-009 
THROW IN WIRE #6	1B1			136131-03-012
	265			136134-03-012
THROW IN WIRE #7	1B1			136131-03-005 
	265			136134-03-005 
SLIDEOUT WIRE #1				136151-02-023 
INVERTER CHARGER MAIN	1B1			137136-01-013
	265			136138-01-013
INVERTER CHARGER SUB MAIN	1B1			136137-01-013
	265			136138-01-013
INVERTER CHARGER EXTENSION				189760-01-096 


-  MARK ONE WHITE WIRE OF ASSEMBLY WITH (1) WRAP OF BLACK TAPE ON EACH END. REFER TO WIRE ASM-INVERTER FOR MORE INFORMATION.
-  SEE DETAIL GC FOR ADDITIONAL INFORMATION.
-  SEE DETAIL GB FOR ADDITIONAL INFORMATION.
-  SEE DETAIL GA FOR CONNECTOR INSTALLATION.

NOTES:
 1. ALL GROUNDS WIRES TO BE COVERED WITH TUBING 8041-02-000.


-  CODES/STANDARDS-CSA/CMVSS
-  CODES/STANDARDS USA

FIRST USED	
15 A-SERIES	
DO NOT SCALE DRAWING	
TITLE: LOAD CENTER/ATS ASM	
SHEET 2	PART NO 187791 REV


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

 FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

187791

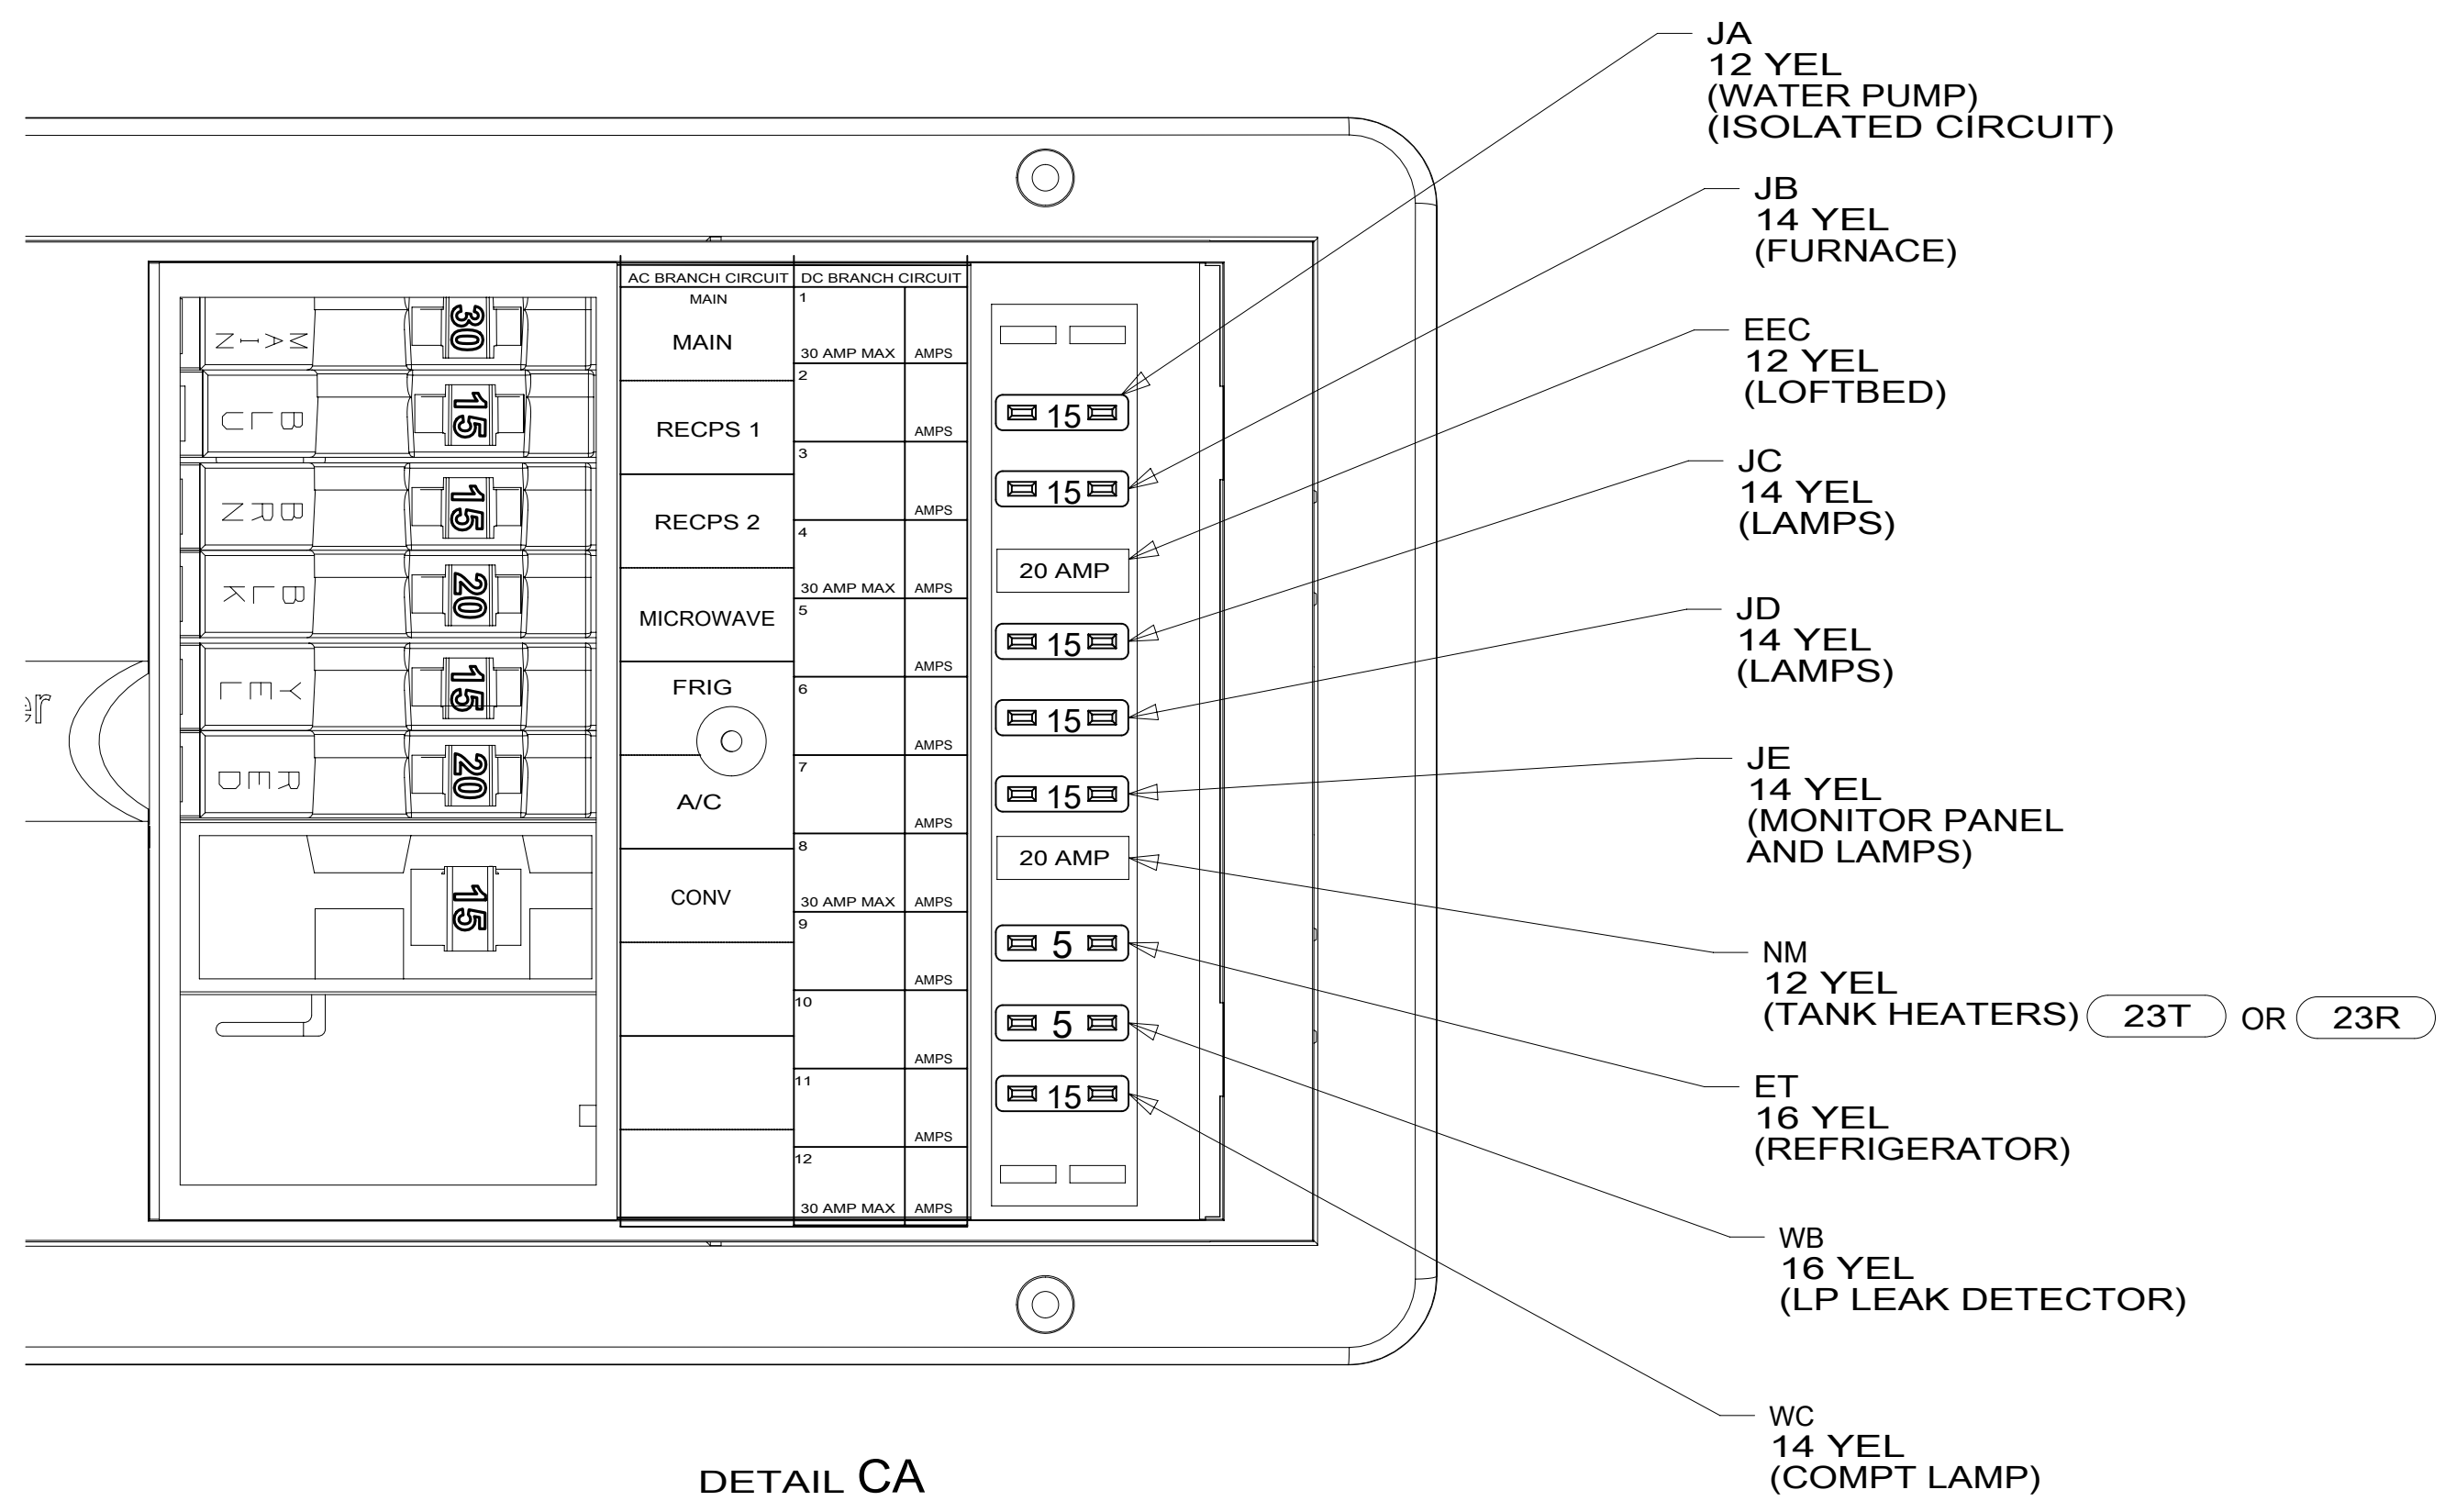

DETAIL CA

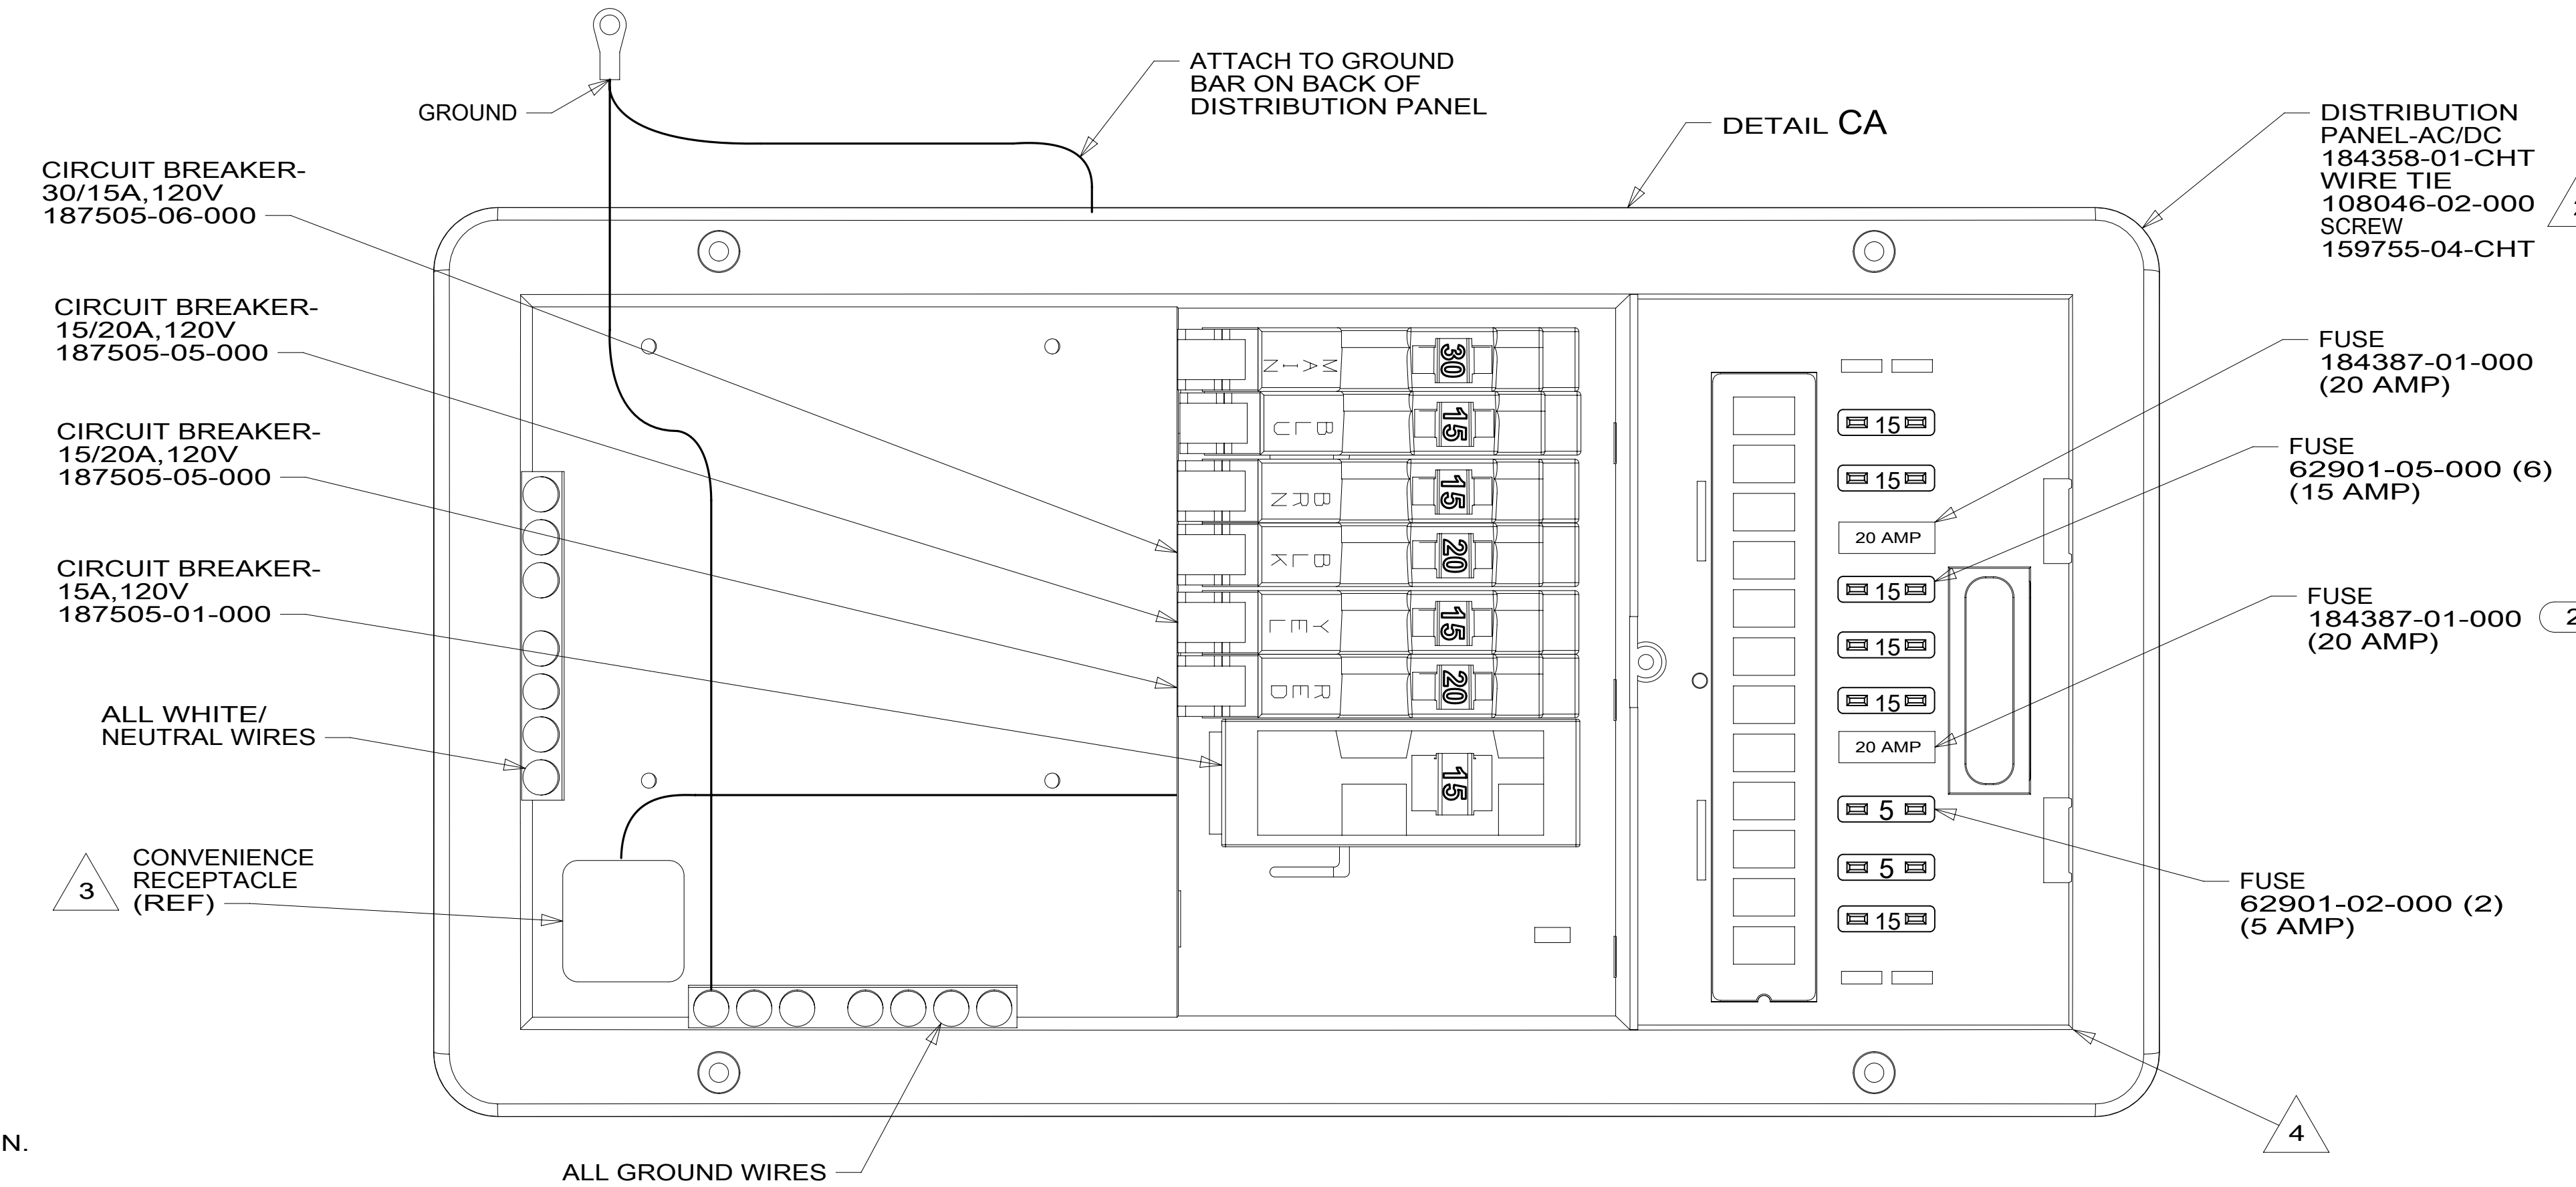

- NOTES:
- 4 SEE WIRING INSTL-BODY, 12V FOR ADDITIONAL INFORMATION.
 - 3 CONNECT BLACK WIRE FROM CONVENIENCE RECEPTACLE TO DEDICATED CIRCUIT BREAKER.
 - 2 ATTACH TO UNUSED SCREW HOLE ON BACK SIDE OF PANEL TO SECURE WIRES.
 - 1. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.


- 23R DRAINAGE SYSTEM/HEAT-PREWIRE
- 23T DRAINAGE SYSTEM-HEATED
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FIRST USED	
15 A-SERIES	
DO NOT SCALE DRAWING	
TITLE: LOAD CENTER/ATS ASM	
SHEET 3	PART NO 187791 REV
1 08-Oct-2015	


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


187791

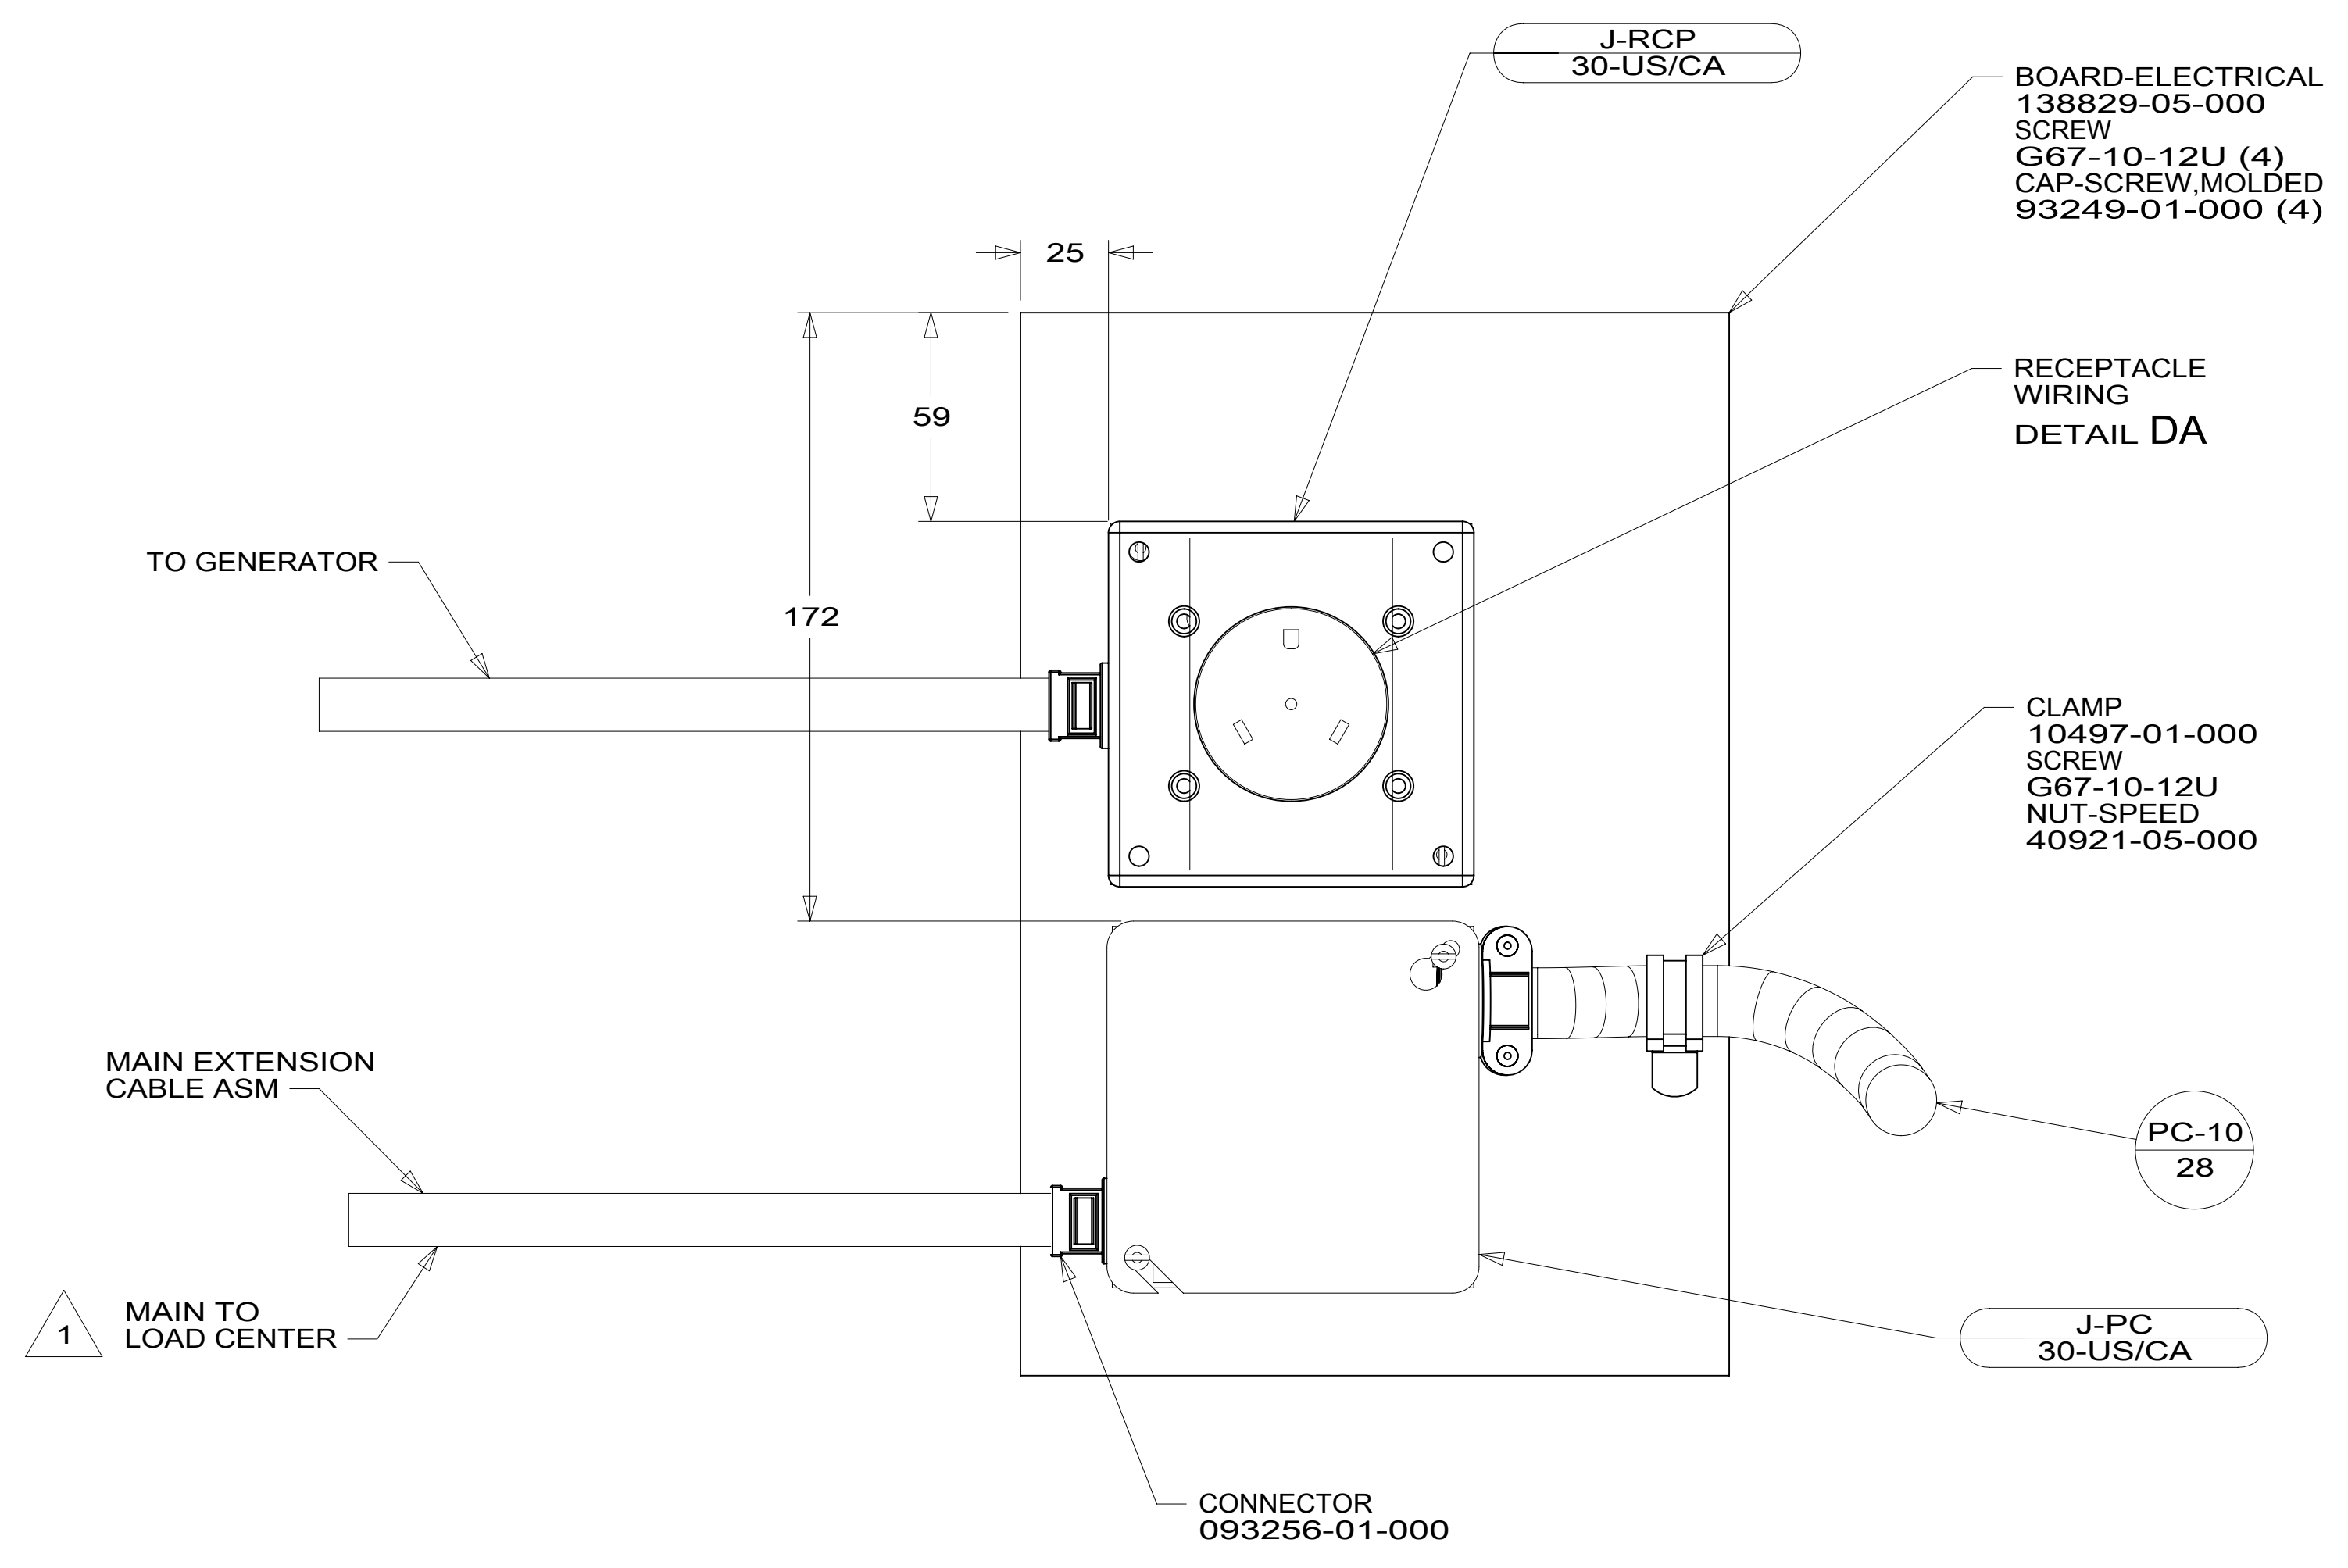

A26A,A27B

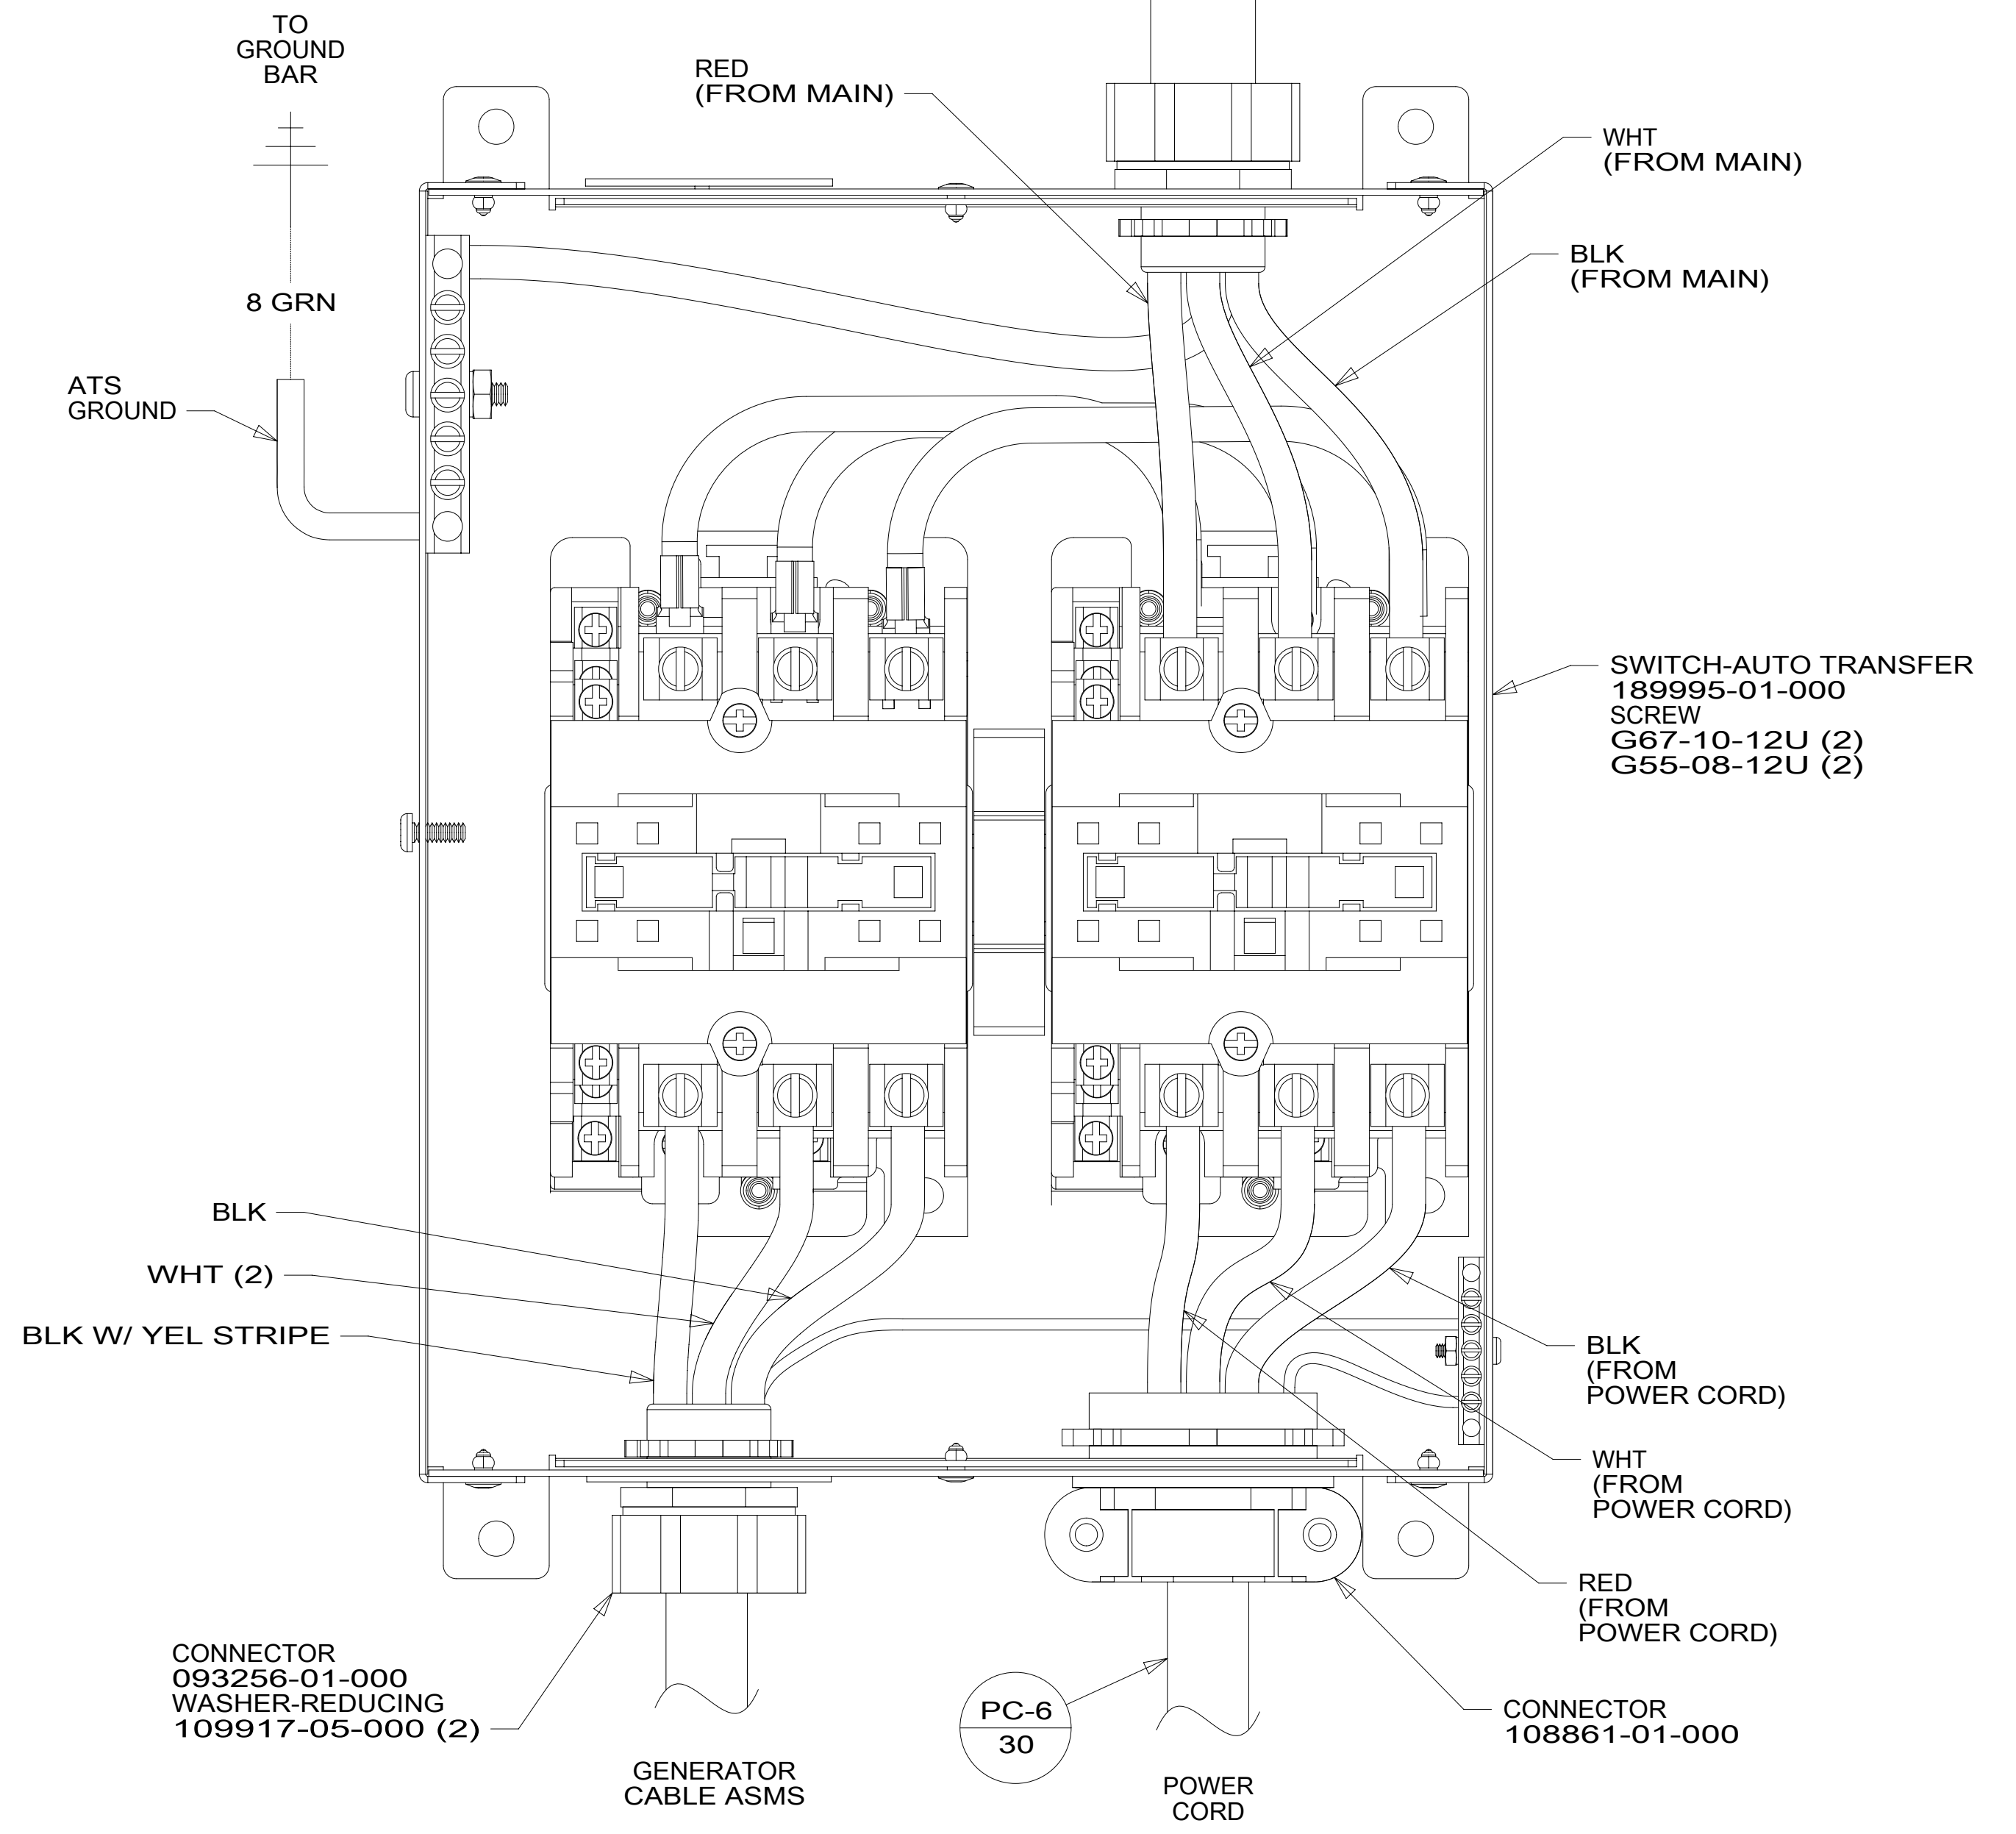

A31C

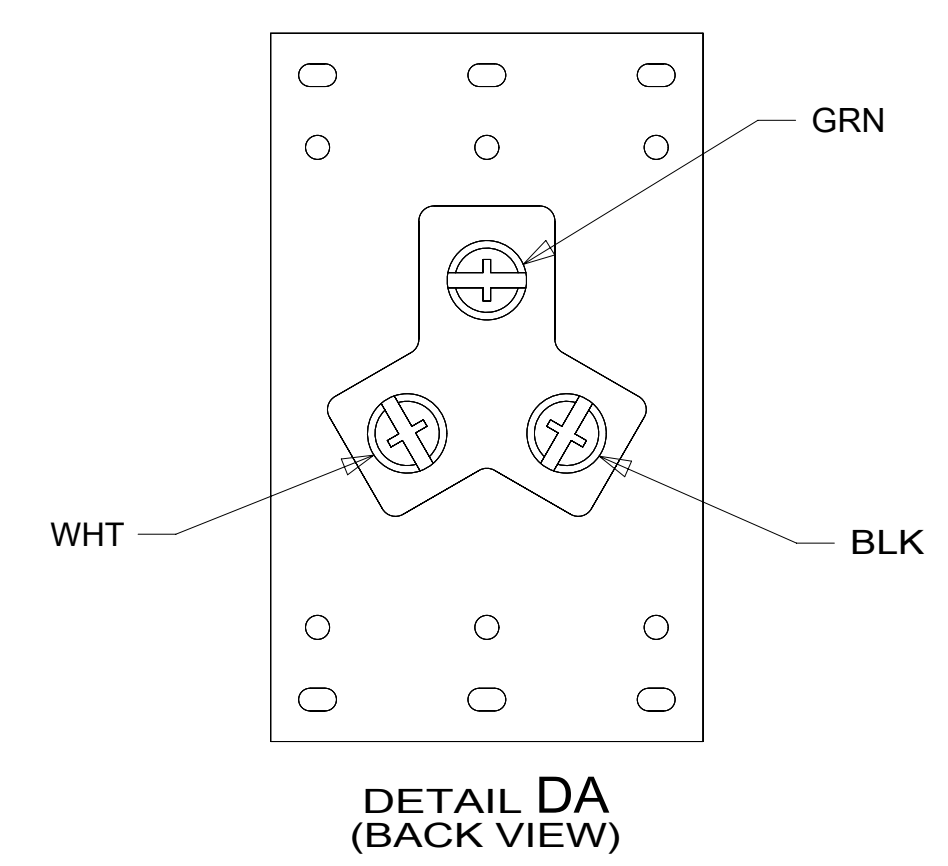

2 DO NOT CONNECT CABLE TO ATS DURING ASSEMBLY OF LOAD CENTER. CABLE TO BE CONNECTED IN MOTOR HOME PLANT.

1 SEE WIRING INSTL-BODY, 110V FOR ADDITIONAL INFORMATION.





NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265	CODES/STANDARDS-CSA/CMVSS
1B1	CODES/STANDARDS USA
1B1	265
FIRST USED	
15 A-SERIES	
DO NOT SCALE DRAWING	
TITLE: LOAD CENTER/ATS ASM	
SHEET 4	PART NO 187791 REV
1 08-Oct-2015	

187791

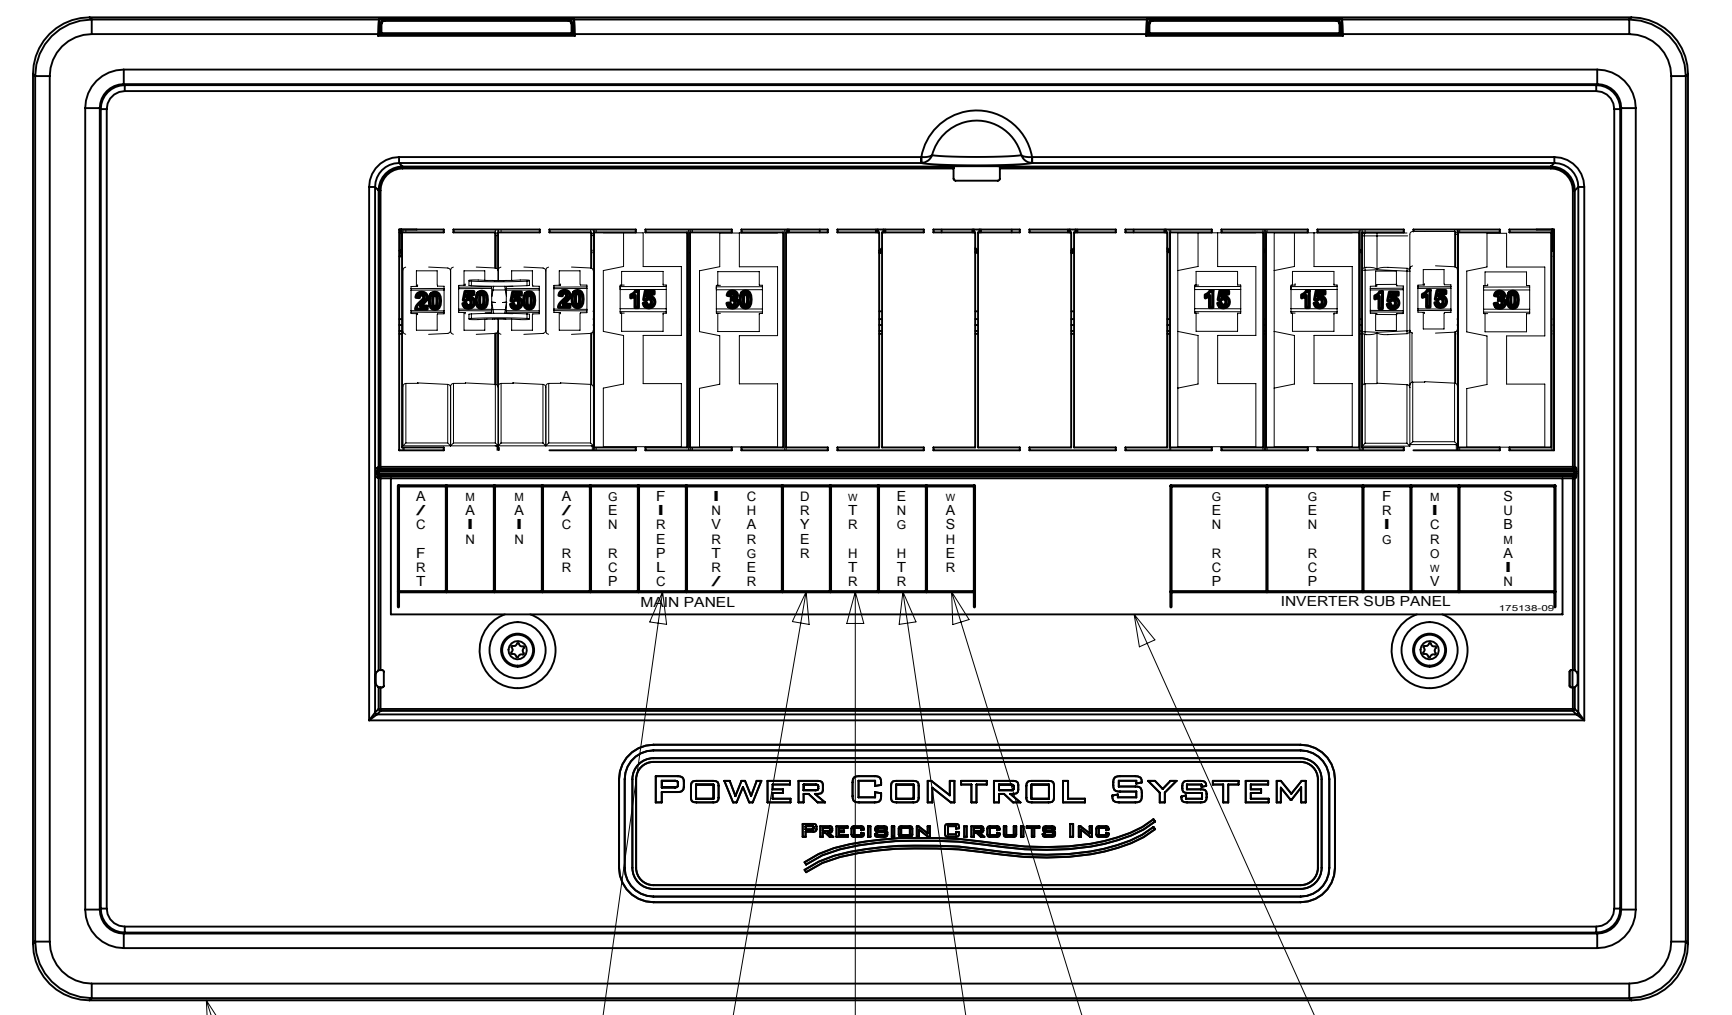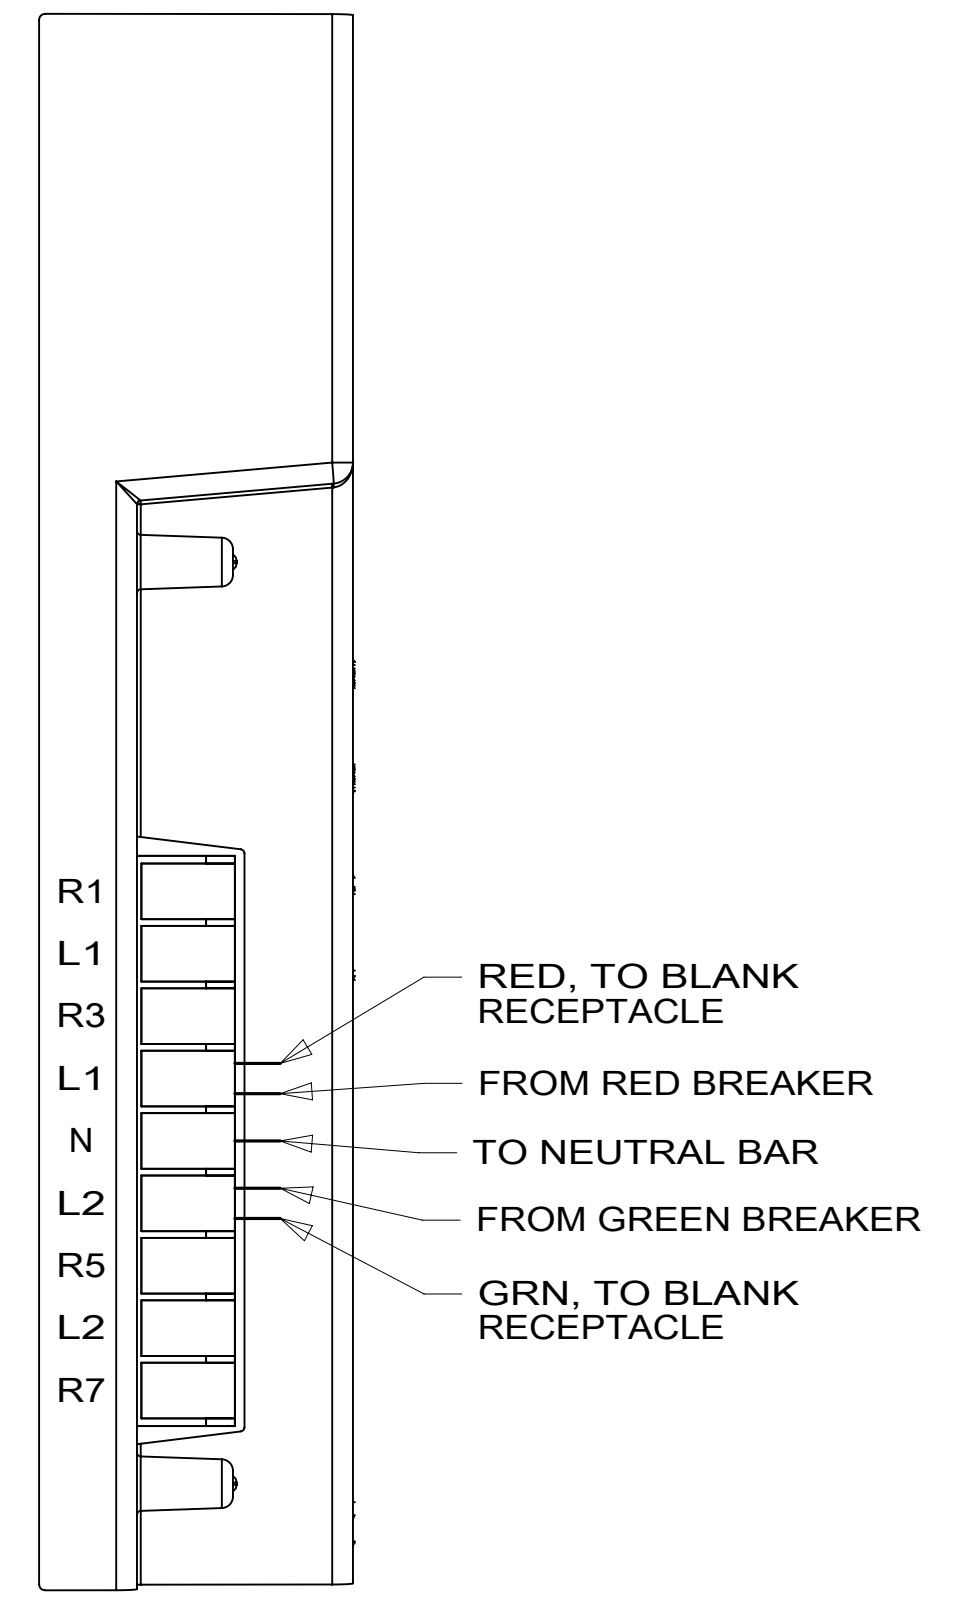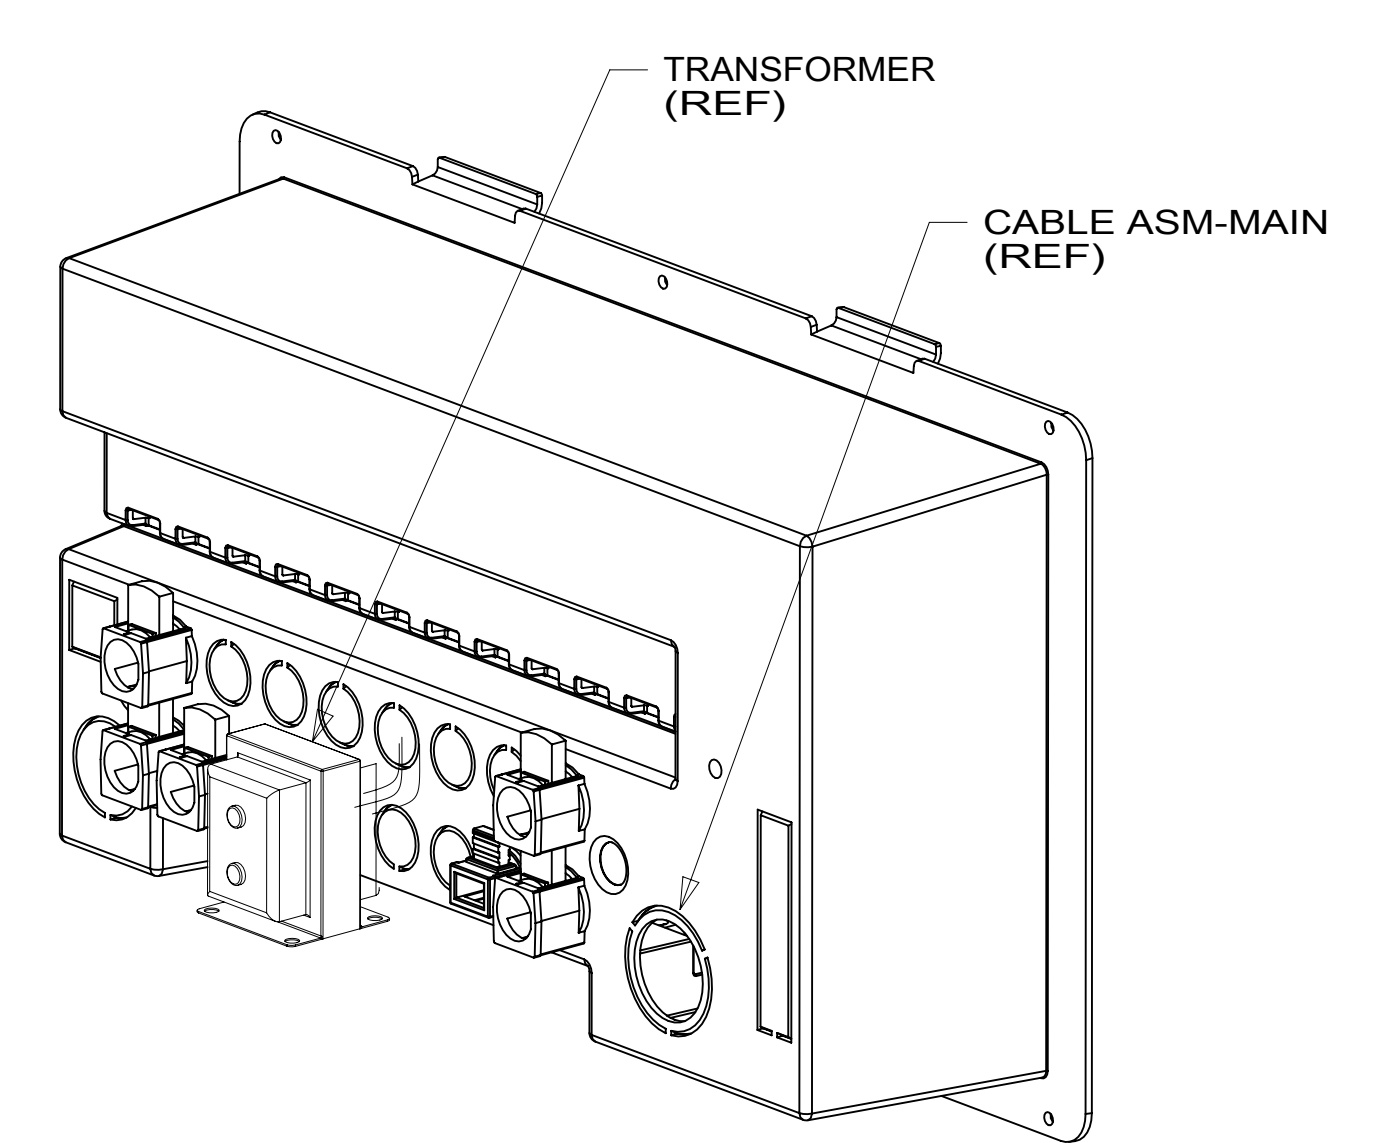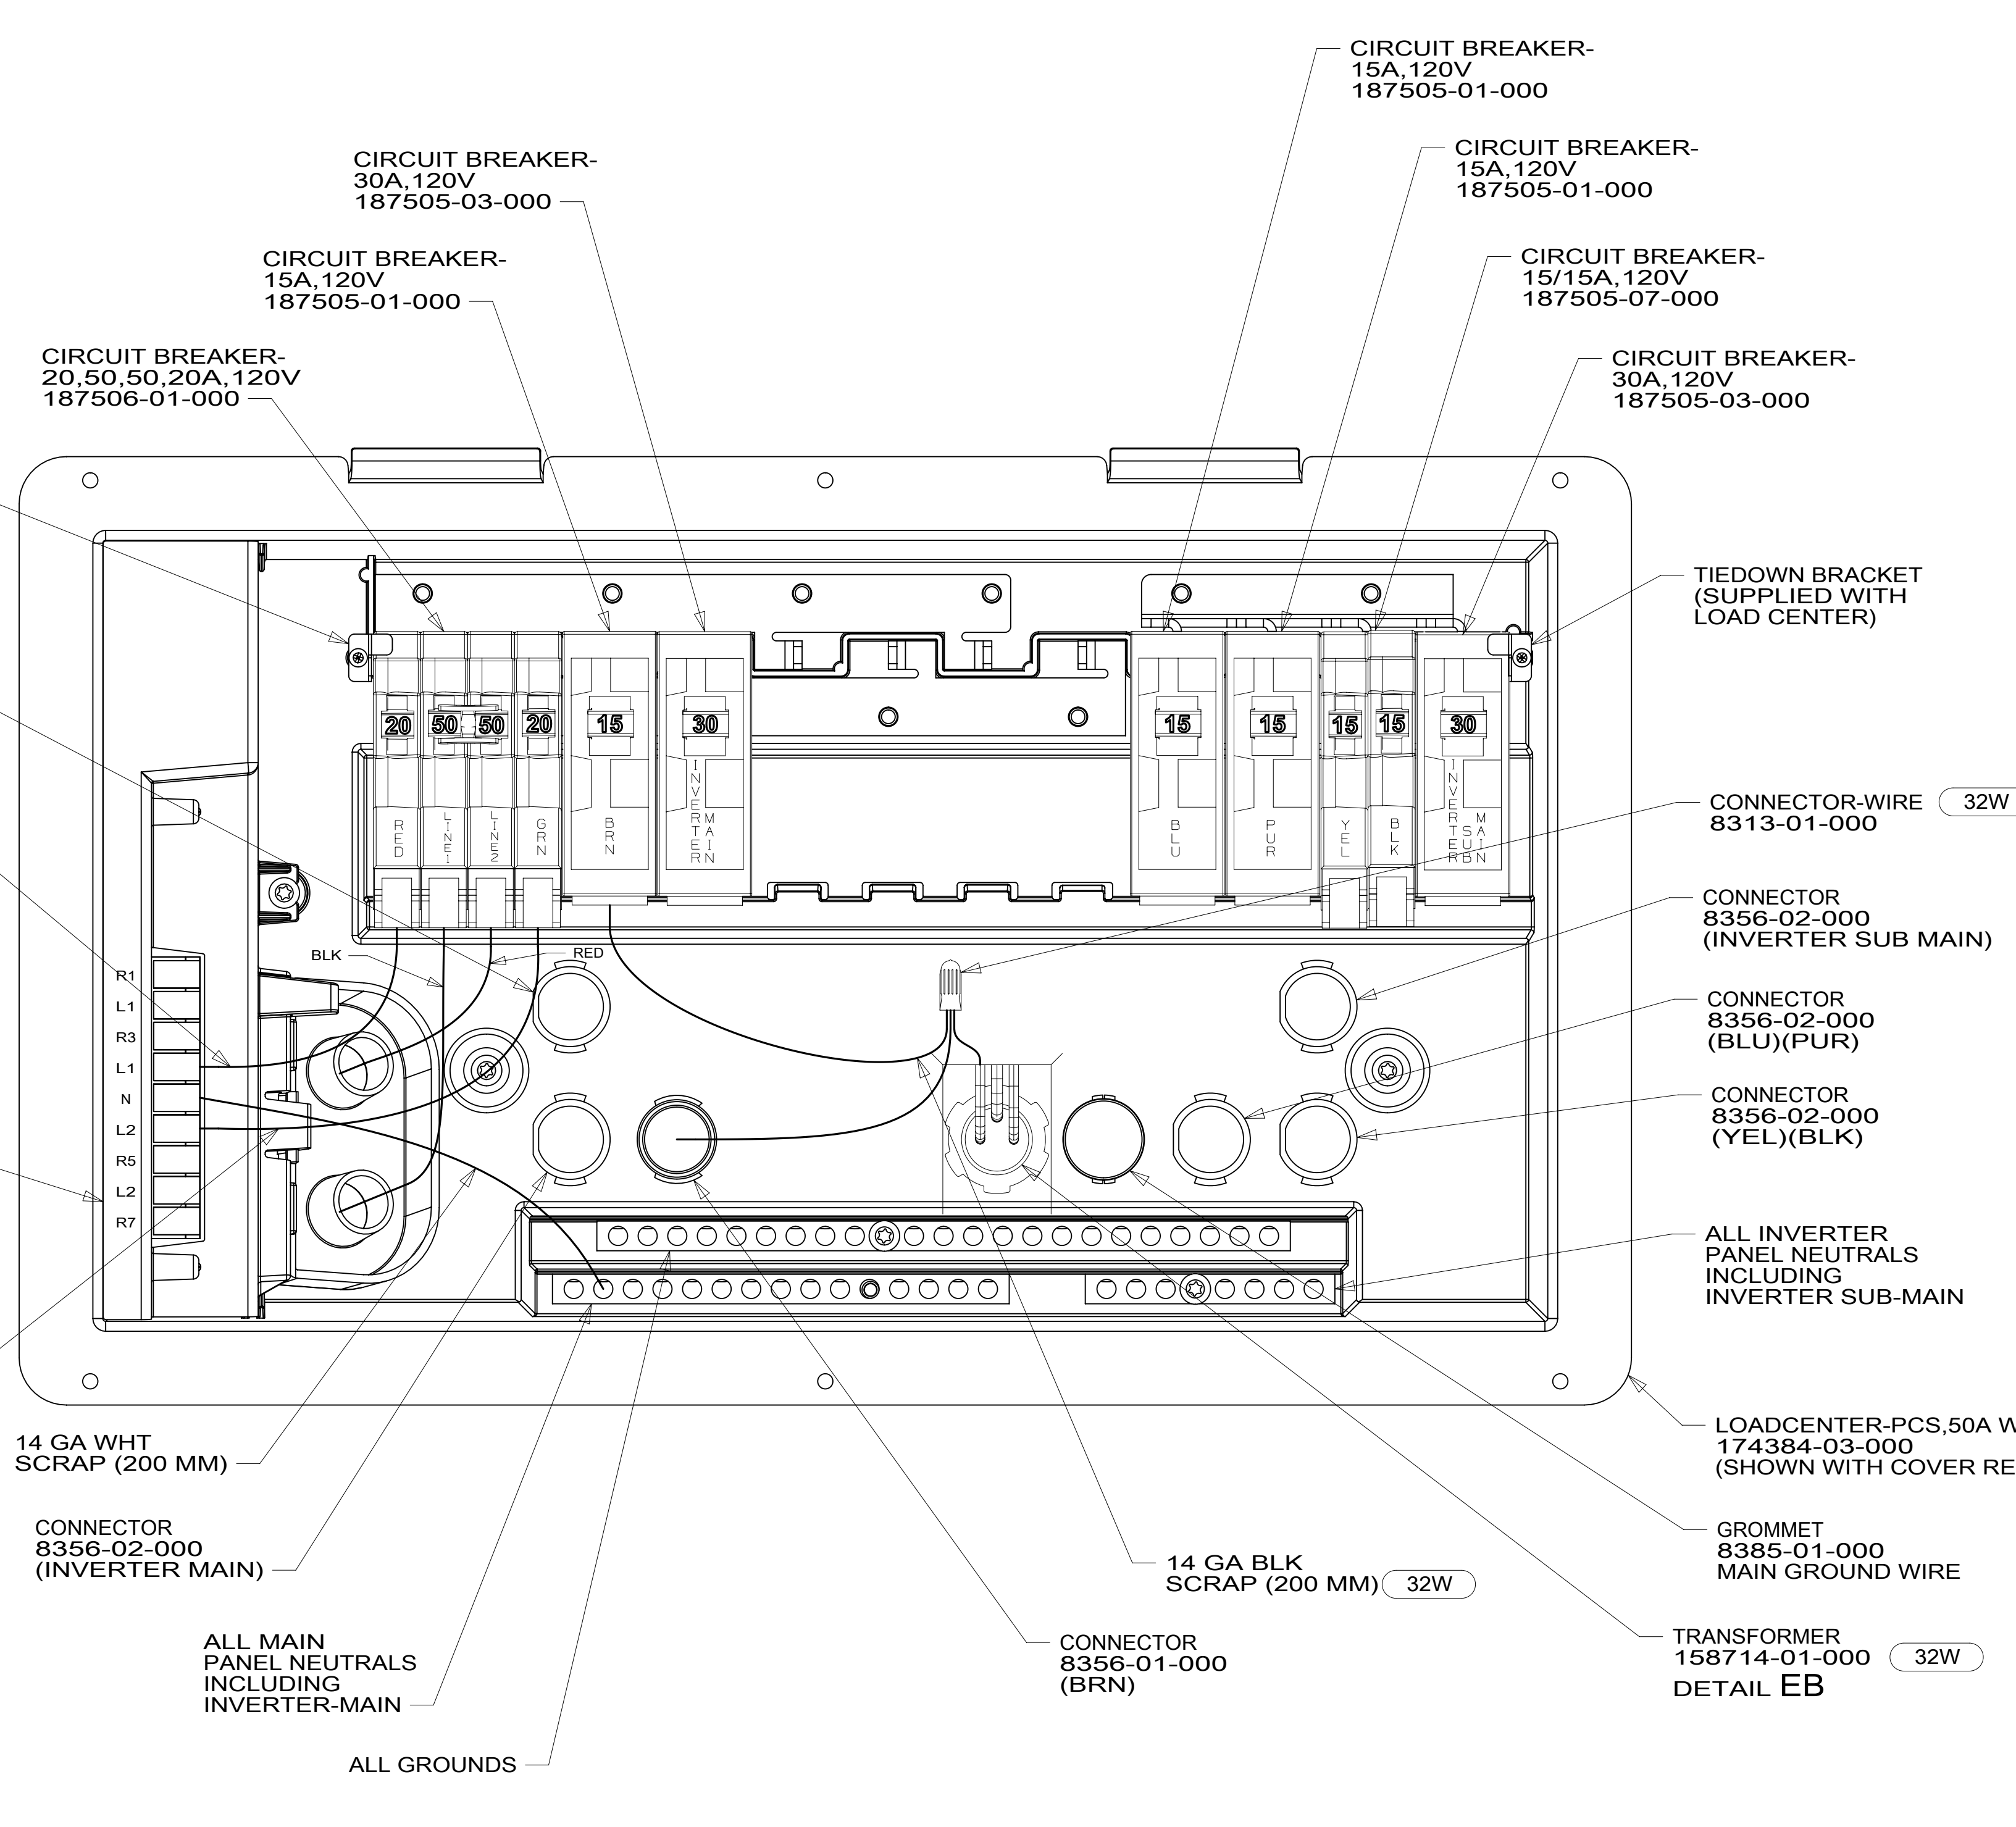

- 7 BLACKEN OUT WASHER.
- 6 BLACKEN OUT WTR HTR.
- 5 BLACKEN OUT DRYER.
- 4 BLACKEN OUT FIREPLACE.
- 3 BLACKEN OUT ENG HTR.

2. REMOVE 400MM FROM OUTER JACKET ON ALL WIRES ENTERING LOAD CENTER AND TRIM INDIVIDUAL CONDUCTORS AS REQUIRED TO MAKE INTERNAL CONNECTIONS
1. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.

NOTES:

- 15L RESIDENTIAL REFRIGERATOR PKG
- 32W GENERATOR-START,AUTO SYSTEM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA





1B1	265
FIRST USED	
15 A-SERIES	
DO NOT SCALE DRAWING	
TITLE: LOAD CENTER/ATS ASM	
SHEET 5	PART NO 187791 REV
08-Oct-2015	

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

A31C WITH 32W AND 15L

187791

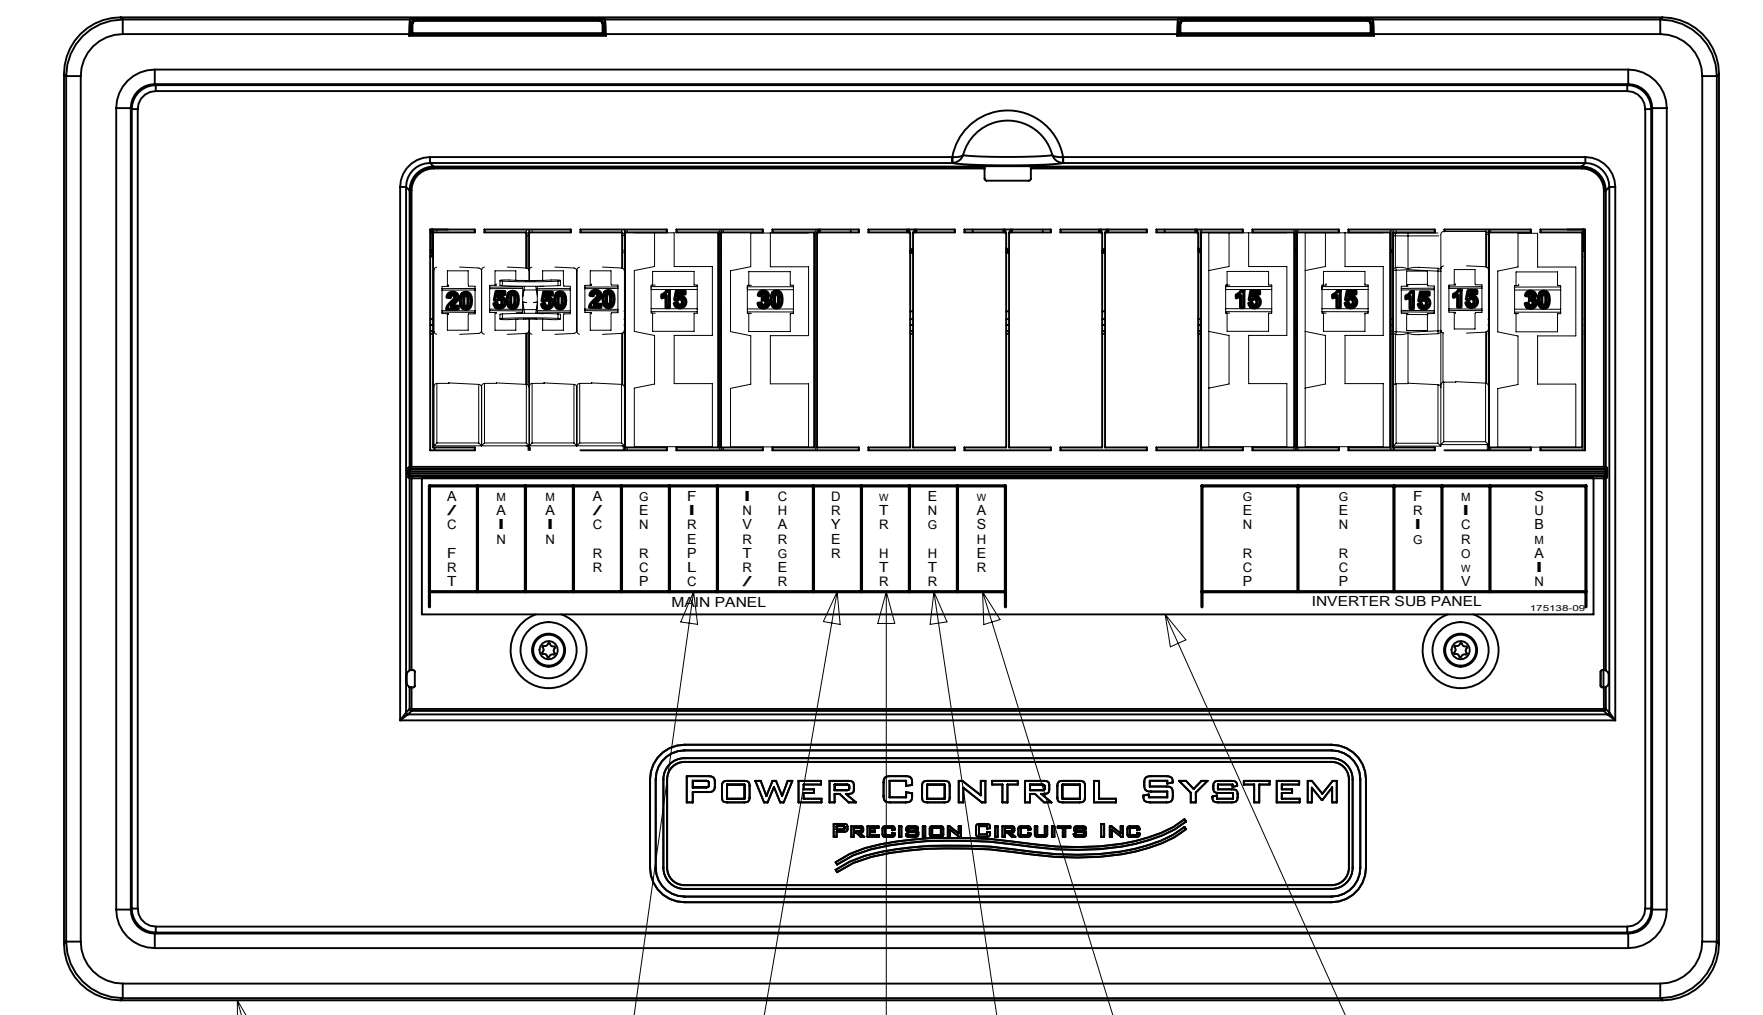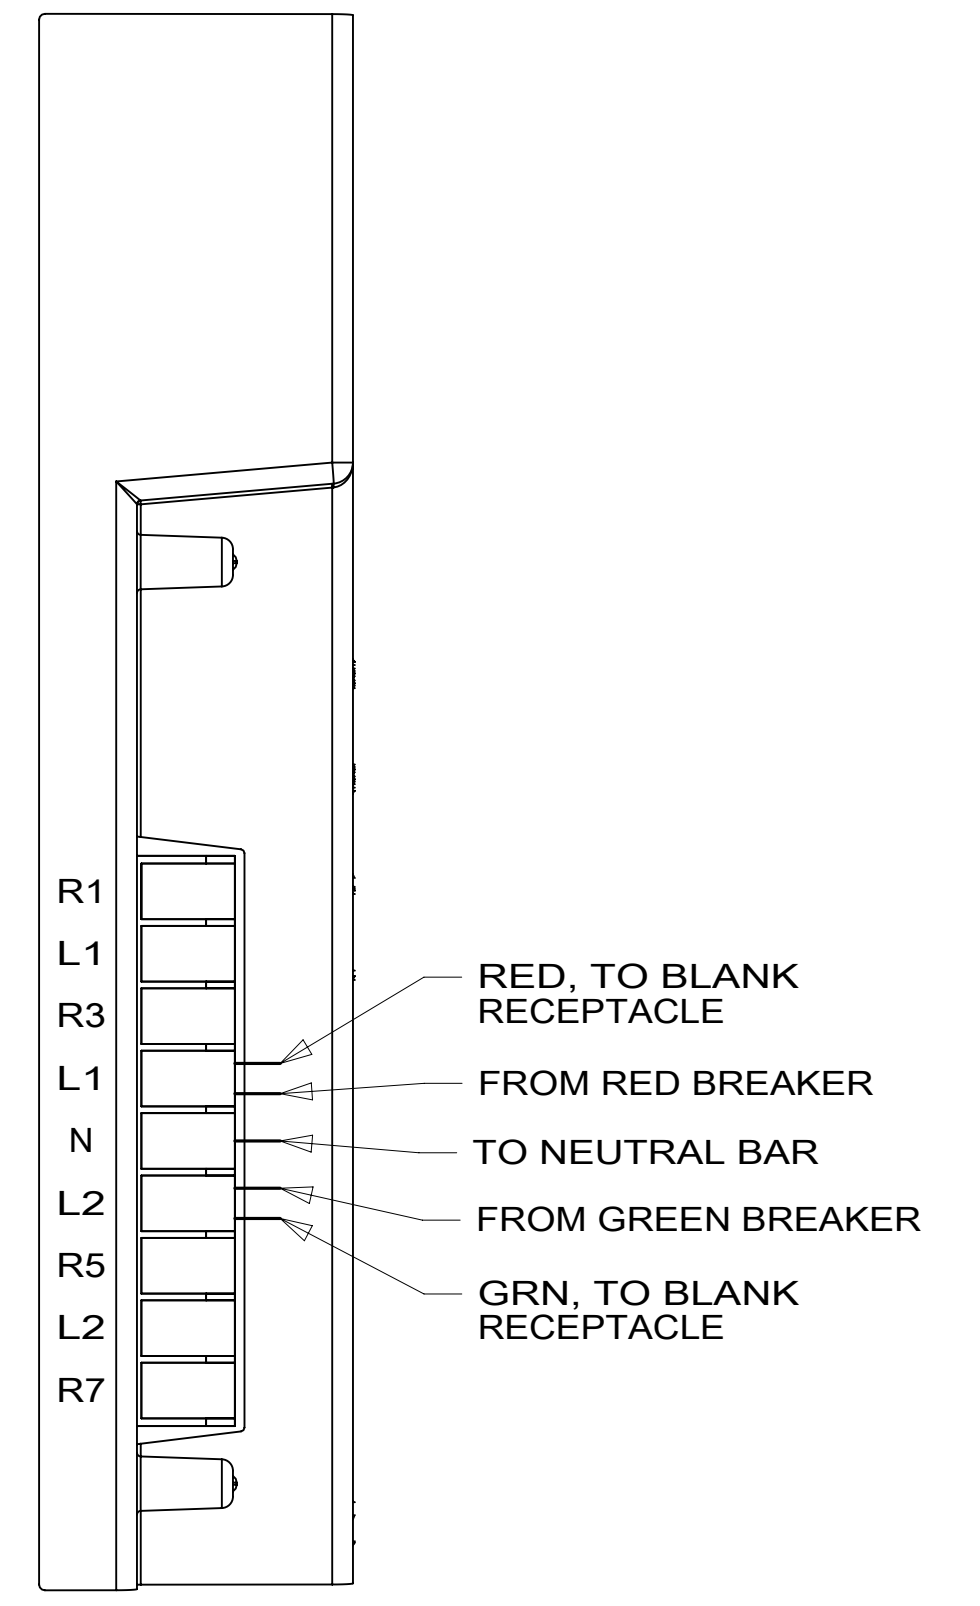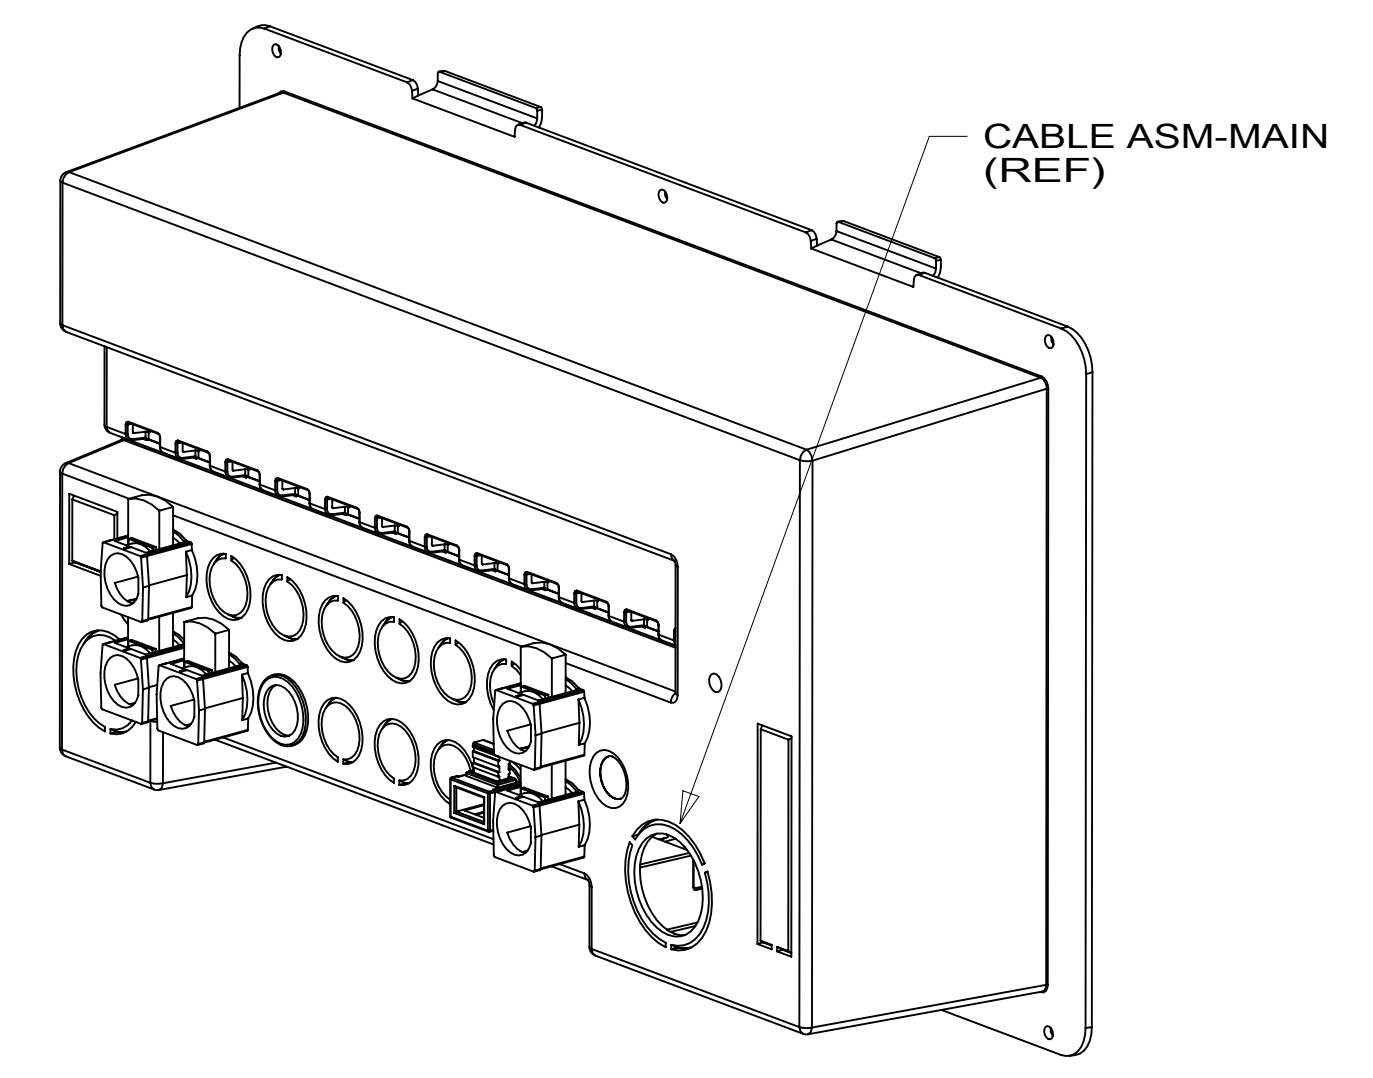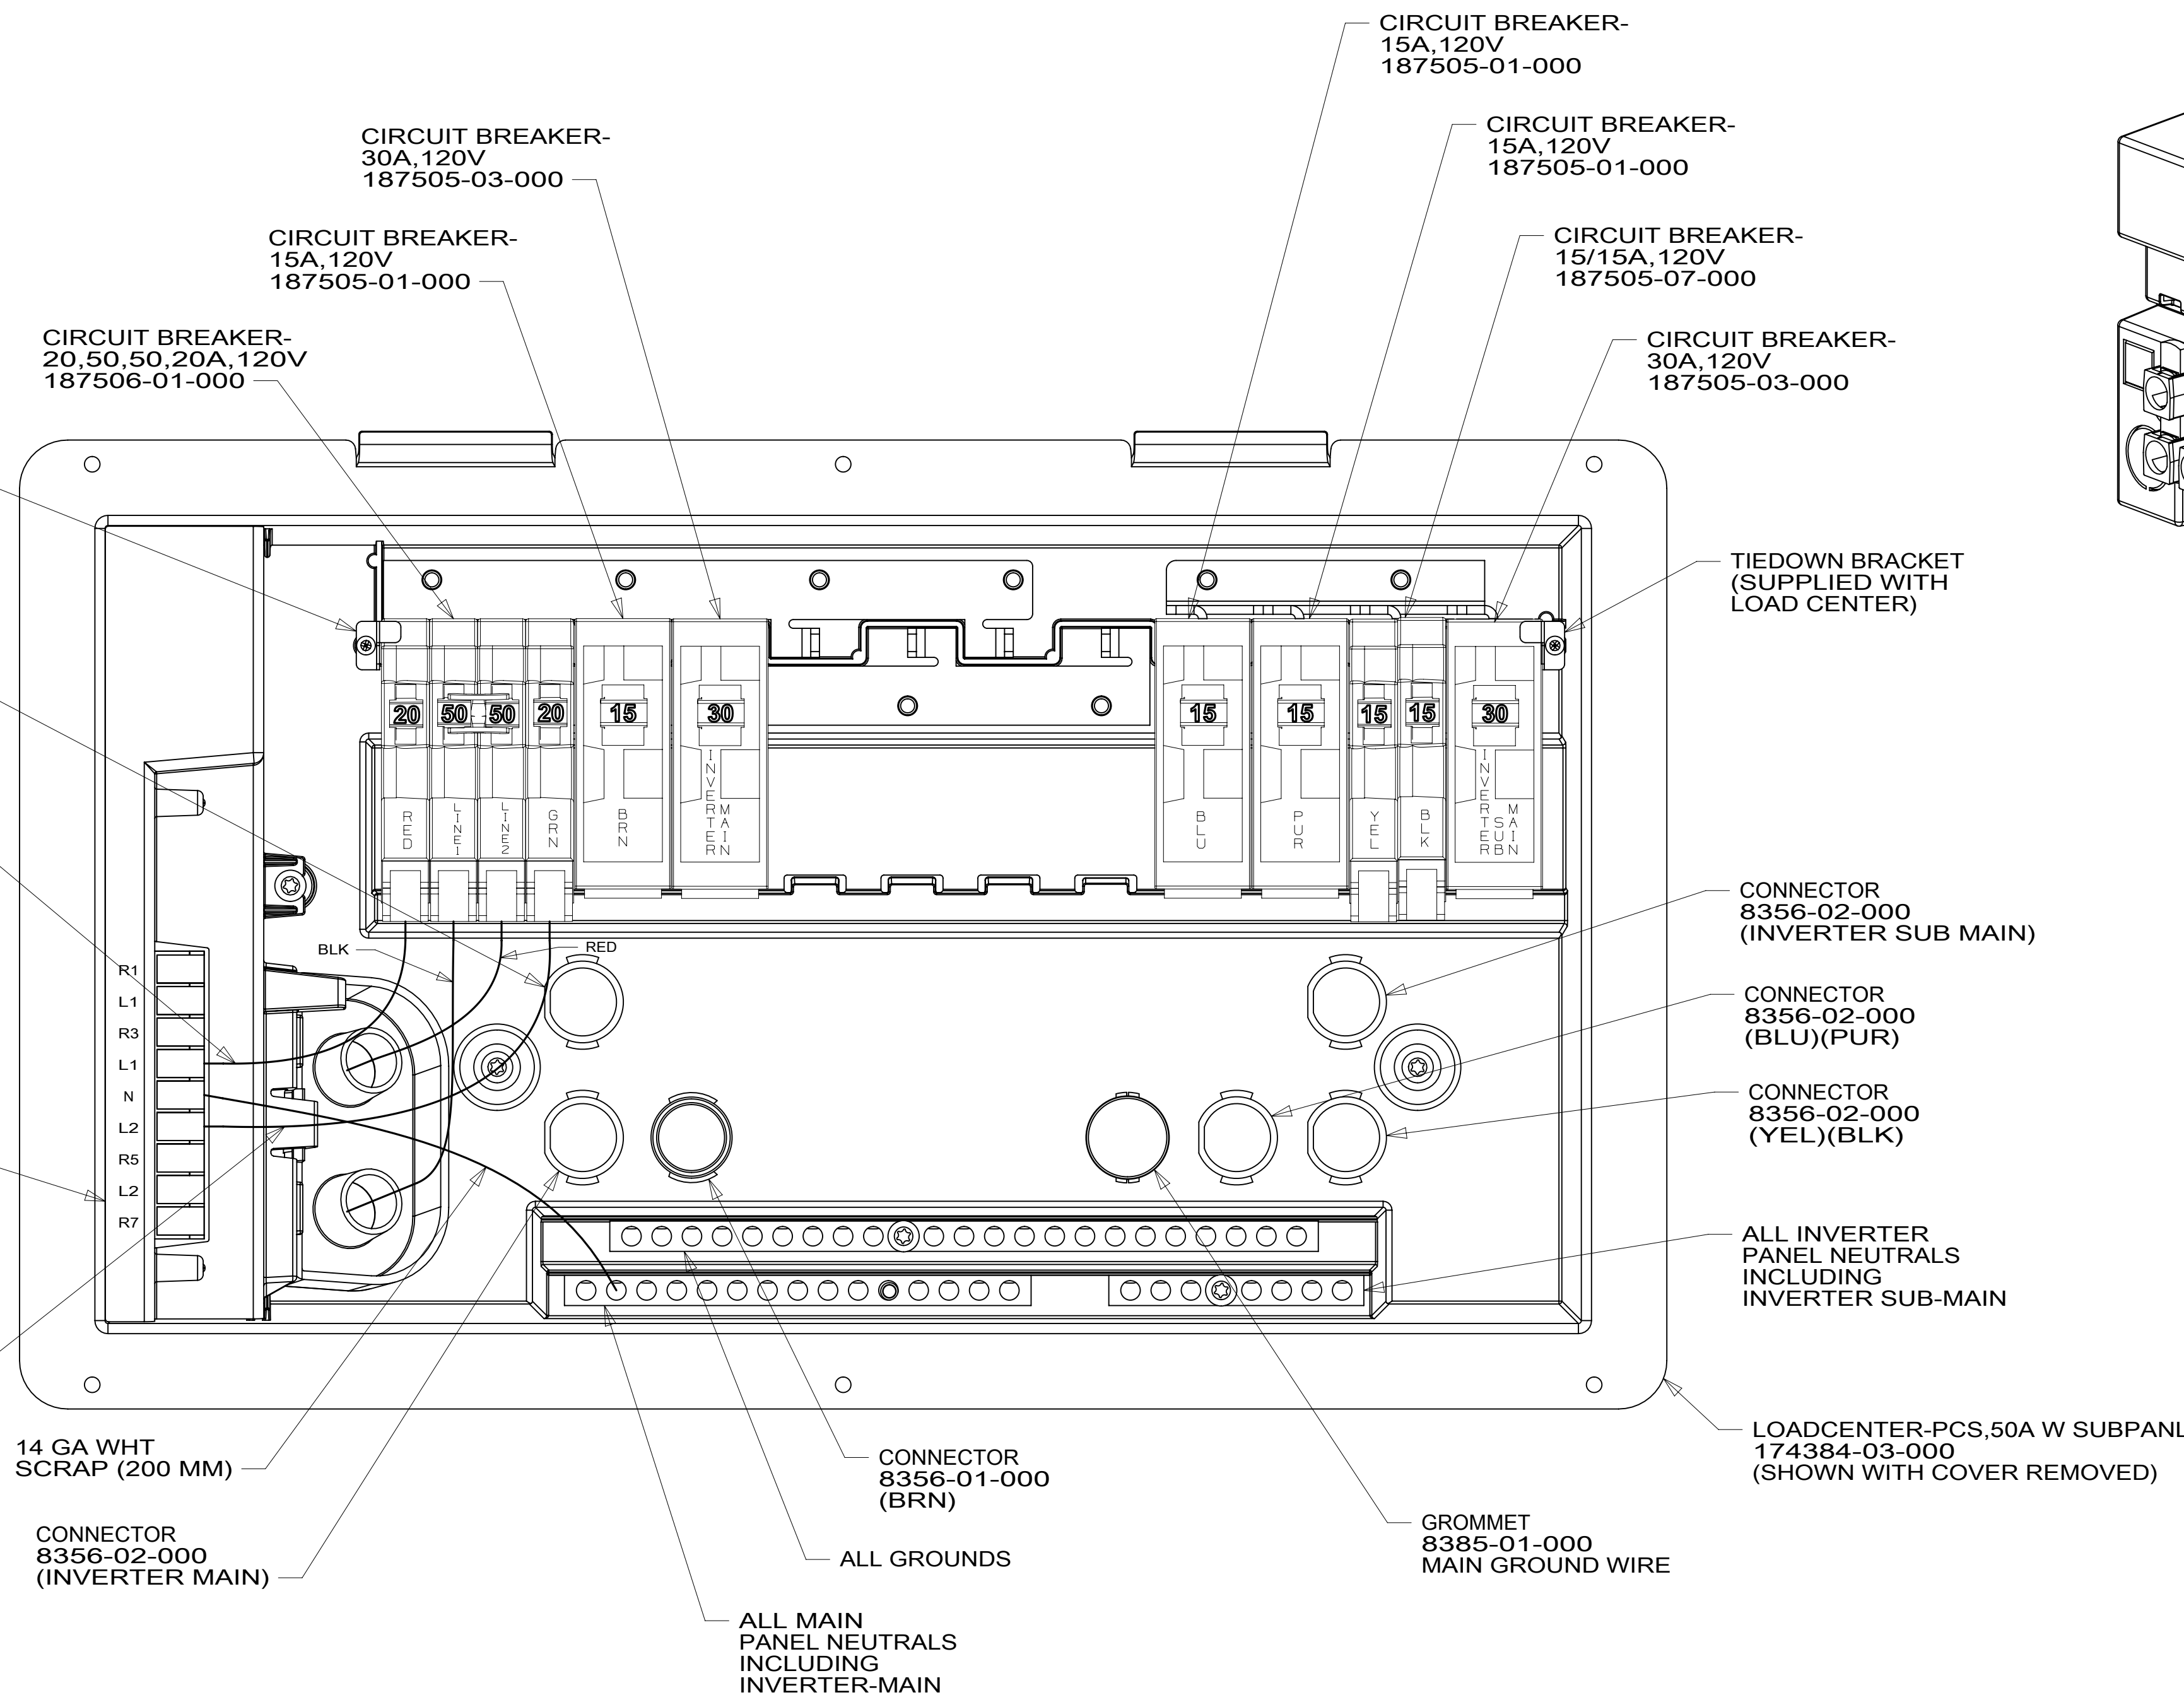

- 7 BLACKEN OUT WASHER.
- 6 BLACKEN OUT WTR HTR.
- 5 BLACKEN OUT DRYER.
- 4 BLACKEN OUT FIREPLACE.
- 3 BLACKEN OUT ENG HTR.

2. REMOVE 400MM FROM OUTER JACKET ON ALL WIRES ENTERING LOAD CENTER AND TRIM INDIVIDUAL CONDUCTORS AS REQUIRED TO MAKE INTERNAL CONNECTIONS
1. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 144 REFRIGERATOR-DOUBLE DOOR
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


1B1	265
FIRST USED	
15 A-SERIES	
DO NOT SCALE DRAWING	
TITLE: LOAD CENTER/ATS ASM	
SHEET 6	PART NO 187791 REV
1 08-Oct-2015	

A31C WITH 144

187791



DETAIL GA

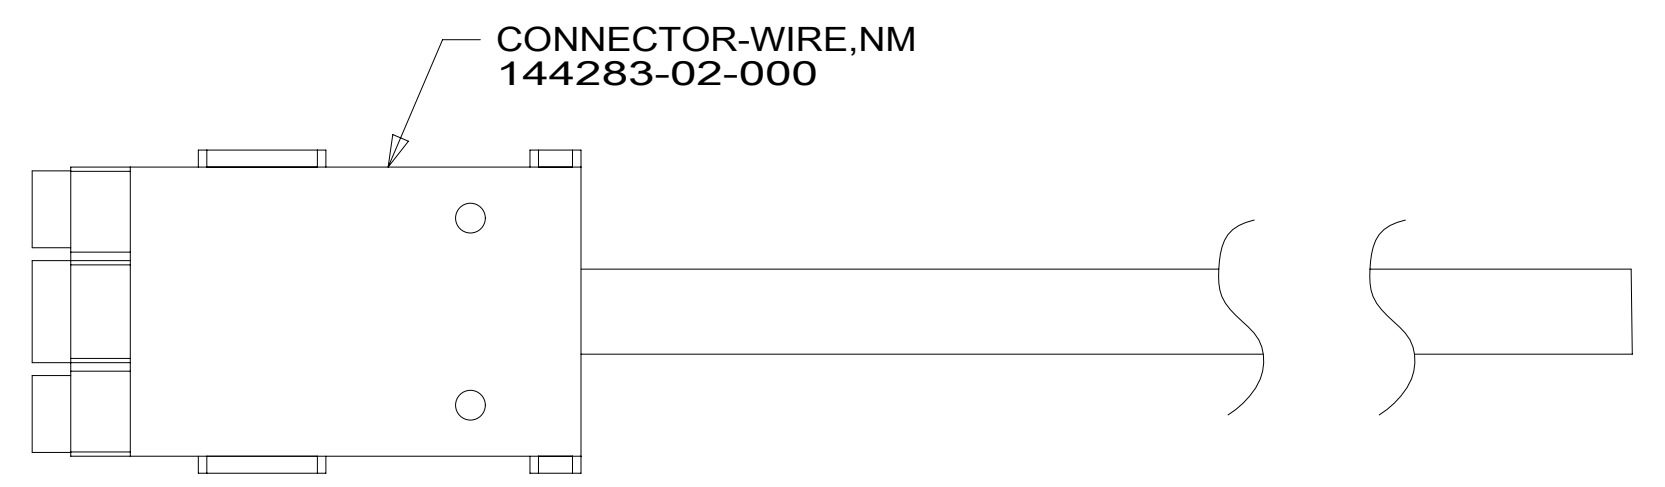

DETAIL GB



DETAIL GC

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FIRST USED **15 A-SERIES**

DO NOT SCALE DRAWING

TITLE: **LOAD CENTER/ATS ASM**

SHEET 7 PART NO **187791** REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

187791