



DRAWING NO.	MODEL
191851-01	259K
191851-02	259G



RELEASE	REV/DATE	DWG NO	191851
REV ZONE	REVISION RECORD	DATE	DFT-ORIG

		259K	259G
RED	1B1	136135-07-060	136135-07-070
	265	136136-07-060	136136-07-070
YEL	1B1	136131-05-015	136131-05-030
	265	136134-05-015	136134-05-030
BLK	1B1	136131-06-060	136131-06-045
	265	136134-06-060	136134-06-045
BLU	1B1	136131-02-230	136131-02-050
	265	136134-02-230	136134-02-050
WHT	1B1	136135-09-030	136135-09-030
	265	136136-09-030	136136-09-030
YEL-2	1B1	136131-13-043	136131-13-030
	265	136134-13-043	136134-13-030
MAIN	1B1	136137-01-025	136137-01-025
	265	136138-01-025	136138-01-025
GROUND MAIN		136145-05-030	136145-05-020
MAIN EXTENSION	1B1	136137-01-040	136137-01-030
	265	136138-01-040	136138-01-030
CORD-POWER ASM		183140-01-000	183140-01-000
GROUND ATS		136145-05-020	136145-05-020
THROW IN WIRE #1	1B1	136131-02-050	136131-02-085
	265	136134-02-050	136134-02-085
THROW IN WIRE #2	1B1	-----	136131-02-070
	265	-----	136134-02-070



- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265

- 7 GROUP WIRES EXITING BACK OF LOAD CENTER. WITH TIE-WIRE 116673-01-000. DO NOT TIE TO LOAD CENTER.
- 6 ATTACH WIRES TO BACK SIDE OF LOAD CENTER. USE EXISTING HOLES AND TIE-WIRE 116673-01-000.
- 5 DO NOT HI-POT POWER CORD, LED INDICATOR LIGHT MAY FAIL.
- 4 GROUND WIRES TO BE INSTALLED ON MFG LINE. SHIP GROUND WIRES LOOSE WITH LOAD CENTER.
- 3. SEE WIRING INSTL-BODY, 12V FOR ADDITIONAL INFORMATION.
- 2. SECURE WIRES TO BACKSIDE OF LOAD CENTER WITH WIRE TIE 116673-01-000.
- 1. ALL GROUNDS WIRES TO BE COVERED WITH TUBING 8041-02-000.


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

WINNEBAGO COPYRIGHT 2014 WINNEBAGO INDUSTRIES, INC.


DFT-ORIG	ORIG. DATE
CHKR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	
M.E.	FIRST USED
DSNR	16 259K
UNSPECIFIED TOLERANCES ARE:	
WHOLE DIM (X)	: 3
ONE-PLACE (X.X)	: 1.5
TWO-PLACE (X.XX)	: 0.50
ANGLE	: 1°
THIRD ANGLE PROJECTION	
DO NOT SCALE DRAWING	REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES
TITLE: LOAD CENTER/ATS ASM	
SHEET 1 OF 2	PART NO 191851 REV
REF:	1 14-Aug-2015

*191851 *A

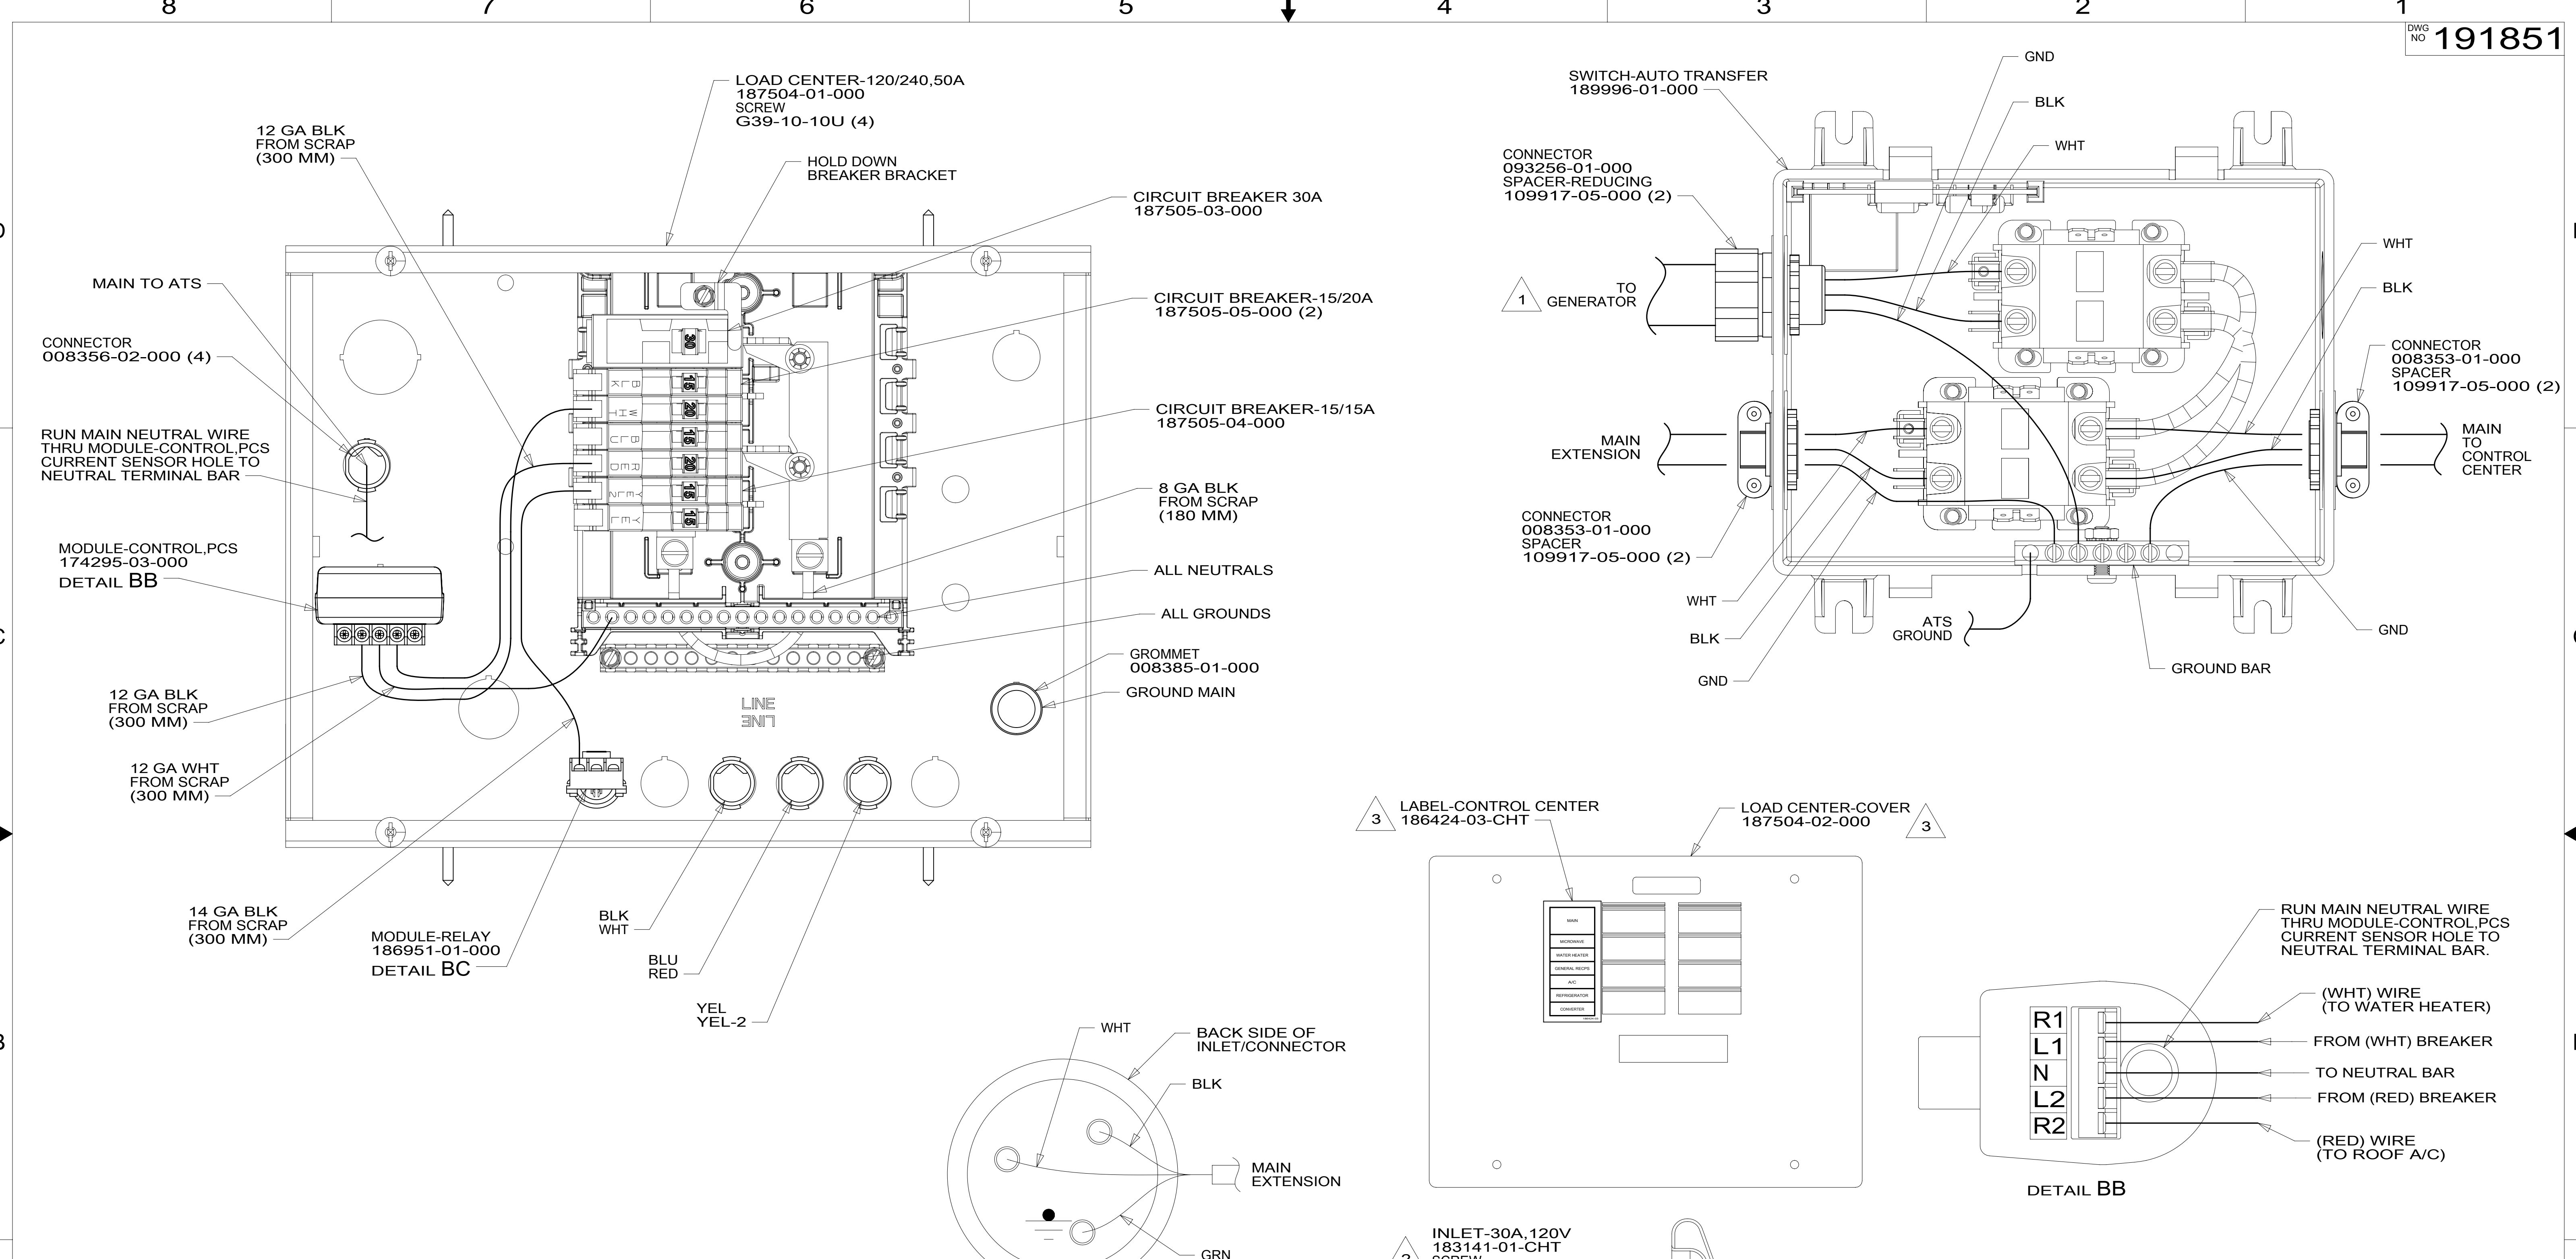


8. ALL 110V STRANDED WIRE WITHOUT TERMINALS TO BE STRIPPED 10 MM AND SOLDER DIPPED.
7. REMOVE 400 MM FROM OUTER JACKET ON ALL WIRES ENTERING LOAD CENTER AND TRIM INDIVIDUAL CONDUCTORS AS REQUIRED TO MAKE INTERNAL CONNECTIONS.
6. ALL WIRES TO BE CLAMPED WITHIN 200 MM OF ATS.
5. GROUND WIRES ARE NOT SHOWN FOR CLARITY.
4. ALL GROUNDS TO BE COVERED WITH TUBING 8041-02-000.
- 3 INSTALLED BY ASSEMBLY LINE.
- 2 DO NOT HI-POT INLET, LED INDICATOR LIGHT MAY FAIL.
- 1 SEE GENERATOR INSTL FOR ADDITIONAL INFORMATION.


NOTES:

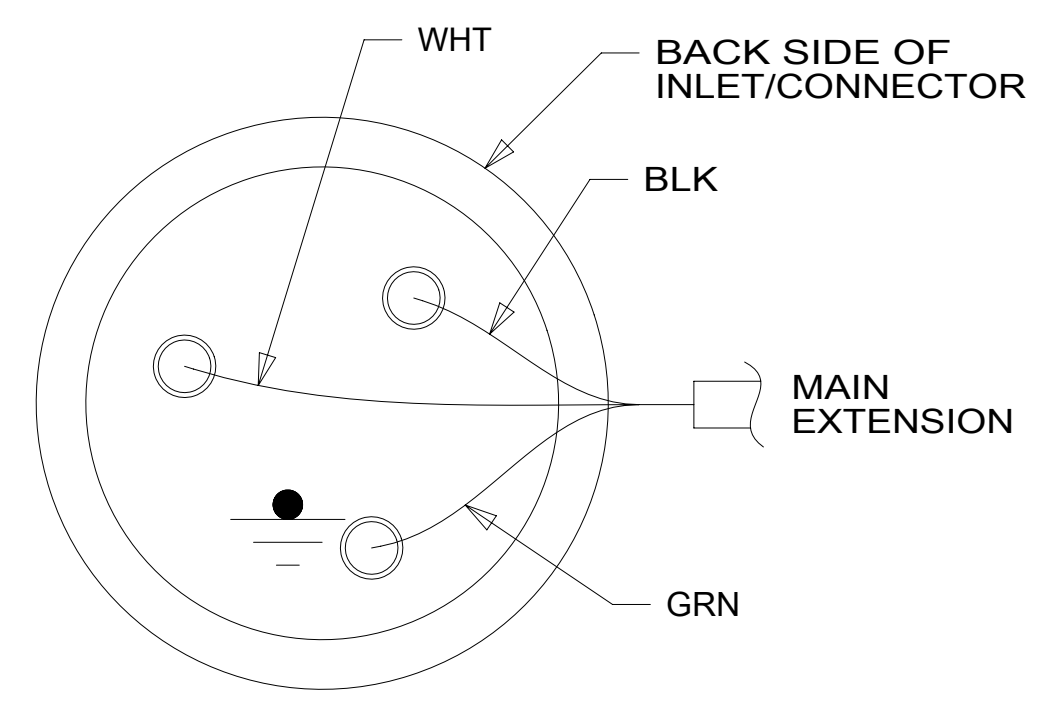

VIEW BA

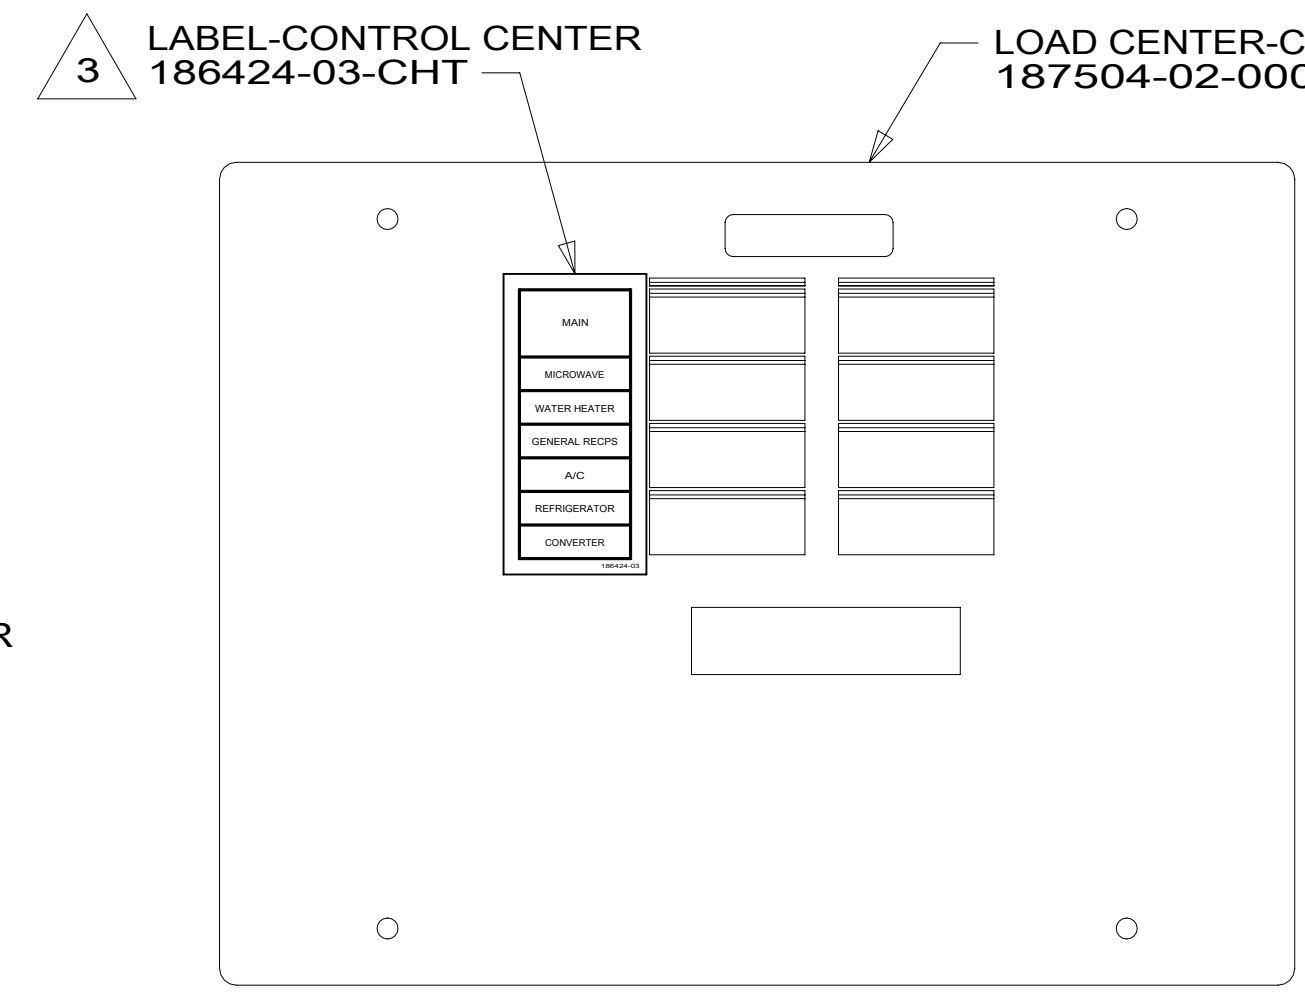

DETAIL BB

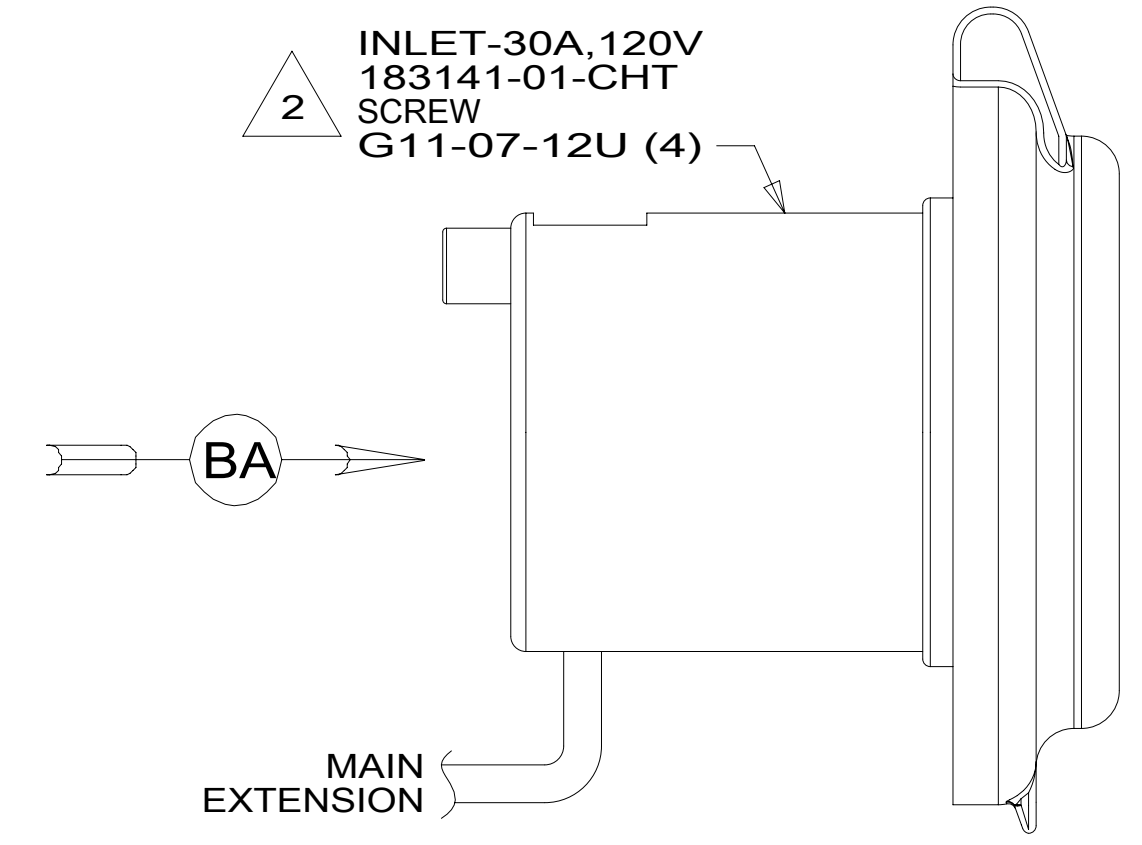

DETAIL BC

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1	265
FIRST USED	
16 259K	
DO NOT SCALE DRAWING	
TITLE: LOAD CENTER/ATS ASM	
SHEET 2	PART NO 191851 REV

191851