

265 CODES/STANDARDS-CSA/CMVSS
 181 CODES/STANDARDS USA
 181 265




DTR	ORIG. DATE
DWR	ALL DIMENSIONS ARE IN MILLIMETERS
P.E.	FIRST DSG
M.F.	16 500-SERIES
DSR	

UNSPECIFIED TOLERANCES ARE:	MATERIAL
WHOLE DIM (X)	± .3
ONE-PLACE (X.X)	± 1.5
TWO-PLACE (X.XX)	± 0.50
ANGLE	± .1°
THIRD ANGLE PROJECTION	

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DO NOT SCALE DRAWING REFER TO ES0018 FOR PASSENGER TIGHTENING GUIDELINES
 TITLE: CHASSIS ELECTRICAL BOX ASM
 SHEET | OF 3 PART NO 194963 REF

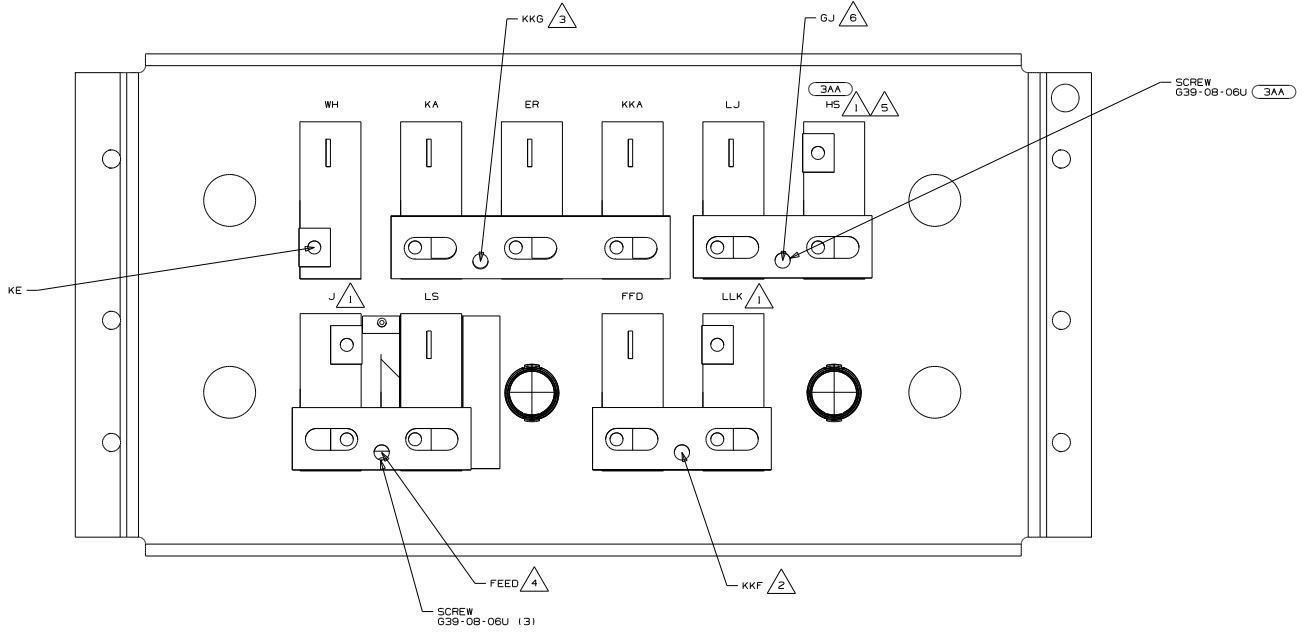

VIEW BA

7. TAPE BACK UNUSED WIRES TO HARNESS.
- 6 MARKED WITH RED TAPE.
 - 5 MARKED WITH WHITE TAPE.
 - 4 MARKED WITH 2 WRAPS OF YELLOW TAPE.
 - 3 MARKED WITH PURPLE TAPE.
 - 2 MARKED WITH YELLOW TAPE.
 - 1 CIRCUIT FROM WIRE ASM-CHASSIS.

NOTES:

- 3AA SOLAR PANEL/BATT CHARGER SYS
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

16 500-SERIES

DO NOT SCALE DRAWING


TITLE: CHASSIS ELECTRICAL BOX ASM

SHEET 2 PART NO 194963 REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000



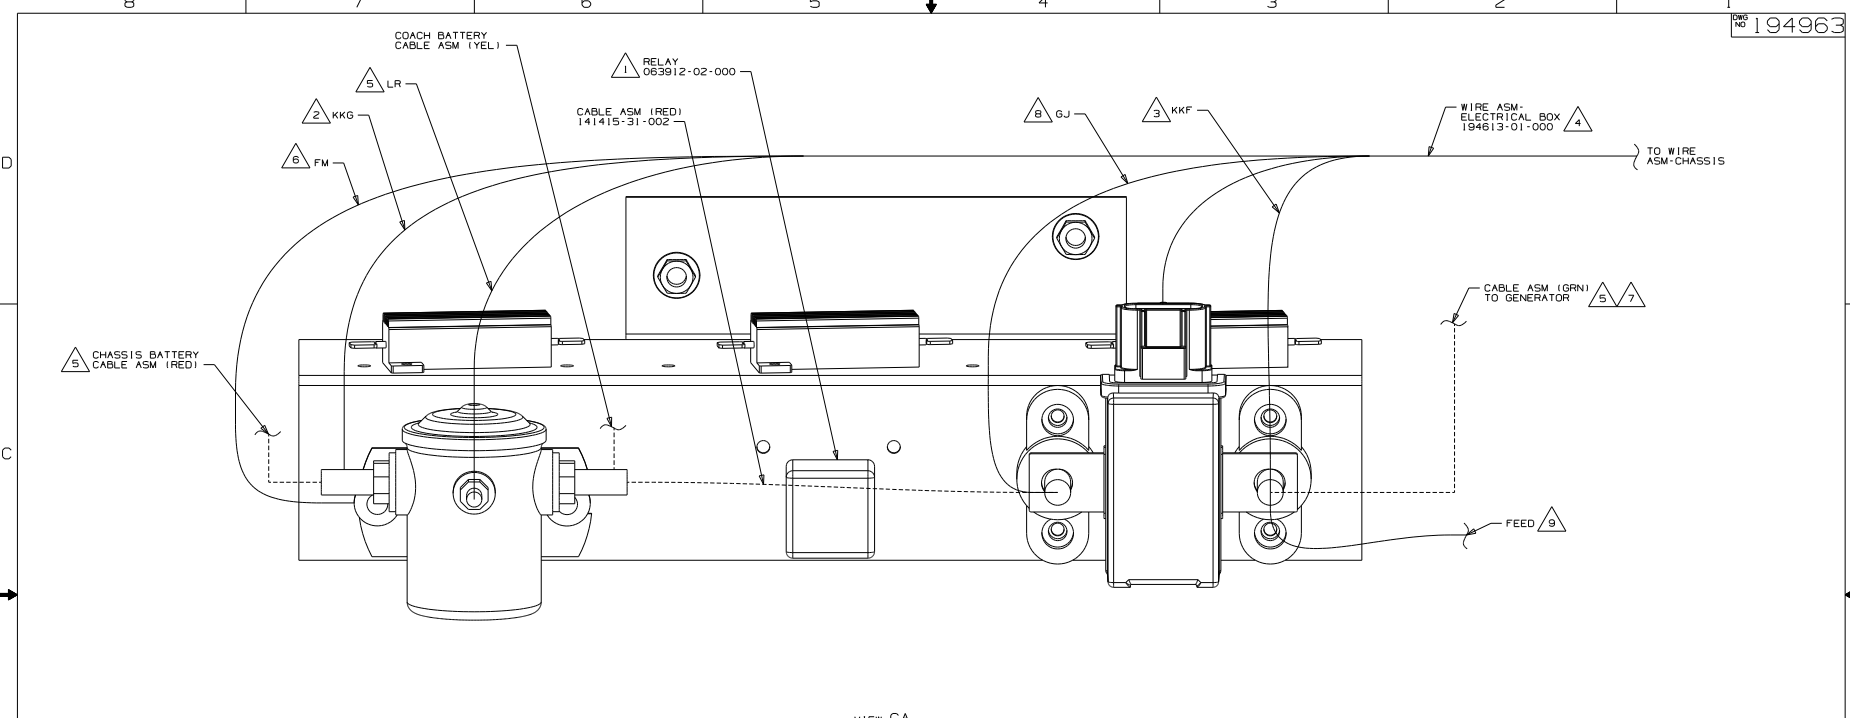

VIEW CA

- 9 MARKED WITH 2 WRAPS OF YELLOW TAPE.
- 8 MARKED WITH RED TAPE.
- 7 WITH FEATURE 321 OR 323 DO NOT CONNECT CABLE ASM-GENERATOR (GRN) TO SOLENOID. TAPE END WITH TAPE 8363-01-000 AND LEAVE CABLE END LOOSE IN ELECTRICAL BOX.
- 6 SECURE WITH SOLENOID MOUNTING SCREW.
- 5 WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 4 TAPE BACK UNUSED WIRES TO HARNESS.
- 3 WIRE IS MARKED WITH YELLOW TAPE.
- 2 WIRE IS MARKED WITH PURPLE TAPE.
- 1 SEE WIRE ASM-CHASSIS FOR ADDITIONAL INFORMATION.

NOTES:

- 323 GENERATOR PREP KIT - DIESEL
- 321 GENERATOR PREP KIT
- 265 CODES/STANDARDS-CSA/CMVSS
- 181 CODES/STANDARDS USA

181 265

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

FOR ELECTRICAL SPECIFICATIONS SEE DWG NO. 128783-01-000

16 500-SERIES

DO NOT SCALE DRAWING

TITLE: CHASSIS ELECTRICAL BOX ASM

SHEET 3 PART NO 194963

