

CIRCUIT BREAKER-15 AMP  
93654-02-000  
SCREW  
G52-06-05U  
SPACER-CIRCUIT BREAKER  
141789-01-000

CIRCUIT BREAKER-6 AMP  
93654-01-000  
SCREW  
G52-06-04U  
G52-06-05U  
SPACER-CIRCUIT BREAKER  
141789-01-000

CIRCUIT BREAKER-55 AMP  
113482-01-000  
SCREW  
G19-10-08U

CIRCUIT BREAKER-20 AMP  
93654-03-000  
SCREW  
G52-06-04U  
G52-06-05U  
SPACER-CIRCUIT BREAKER  
141789-01-000

CIRCUIT BREAKER-30 AMP  
93655-02-000  
SPACER-CIRCUIT BREAKER  
141789-01-000  
SCREW  
G52-06-05U (2)

CIRCUIT BREAKER-6 AMP  
93654-01-000  
SCREW  
G52-06-04U  
G52-06-05U  
SPACER-CIRCUIT BREAKER  
141789-01-000

CIRCUIT BREAKER-55 AMP  
113482-01-000  
SCREW  
G19-10-08U

CIRCUIT BREAKER-30 AMP  
93655-02-000  
SPACER-CIRCUIT BREAKER  
141789-01-000  
SCREW  
G52-06-04U  
G52-06-05U

SLIDEOUT  
COACH FRONT PANEL  
COACH BREAKER PANEL  
AWNING  
ELEC. STEP IGNITION  
ELEC. STEP POWER  
ELEC. STEP CONTROL  
CHASSIS FRONT PANEL  
BATTERY MODE SOLENOID AND DISCONNECT RELAY LOCATED INSIDE

LABEL-CIRCUIT BREAKER  
93236-79-000

PLATE-CIRCUIT BREAKER  
118531-10-CHT  
SCREW  
G39-08-089 (2)

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265





DSNR:		ALL DIMENSIONS ARE IN MILLIMETERS	
DIFFR:		MATERIAL:	
UNSPECIFIED TOLERANCES:			
WHOLE DIM (X)	3		
ONE-PLACE (X.X)	1.5		
TWO-PLACE (X.XX)	0.50		
ANGLE	1°		
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES		WEIGHT: (LBS)	FIRST USED:
		X	
DESCRIPTION: <b>CHASSIS ELECTRICAL BOX ASM</b>			
SHEET:	ITEM/PART NO.:	REV:	
1 OF 2	000013520 / 31170101000		
REF:		1 04-Aug-2017	

- NOTES:
- 2 USE THE LONGER SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.
  - 1 REPLACE EXISTING SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

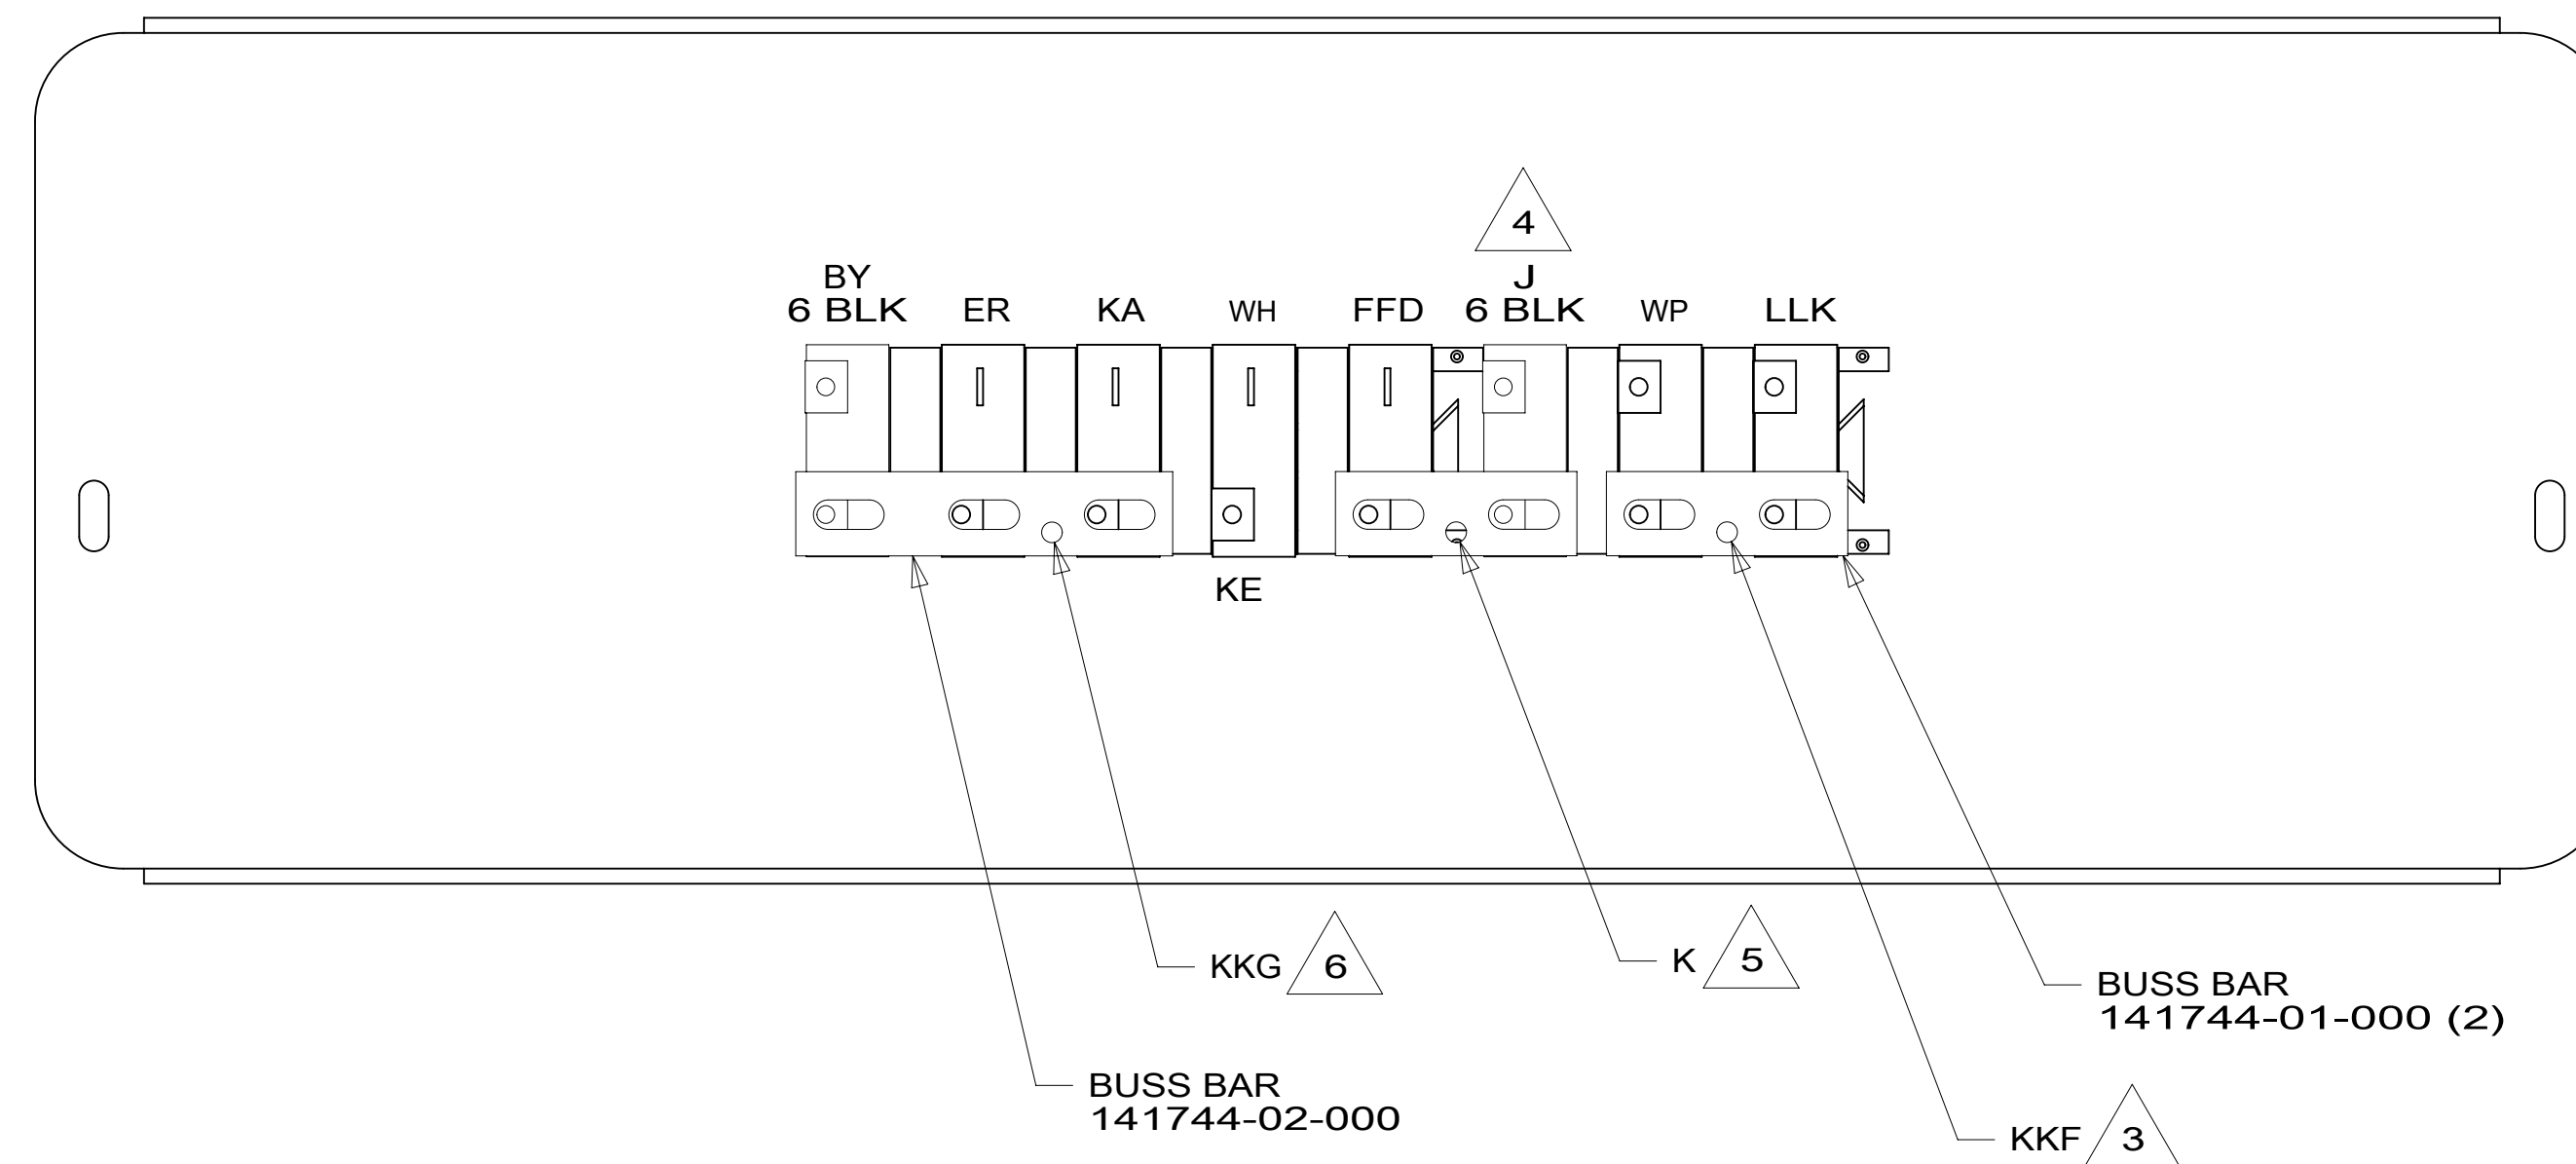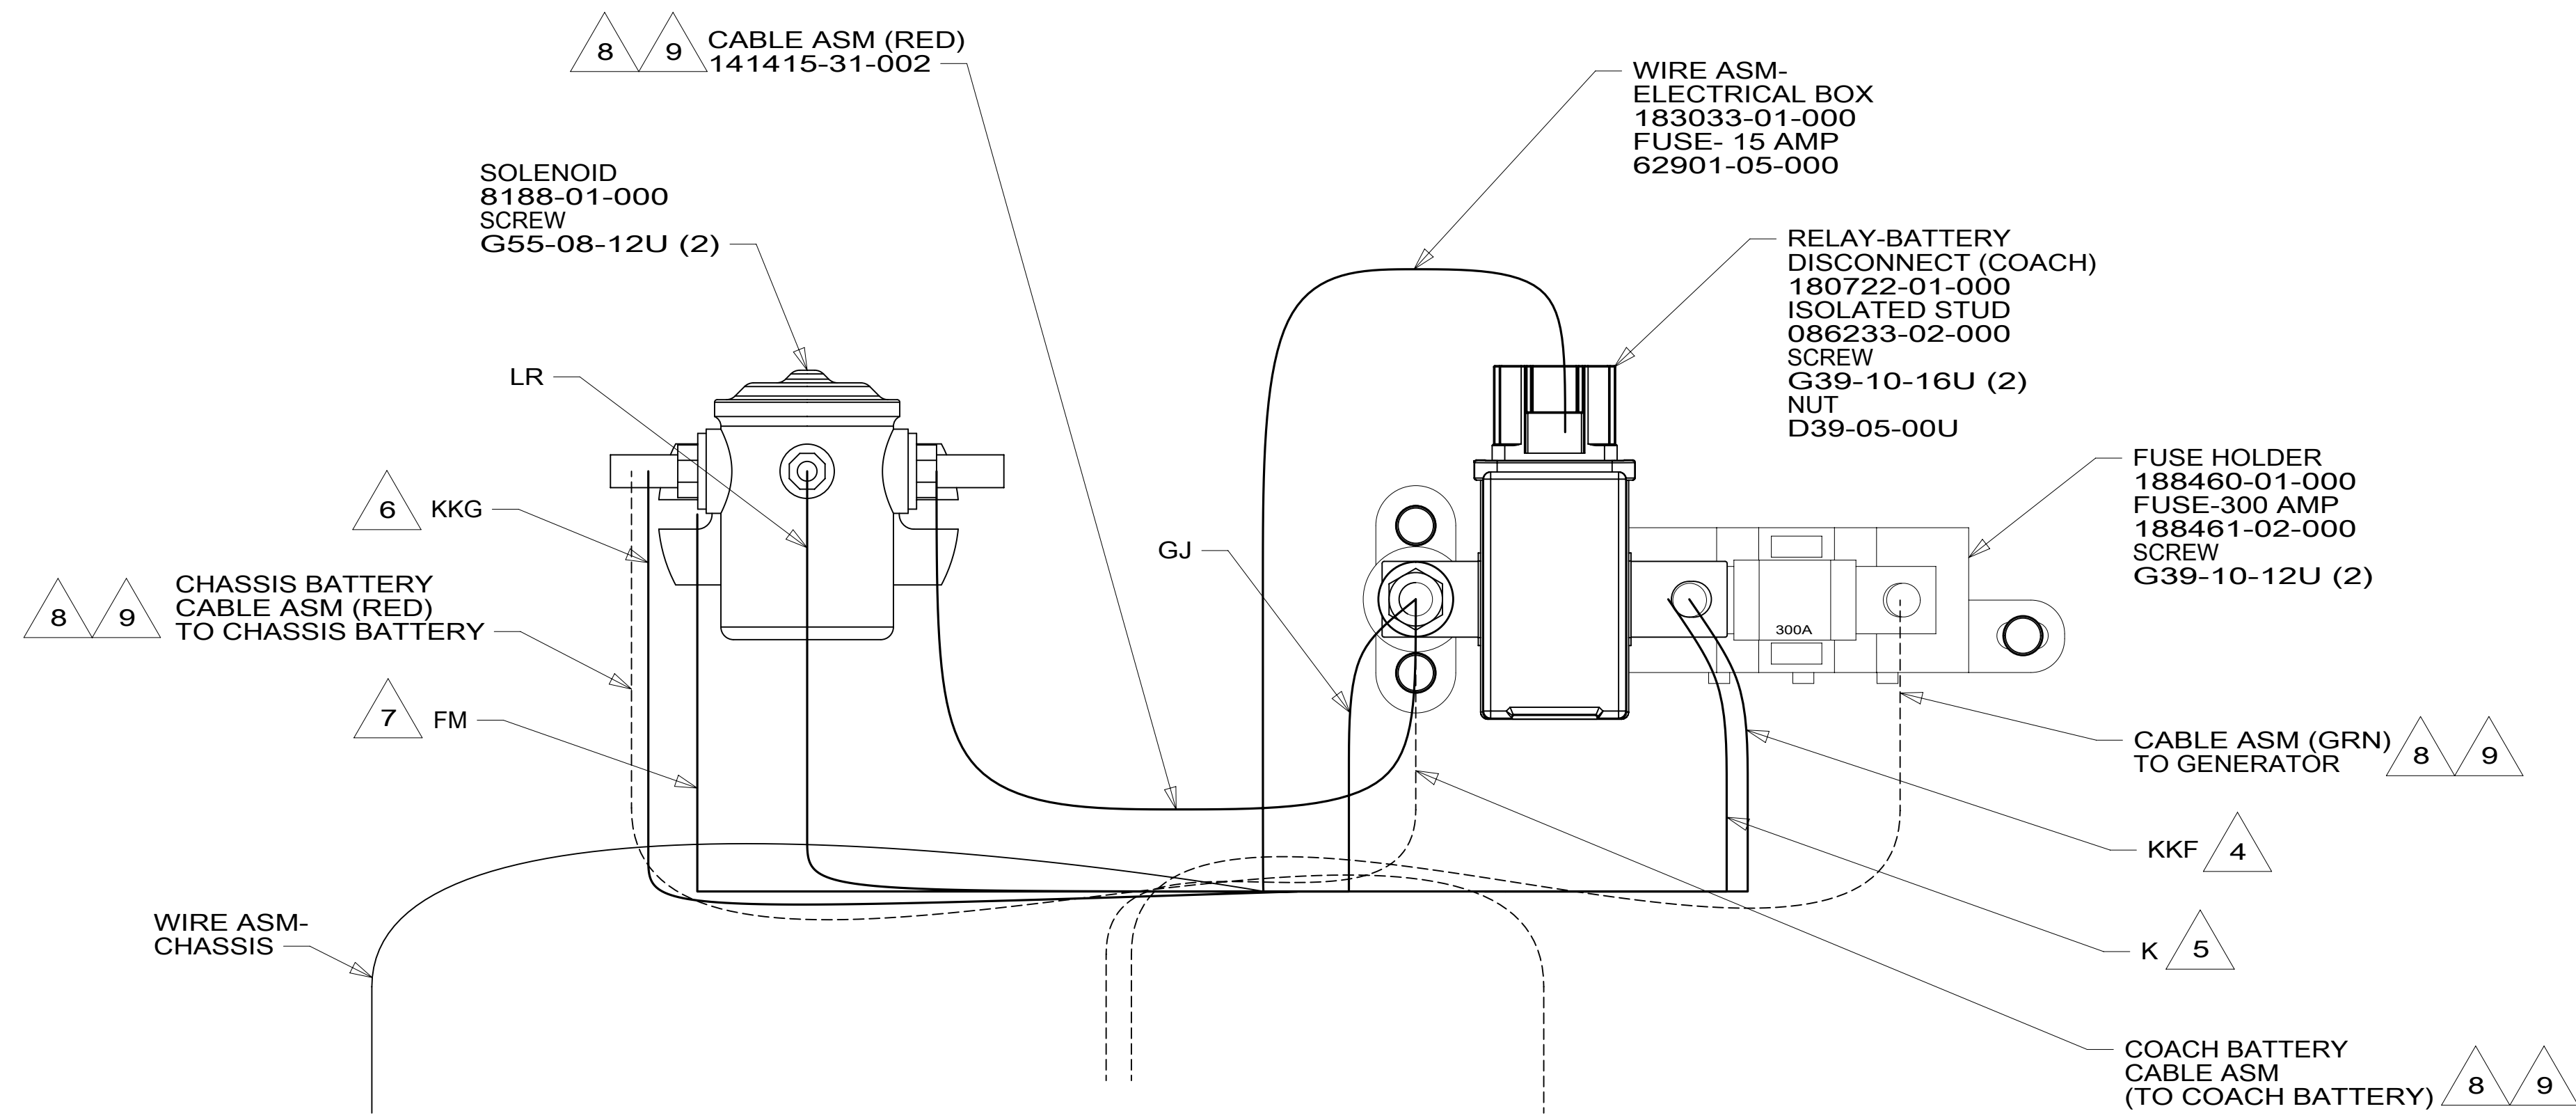

DETAIL BA

- 9 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
- 8 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 7 SECURE WITH SOLENOID MOUNTING SCREW.
- 6 WIRE MARKED WITH RED TAPE.
- 5 WIRE MARKED WITH PURPLE TAPE.
- 4 WIRE MARKED WITH YELLOW TAPE.
- 3 WIRE MARKED WITH 2 WRAPS OF YELLOW TAPE.

2. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
1. LEGEND: — WINNEBAGO: - - - - - CABLE: - - - - - CHASSIS SUPPLIED WIRING.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

DESCRIPTION:  
**CHASSIS ELECTRICAL BOX ASM**

SHEET: 2 OF 2 ITEM/PART NO: 000013520 / 31170101000 REV

FOR ELECTRICAL  
TORQUE  
SPECIFICATIONS  
SEE DWG NO.  
128783-01-000

FOR  
ELECTRICAL  
CALLOUTS  
SEE DWG NO.  
121339-01-000