


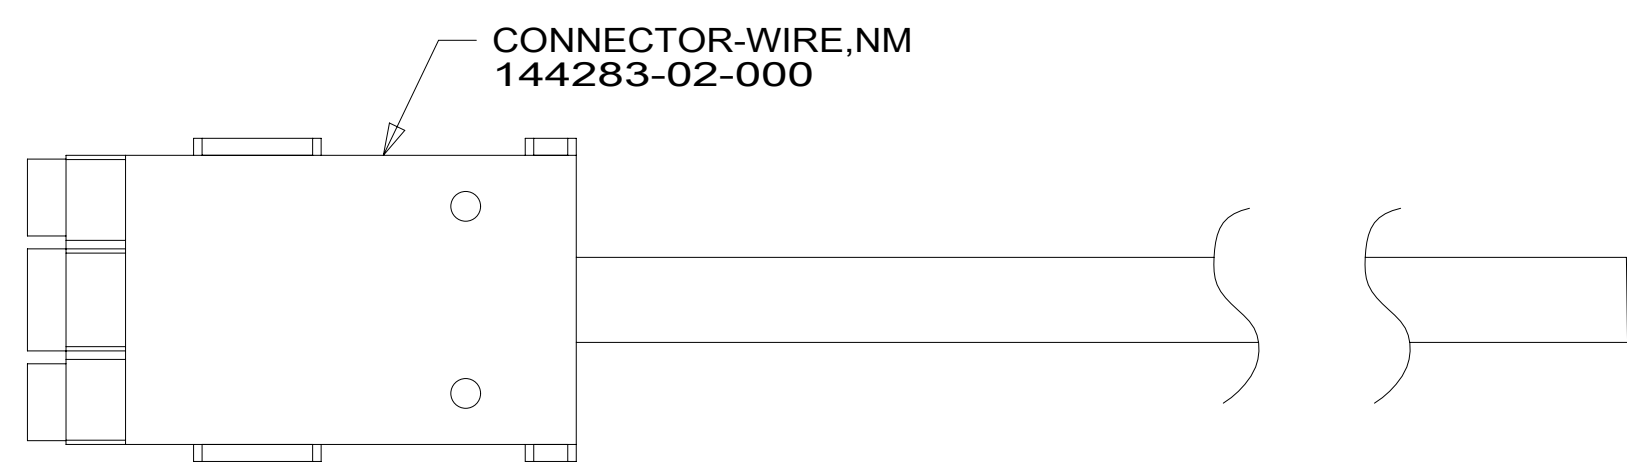
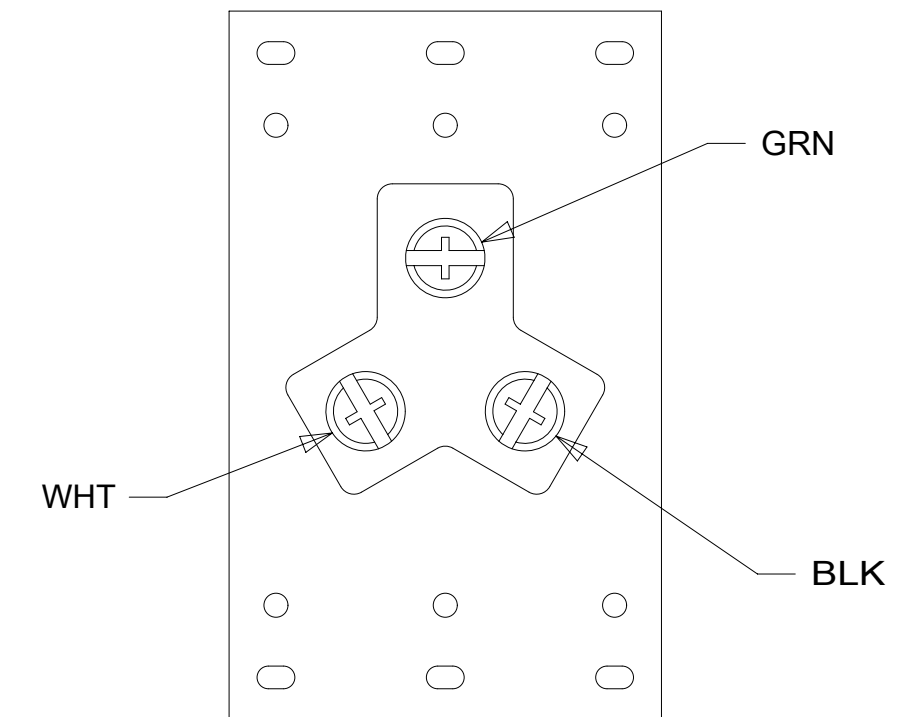
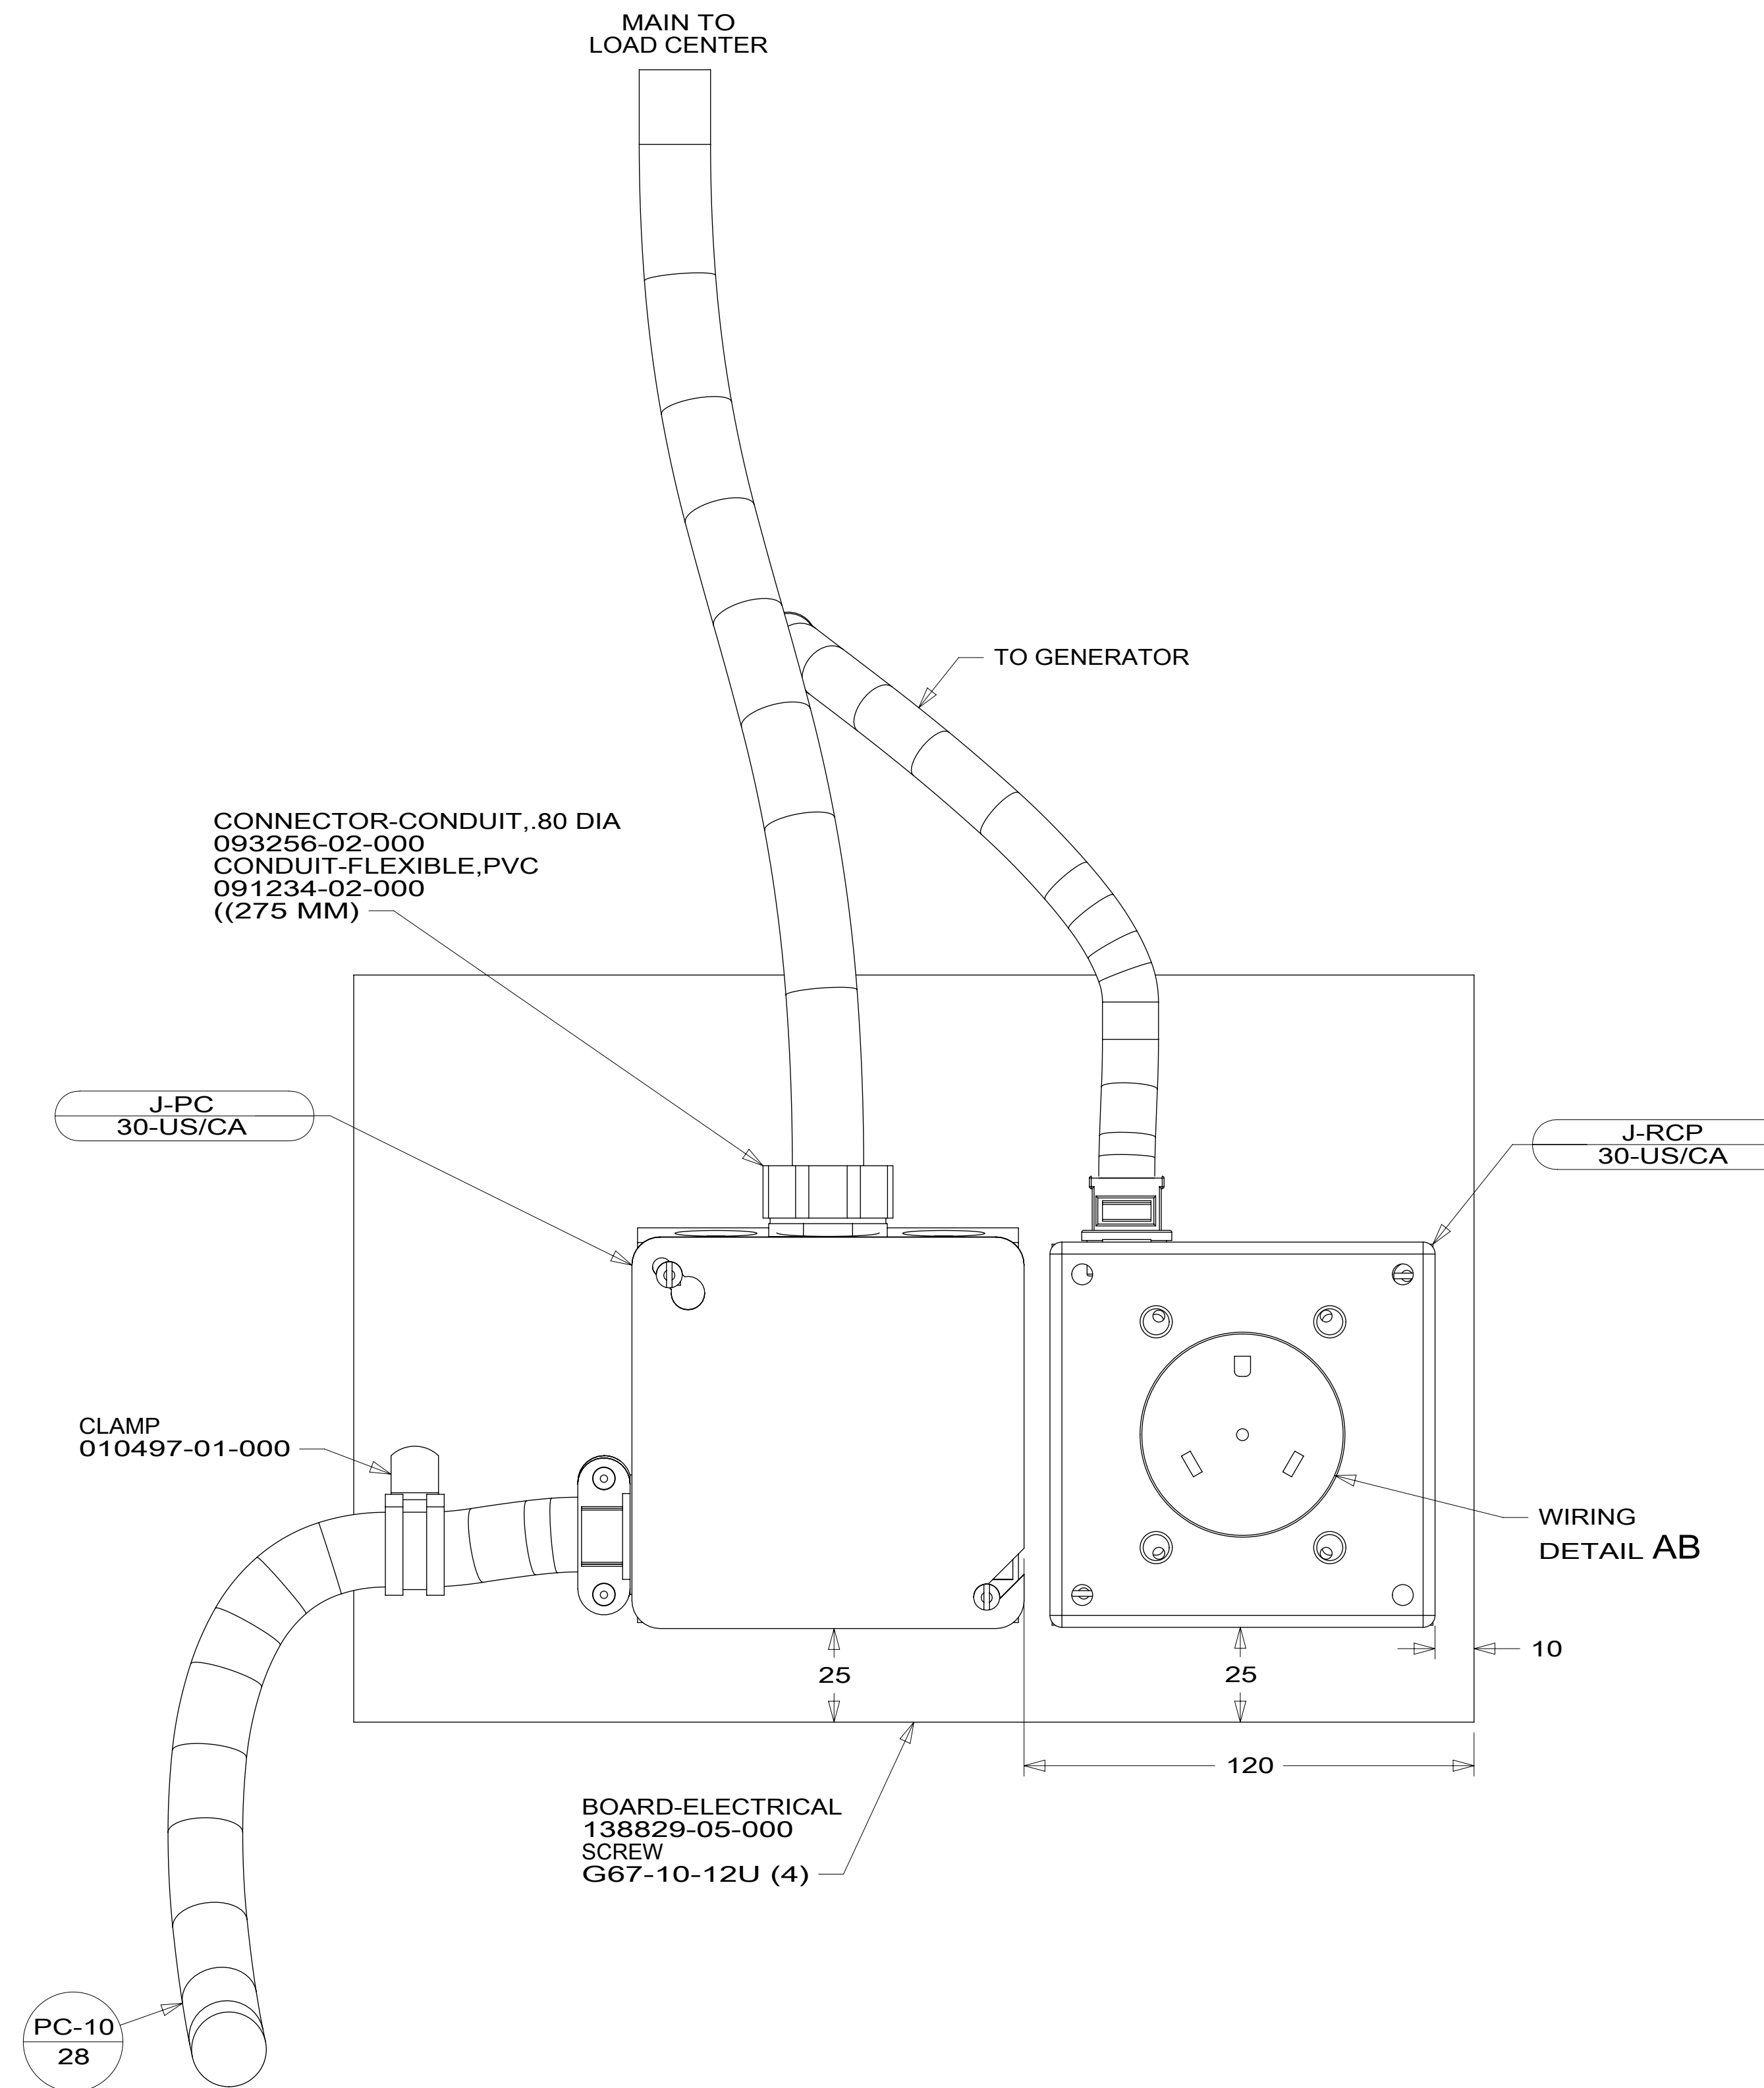


RED	1B1	136135-07-052
	265	136136-07-052
YEL	1B1	136131-05-010 
	265	136134-05-010 
BRN	1B1	136131-03-052
	265	136134-03-052
BLU	1B1	136131-02-087
	265	136134-02-087
MAIN	1B1	136137-01-072
	265	136138-01-072
BLK	1B1	136131-06-012
	265	136134-06-012
THROW IN WIRE #1	1B1	136131-03-070
	265	136134-03-070
THROW IN WIRE #2	1B1	136131-05-012 
	265	136134-05-012 
GROUND MAIN		178545-01-014



DETAIL AA



DETAIL AB  
(BACK VIEW)



 SEE DETAIL AA FOR CONNECTOR INSTALLATION.



1. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.

NOTES:


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

 FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

 CODES/STANDARDS-CSA/CMVSS  
 CODES/STANDARDS USA



DSNR:		ALL DIMENSIONS ARE IN MILLIMETERS 	
DFFR:		MATERIAL:	
UNSPECIFIED TOLERANCES:			
WHOLE DIM (X)	: 3		
ONE-PLACE (X.X)	: 1.5		
TWO-PLACE (X.XX)	: 0.50		
ANGLE	: 1°		
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES		WEIGHT: (LBS)	FIRST USED:
			17 E26HE
DESCRIPTION: <b>LOAD CENTER/ATS ASM</b>			
SHEET: 1 OF 2	ITEM/PART NO: 000013526 / 31171501000	REV	

