

8

7

6

5

4

3

2

1



D

D

CABLE ASM-CHASSIS GND EXT (BLK)	133566-12-018
CABLE ASM-CHASSIS BATTERY DISCONNECT SUPPLY (RED)	141415-32-010
CABLE ASM-COACH BATTERY DISCONNECT SUPPLY (YEL)	141416-52-014
CABLE ASM-COACH BATTERY GND (BLK)	133567-12-008
CABLE ASM-GENERATOR (GRN)	141415-42-071
CABLE ASM-GENERATOR GND (BLK)	133566-12-008
LEVELING SYSTEM POWER CABLE (BLU)	141415-29-020
LEVELING SYSTEM GND CABLE (BLK)	133566-12-008
CABLE ASM-STARTER (RED)	141416-32-016
CABLE ASM-COACH BATTERY FUSE	141416-52-003
CABLE ASM-CHASSIS BATTERY FUSE	141415-32-003

C

C

B

B

A

A

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265



COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.

DSNR:		ALL DIMENSIONS ARE IN MILLIMETERS	
DFFR:		MATERIAL:	
UNSPECIFIED TOLERANCES:			
WHOLE DIM (X)	: 3		
ONE-PLACE (X.X)	: 1.5		
TWO-PLACE (X.XX)	: 0.50		
ANGLE	: 1°		

REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES

WEIGHT: (LBS) FIRST USED: 17 E26HE

BATTERY INSTL

SHEET: 1 OF 4 ITEM/PART NO: 000013566 / 31171701000 REV

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

8

7

6

5


4

3

2

1



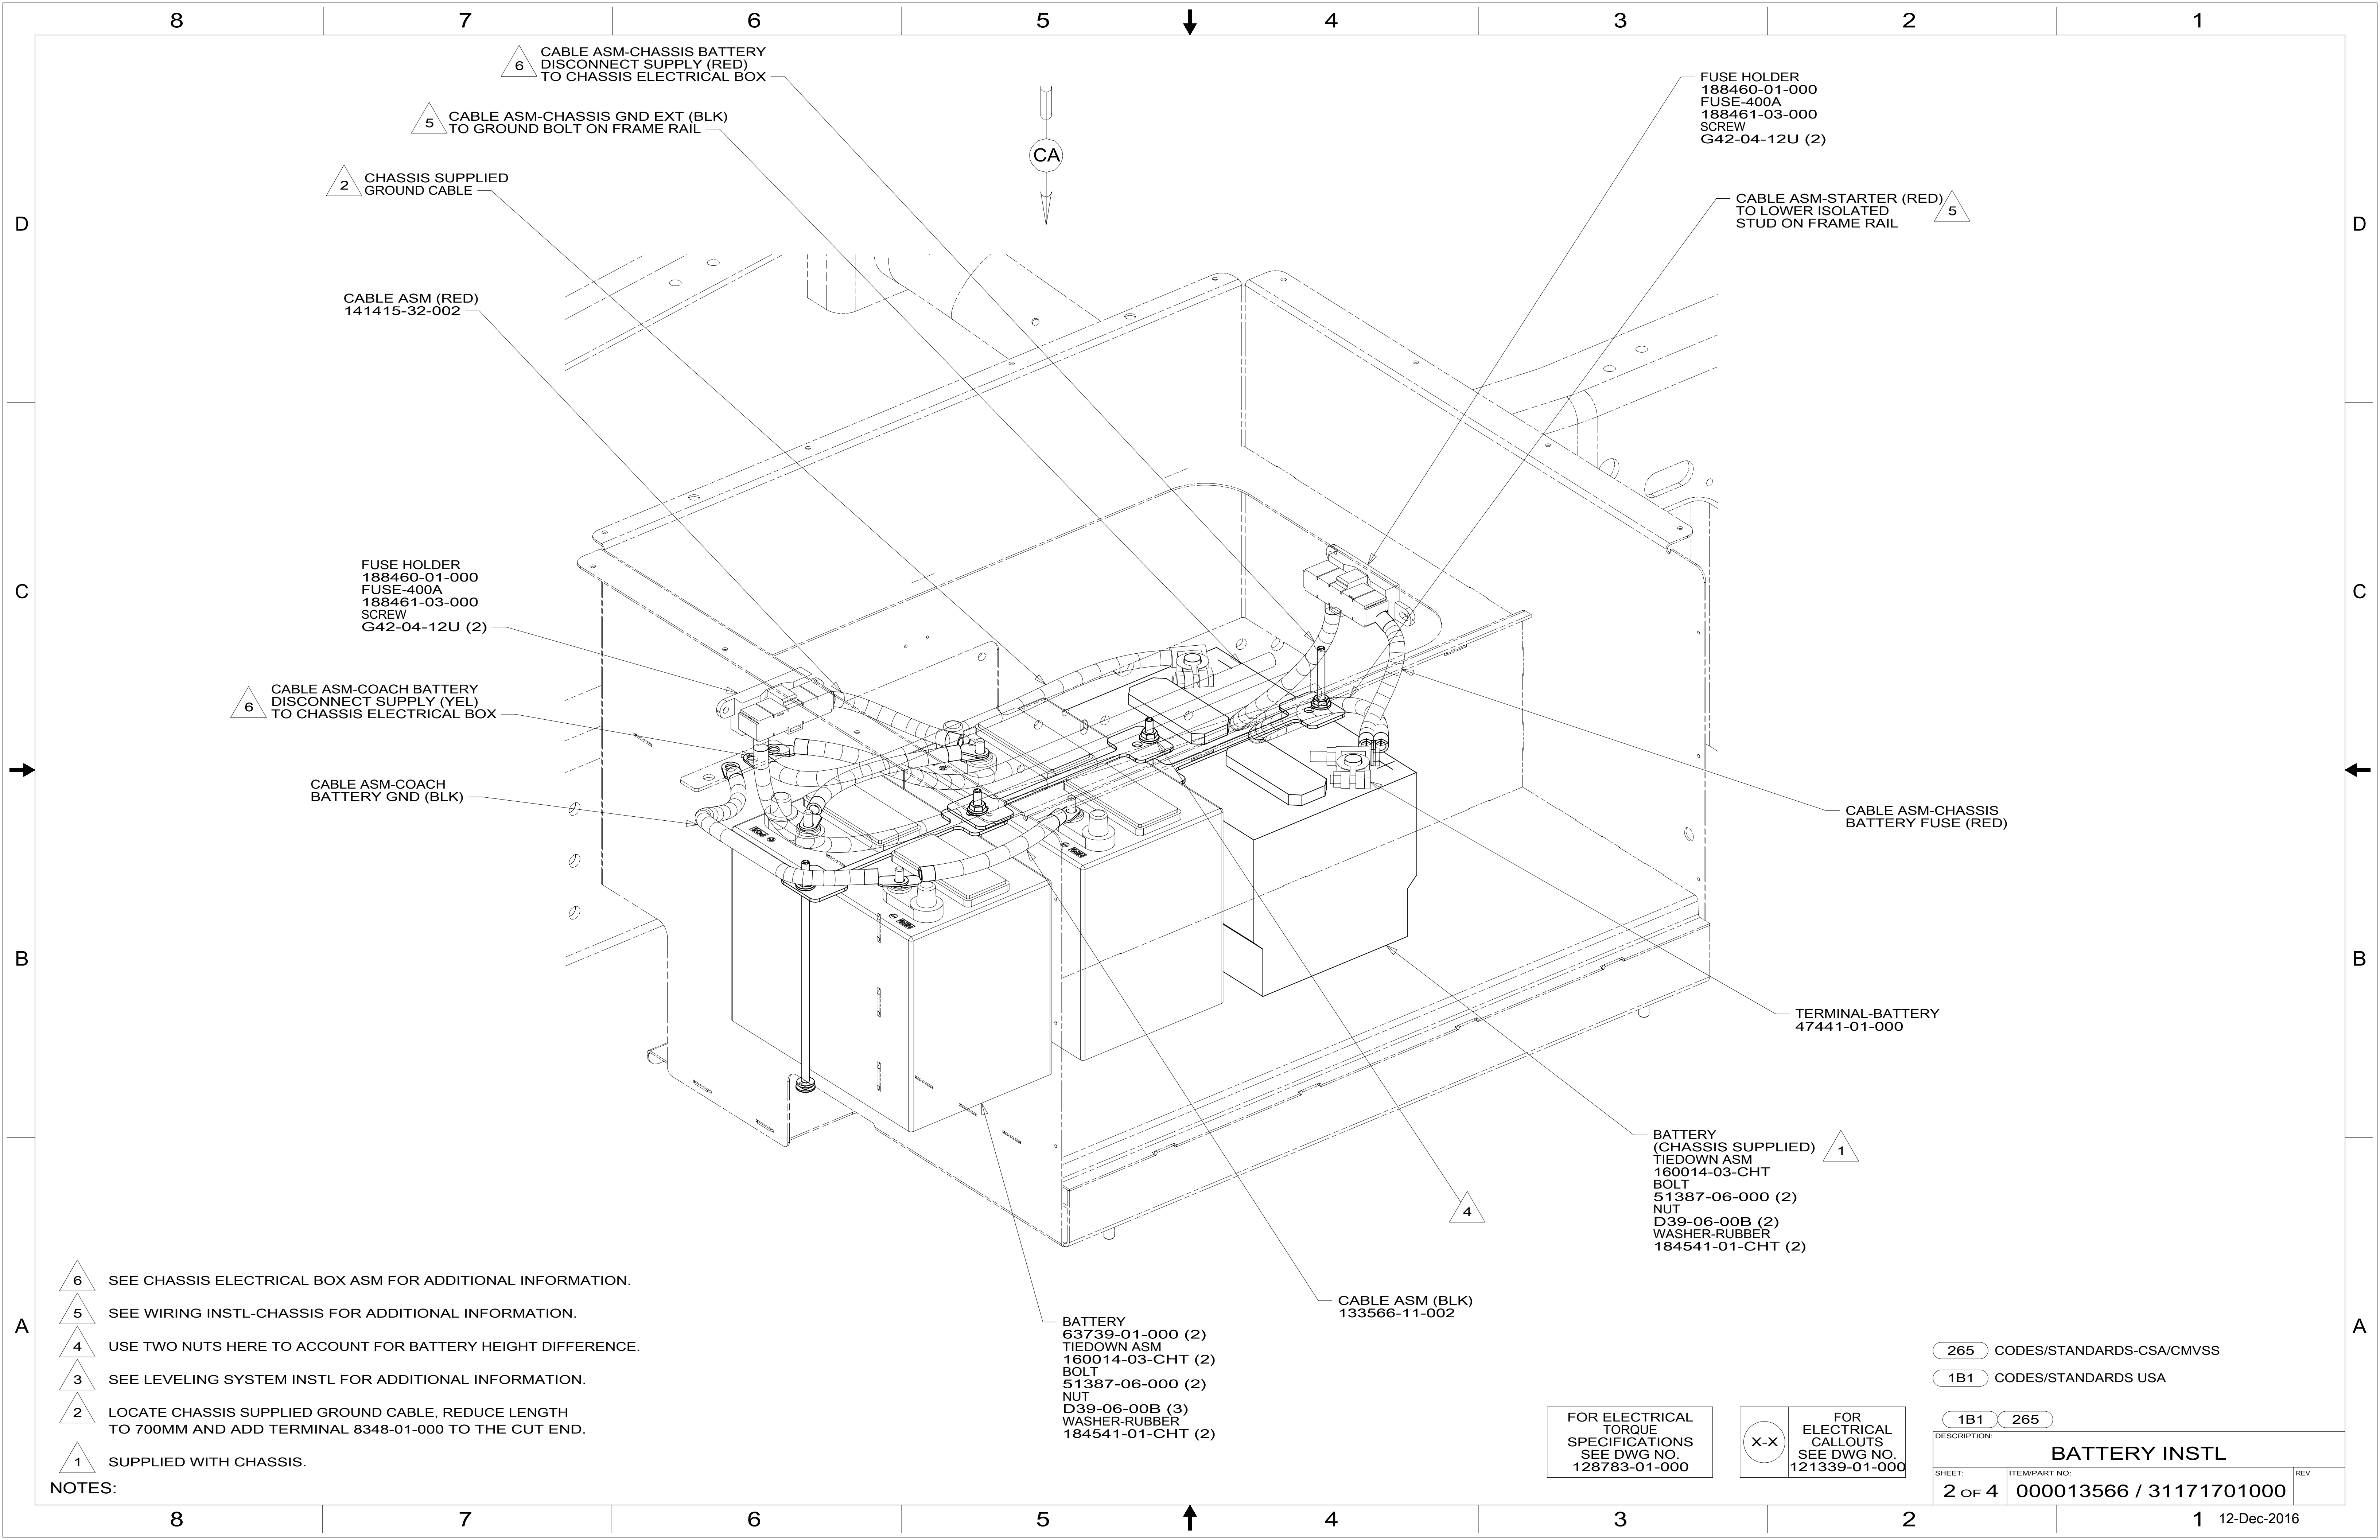

6 CABLE ASM-CHASSIS BATTERY DISCONNECT SUPPLY (RED) TO CHASSIS ELECTRICAL BOX

5 CABLE ASM-CHASSIS GND EXT (BLK) TO GROUND BOLT ON FRAME RAIL

2 CHASSIS SUPPLIED GROUND CABLE

CABLE ASM (RED) 141415-32-002

FUSE HOLDER 188460-01-000 FUSE-400A 188461-03-000 SCREW G42-04-12U (2)

CABLE ASM-STARTER (RED) TO LOWER ISOLATED STUD ON FRAME RAIL 5

CABLE ASM-CHASSIS BATTERY FUSE (RED)

6 CABLE ASM-COACH BATTERY DISCONNECT SUPPLY (YEL) TO CHASSIS ELECTRICAL BOX

CABLE ASM-COACH BATTERY GND (BLK)

6

TERMINAL-BATTERY 47441-01-000

1 BATTERY (CHASSIS SUPPLIED) TIEDOWN ASM 160014-03-CHT BOLT 51387-06-000 (2) NUT D39-06-00B (2) WASHER-RUBBER 184541-01-CHT (2)

4

4 BATTERY 63739-01-000 (2) TIEDOWN ASM 160014-03-CHT (2) BOLT 51387-06-000 (2) NUT D39-06-00B (3) WASHER-RUBBER 184541-01-CHT (2)

4 CABLE ASM (BLK) 133566-11-002

- 6 SEE CHASSIS ELECTRICAL BOX ASM FOR ADDITIONAL INFORMATION.
- 5 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 4 USE TWO NUTS HERE TO ACCOUNT FOR BATTERY HEIGHT DIFFERENCE.
- 3 SEE LEVELING SYSTEM INSTL FOR ADDITIONAL INFORMATION.
- 2 LOCATE CHASSIS SUPPLIED GROUND CABLE, REDUCE LENGTH TO 700MM AND ADD TERMINAL 8348-01-000 TO THE CUT END.
- 1 SUPPLIED WITH CHASSIS.


NOTES:


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA


DESCRIPTION:		1B1 265	
BATTERY INSTL			
SHEET:	ITEM/PART NO.:	REV	
2 OF 4	000013566 / 31171701000		

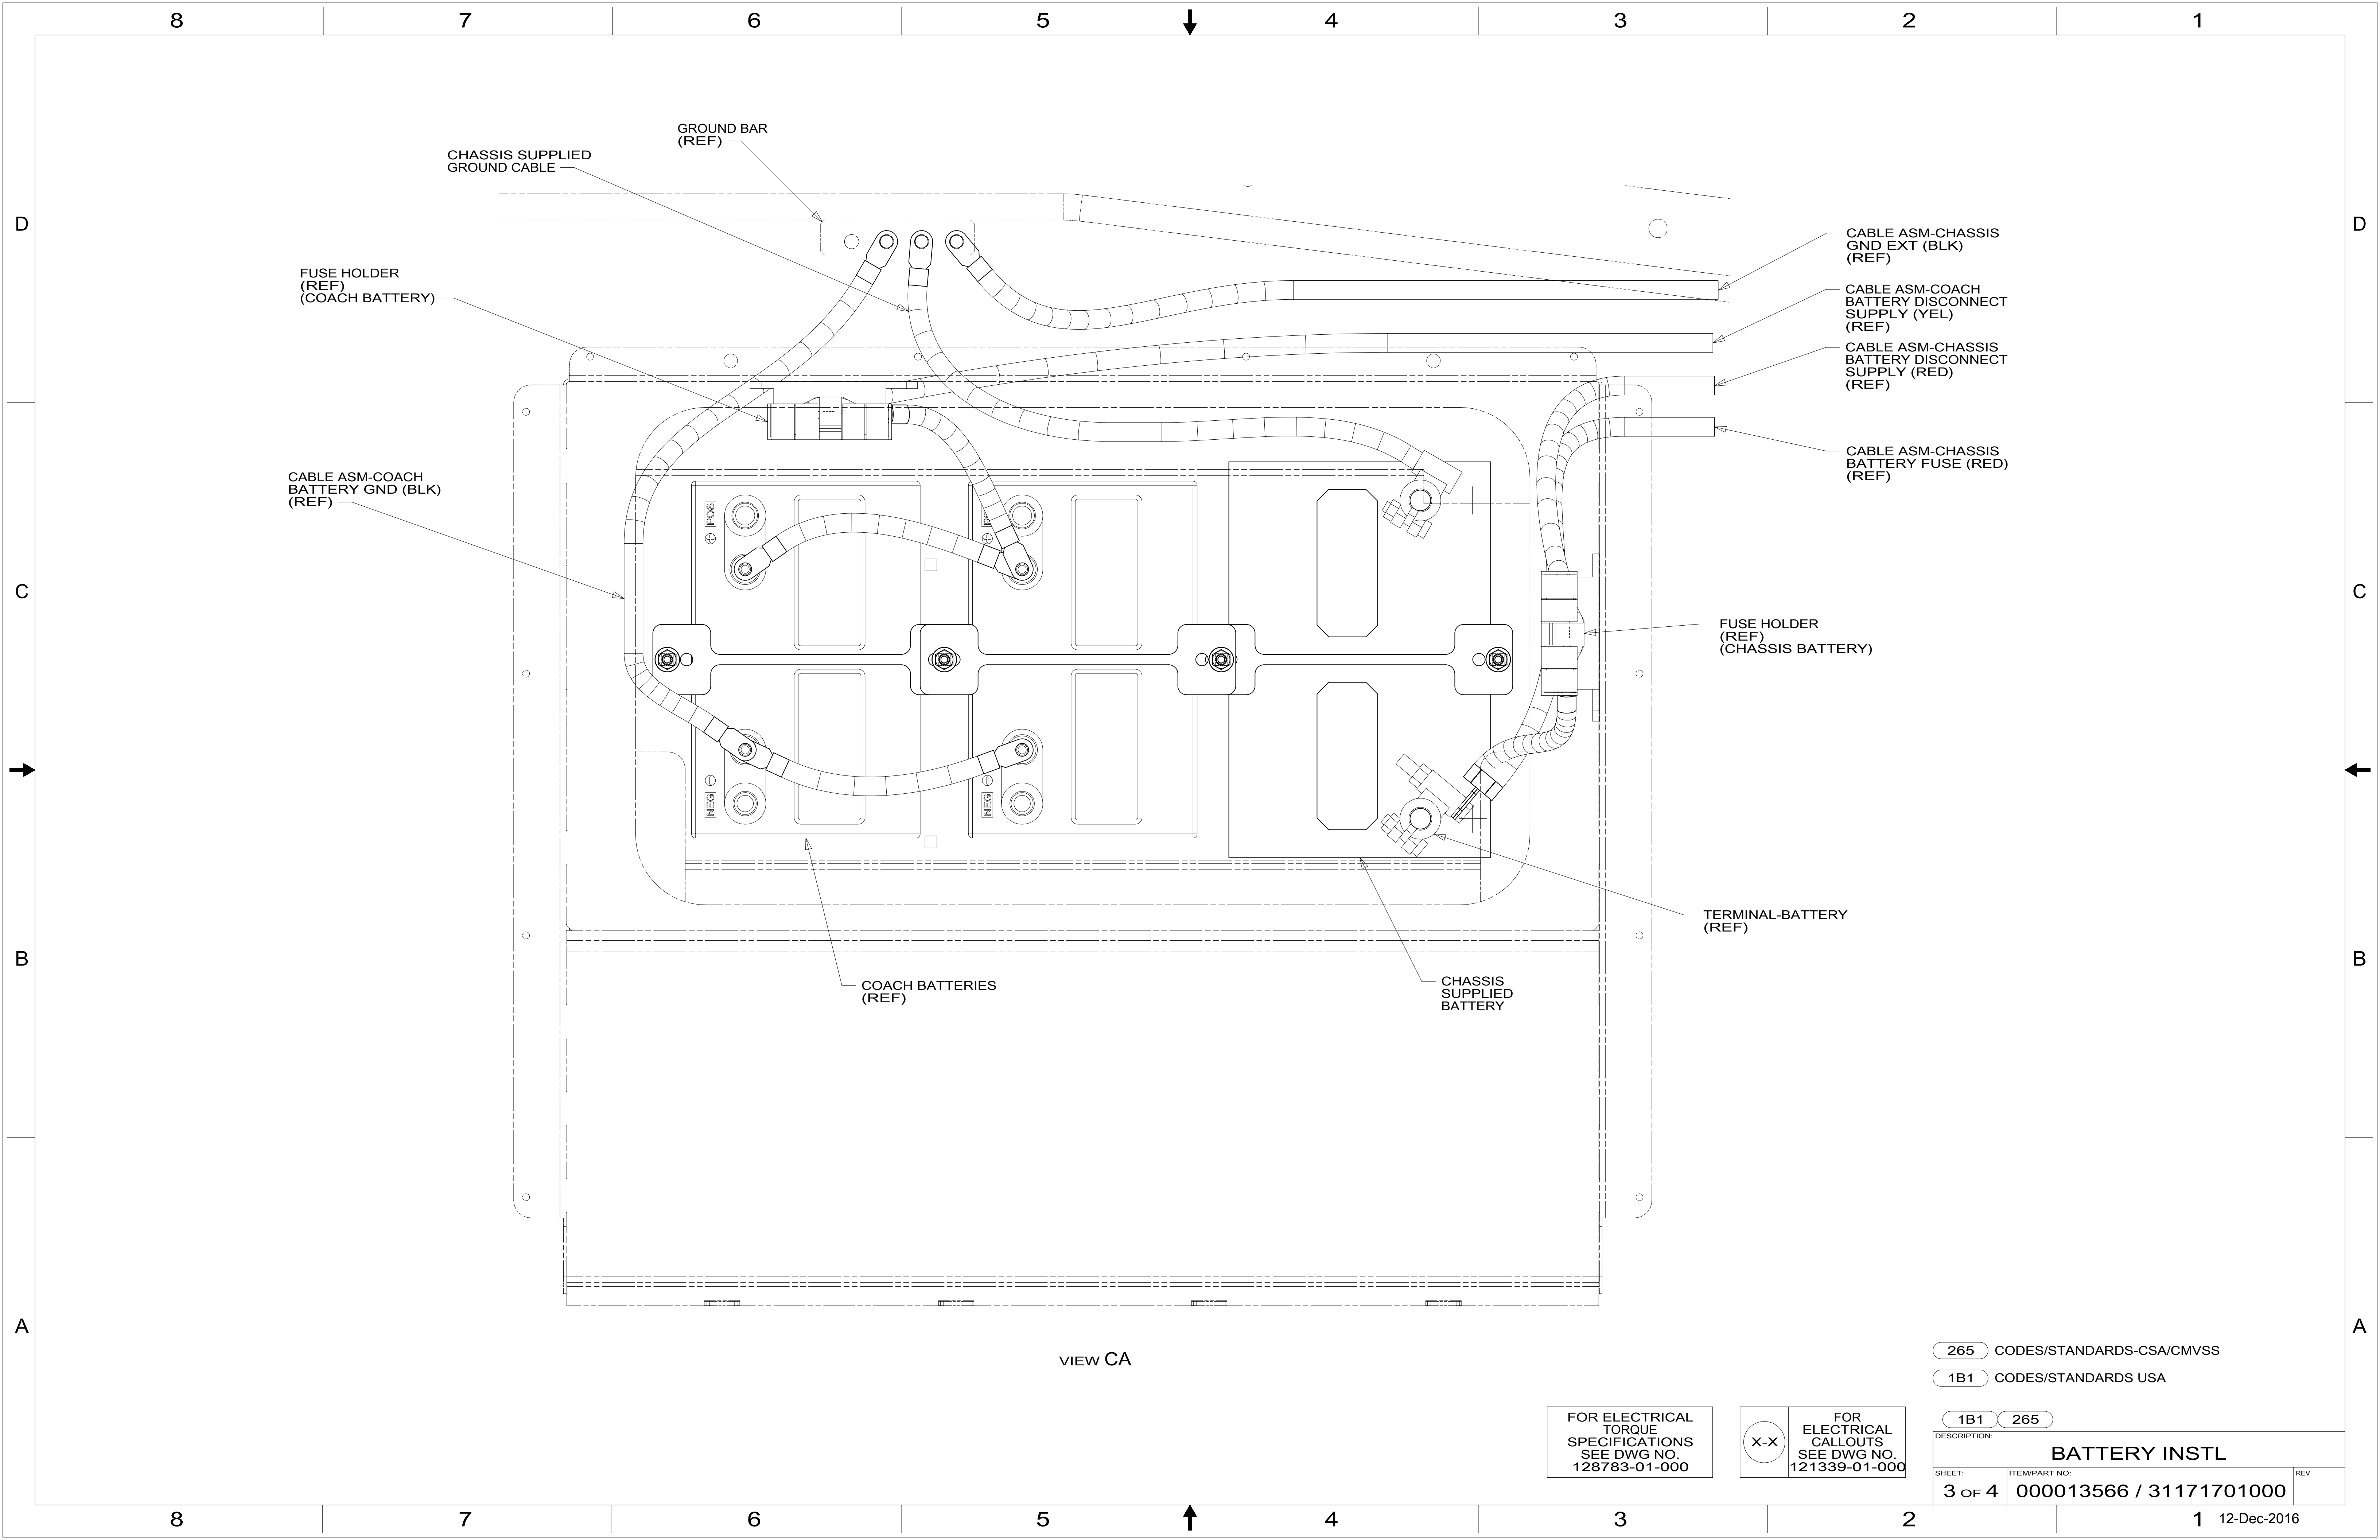

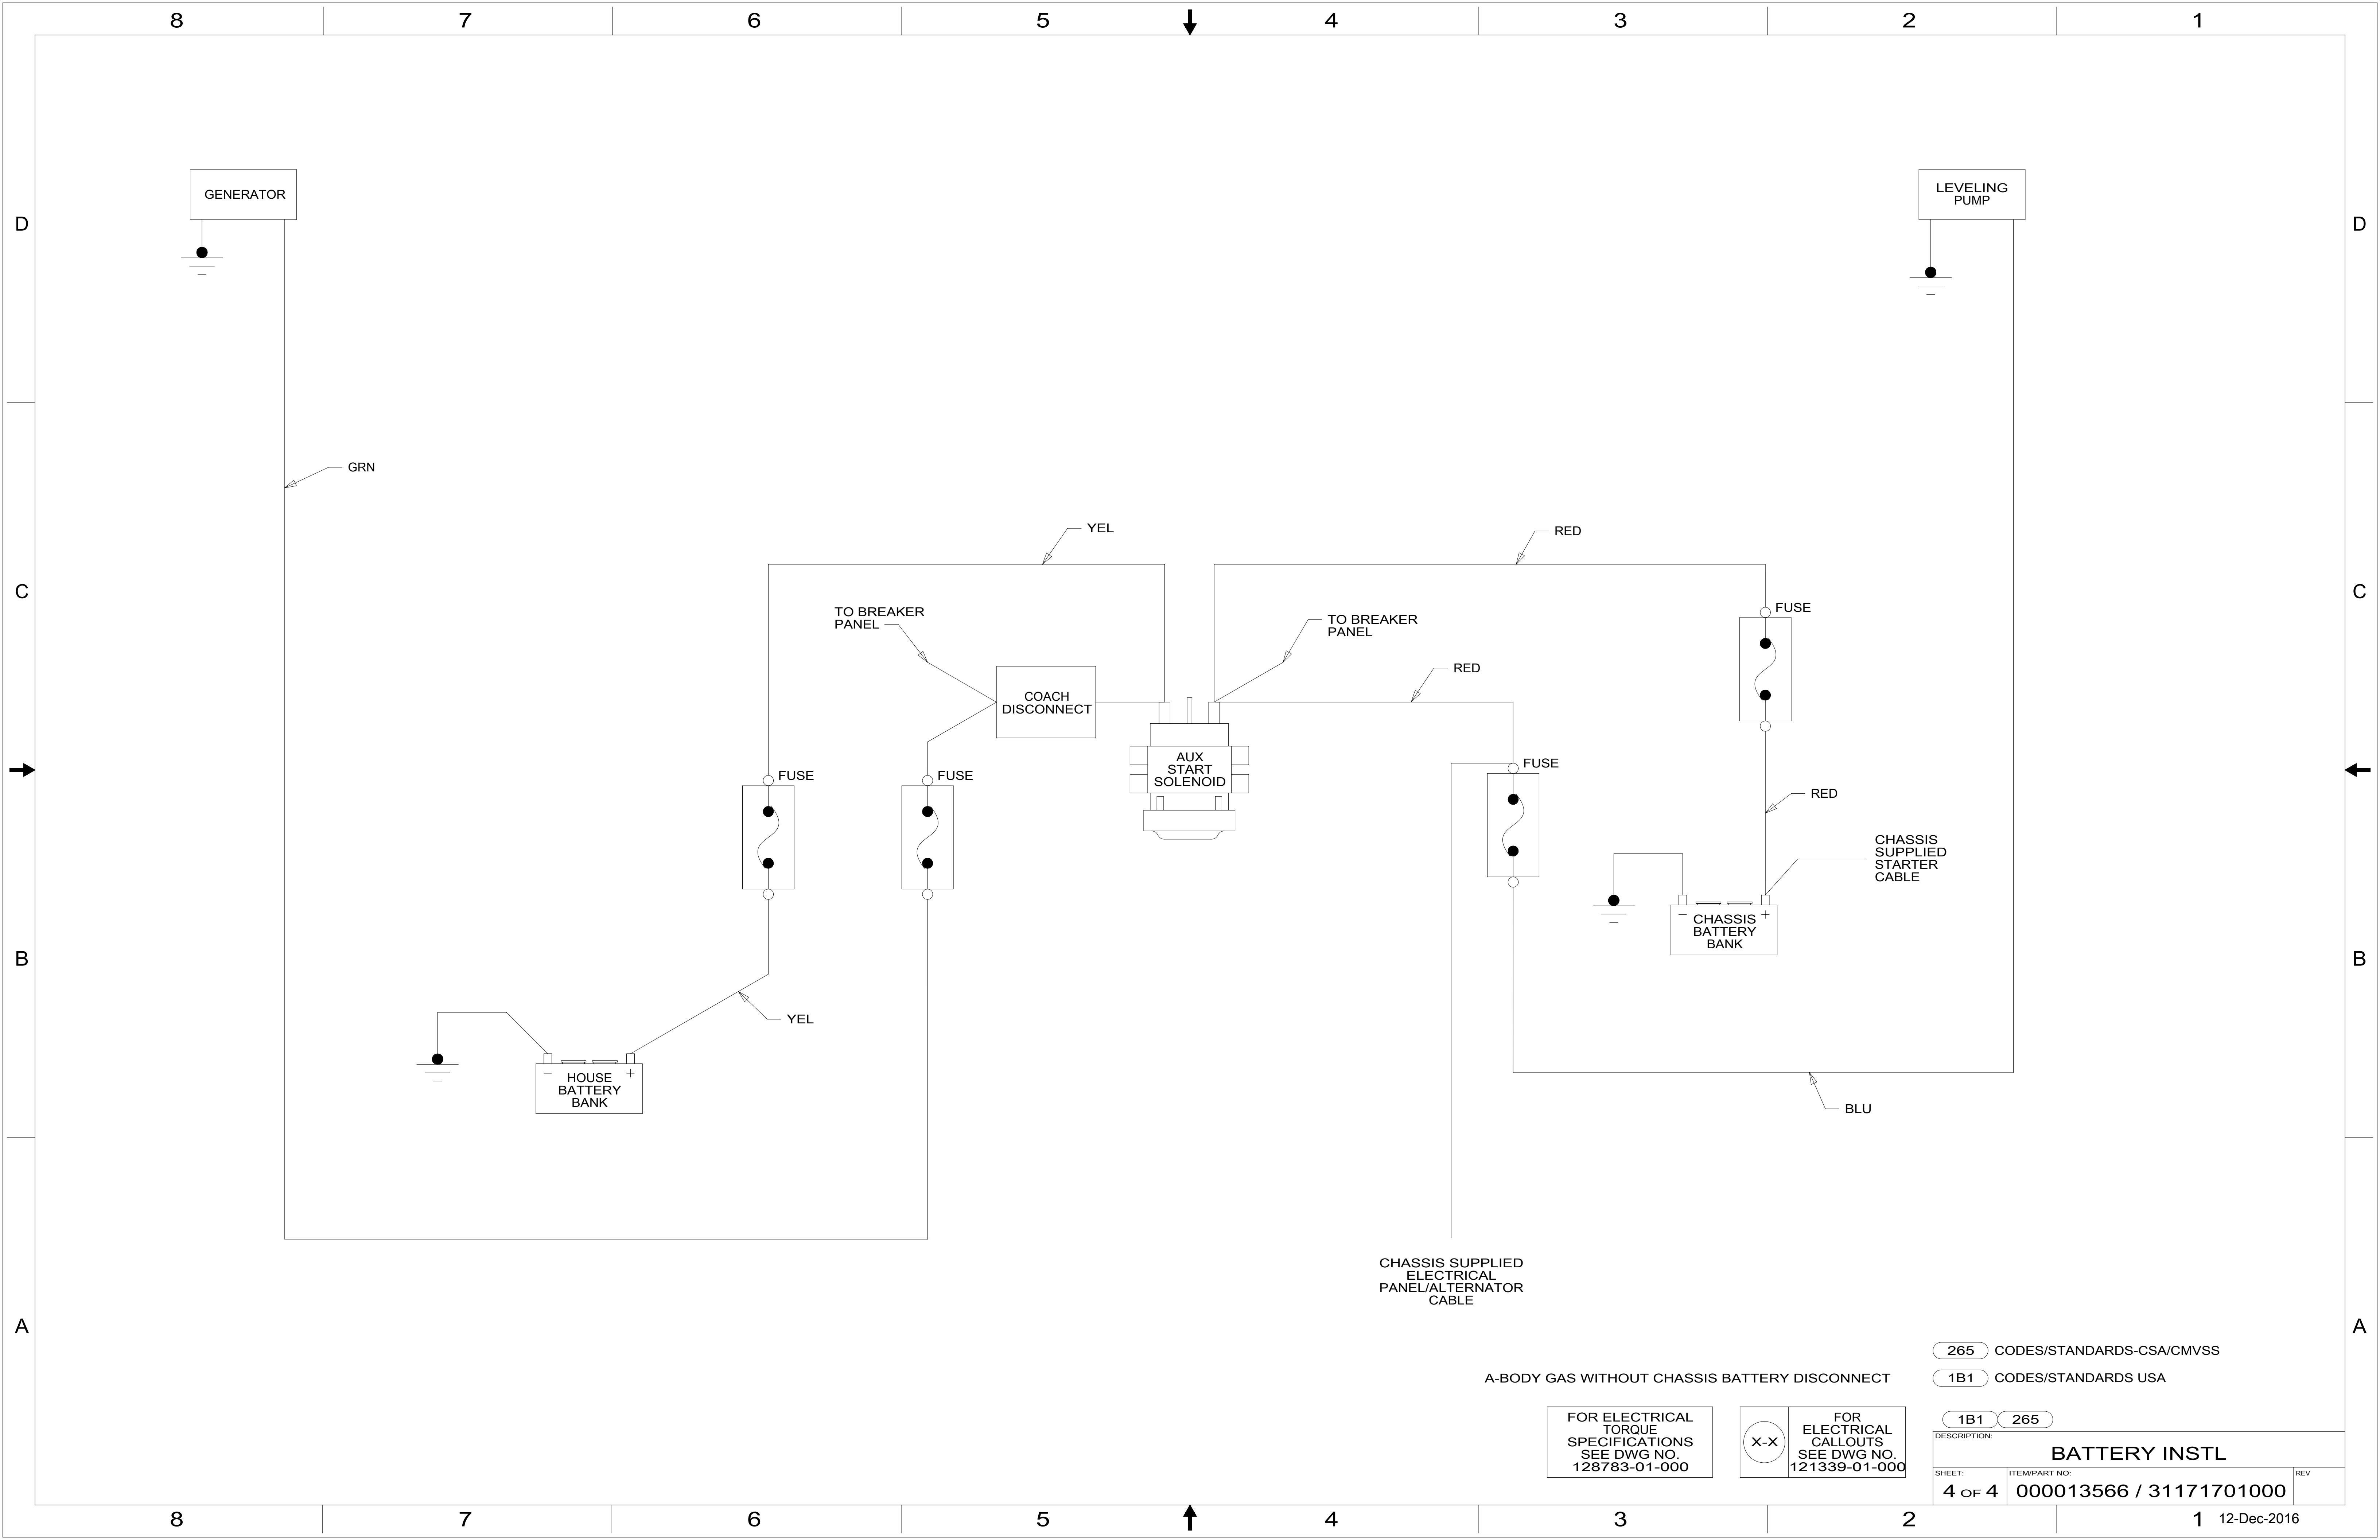

A-BODY GAS WITHOUT CHASSIS BATTERY DISCONNECT

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000



FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION:		1B1 265	
BATTERY INSTL			
SHEET:	ITEM/PART NO.:	REV	
4 OF 4	000013566 / 31171701000		