

8

7

6

5



4

3

2

1

CABLE ASM-CHASSIS BATTERY (RED)	141415-37-030	
CABLE ASM-COACH BATTERY (YEL)	141415-52-007	
CABLE ASM-COACH BATTERY GND (BLK)	133567-12-007	
CABLE ASM-GENERATOR (GRN)	141415-42-039	
CABLE ASM-GENERATOR GND (BLK)	133566-12-005	
CABLE ASM-FRAME GND	133566-12-003	

D

D

C

C

B

B

A

A

- CODES/STANDARDS-CSA/CMVSS
- CODES/STANDARDS USA
-

WINNEBAGO[®]
COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.

DSNR:		ALL DIMENSIONS ARE IN MILLIMETERS	
DIFFR:		MATERIAL:	
UNSPECIFIED TOLERANCES:			
WHOLE DIM (X)	: 3		
ONE-PLACE (X.X)	: 1.5		
TWO-PLACE (X.XX)	: 0.50		
ANGLE	: 1°		
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES		WEIGHT: (LBS)	FIRST USED:
			17 423T
BATTERY INSTL			
SHEET:	ITEM/PART NO.:	REV:	
1 OF 2	000022574 / 31448901000		
REF:			

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- ROUTING OF CABLE SHOWN IN WIRING INSTL-CHASSIS ONLY.
2. BATTERY CABLES ARE NOT TO BE ROUTED OVER BATTERY FILL CAPS.
 1. SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

NOTES:

8

7

6

5




4

3

2

1 04-Jan-2017

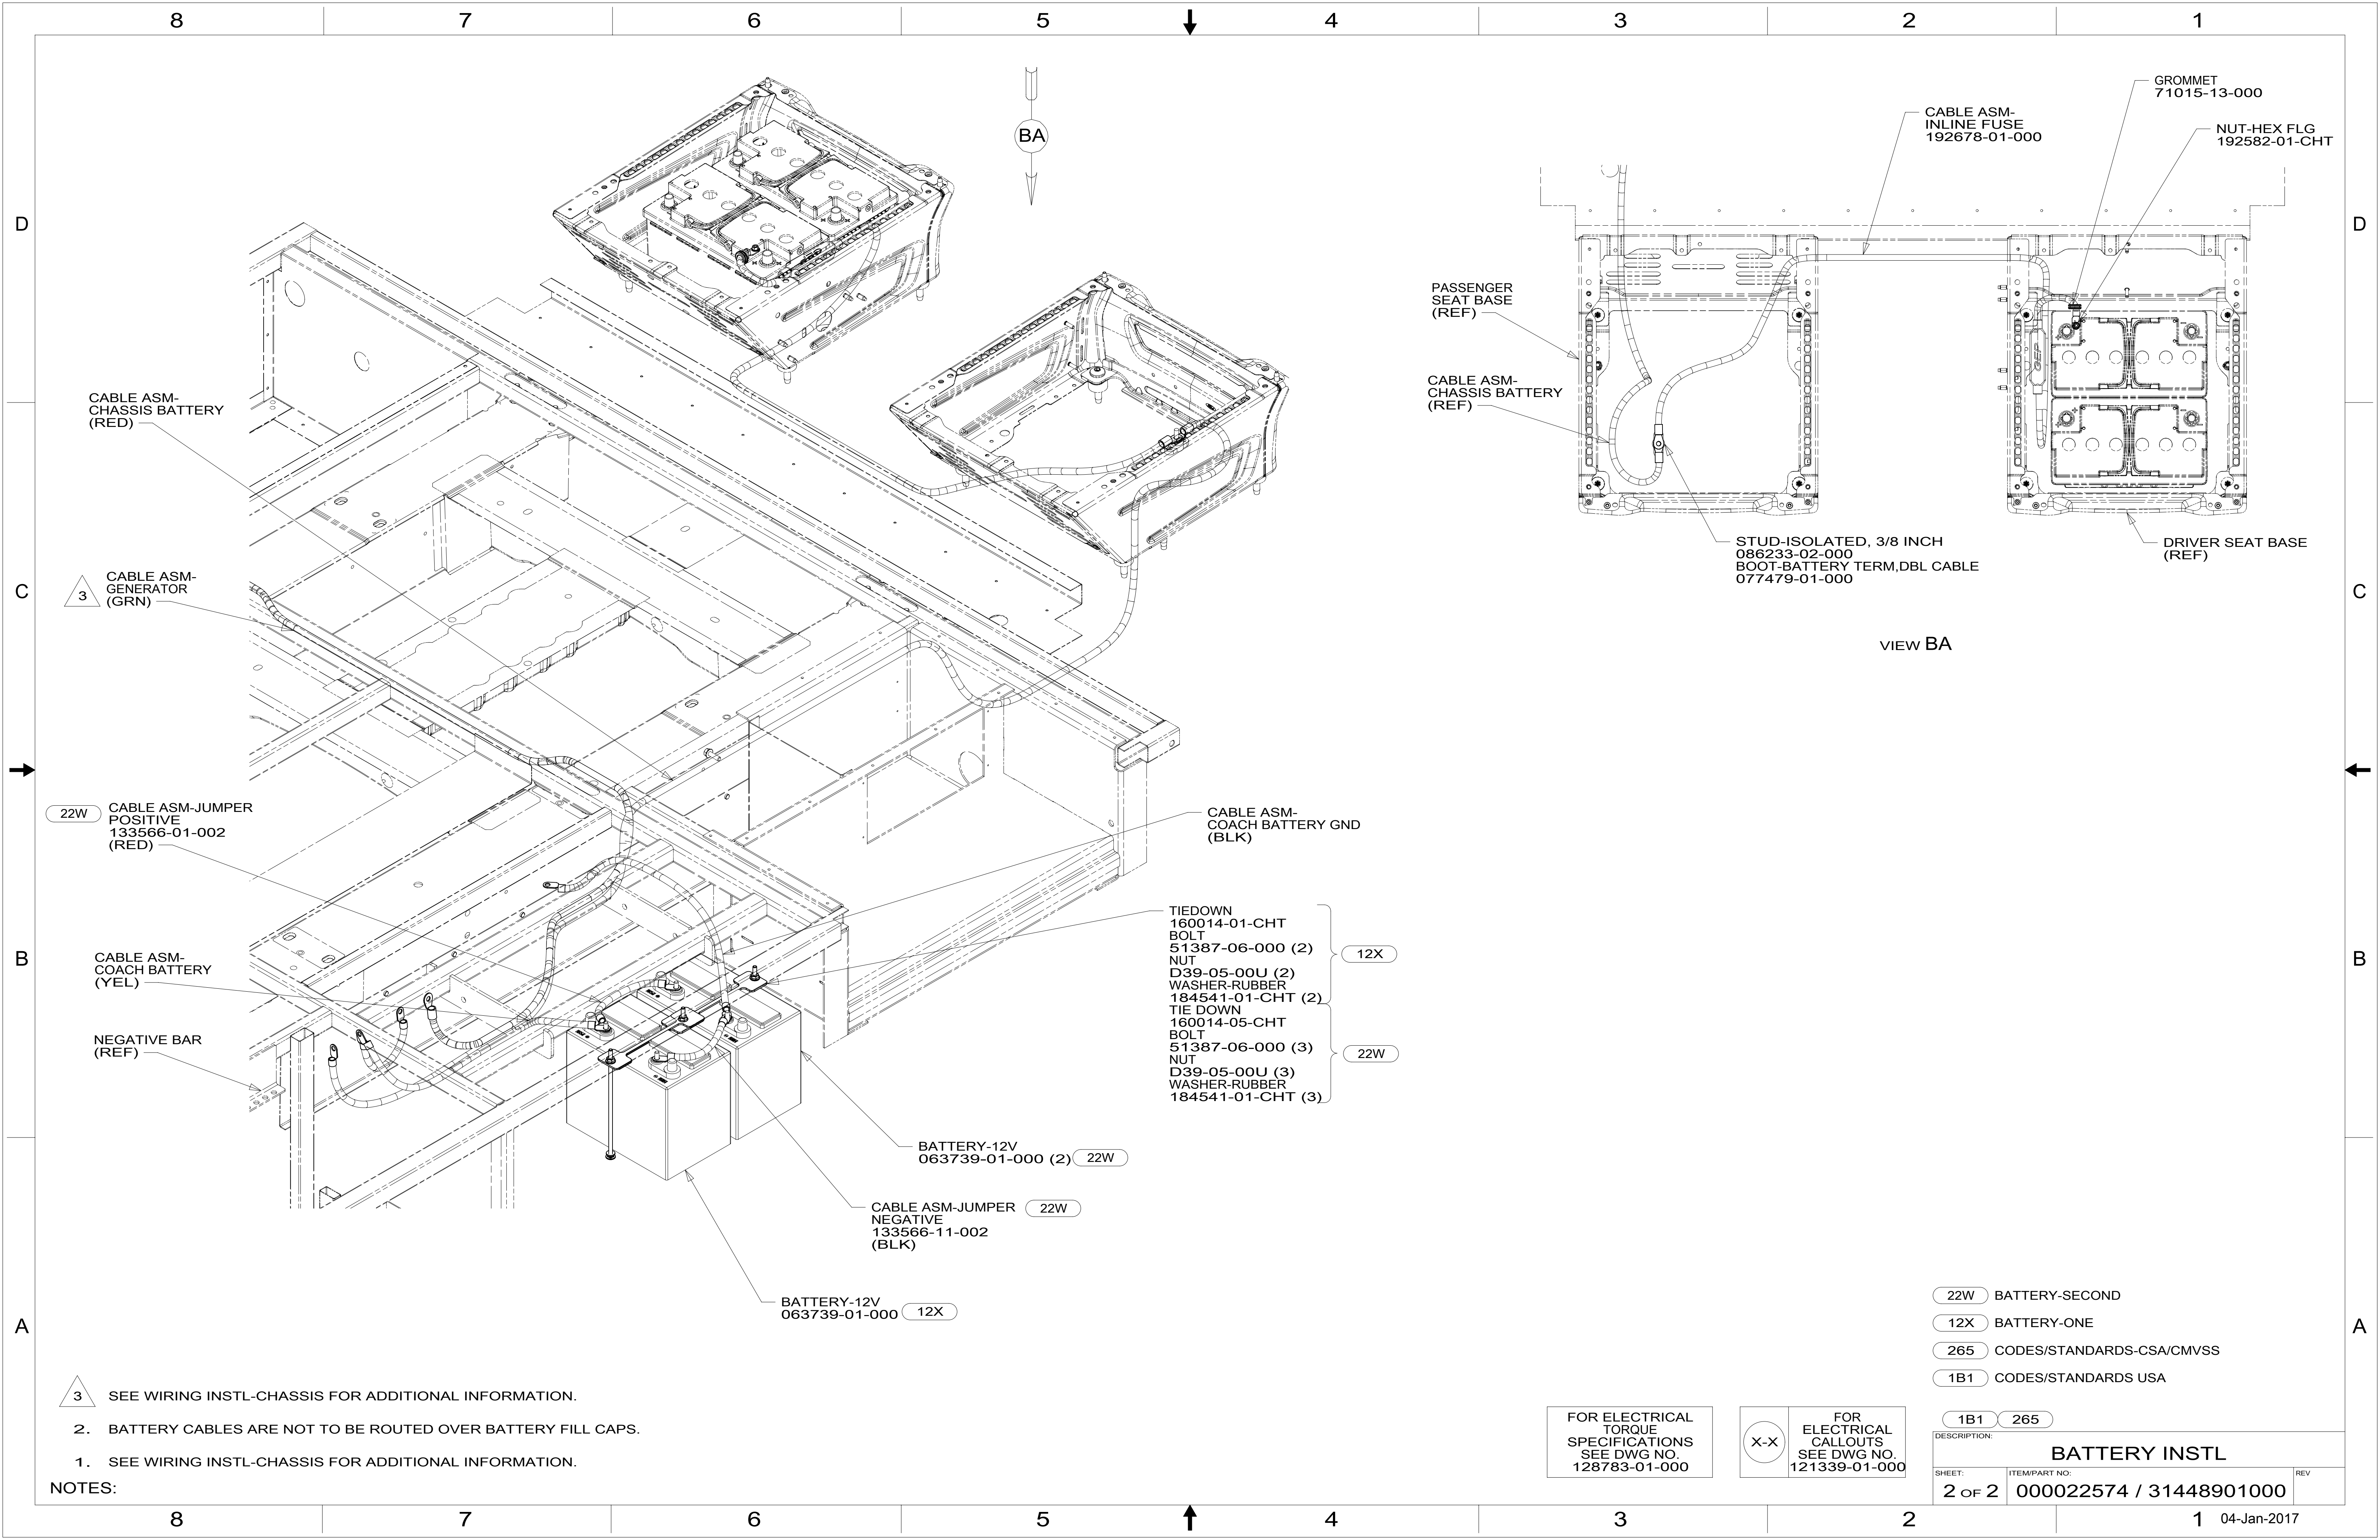

CABLE ASM-
CHASSIS BATTERY
(RED)

3
CABLE ASM-
GENERATOR
(GRN)

22W
CABLE ASM-JUMPER
POSITIVE
133566-01-002
(RED)

CABLE ASM-
COACH BATTERY
(YEL)

NEGATIVE BAR
(REF)

BATTERY-12V
063739-01-000 (2) 22W

CABLE ASM-JUMPER 22W
NEGATIVE
133566-11-002
(BLK)

BATTERY-12V
063739-01-000 12X

CABLE ASM-
COACH BATTERY GND
(BLK)

TIEDOWN
160014-01-CHT
BOLT
51387-06-000 (2) 12X
NUT
D39-05-00U (2)
WASHER-RUBBER
184541-01-CHT (2)
TIE DOWN
160014-05-CHT
BOLT
51387-06-000 (3) 22W
NUT
D39-05-00U (3)
WASHER-RUBBER
184541-01-CHT (3)

BA

VIEW BA

PASSENGER
SEAT BASE
(REF)

CABLE ASM-
CHASSIS BATTERY
(REF)

STUD-ISOLATED, 3/8 INCH
086233-02-000
BOOT-BATTERY TERM, DBL CABLE
077479-01-000

CABLE ASM-
INLINE FUSE
192678-01-000

GROMMET
71015-13-000

NUT-HEX FLG
192582-01-CHT

DRIVER SEAT BASE
(REF)

3 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

2. BATTERY CABLES ARE NOT TO BE ROUTED OVER BATTERY FILL CAPS.

1. SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 22W BATTERY-SECOND
- 12X BATTERY-ONE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

DESCRIPTION:

BATTERY INSTL

SHEET:
2 OF 2

ITEM/PART NO:
000022574 / 31448901000

REV

1 04-Jan-2017