




8 7 6 5 4 3 2 1

D  
C  
B  
A

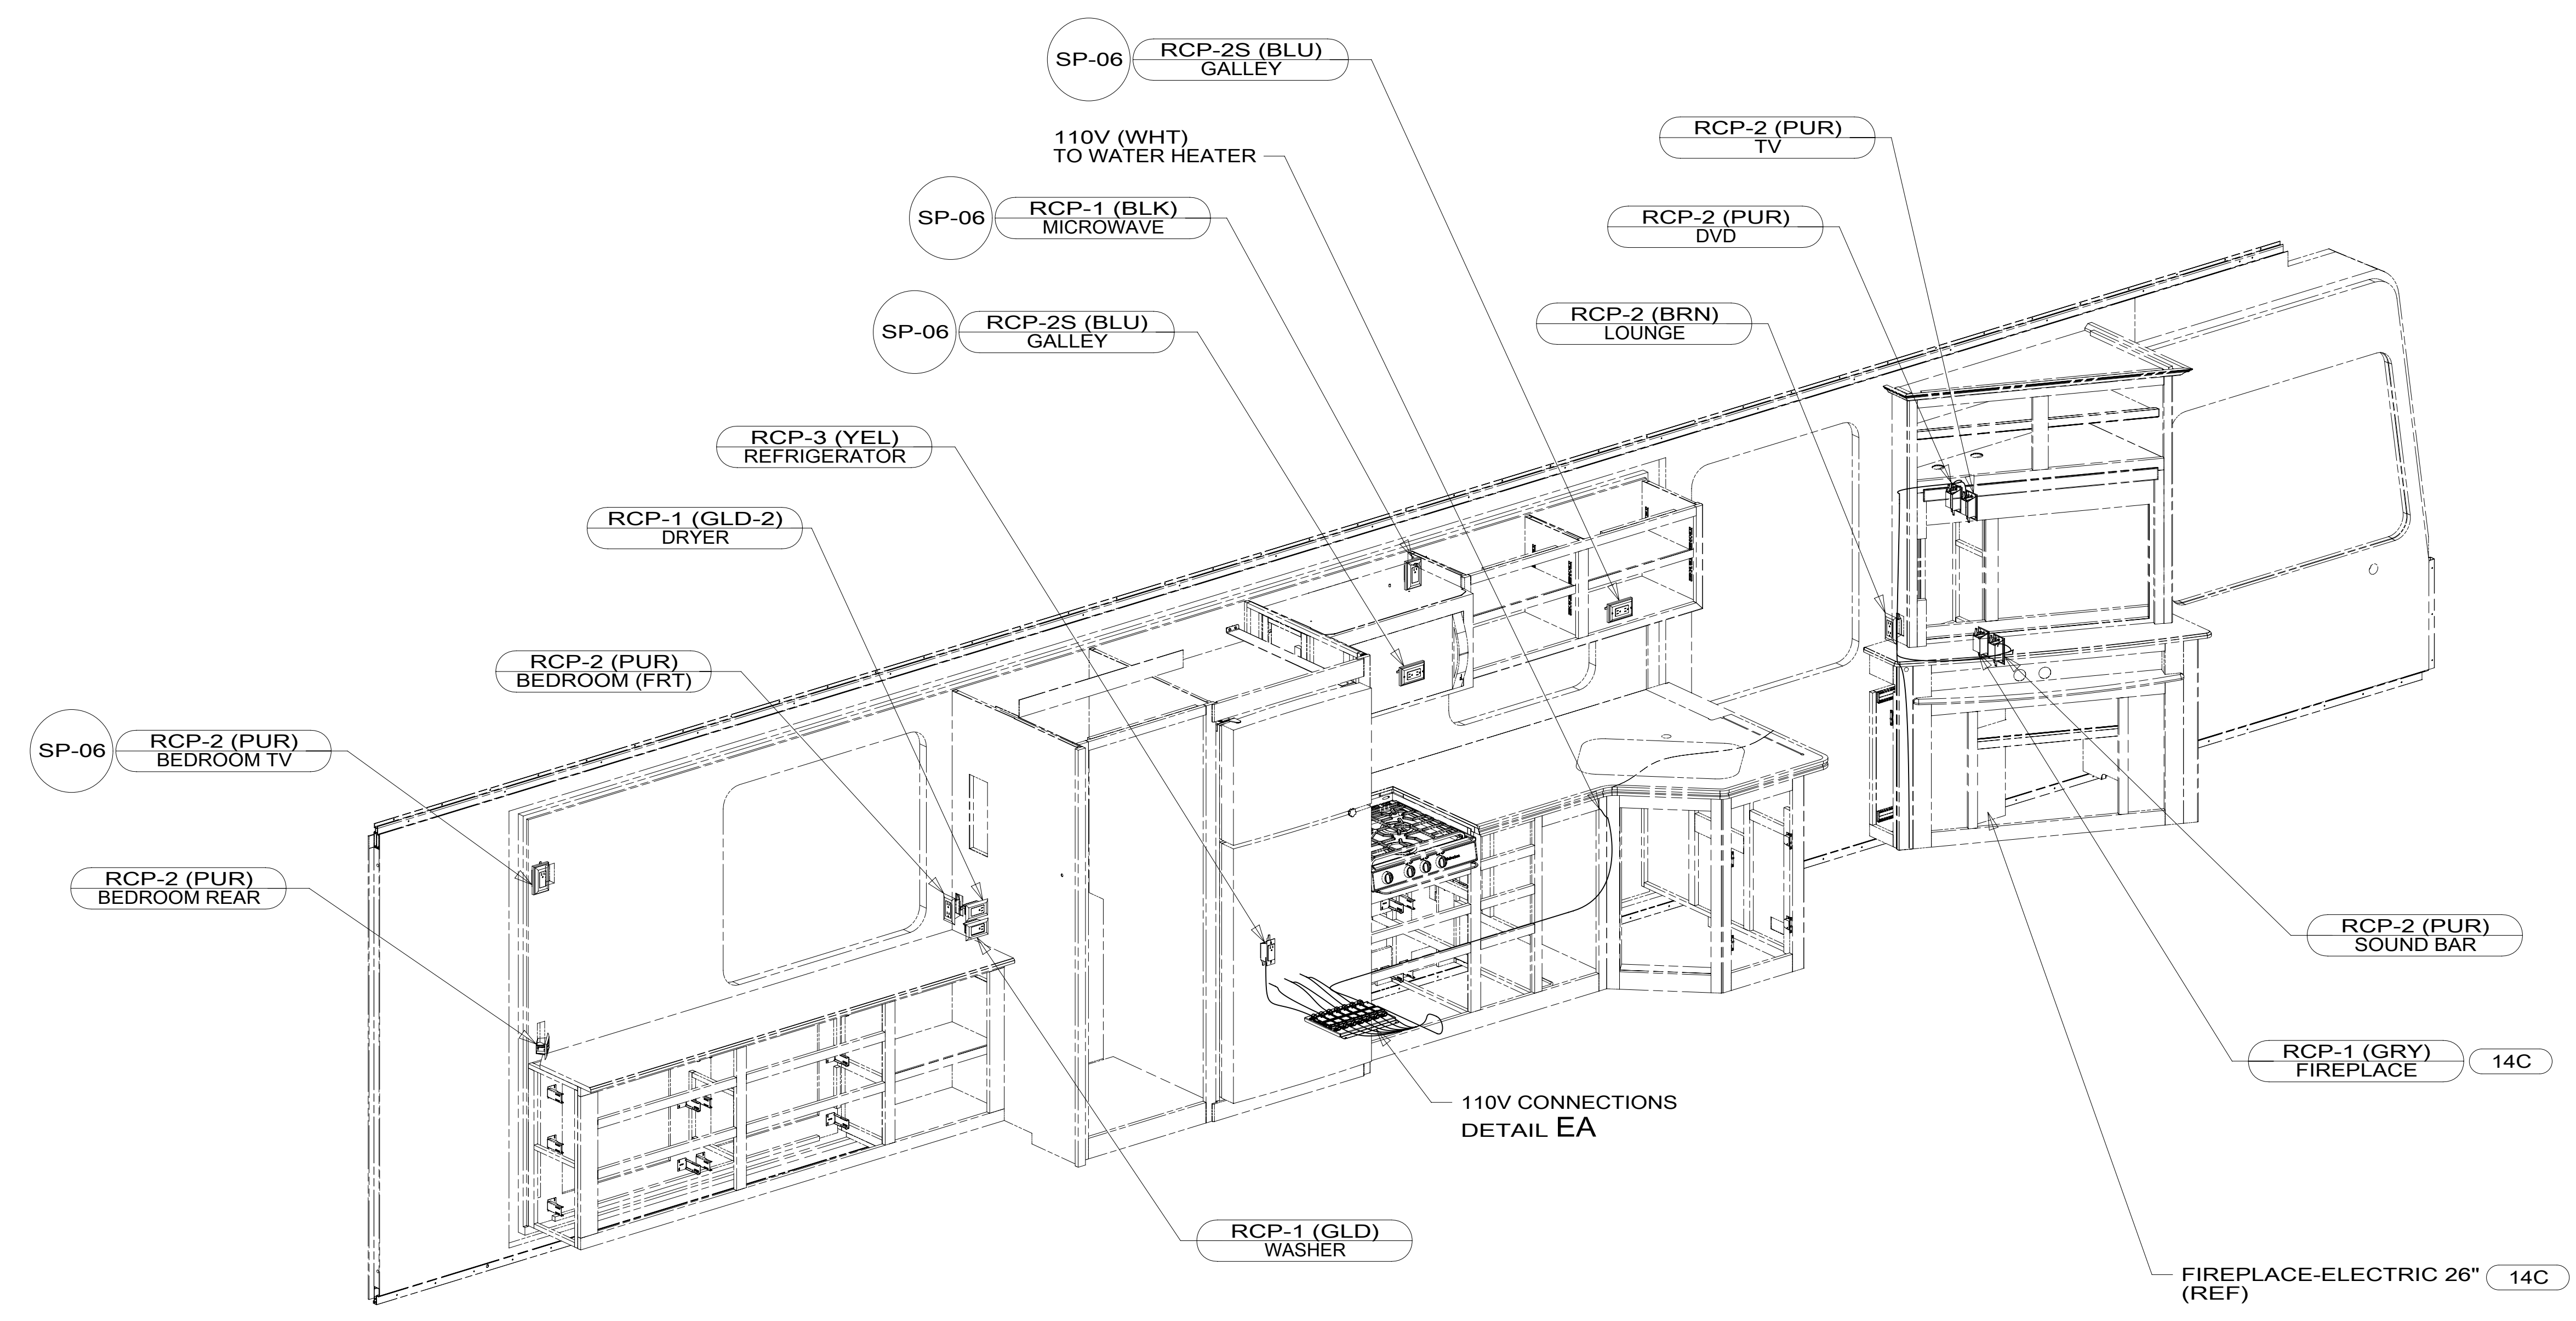

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 14C FIREPLACE-ELECTRIC
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION:		1B1 265	
<b>WIRING INSTL-BODY, 110V</b>			
SHEET:	ITEM/PART NO.:	REV:	
2 OF 6	000022819 / 31456601000		

8 7 6 5 4 3 2 1 02-Apr-2018

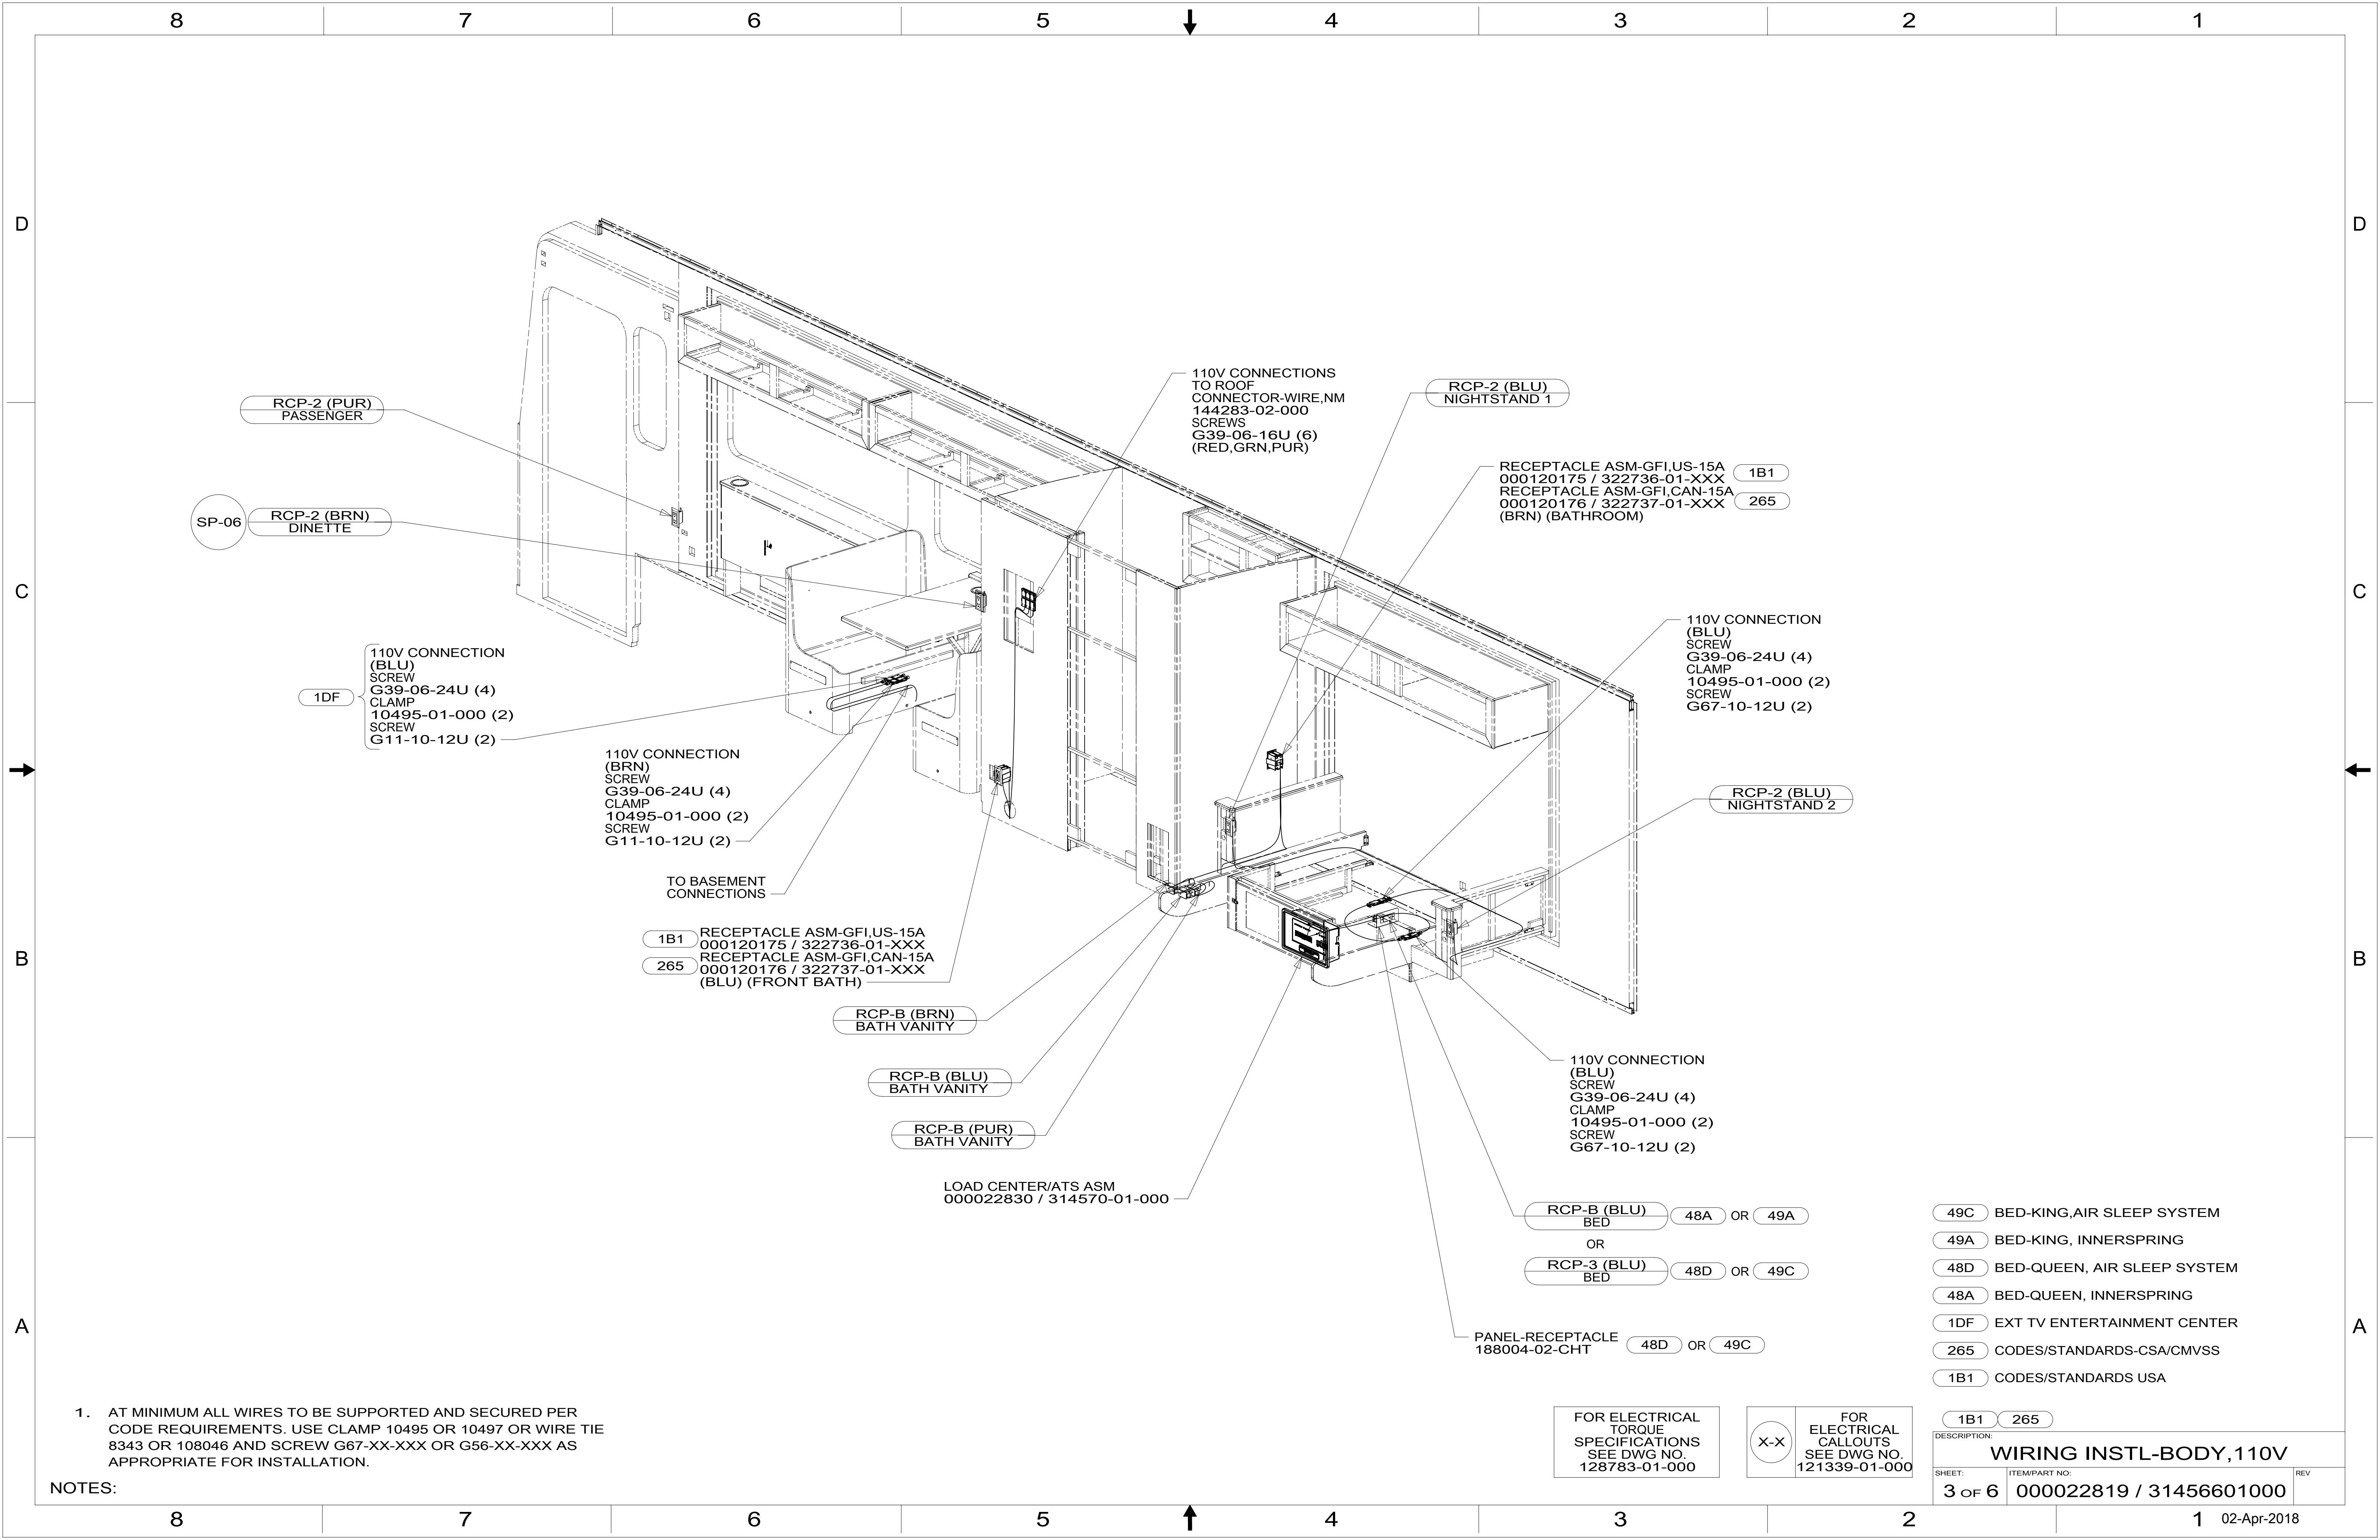

RCP-2 (PUR)  
PASSENGER

SP-06 RCP-2 (BRN)  
DINETTE

110V CONNECTION  
(BLU)  
SCREW  
G39-06-24U (4)  
CLAMP  
10495-01-000 (2)  
SCREW  
G11-10-12U (2)

1DF

110V CONNECTION  
(BRN)  
SCREW  
G39-06-24U (4)  
CLAMP  
10495-01-000 (2)  
SCREW  
G11-10-12U (2)

TO BASEMENT  
CONNECTIONS

1B1 RECEPTACLE ASM-GFI,US-15A  
000120175 / 322736-01-XXX  
265 RECEPTACLE ASM-GFI,CAN-15A  
000120176 / 322737-01-XXX  
(BLU) (FRONT BATH)

RCP-B (BRN)  
BATH VANITY

RCP-B (BLU)  
BATH VANITY

RCP-B (PUR)  
BATH VANITY

LOAD CENTER/ATS ASM  
000022830 / 314570-01-000

110V CONNECTIONS  
TO ROOF  
CONNECTOR-WIRE,NM  
144283-02-000  
SCREWS  
G39-06-16U (6)  
(RED,GRN,PUR)

RCP-2 (BLU)  
NIGHTSTAND 1

RECEPTACLE ASM-GFI,US-15A  
000120175 / 322736-01-XXX 1B1  
RECEPTACLE ASM-GFI,CAN-15A  
000120176 / 322737-01-XXX 265  
(BRN) (BATHROOM)

110V CONNECTION  
(BLU)  
SCREW  
G39-06-24U (4)  
CLAMP  
10495-01-000 (2)  
SCREW  
G67-10-12U (2)

RCP-2 (BLU)  
NIGHTSTAND 2

110V CONNECTION  
(BLU)  
SCREW  
G39-06-24U (4)  
CLAMP  
10495-01-000 (2)  
SCREW  
G67-10-12U (2)

RCP-B (BLU)  
BED 48A OR 49A

RCP-3 (BLU)  
BED 48D OR 49C

PANEL-RECEPTACLE  
188004-02-CHT 48D OR 49C

- 49C BED-KING,AIR SLEEP SYSTEM
- 49A BED-KING, INNERSPRING
- 48D BED-QUEEN, AIR SLEEP SYSTEM
- 48A BED-QUEEN, INNERSPRING
- 1DF EXT TV ENTERTAINMENT CENTER
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


NOTES:  
1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER  
CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE  
8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS  
APPROPRIATE FOR INSTALLATION.

FOR ELECTRICAL  
TORQUE  
SPECIFICATIONS  
SEE DWG NO.  
128783-01-000

FOR ELECTRICAL  
CALLOUTS  
SEE DWG NO.  
121339-01-000


DESCRIPTION: <b>WIRING INSTL-BODY, 110V</b>	
SHEET: <b>3 OF 6</b>	ITEM/PART NO.: <b>000022819 / 31456601000</b>
REV <b>1 02-Apr-2018</b>	



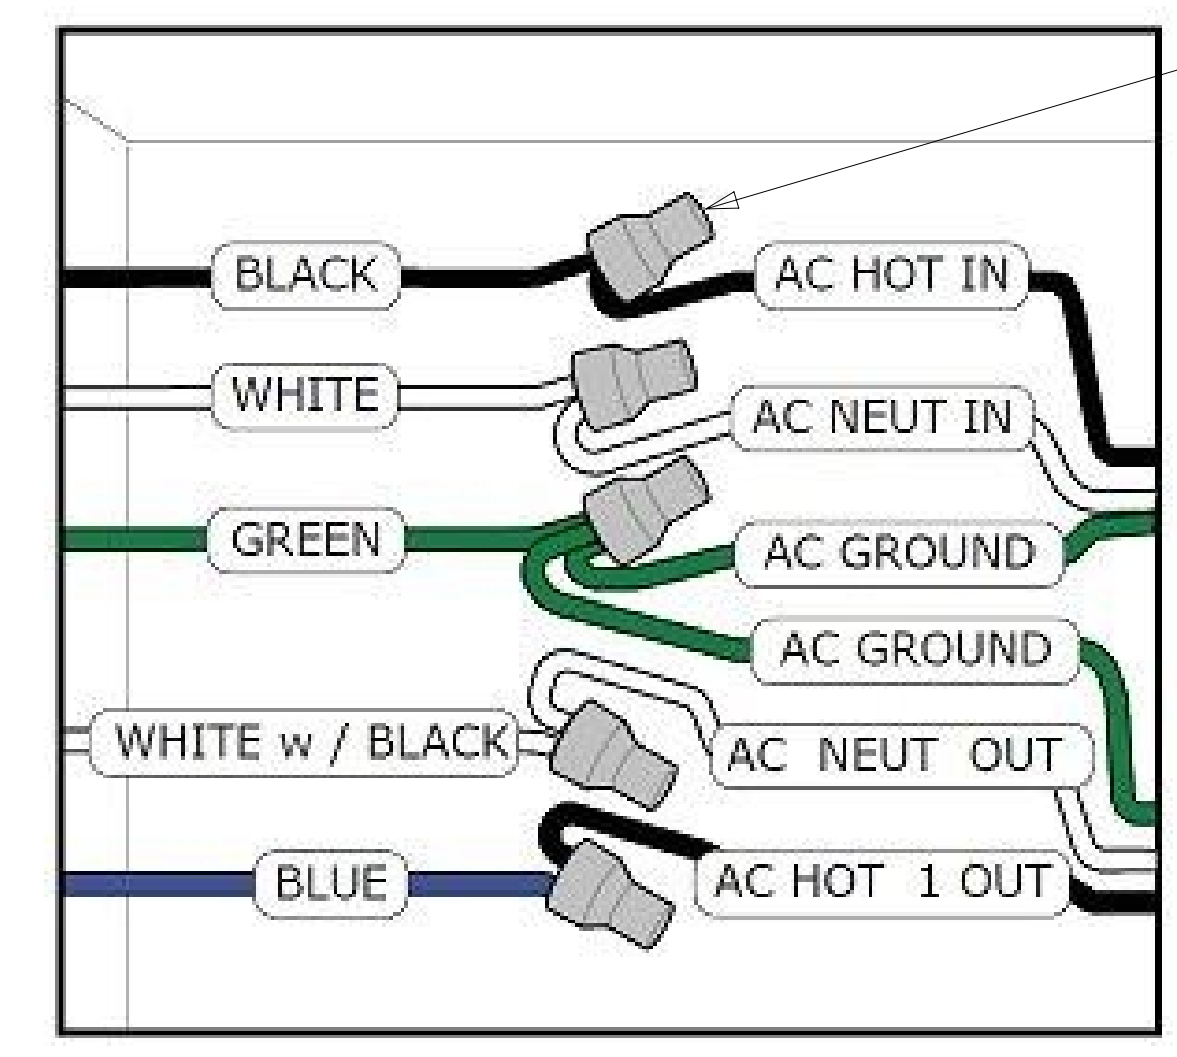

CONNECTOR-WIRE  
008311-01-000 (5)

DETAIL DB

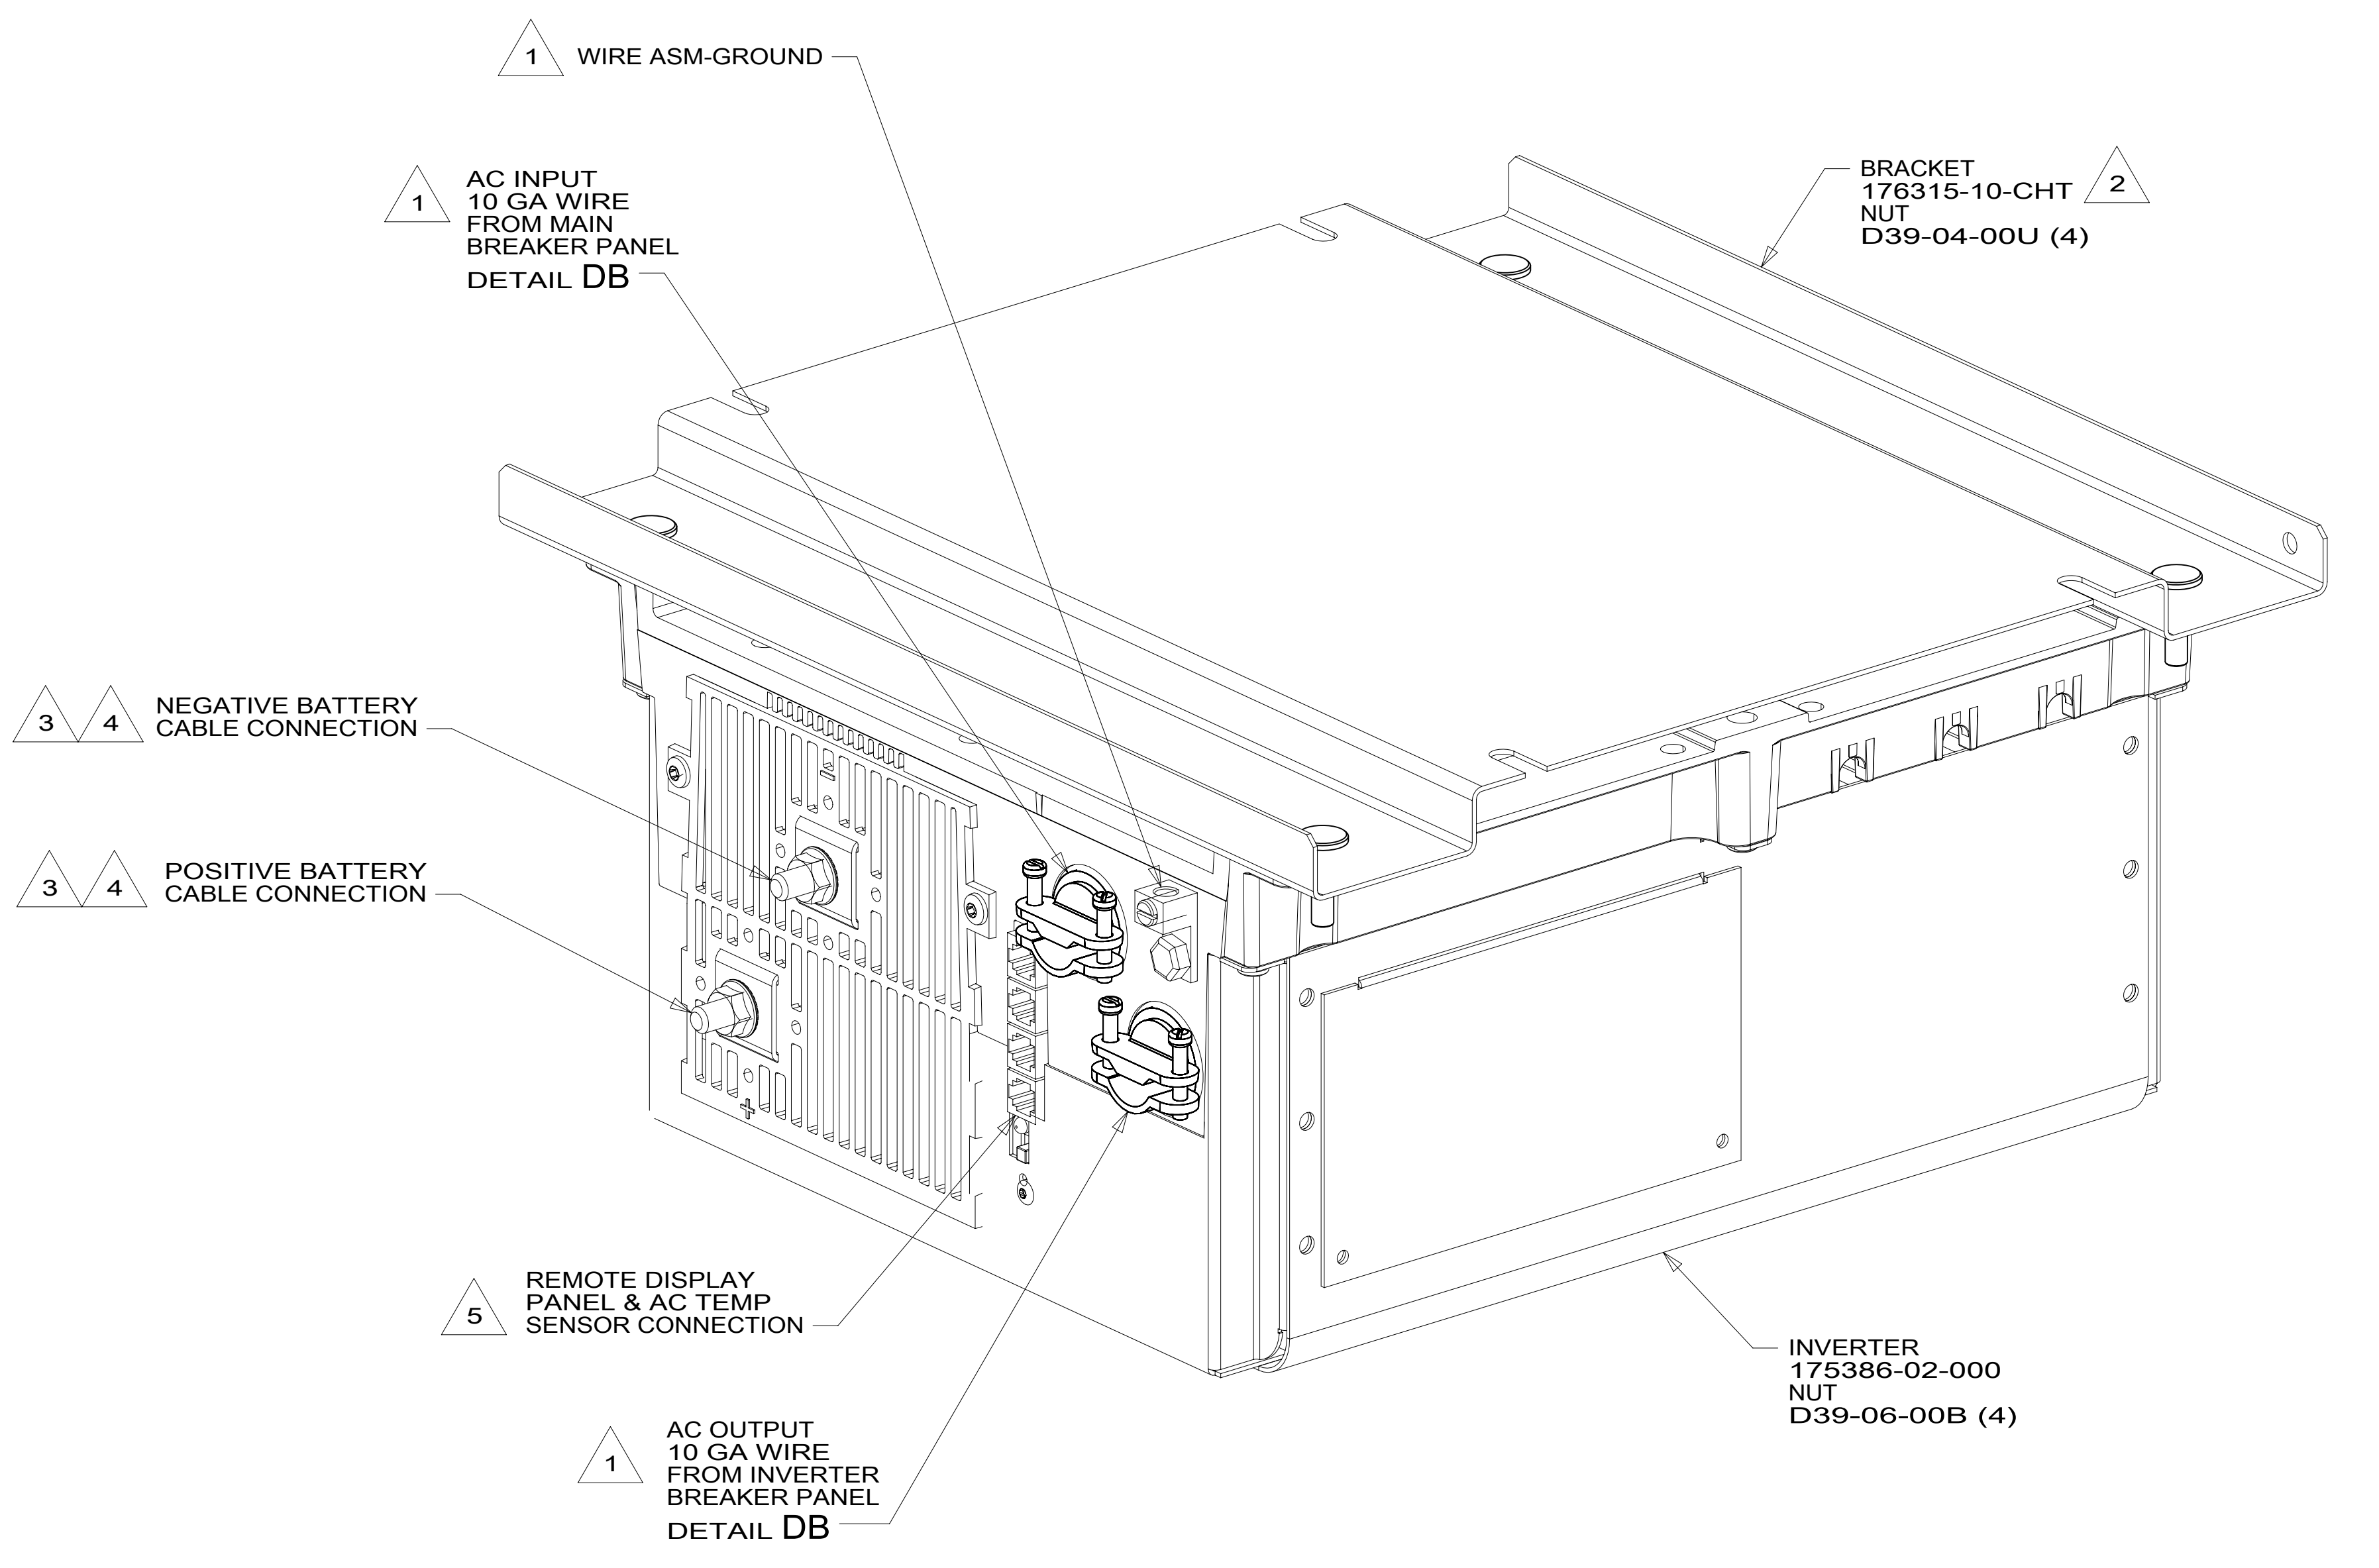

DETAIL DA


- NOTES:
- 5 CABLES PART OF WIRE ASM-COACH.
  - 4 DO NOT USE POWER/AIR TOOL TO INSTALL NUT. TORQUE TO 10-12 FT LBS. DO NOT USE A HAMMER.
  - 3 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
  - 2 BRACKET IS LOCATED BY HOLES ON BRACKET.
  - 1 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.

265 CODES/STANDARDS-CSA/CMVSS  
1B1 CODES/STANDARDS USA


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:	
<b>WIRING INSTL-BODY, 110V</b>	
SHEET:	ITEM/PART NO. REV
4 OF 6	000022819 / 31456601000

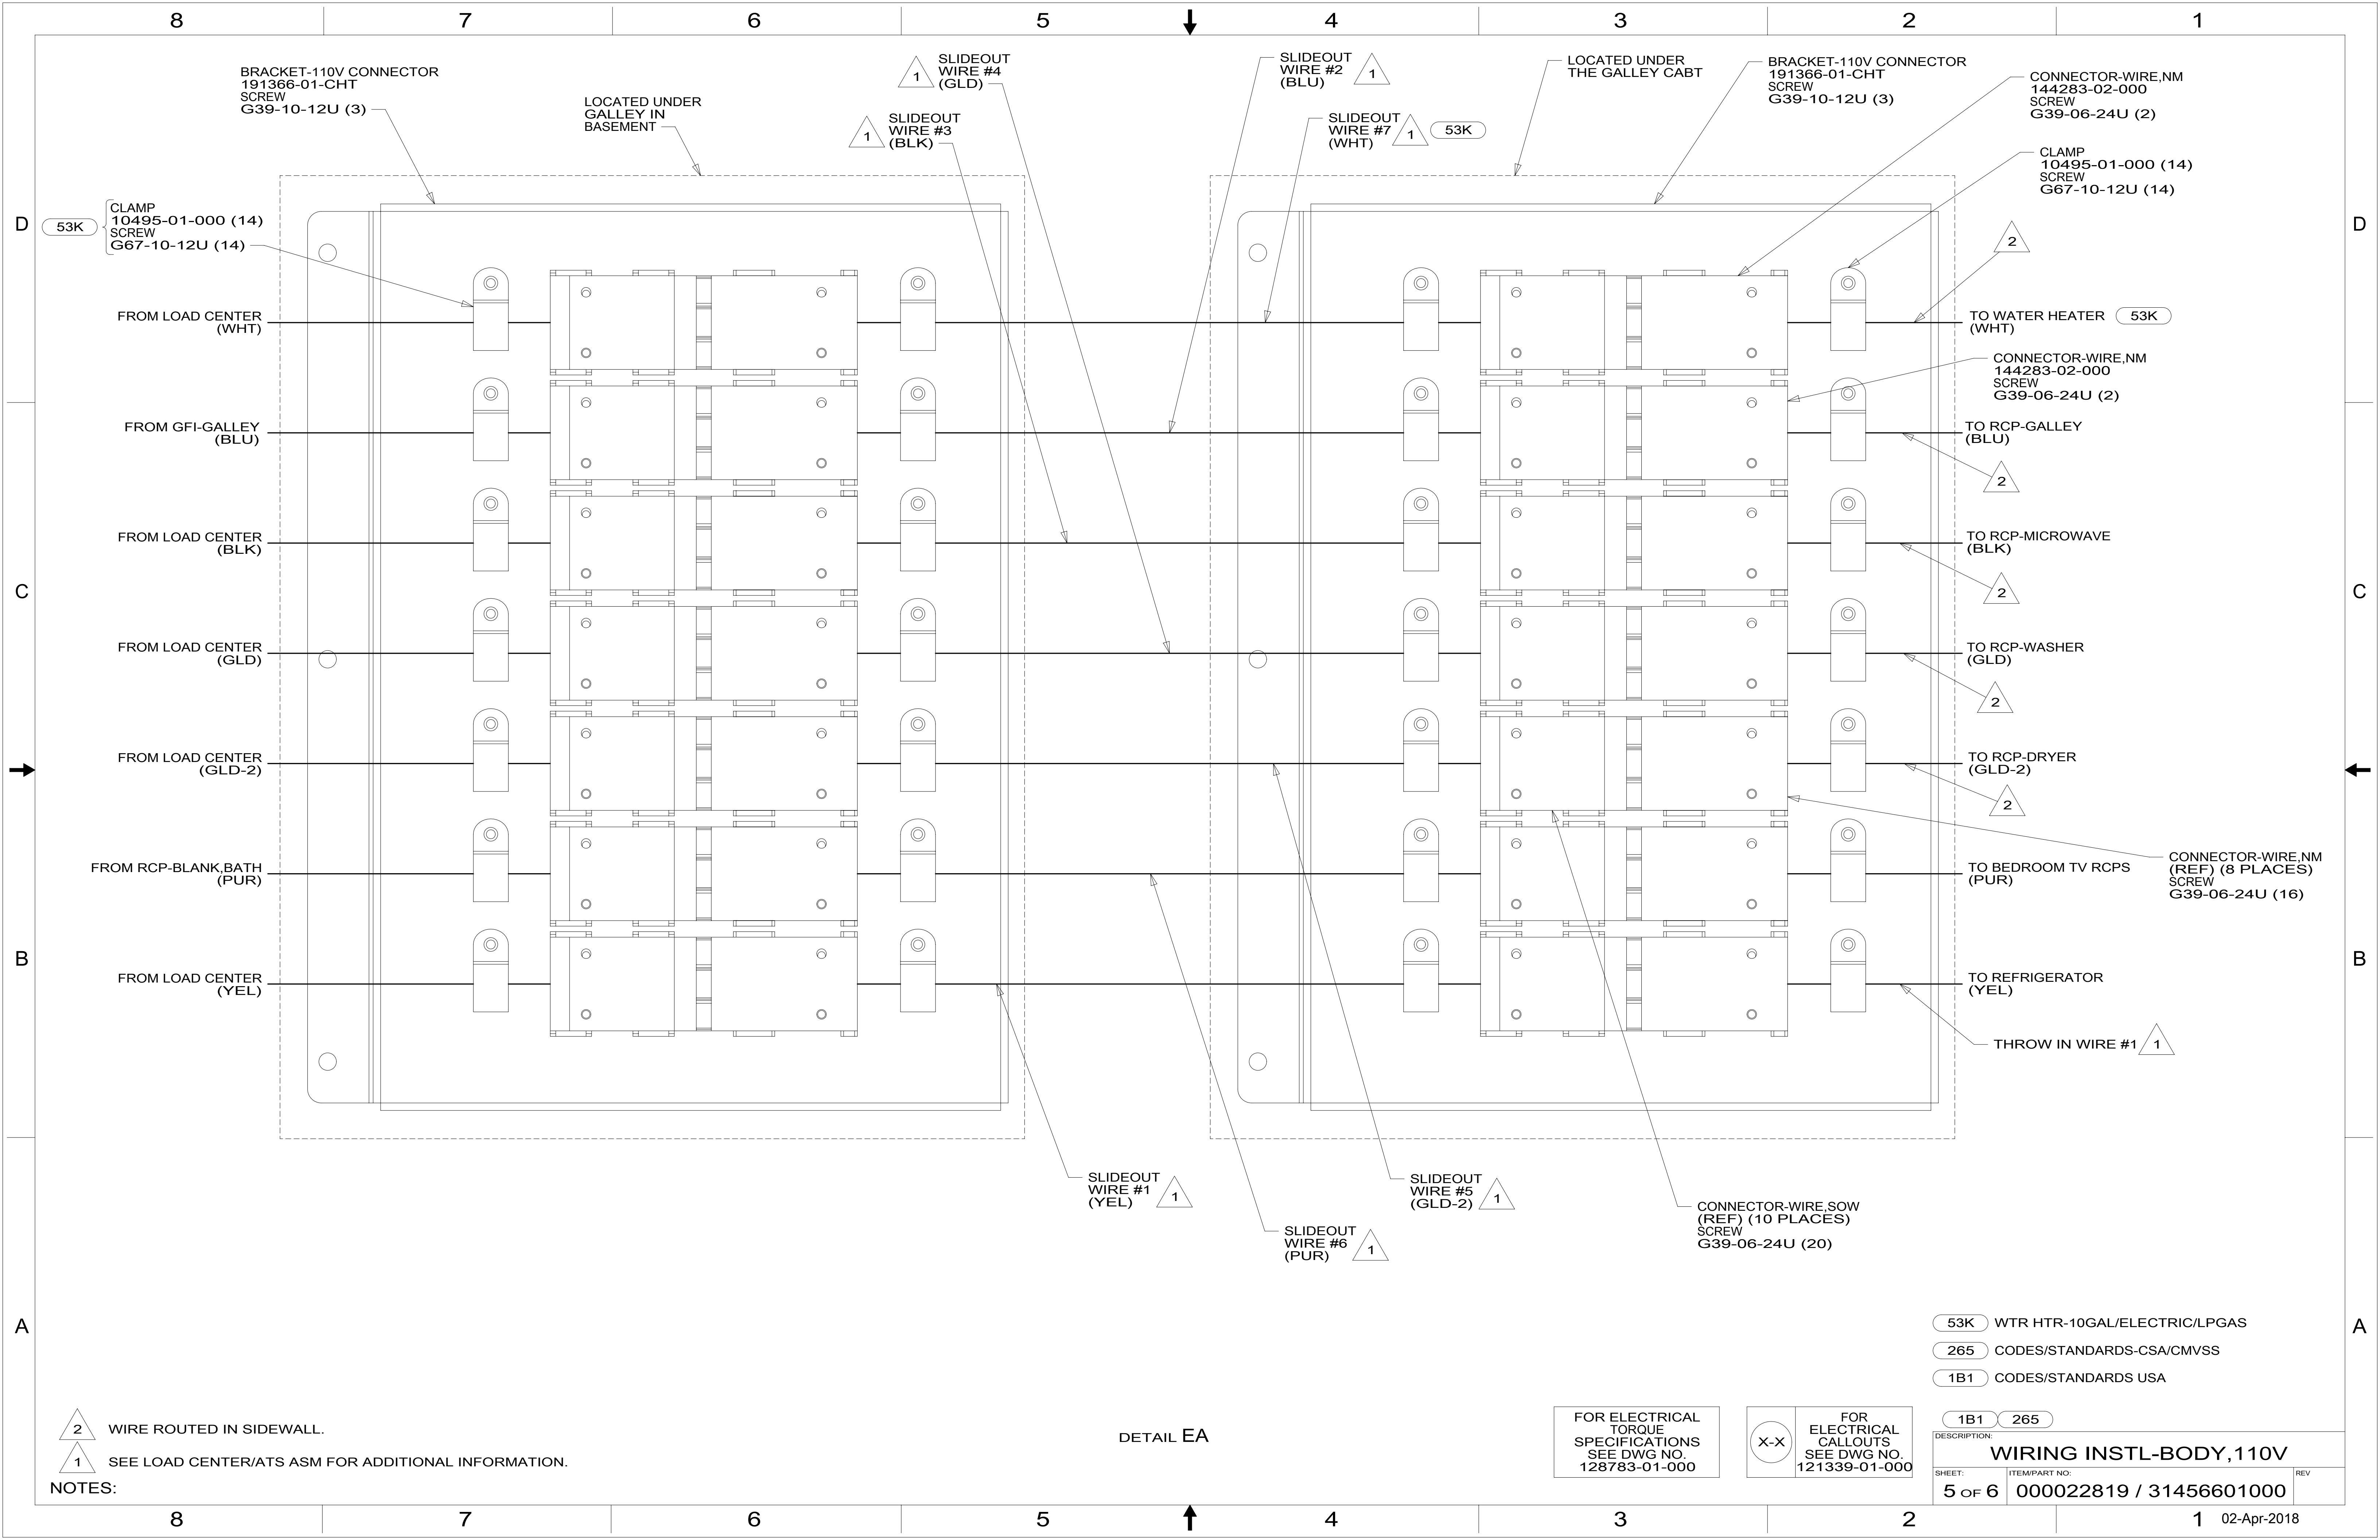

BRACKET-110V CONNECTOR 191366-01-CHT SCREW G39-10-12U (3)  
 LOCATED UNDER GALLEY IN BASEMENT  
 SLIDEOUT WIRE #4 (GLD)  
 SLIDEOUT WIRE #3 (BLK)  
 SLIDEOUT WIRE #2 (BLU)  
 SLIDEOUT WIRE #7 (WHT)  
 LOCATED UNDER THE GALLEY CABT  
 BRACKET-110V CONNECTOR 191366-01-CHT SCREW G39-10-12U (3)  
 CONNECTOR-WIRE,NM 144283-02-000 SCREW G39-06-24U (2)  
 CLAMP 10495-01-000 (14) SCREW G67-10-12U (14)

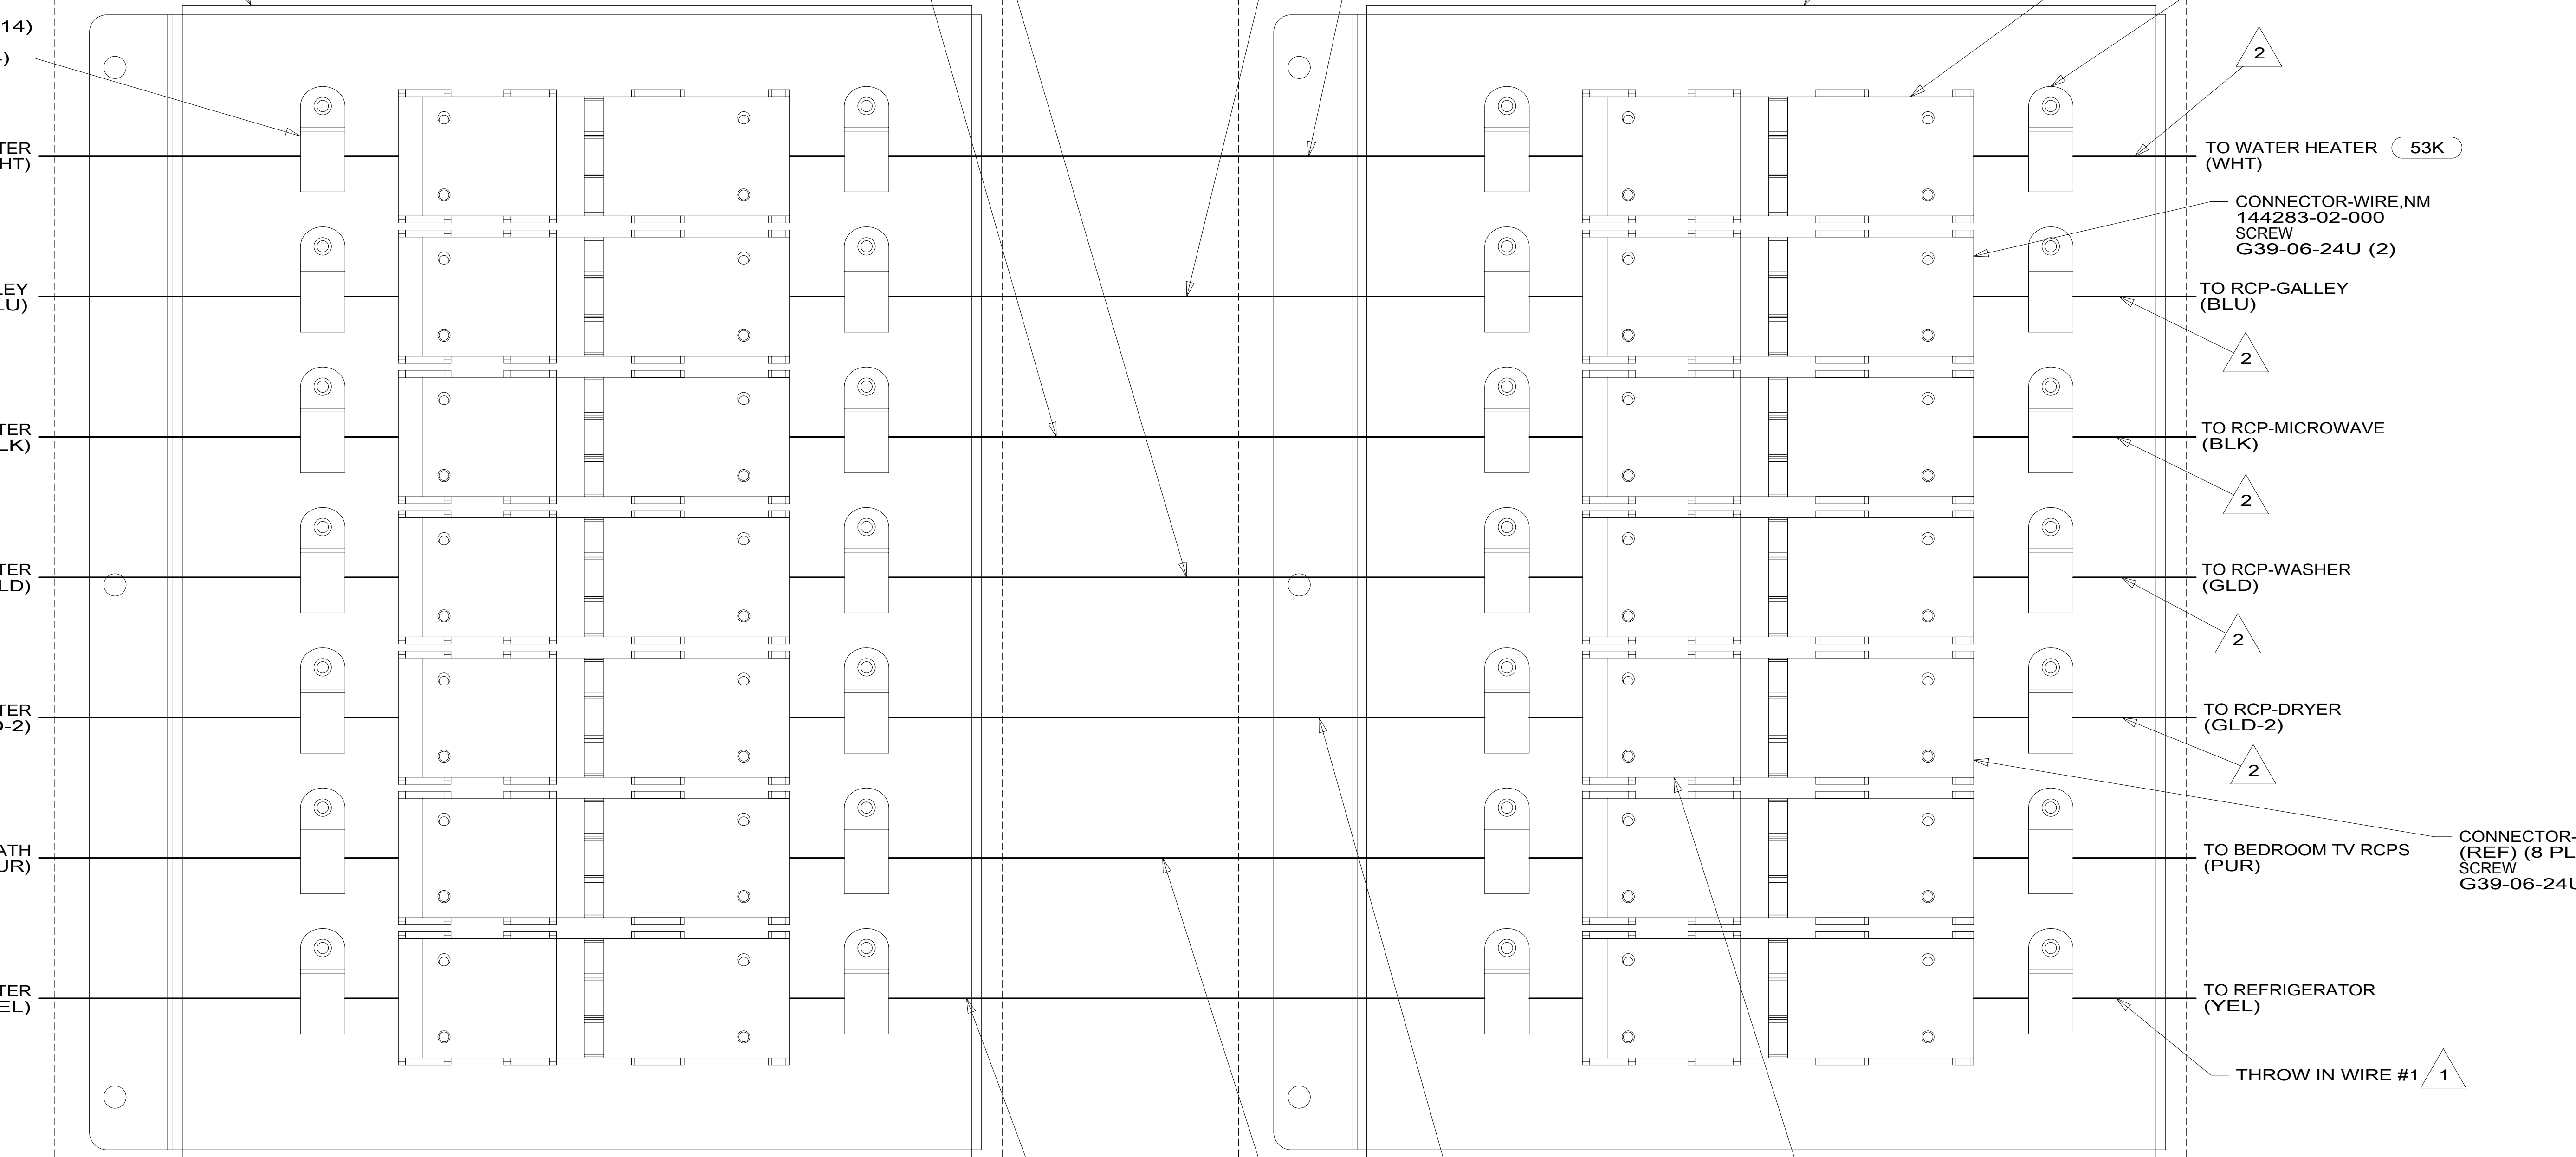

NOTES:  
 2 WIRE ROUTED IN SIDEWALL.  
 1 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.


DETAIL EA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

53K	WTR HTR-10GAL/ELECTRIC/LPGAS
265	CODES/STANDARDS-CSA/CMVSS
1B1	CODES/STANDARDS USA

1B1	265	
DESCRIPTION: <b>WIRING INSTL-BODY, 110V</b>		
SHEET: 5 OF 6	ITEM/PART NO: 000022819 / 31456601000	REV

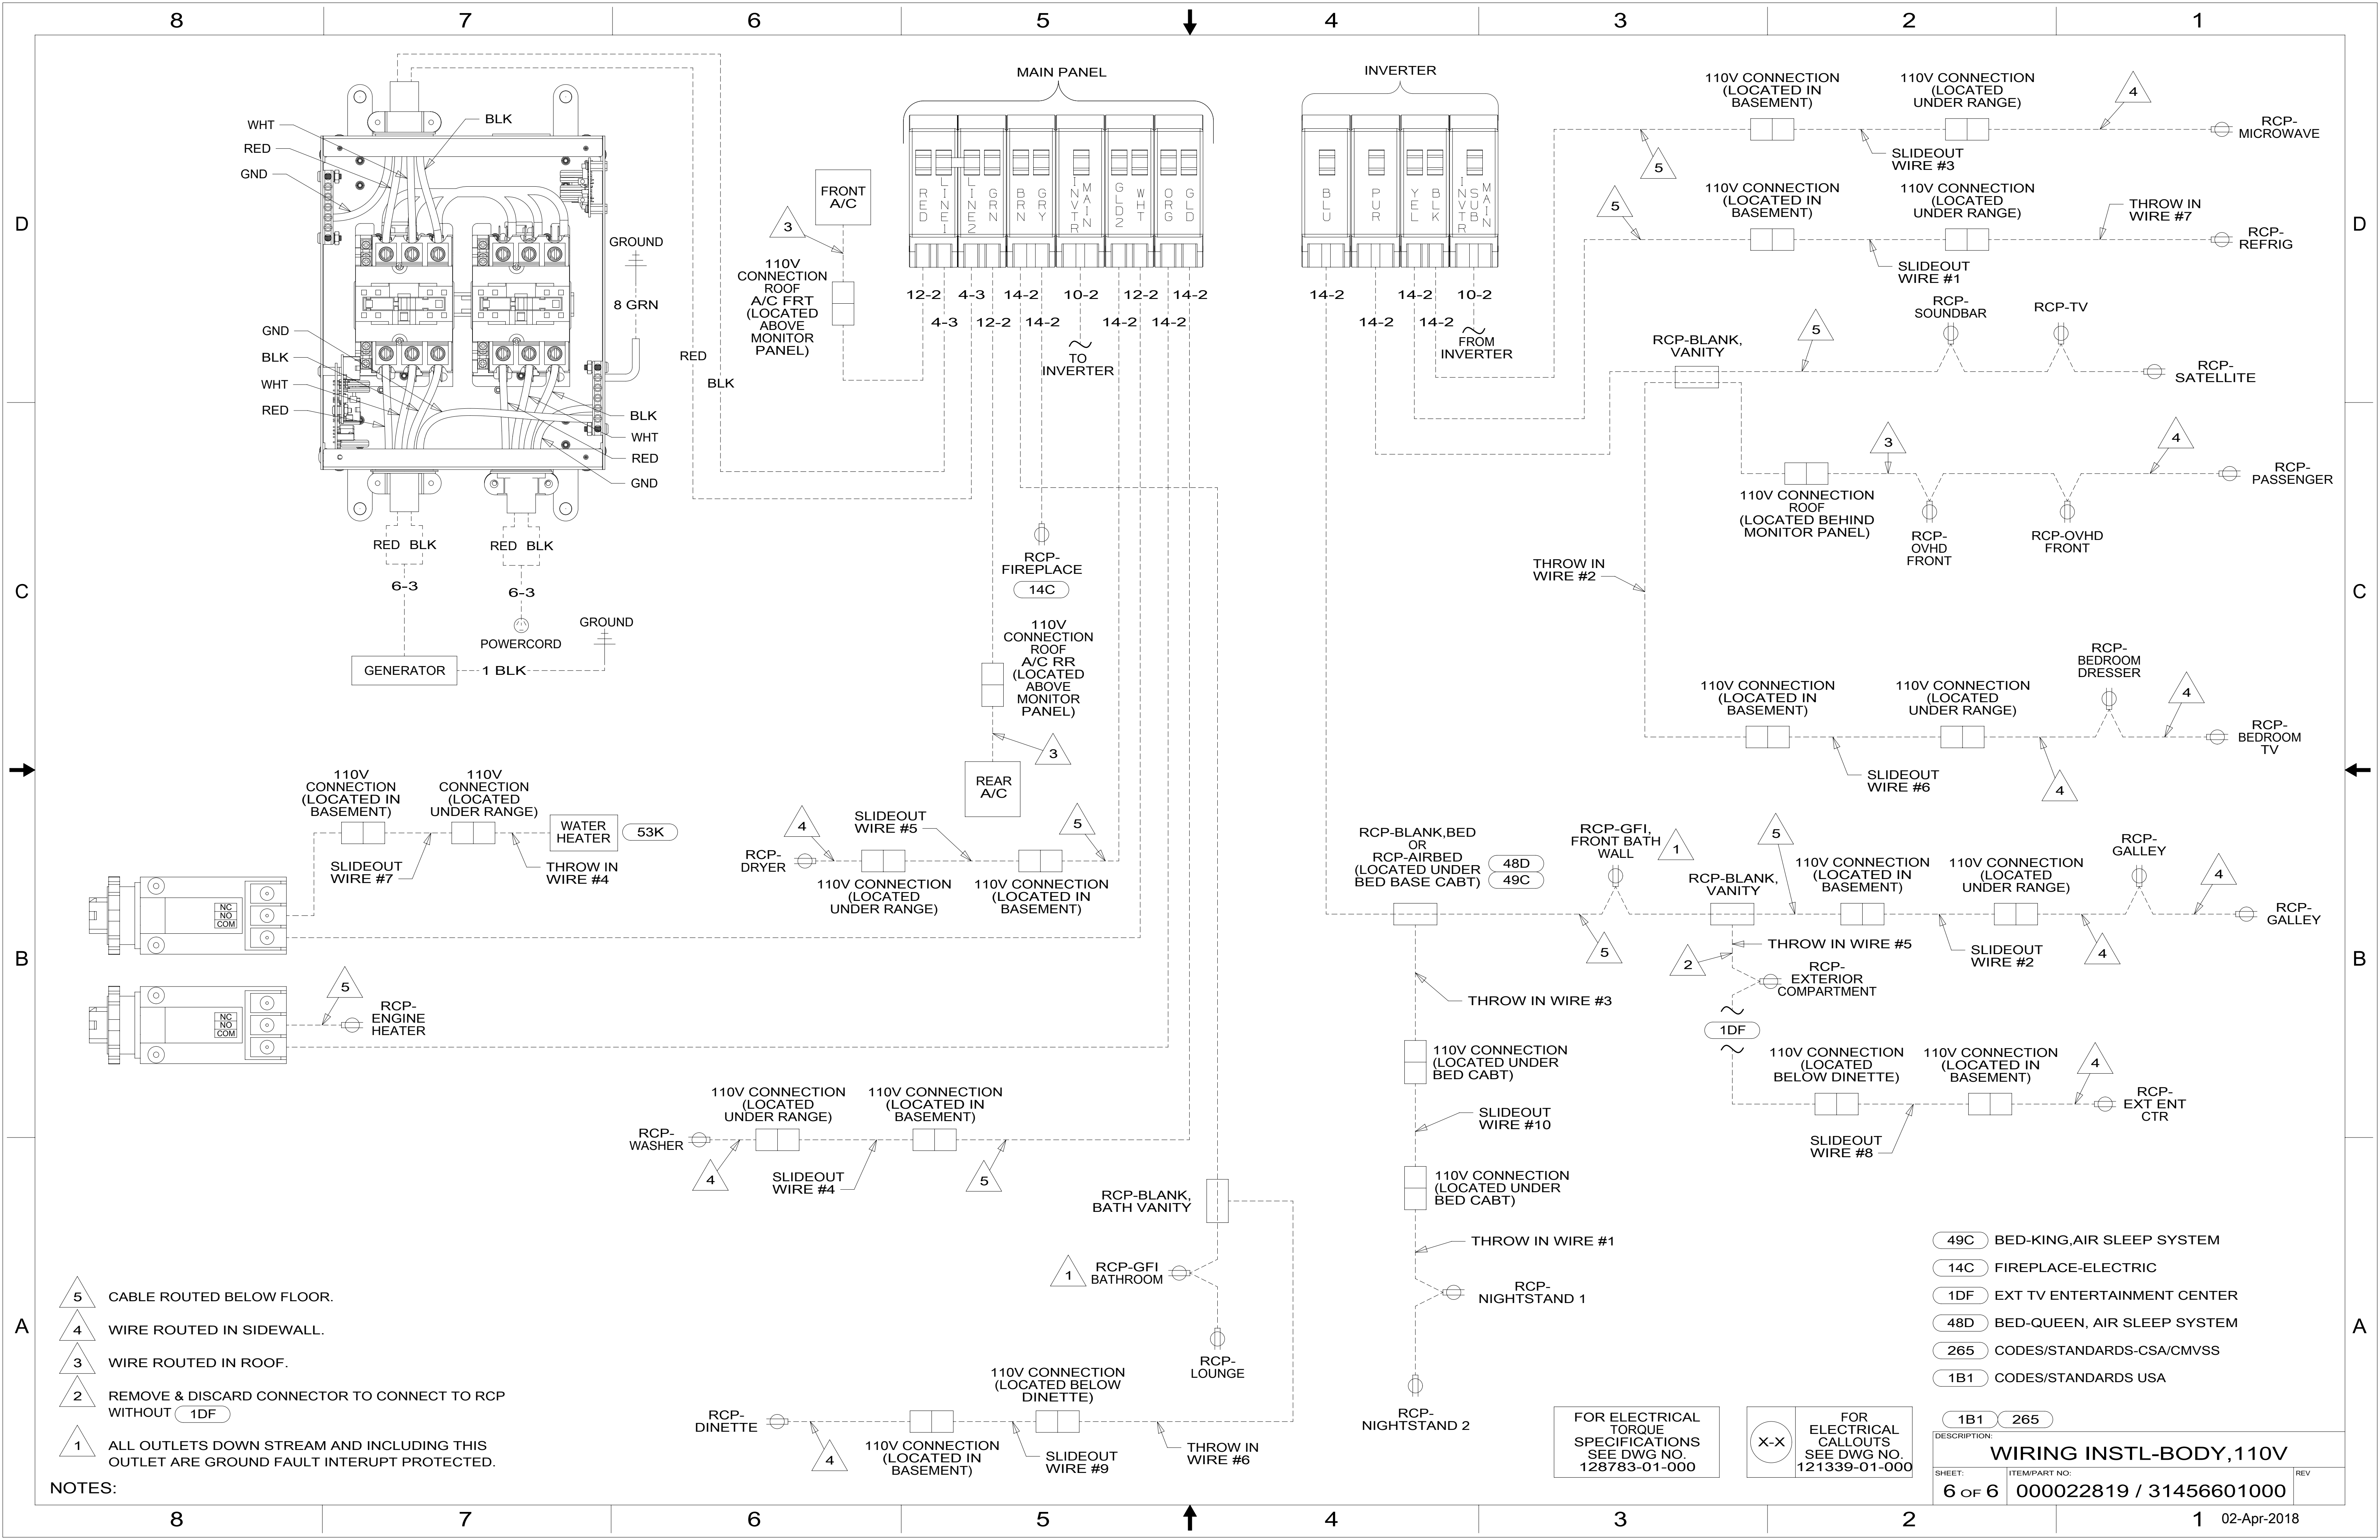

8 7 6 5 4 3 2 1

D

C

B

A

NOTES:

- 5 CABLE ROUTED BELOW FLOOR.
- 4 WIRE ROUTED IN SIDEWALL.
- 3 WIRE ROUTED IN ROOF.
- 2 REMOVE & DISCARD CONNECTOR TO CONNECT TO RCP WITHOUT (1DF)
- 1 ALL OUTLETS DOWN STREAM AND INCLUDING THIS OUTLET ARE GROUND FAULT INTERRUPT PROTECTED.

- 49C BED-KING, AIR SLEEP SYSTEM
- 14C FIREPLACE-ELECTRIC
- 1DF EXT TV ENTERTAINMENT CENTER
- 48D BED-QUEEN, AIR SLEEP SYSTEM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:		<b>WIRING INSTL-BODY, 110V</b>	
SHEET:	ITEM/PART NO.:	REV	
6 OF 6	000022819 / 31456601000		

02-Apr-2018

8 7 6 5 4 3 2 1