

- CIRCUIT BREAKER-20 AMP  
93654-03-000  
SCREW  
G52-06-04U  
G52-06-05U  
SPACER-CIRCUIT BREAKER  
141789-01-000
- CIRCUIT BREAKER-6 AMP  
93654-01-000  
SCREW  
G52-06-04B  
G52-06-05B  
SPACER-CIRCUIT BREAKER  
141789-01-000
- CIRCUIT BREAKER-55 AMP  
113482-01-000  
SCREW  
G19-10-08U
- CIRCUIT BREAKER-30 AMP  
93655-02-000  
SPACER-CIRCUIT BREAKER  
141789-01-000  
SCREW  
G52-06-04U (2)
- CIRCUIT BREAKER-30 AMP  
93655-02-000  
SPACER-CIRCUIT BREAKER  
141789-01-000  
SCREW  
G52-06-05U (2)
- CIRCUIT BREAKER-40 AMP  
93655-03-000 (2)  
SCREW  
G19-10-08U (2)

- CIRCUIT BREAKER-6 AMP  
93654-01-000  
SCREW  
G52-06-04U  
G52-06-05U  
SPACER-CIRCUIT BREAKER  
141789-01-000
- CIRCUIT BREAKER-15 AMP  
93654-02-000  
SCREW  
G52-06-05U  
SPACER-CIRCUIT BREAKER  
141789-01-000
- CIRCUIT BREAKER-30 AMP  
93655-02-000  
SPACER-CIRCUIT BREAKER  
141789-01-000  
SCREW  
G52-06-04U  
G52-06-05U

- CIRCUIT BREAKER-55 AMP  
113482-01-000  
SCREW  
G19-10-08U

- PLATE-CIRCUIT BREAKER  
118531-11-CHT  
SCREW  
G39-08-089 (2)
- LATCH  
98196-01-000 (2)  
RIVET  
H15-04-02R (4)


- 3 REPLACE EXISTING SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.
- 2 USE THE LONGER SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.
- 1 PLACE AROUND ENTIRE PERIMETER OF DOOR WITH SEAM AT BOTTOM.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


- 52S AWNING - 2ND PATIO, ELECTRIC
- 52N AWNING - PATIO, ELECTRIC
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

<b>WINNEBAGO</b> COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.	
DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS
DFFR:	
UNSPECIFIED TOLERANCES:	MATERIAL:
WHOLE DIM (X) : 3	
ONE-PLACE (X.X) : 1.5	
TWO-PLACE (X.XX) : 0.50	
ANGLE : 1°	
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS) FIRST USED: 15 D33C
<b>CHASSIS ELECTRICAL BOX ASM</b>	
SHEET: 1 OF 2	ITEM/PART NO: 000024269 / 31495201000
REF:	1 04-Aug-2017

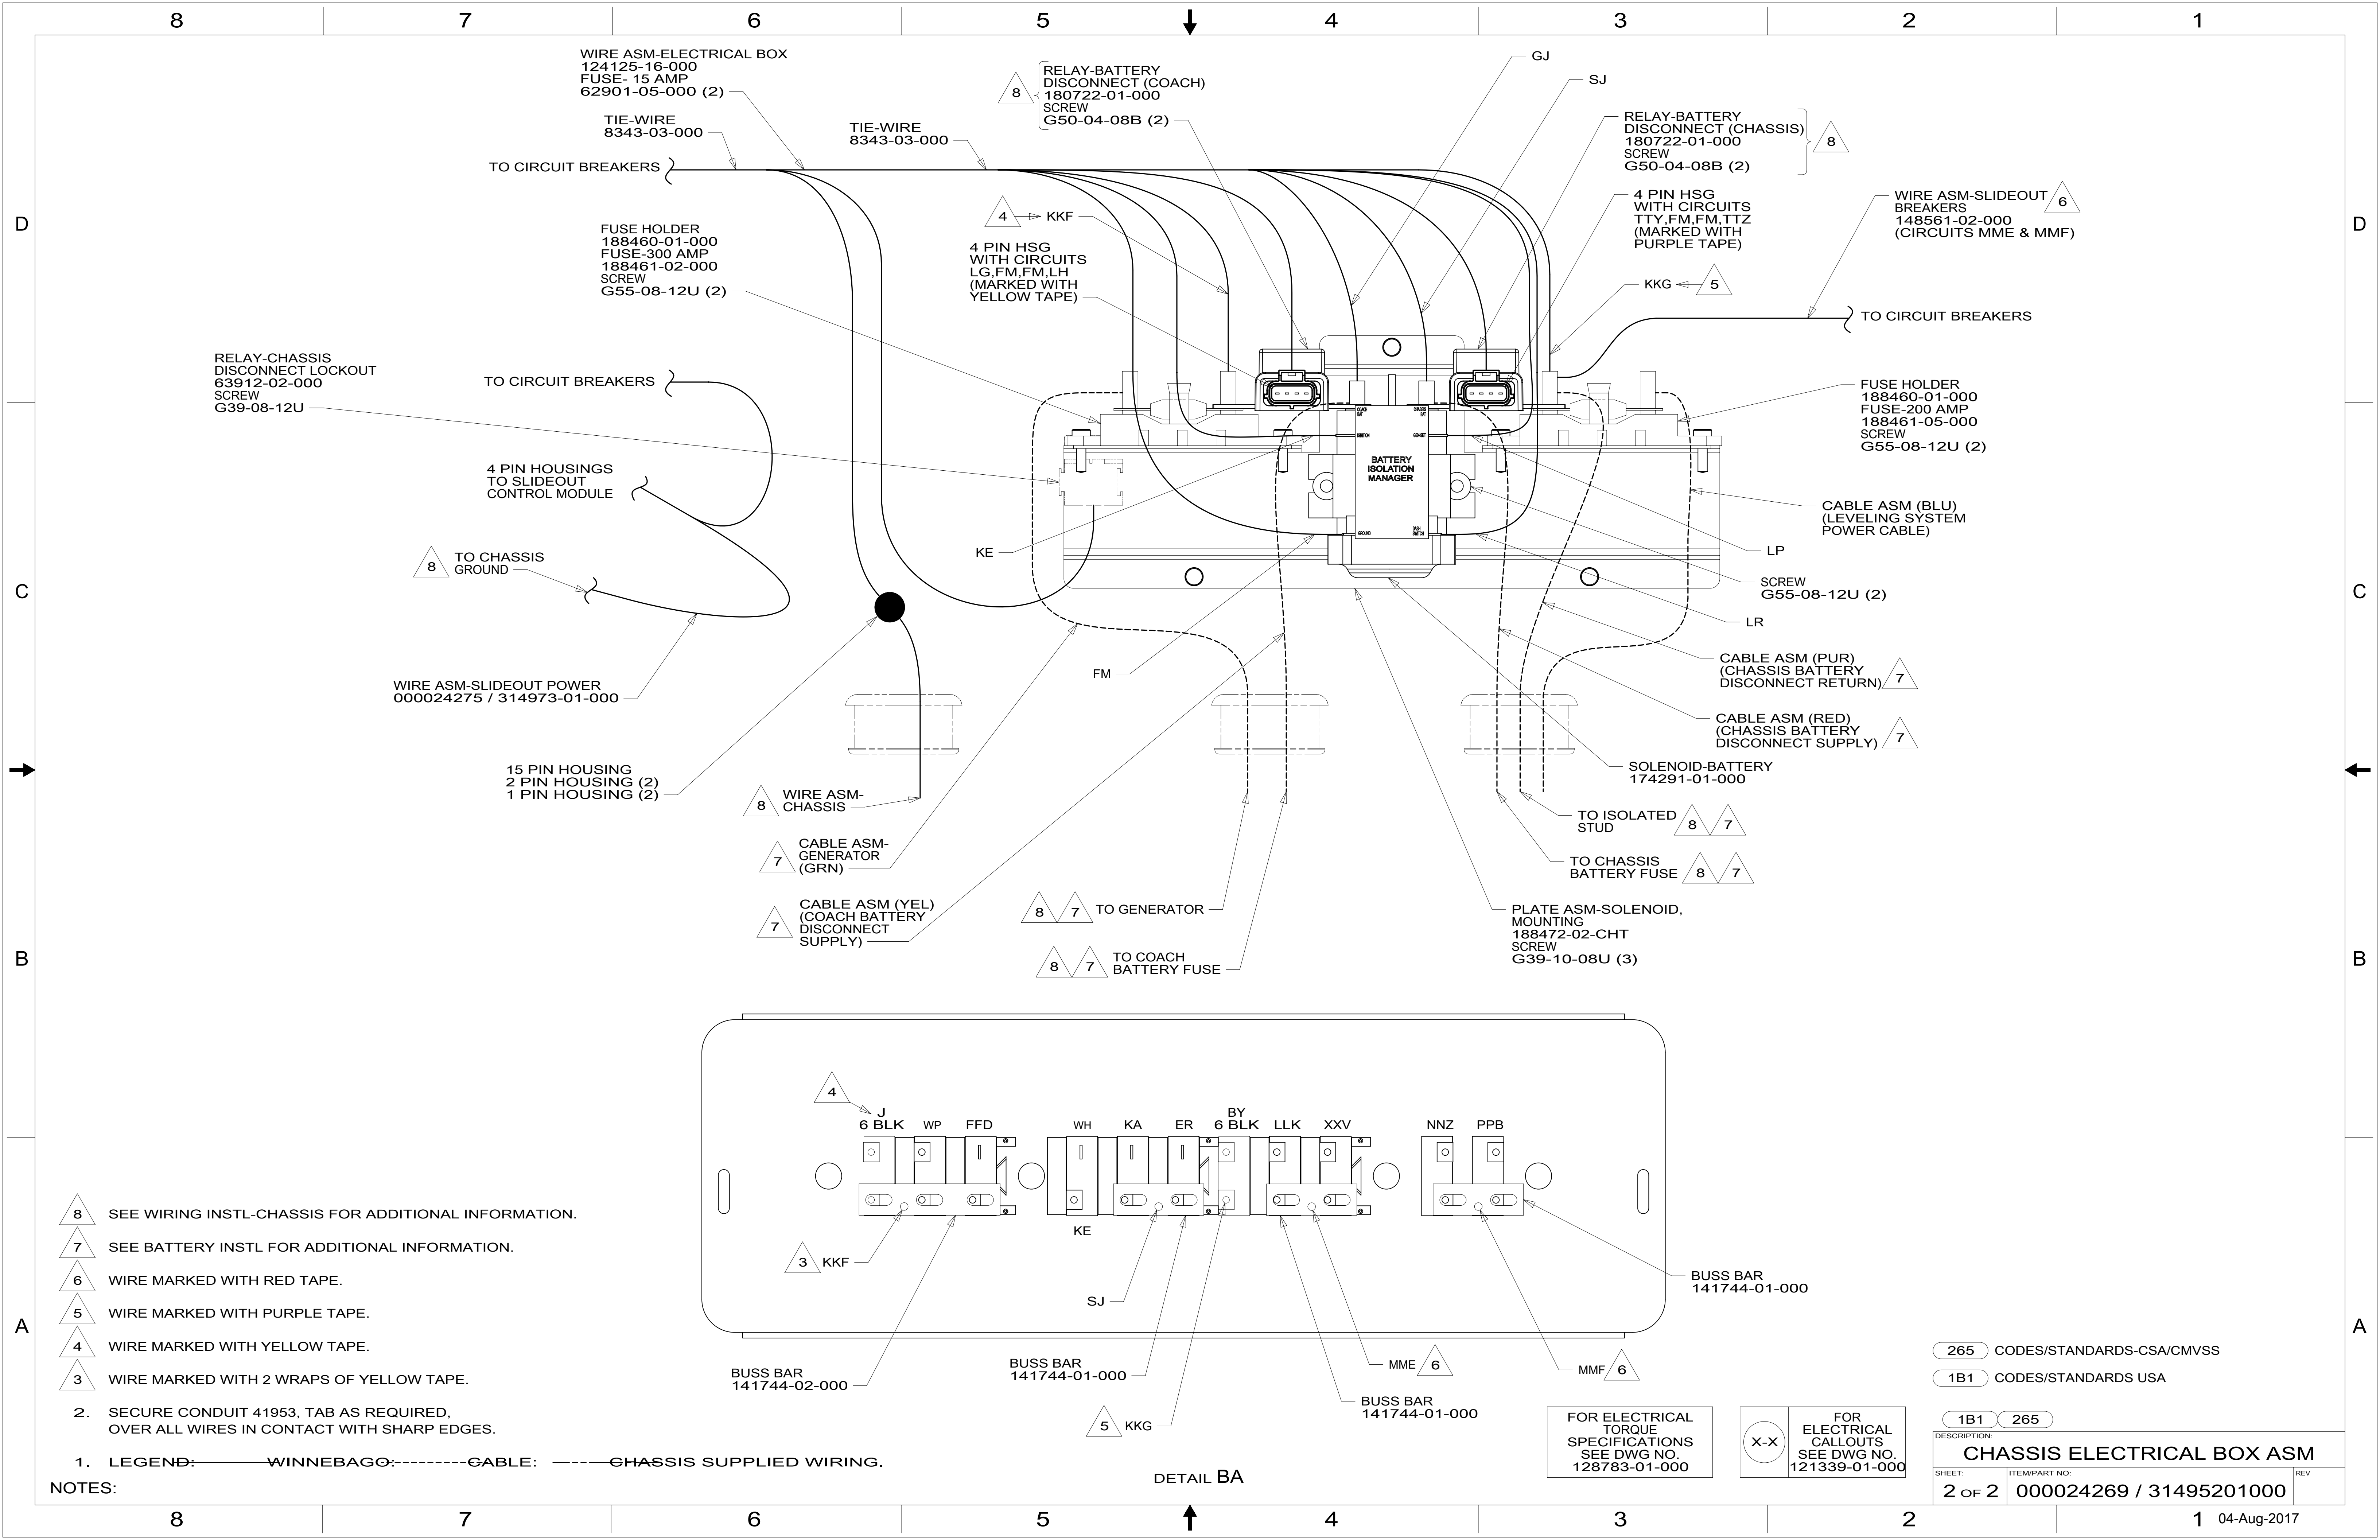

- 8 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
- 7 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
- 6 WIRE MARKED WITH RED TAPE.
- 5 WIRE MARKED WITH PURPLE TAPE.
- 4 WIRE MARKED WITH YELLOW TAPE.
- 3 WIRE MARKED WITH 2 WRAPS OF YELLOW TAPE.

- 2. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
- 1. LEGEND: — WINNEBAGO: - - - - - CABLE: - - - - - CHASSIS SUPPLIED WIRING.

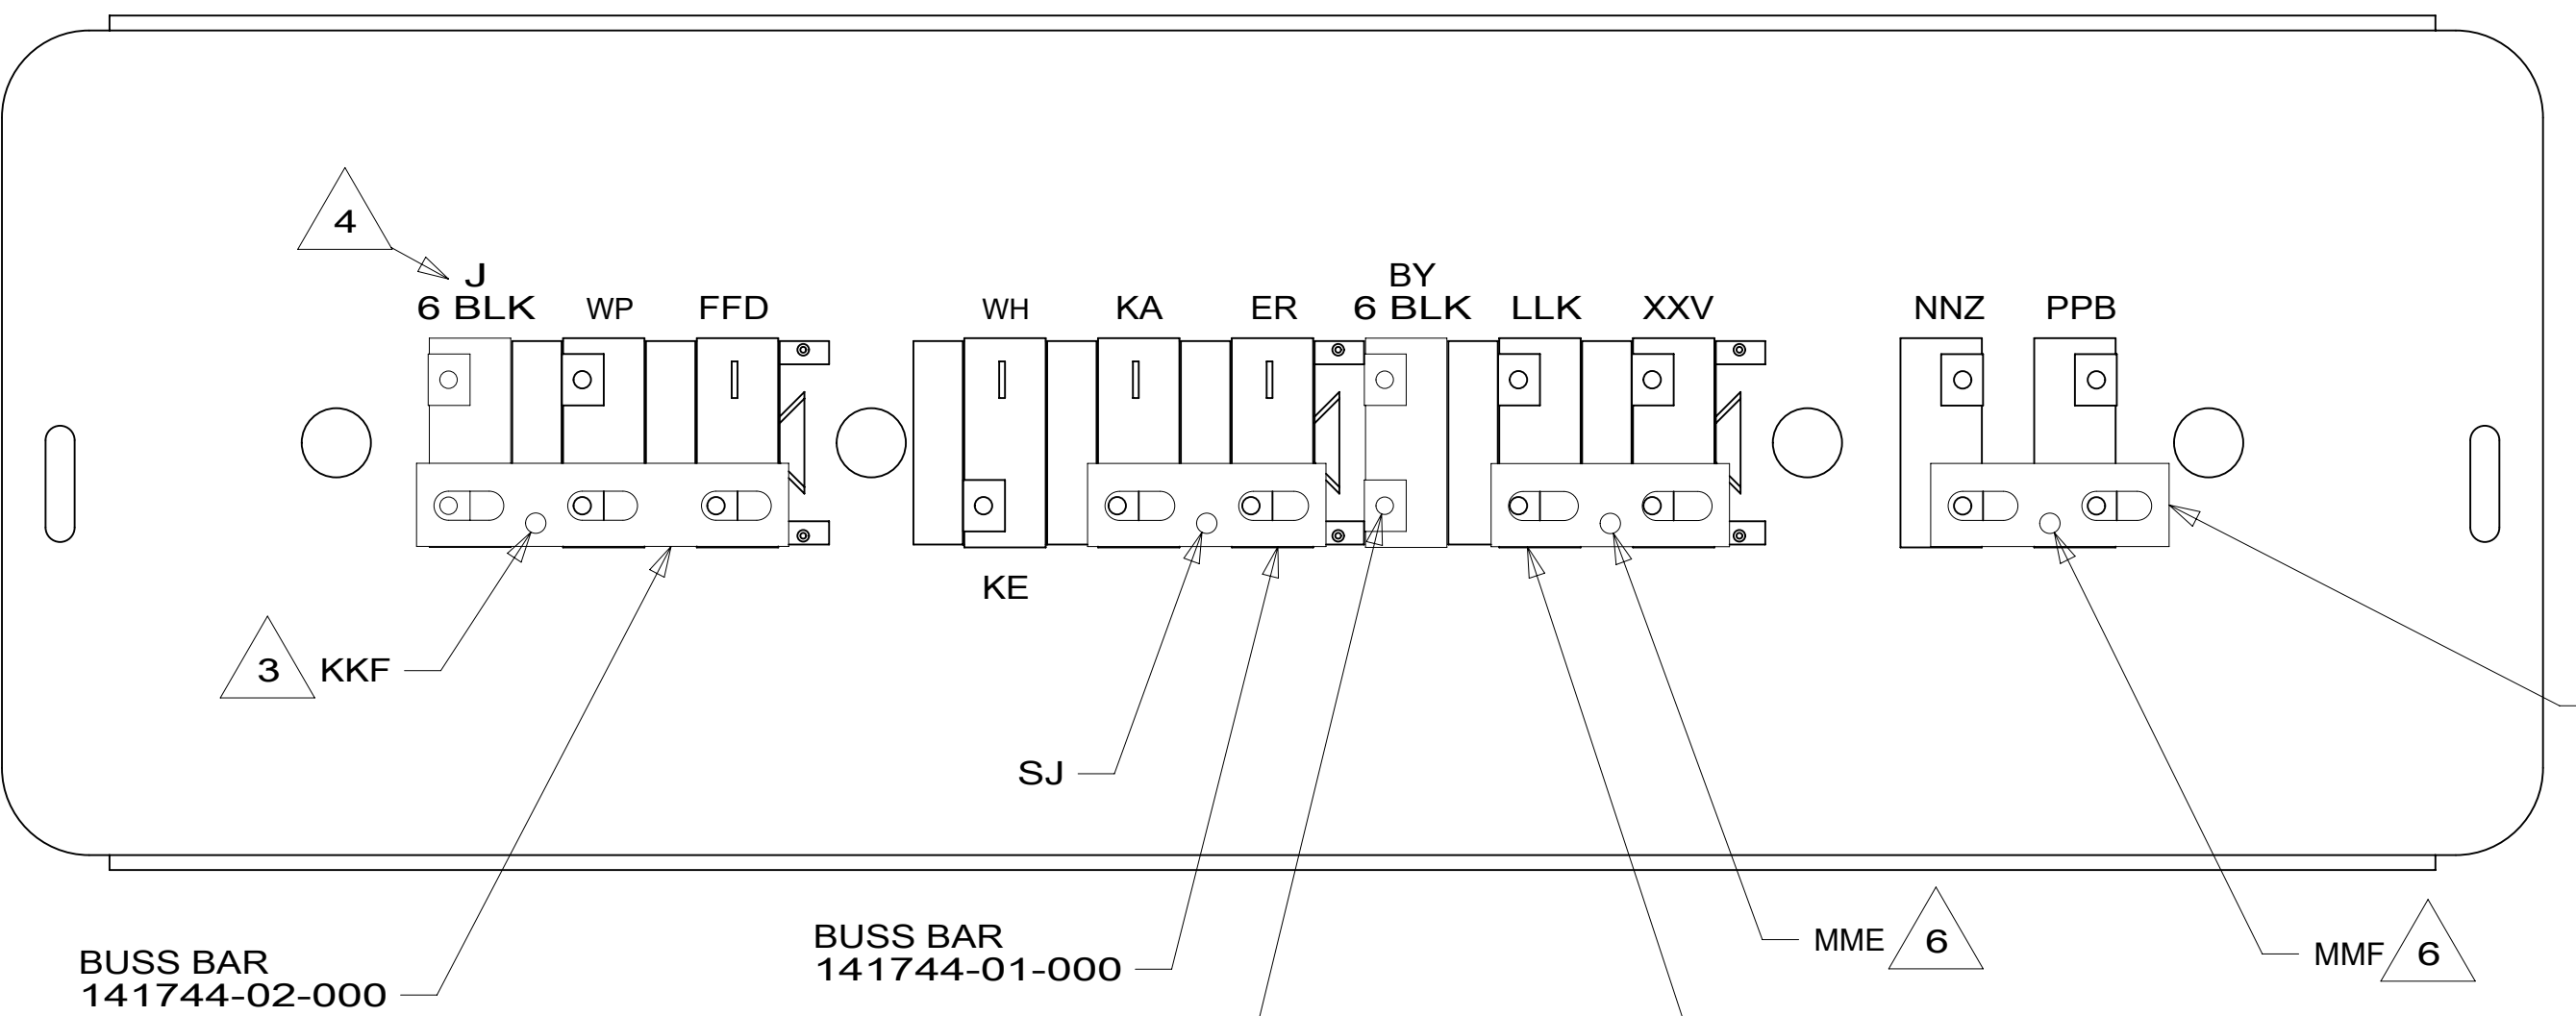

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265	CODES/STANDARDS-CSA/CMVSS
1B1	CODES/STANDARDS USA
1B1	265
DESCRIPTION: <b>CHASSIS ELECTRICAL BOX ASM</b>	
SHEET: 2 OF 2	ITEM/PART NO: 000024269 / 31495201000
REV 04-Aug-2017	