

- 3 45B WIRE ASM-BED LIFT 195046-01-000
- 45D 3 PIN HOUSING TO SIDEWALL
- 45B 3 PIN HSG TO WIRE ASM-BED LIFT
- 3 WIRING TO LOFT BED
- 45D READ-4
- EA
- WIRE ASM-IP.MAIN 000024288 / 314955-01-000
- RING TERMINAL (4) TO GROUND BOLT
- TO RELAYS
- CLIP-WIRE, NYLON 080734-02-000
- TIE-WIRE 008343-01-000
- 6 PIN HOUSING TO LEFT MIRROR
- 12 AND 4 PIN HOUSINGS TO SIDEWALL
- GROMMET 023942-02-000

- TO GROUND STUD
- 45B 9 PIN HOUSING TO ROOF
- 12 PIN HOUSING TO ROOF
- 2 PIN HSG TO SIDEWALL 45D
- 2 PIN HSG TO WIRE ASM-IP.MAIN 45B
- TO SUNVISOR SHADE 3 BUTT SPLICES HHM-BLK HHN-RED KE-BRN
- 4
- SPEAKER 94097-01-000 (2)
- SCREW G11-08-20U (6)
- TAPE (2) (400MM) 2
- 6 PIN HOUSING TO RIGHT MIRROR
- PANEL-SWITCH MOUNTING SINGLE 174834-01-CHT
- SWITCH-MAP LIGHT 174757-20-CHT 45B
- OR SWITCH-BLANK 145754-01-CHT 45D
- USB-CHARGER DUAL,DC 188312-01-000
- 4 PIN HSG TO PASS MAP LAMP SWITCH
- RECEPTACLE-12V 111414-01-000

- 4 CUT VISOR WIRING TO 300 MM BEFORE CONNECTING.
 - 3 SEE SHEET 9 FOR ADDITIONAL INFORMATION ON LOFT BED.
 - 2 USE TAPE 8363-03-000 TO SECURE WIRES IN A-POST.
1. WINNEBAGO WIRE ASSEMBLIES ARE SHOWN FOR CLARITY.
- NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 45D LOFT BED - WITHOUT
- 45B LOFT BED
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

WINNEBAGO
COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.

DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS
DFFR:	
UNSPECIFIED TOLERANCES:	MATERIAL:
WHOLE DIM (X) : 3	
ONE-PLACE (X.X) : 1.5	
TWO-PLACE (X.XX) : 0.50	
ANGLE : 1°	
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS) FIRST USED: 17 E32YE
DESCRIPTION: WIRING INSTL-FRONT END	
SHEET: 1 OF 9	ITEM/PART NO: 000024287 / 31495401000
REF:	1 05-May-2017

8 7 6 5 4 3 2 1

CIRCUIT BREAKER-6 AMP
93654-01-000
SCREW
G52-06-05U
LOCKWASHER
OME02B-04-071


CIRCUIT BREAKER-25 AMP
93655-01-000
SCREW
G52-06-04U
G52-06-05U
LOCKWASHER
OME02B-04-071

CIRCUIT BREAKER-15 AMP
93654-02-000 (3)
SCREW
G52-06-05U (3)

CIRCUIT BREAKER-25 AMP
93655-01-000
SCREW
G52-06-04U
G52-06-05U
LOCKWASHER
OME02B-04-071

LABEL-CIRCUIT BREAKER
93236-66-000


BREAKER-SELF RESET, 20 AMP
182283-01-000
SCREW
G52-06-04U
WASHER-LOCK
OME02B-04-071

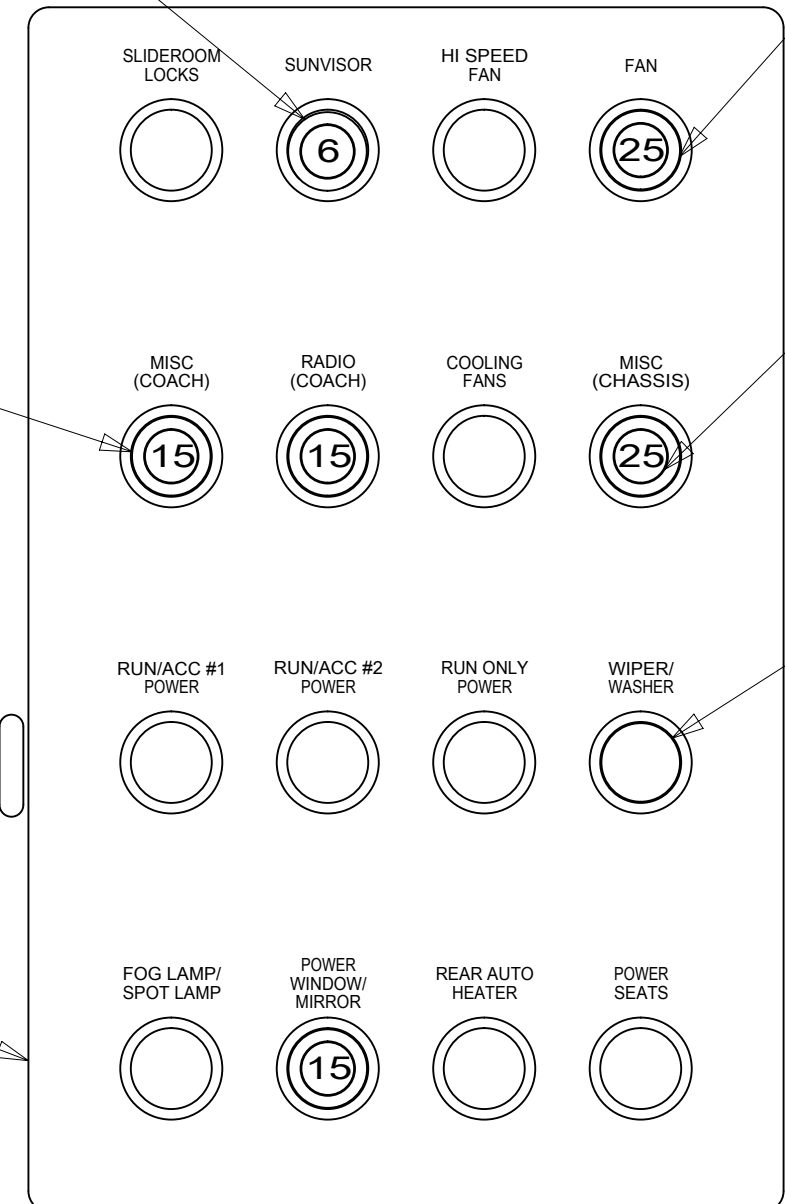


VIEW BB

BRACKET-FUSE PANEL
149690-02-CHT
SCREW
000G11-10-08B (4)

BRACKET-CIRCUIT BREAKER
149689-01-CHT
SCREW
000G11-10-08B (4)

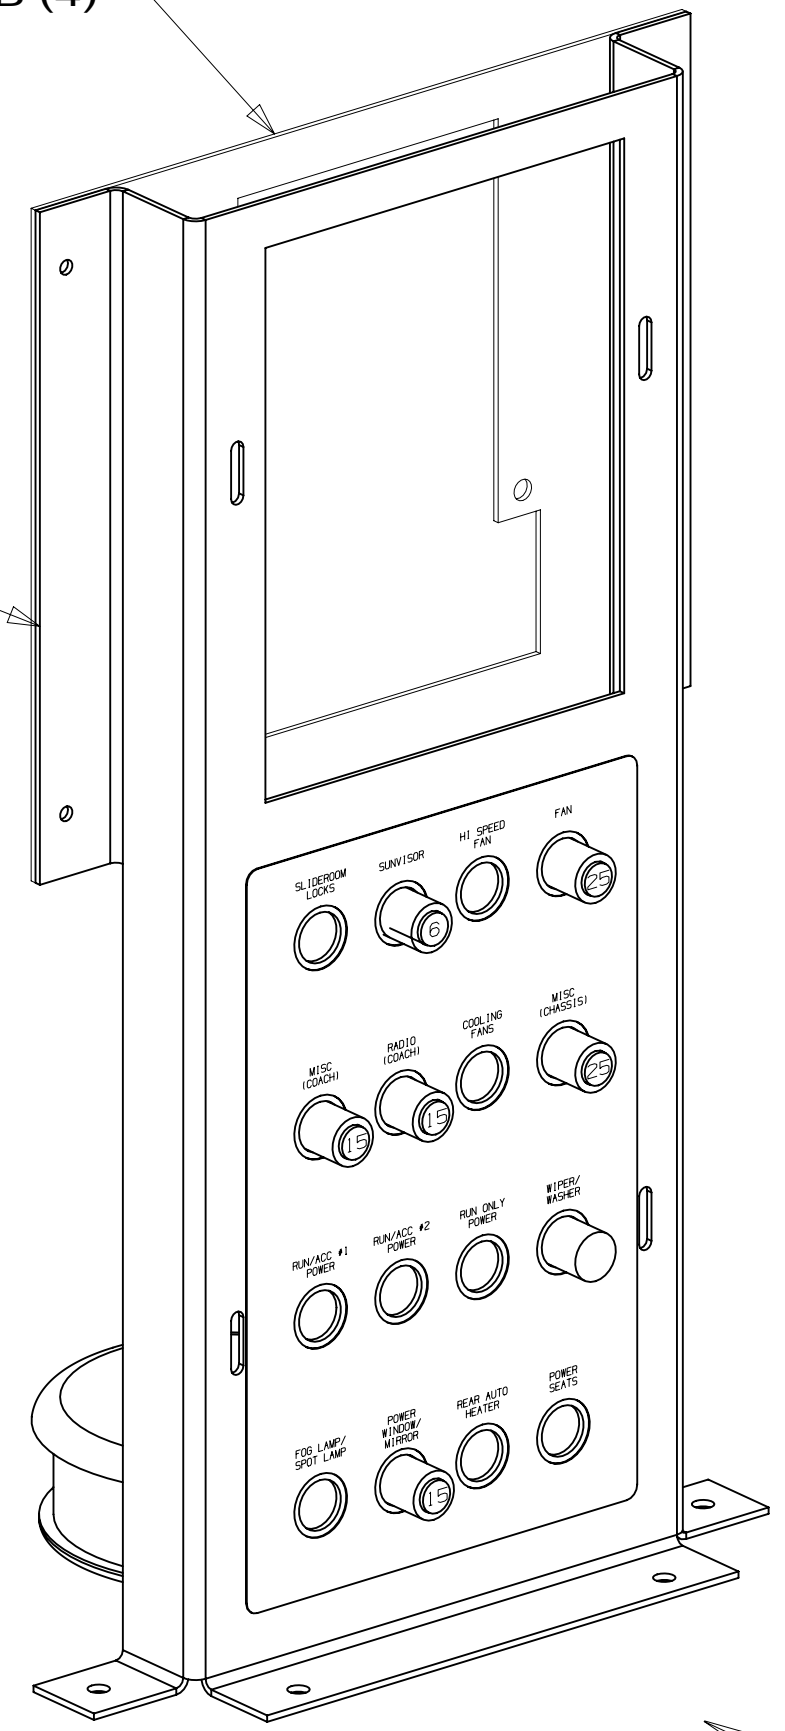

DETAIL BA

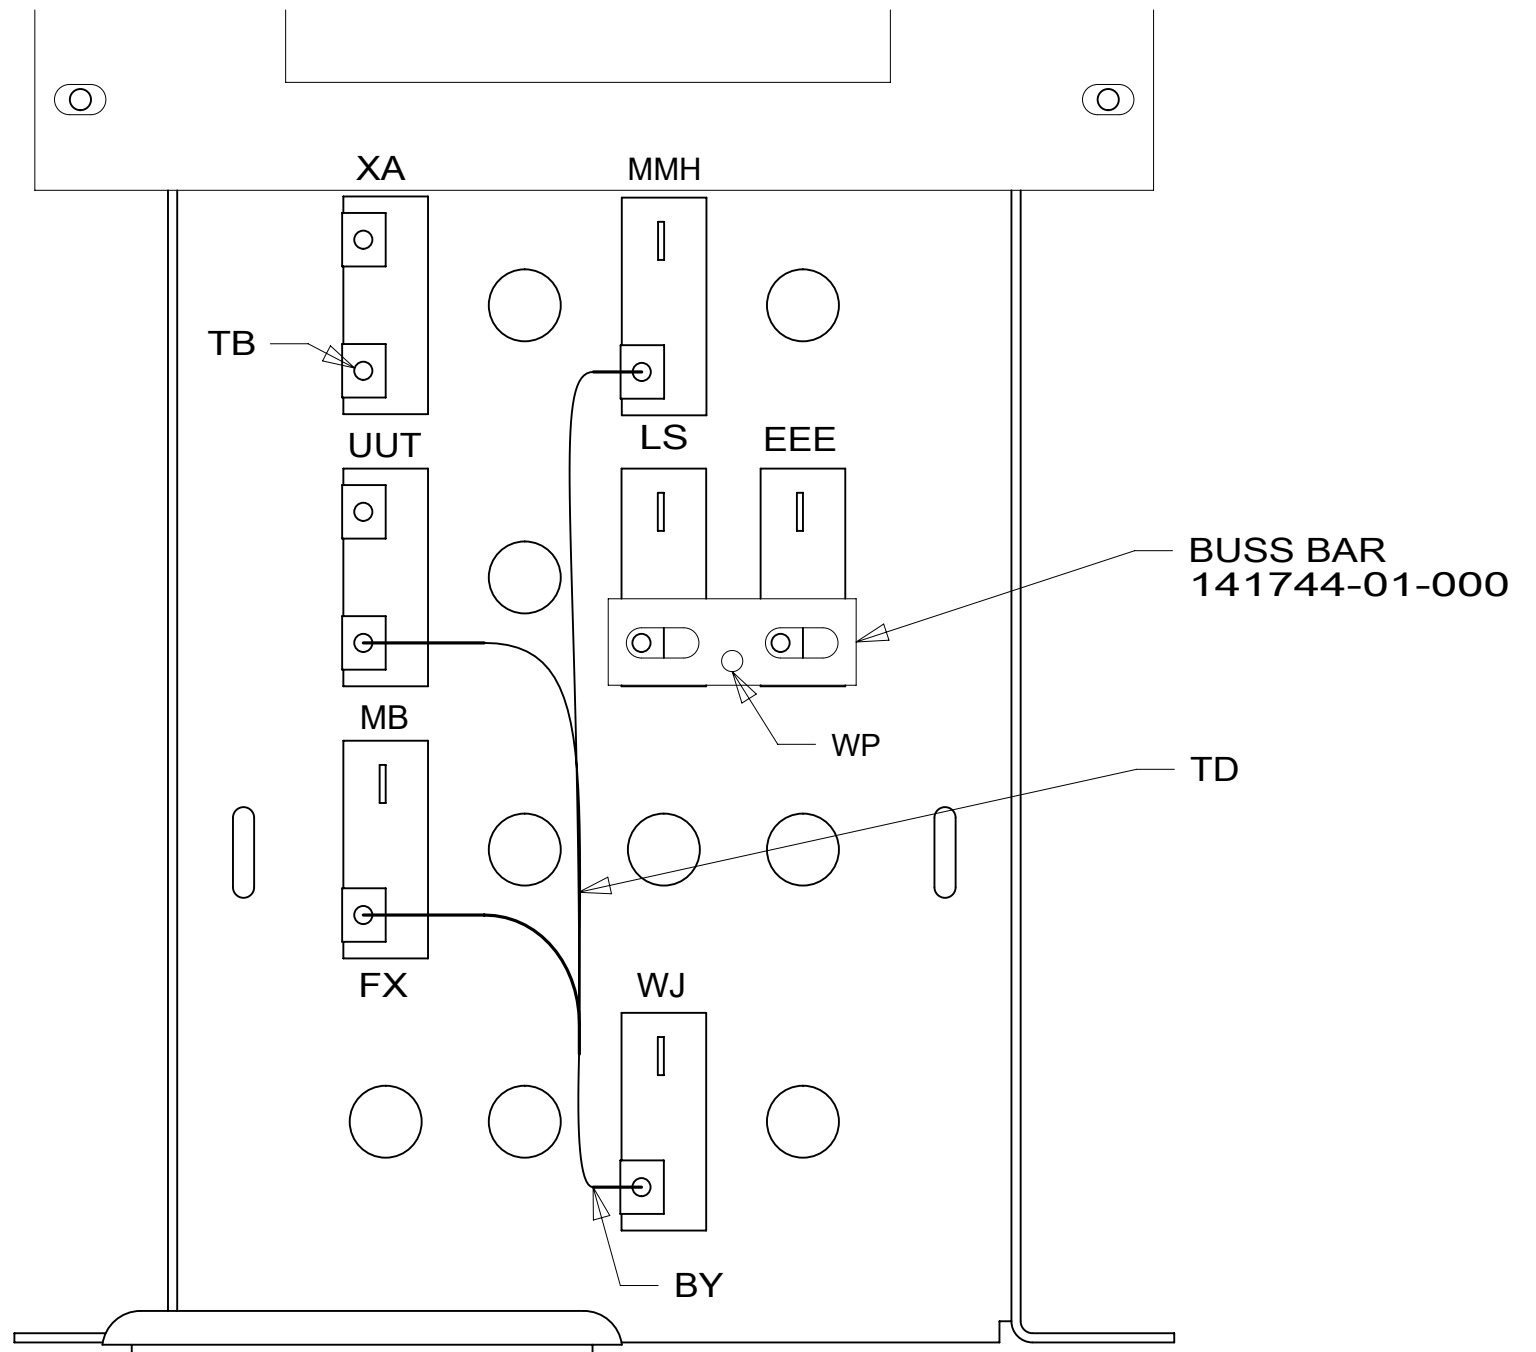

VIEW BC

1 ALL CIRCUITS ARE IN WIRE ASM-IP,MAIN.
NOTES:


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

1B1	265
DESCRIPTION: WIRING INSTL-FRONT END	
SHEET: 2 OF 9	ITEM/PART NO: 000024287 / 31495401000
REV	

8 7 6 5 4 3 2 1 05-May-2017

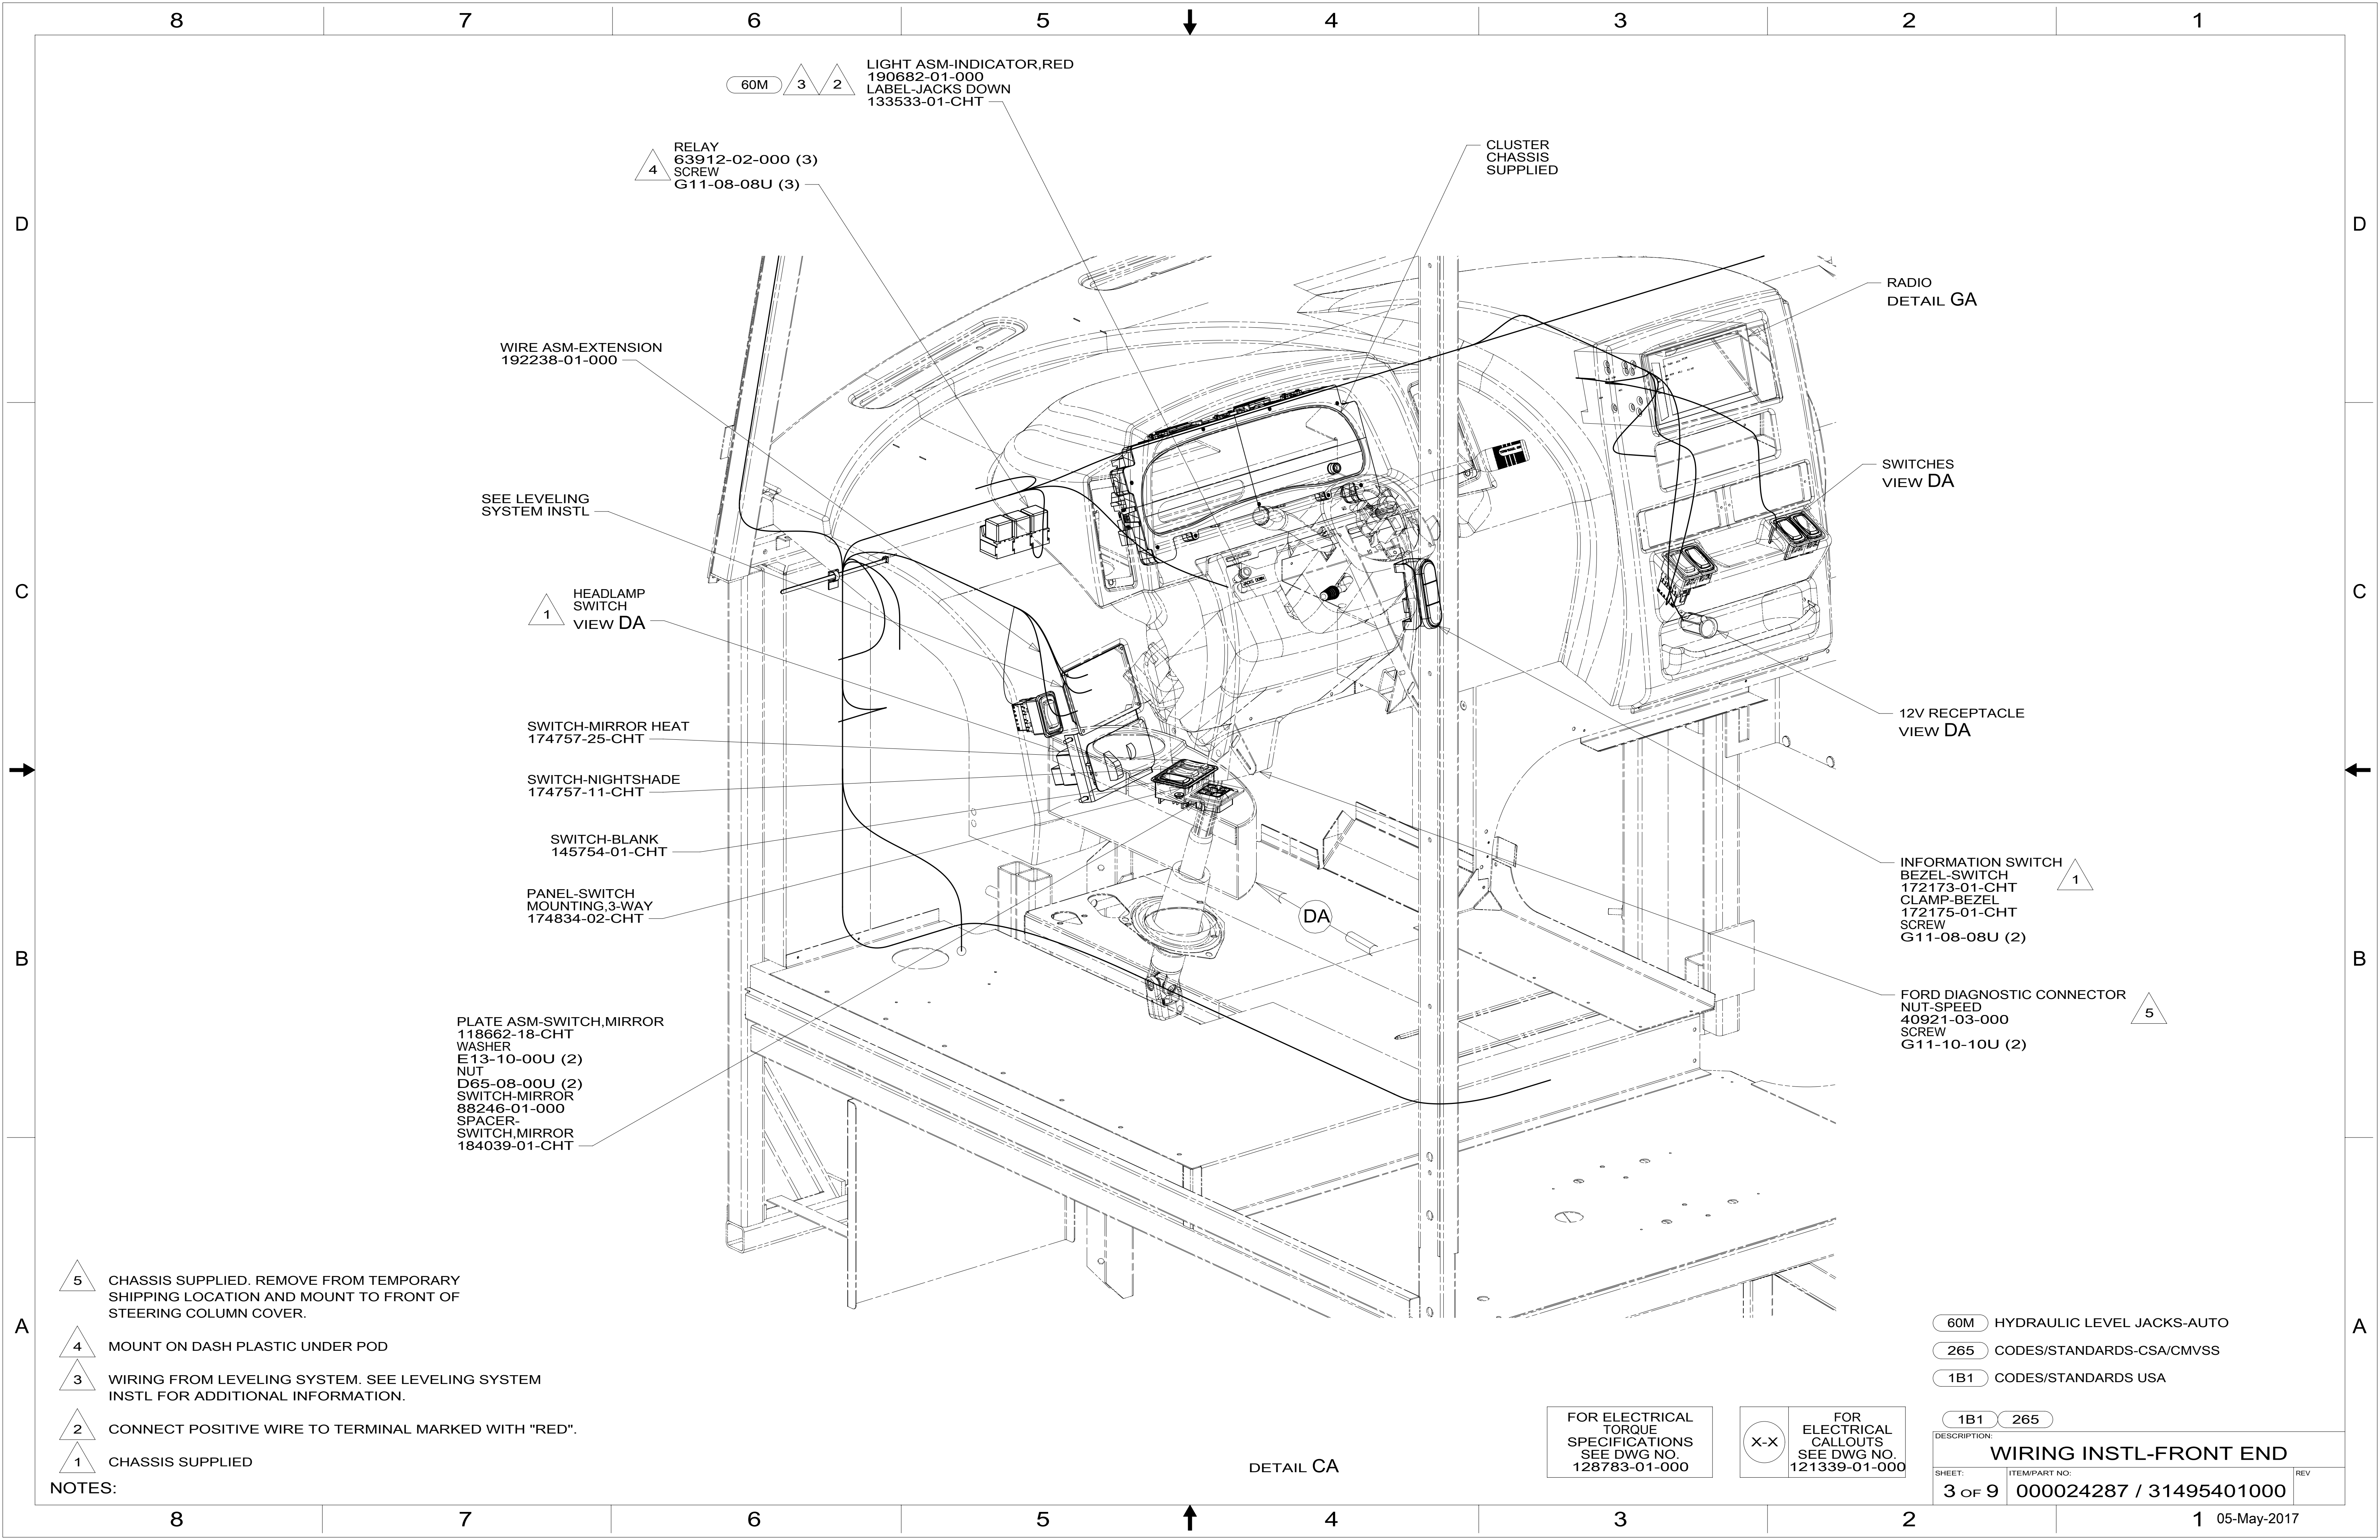

60M 3 2 LIGHT ASM-INDICATOR,RED
190682-01-000
LABEL-JACKS DOWN
133533-01-CHT

4 RELAY
63912-02-000 (3)
SCREW
G11-08-08U (3)

WIRE ASM-EXTENSION
192238-01-000

SEE LEVELING
SYSTEM INSTL

1 HEADLAMP
SWITCH
VIEW DA

SWITCH-MIRROR HEAT
174757-25-CHT

SWITCH-NIGHTSHADE
174757-11-CHT

SWITCH-BLANK
145754-01-CHT

PANEL-SWITCH
MOUNTING,3-WAY
174834-02-CHT

PLATE ASM-SWITCH,MIRROR
118662-18-CHT
WASHER
E13-10-00U (2)
NUT
D65-08-00U (2)
SWITCH-MIRROR
88246-01-000
SPACER-
SWITCH,MIRROR
184039-01-CHT

CLUSTER
CHASSIS
SUPPLIED

RADIO
DETAIL GA

SWITCHES
VIEW DA

12V RECEPTACLE
VIEW DA

1 INFORMATION SWITCH
BEZEL-SWITCH
172173-01-CHT
CLAMP-BEZEL
172175-01-CHT
SCREW
G11-08-08U (2)

5 FORD DIAGNOSTIC CONNECTOR
NUT-SPEED
40921-03-000
SCREW
G11-10-10U (2)

5 CHASSIS SUPPLIED. REMOVE FROM TEMPORARY SHIPPING LOCATION AND MOUNT TO FRONT OF STEERING COLUMN COVER.

4 MOUNT ON DASH PLASTIC UNDER POD

3 WIRING FROM LEVELING SYSTEM. SEE LEVELING SYSTEM INSTL FOR ADDITIONAL INFORMATION.

2 CONNECT POSITIVE WIRE TO TERMINAL MARKED WITH "RED".

1 CHASSIS SUPPLIED

NOTES:

- 60M HYDRAULIC LEVEL JACKS-AUTO
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:	
WIRING INSTL-FRONT END	
SHEET:	ITEM/PART NO.:
3 OF 9	000024287 / 31495401000
REV	
	1 05-May-2017

DETAIL CA

8 7 6 5 4 3 2 1

D

D

C


C

B

B

A

A

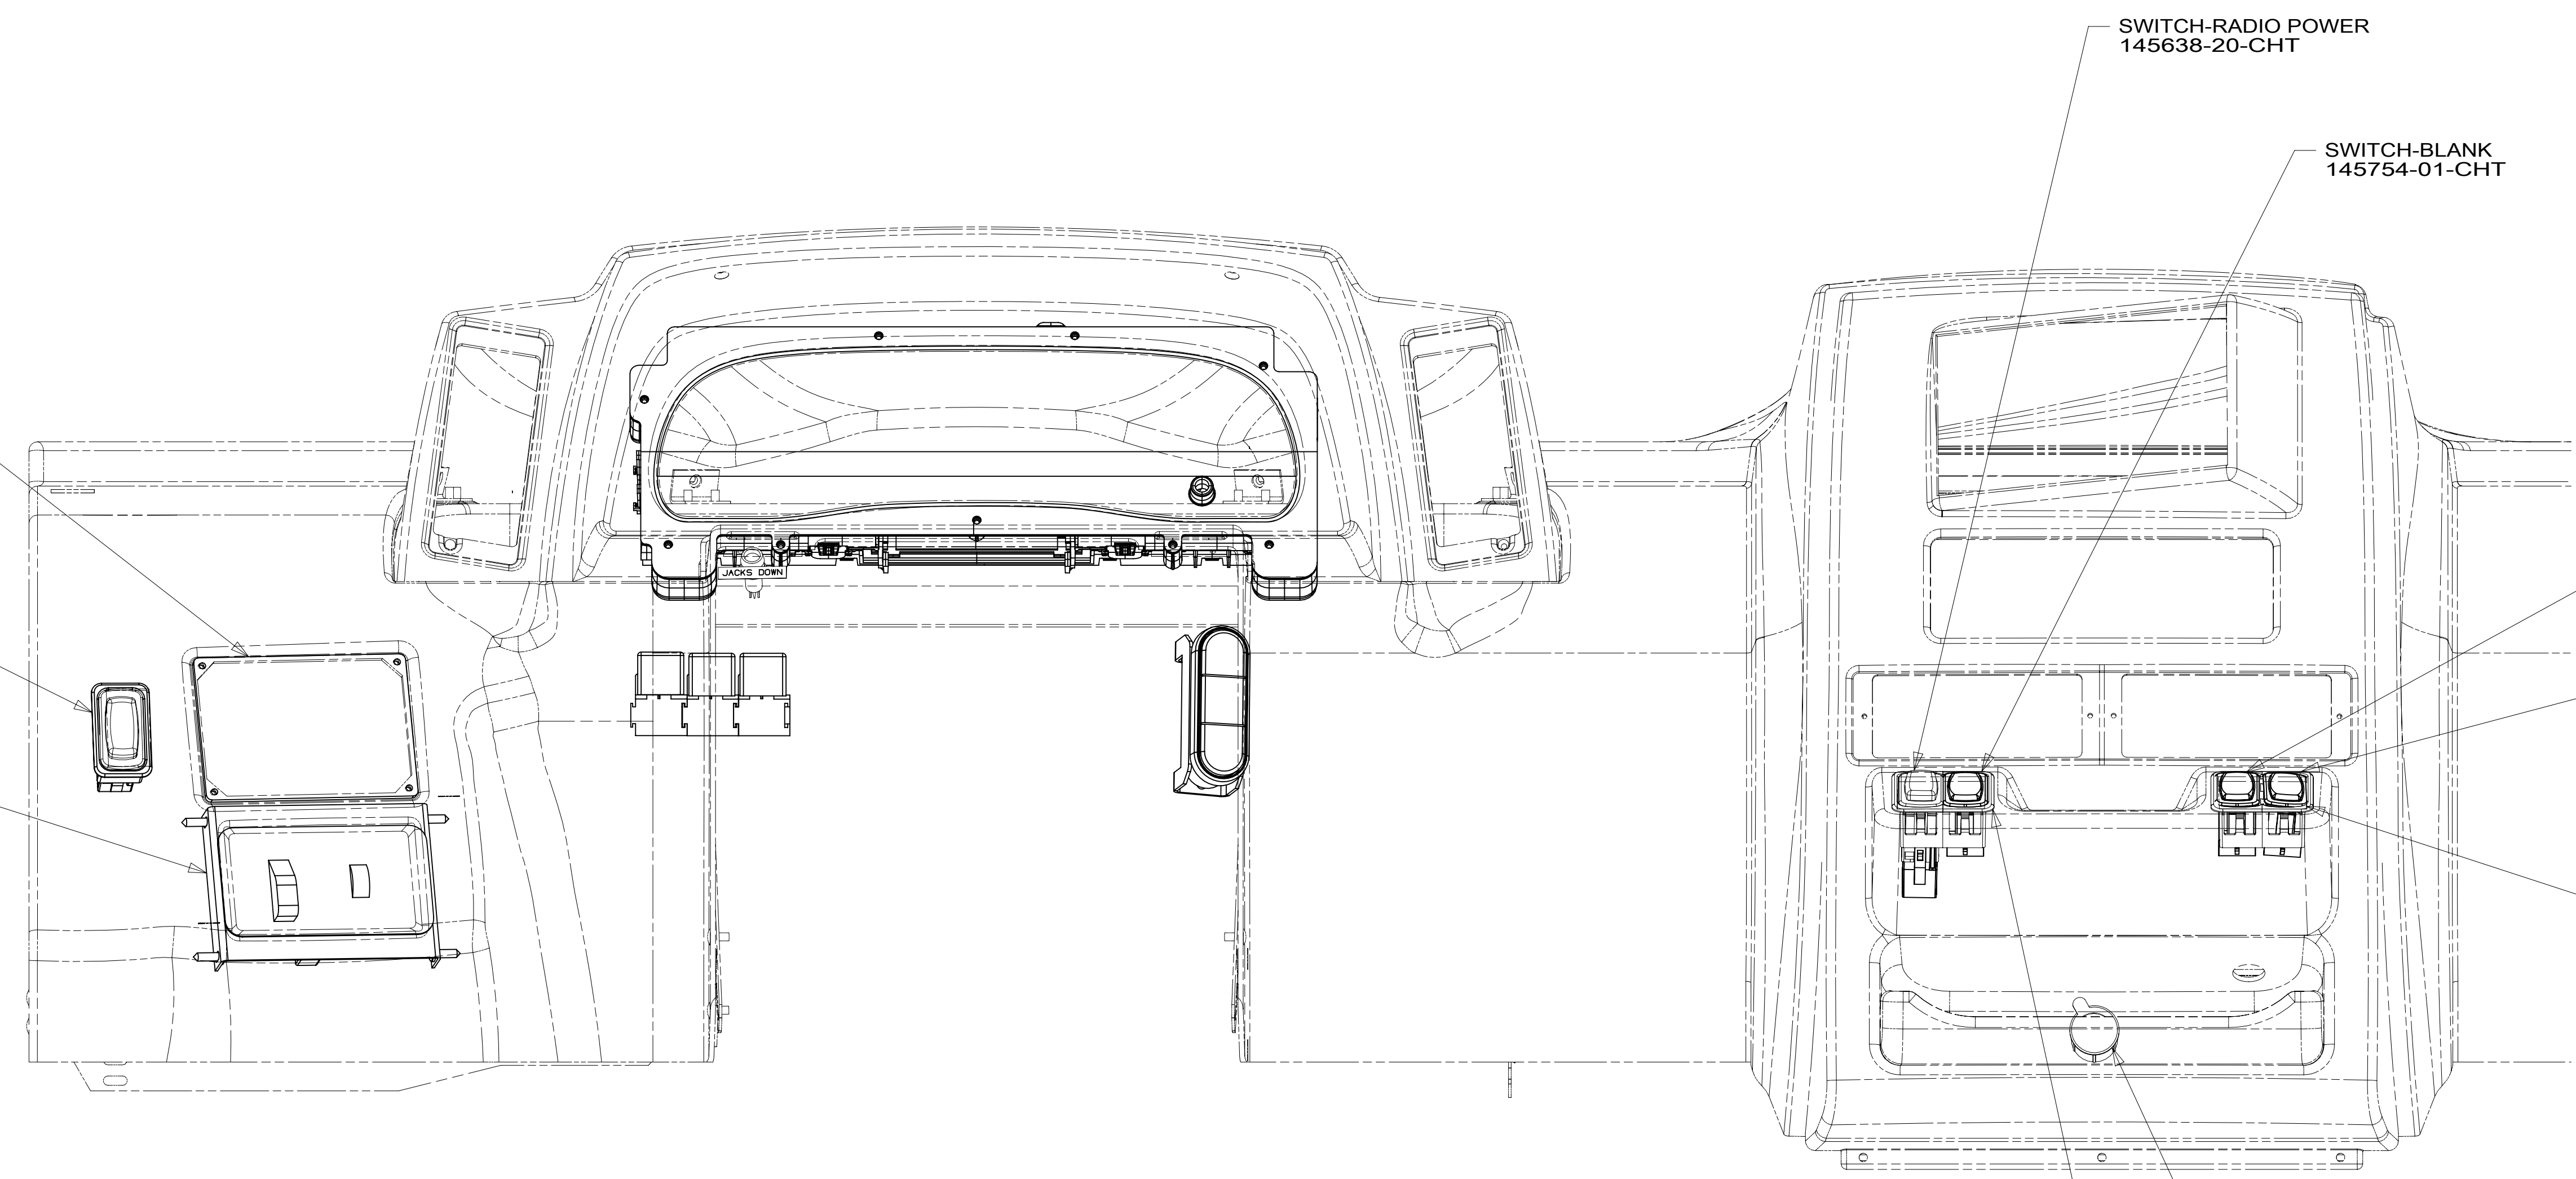

VIEW DA

2 SWITCH-BATTERY BOOST
145638-18-CHT
PANEL-SWITCH MOUNT
174834-01-CHT

MOUNT-HEADLAMP SWITCH
155516-03-CHT

SWITCH-RADIO POWER
145638-20-CHT

SWITCH-BLANK
145754-01-CHT


SWITCH-BLANK
145754-01-CHT

PANEL-SWITCH MOUNTING
174834-05-CHT (2)


SWITCH-BLANK
145754-01-CHT

RECEPTACLE-12V
111414-01-000

PANEL-SWITCH MOUNTING
174834-05-CHT (2)

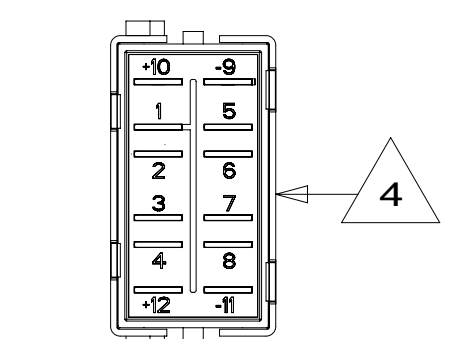

DETAIL DB
(MOUNTED VERTICALLY)

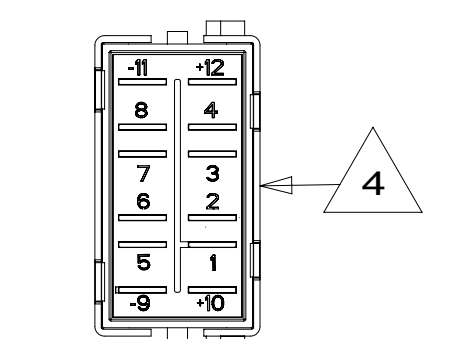

DETAIL DC
(MOUNTED VERTICALLY)

- NOTES:
- 4 WITH SWITCH INSTALLED THIS SIDE OF SWITCH WILL FACE LEFT SIDEWALL.
 - 3 DETAIL IS LOOKING AT SWITCH FROM THE BACK SIDE OF SWITCH AS ITS INSTALLED.
 - 2 SEE DETAIL DC FOR ORIENTATION.
 - 1 SEE DETAIL DB FOR ORIENTATION.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA



DESCRIPTION:	
WIRING INSTL-FRONT END	
SHEET:	ITEM/PART NO. REV
4 OF 9	000024287 / 31495401000

8 7 6 5 4 3 2 1 05-May-2017

8 7 6 5 4 3 2 1

D
C
B
A

D
C
B
A

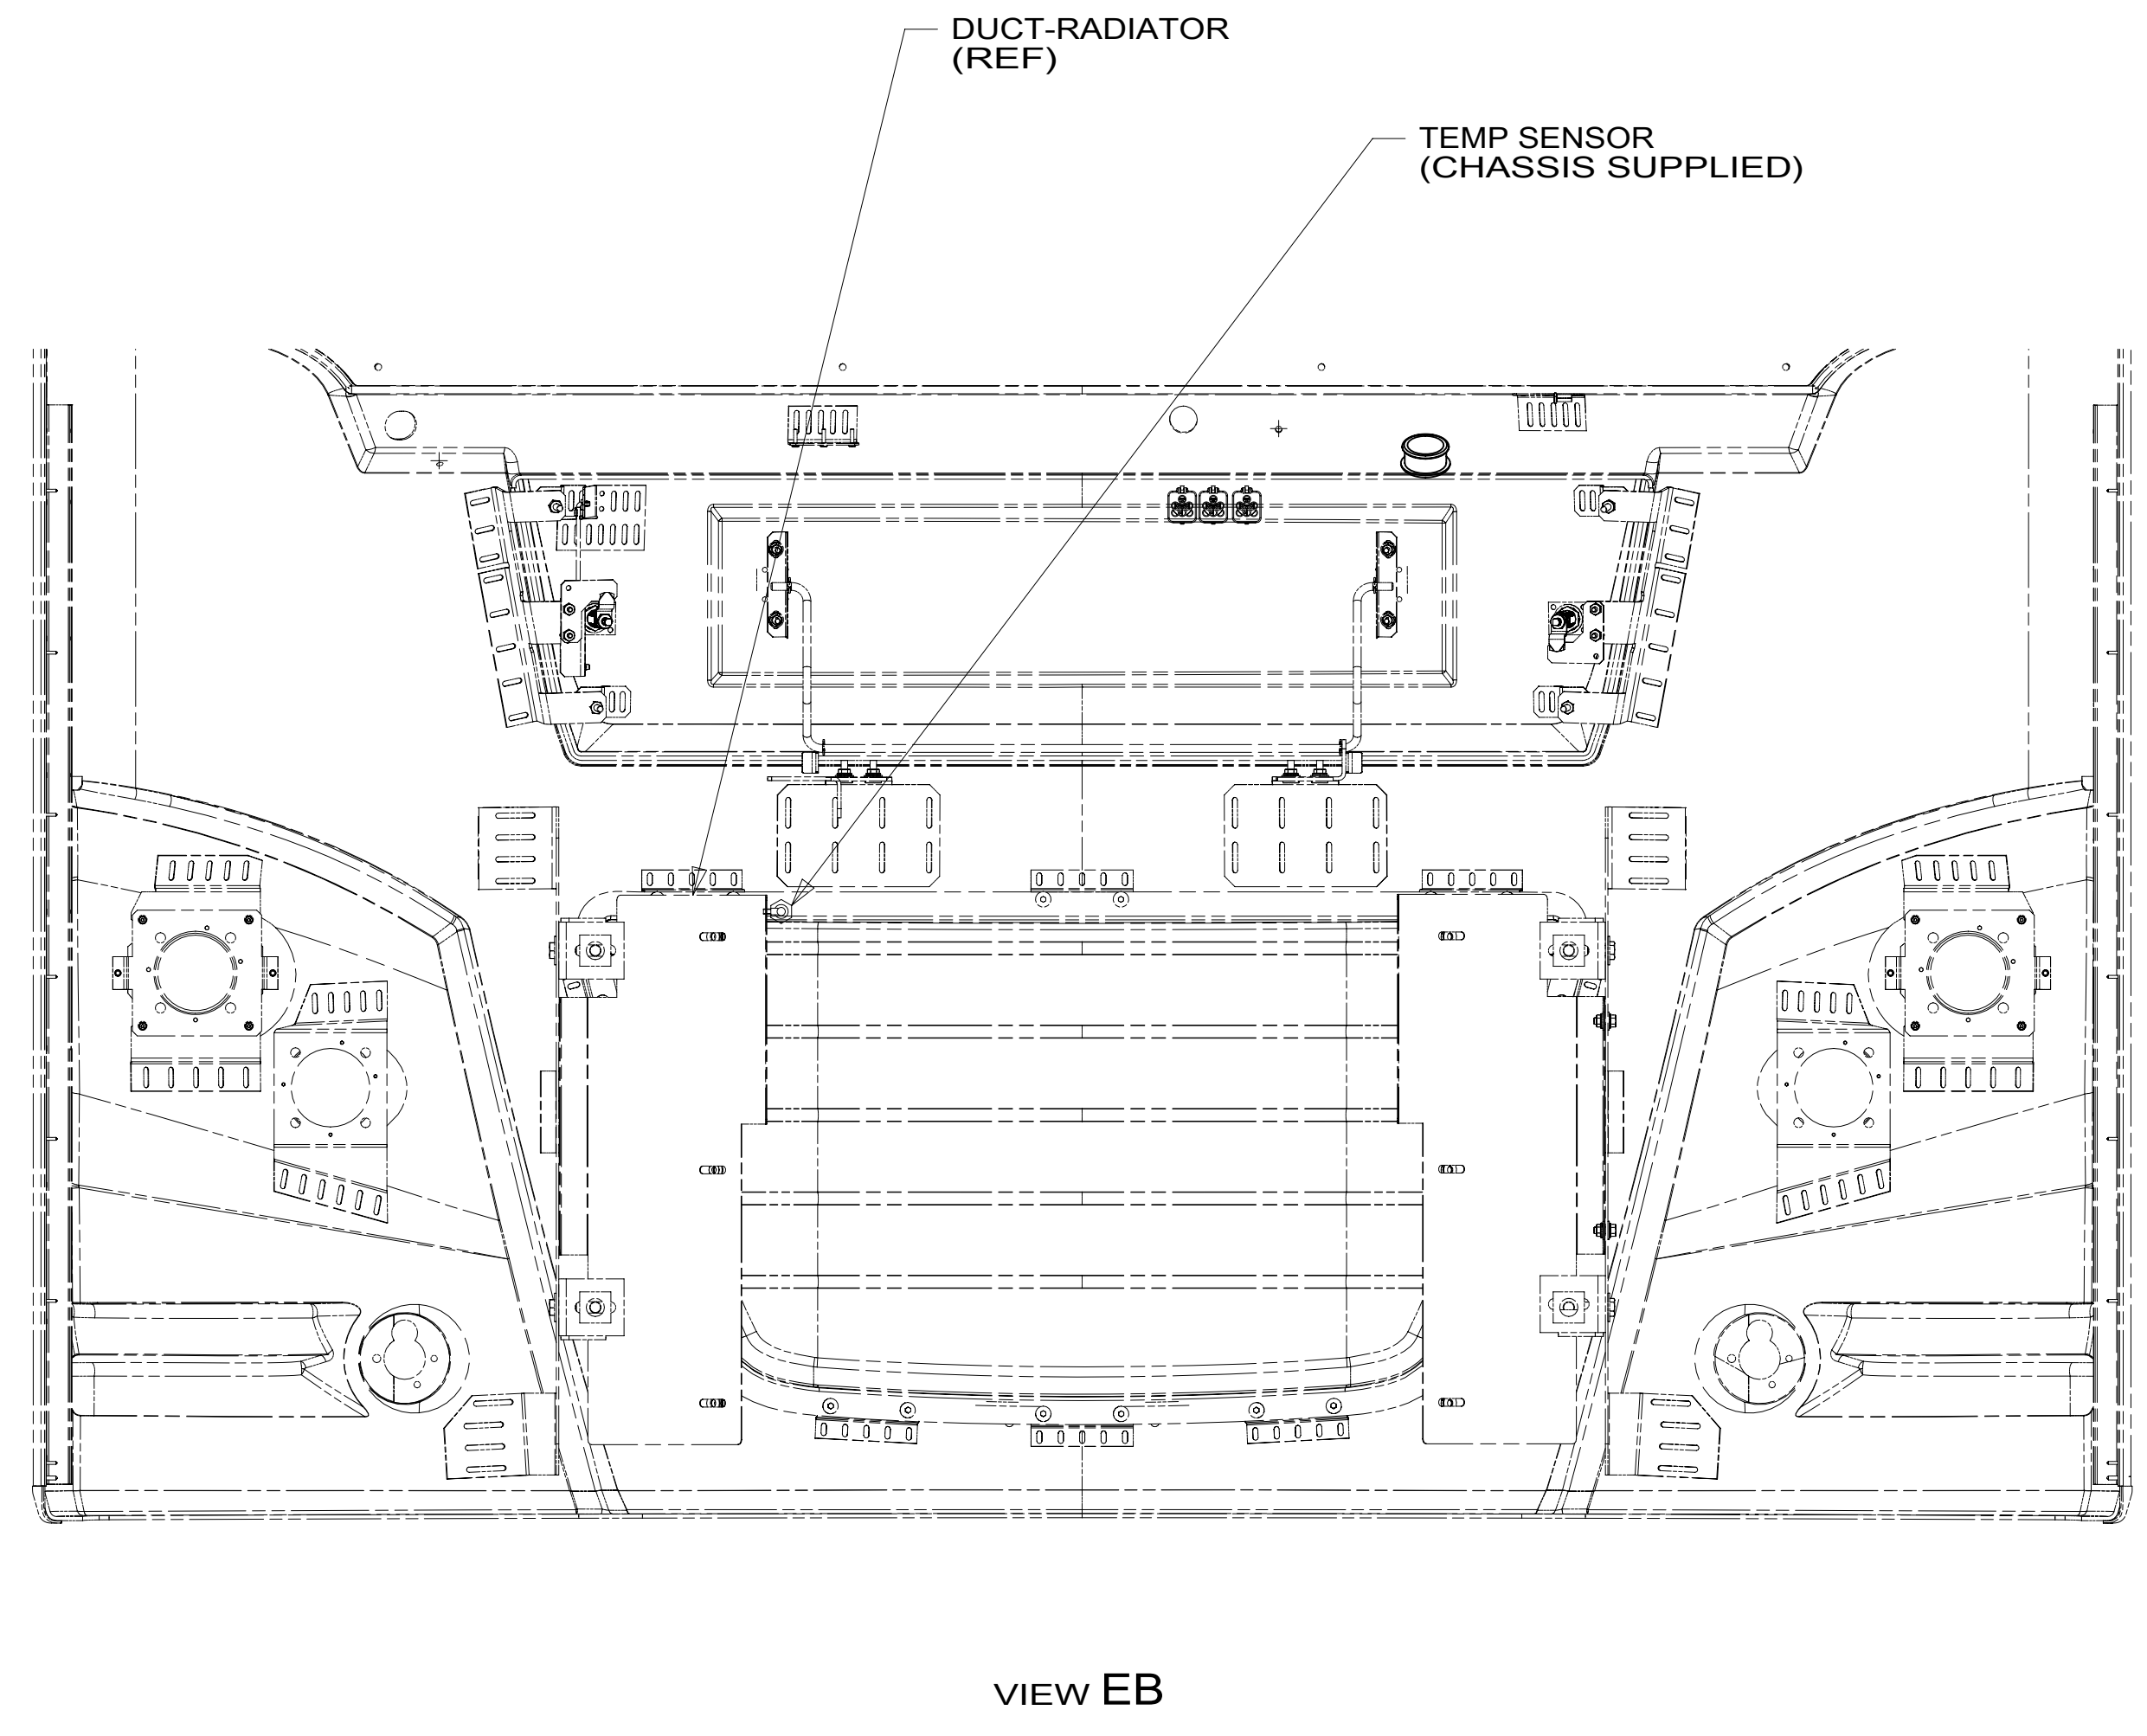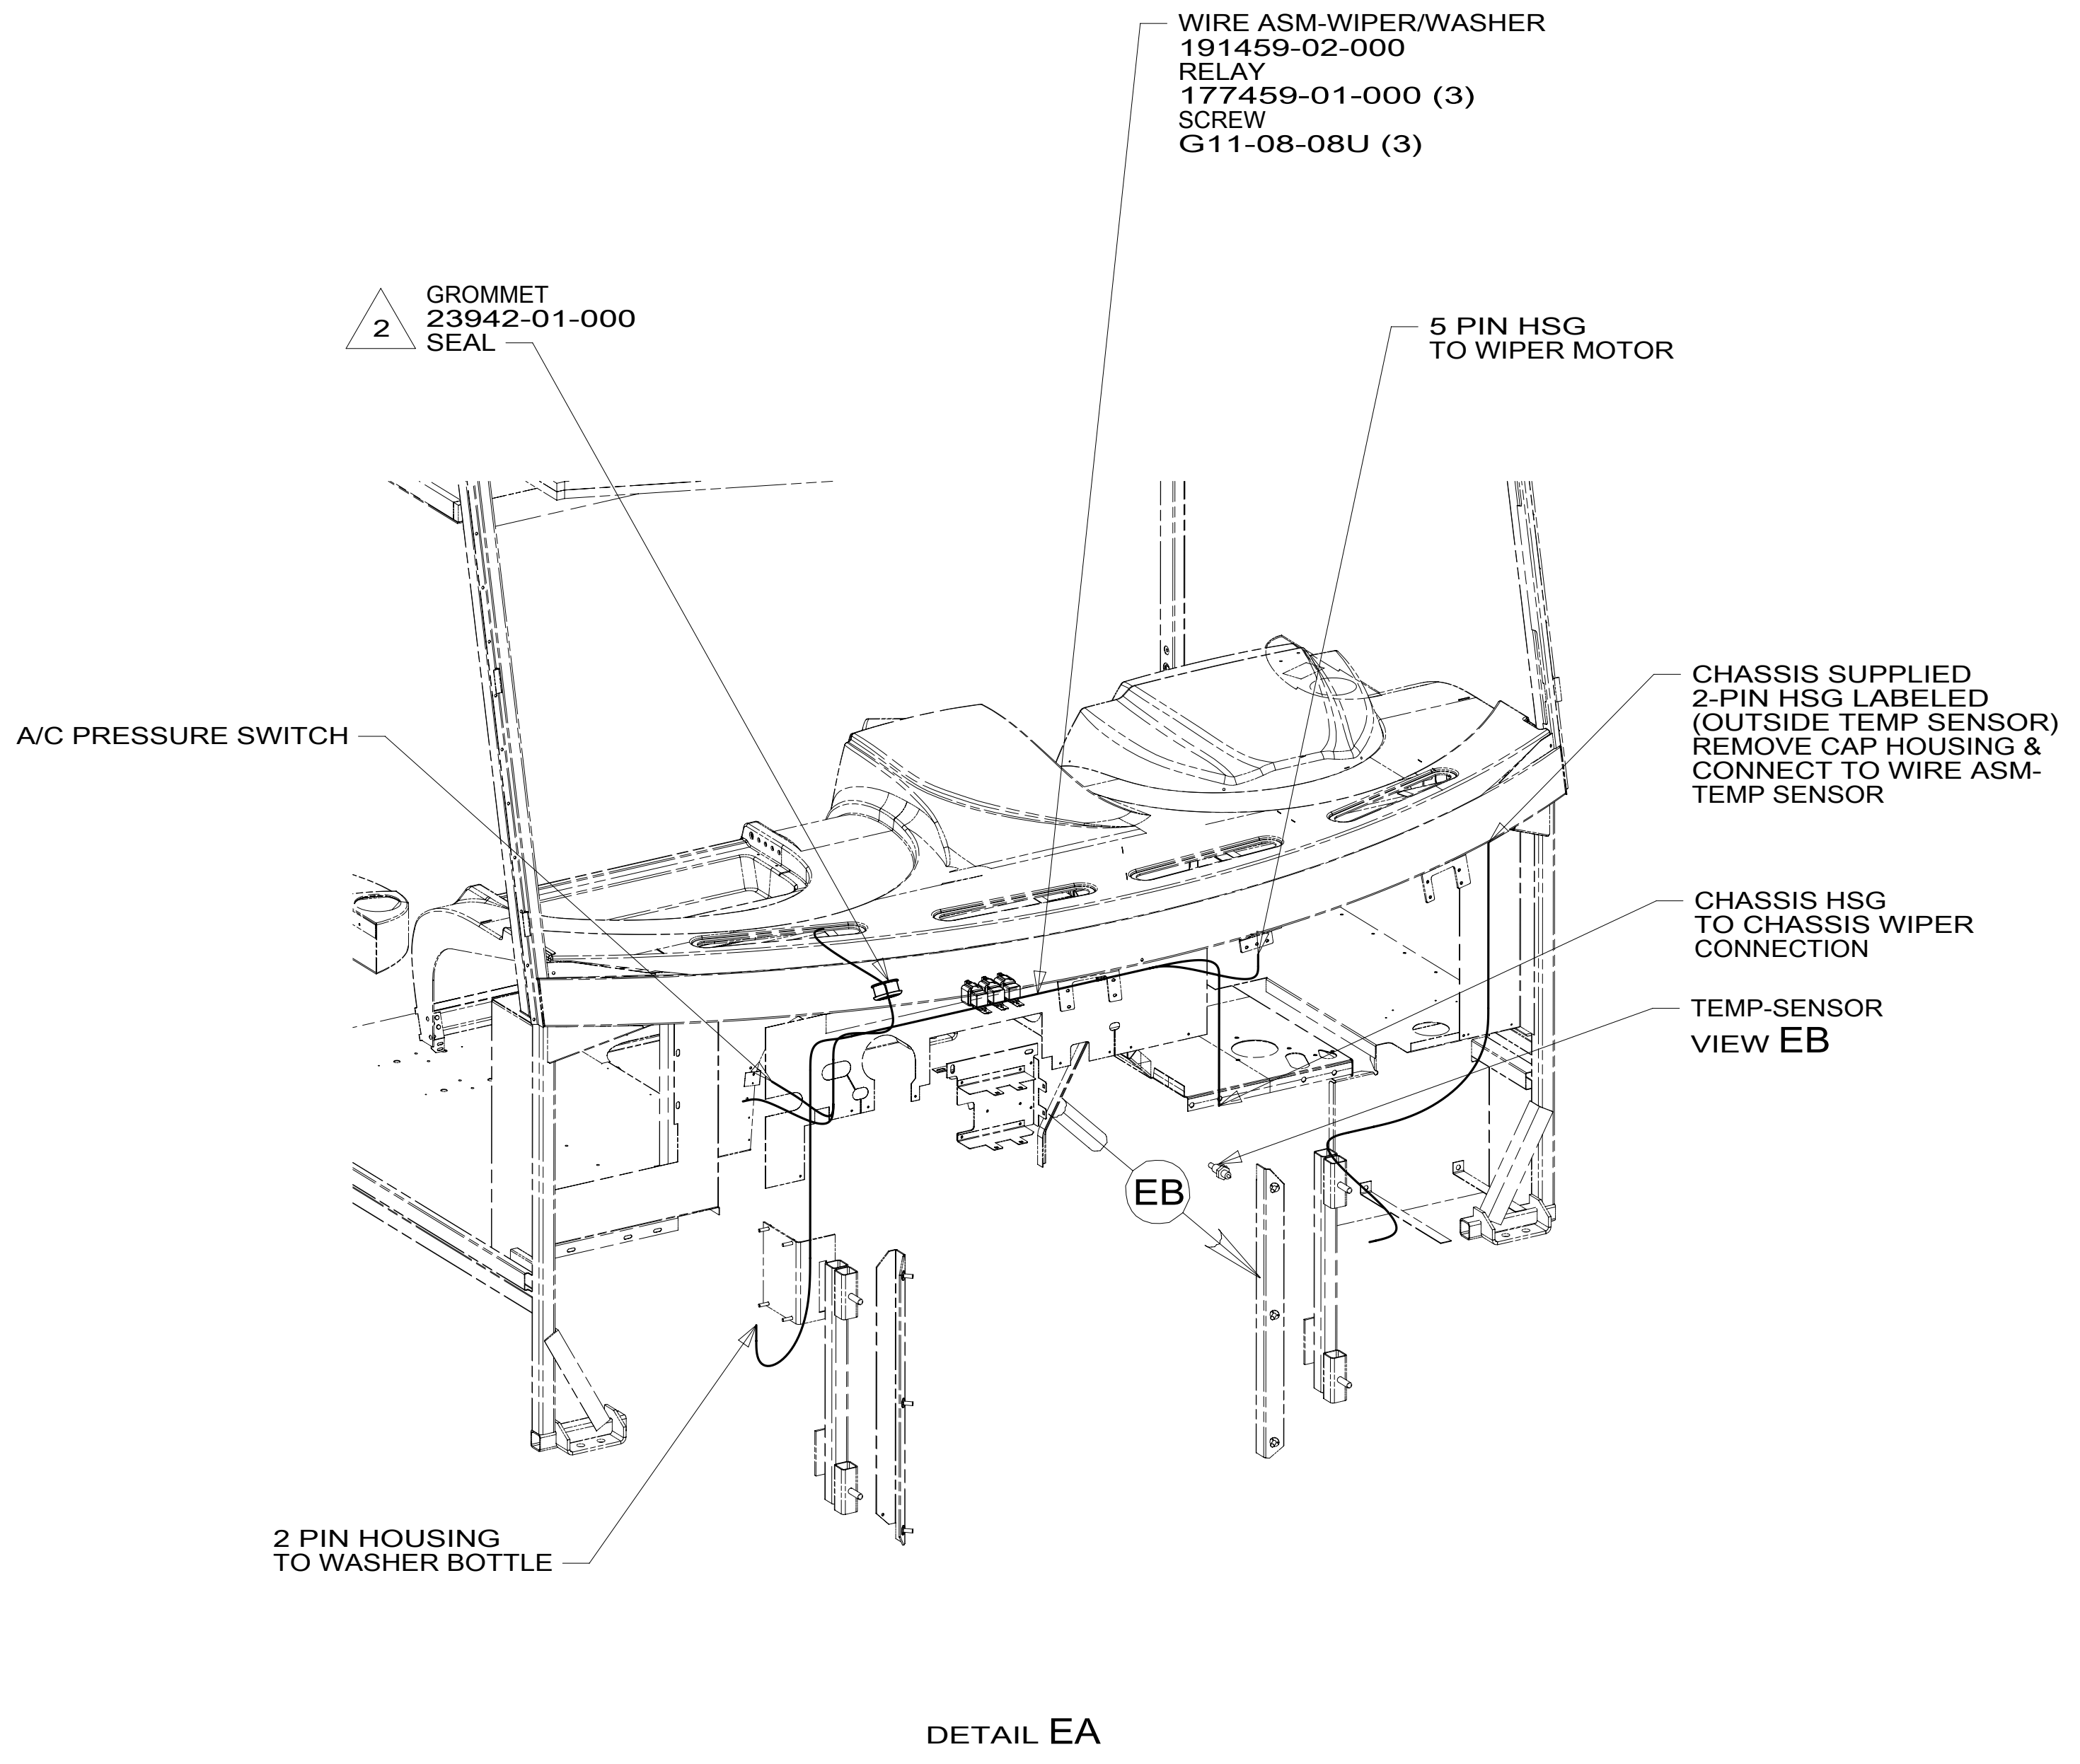

- 2 ROUTE WIRES THROUGH HOLE IN STEEL.
- GATHER ALL EXCESS WIRE AFTER MAKING ALL CONNECTIONS.
BUNDLE AND SECURE WITH WIRE TIE 8343-01-000 OR 93147-01-000.
- NOTES:


265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

DESCRIPTION: WIRING INSTL-FRONT END		REV
SHEET: 5 OF 9	ITEM/PART NO: 000024287 / 31495401000	

8 7 6 5 4 3 2 1 05-May-2017

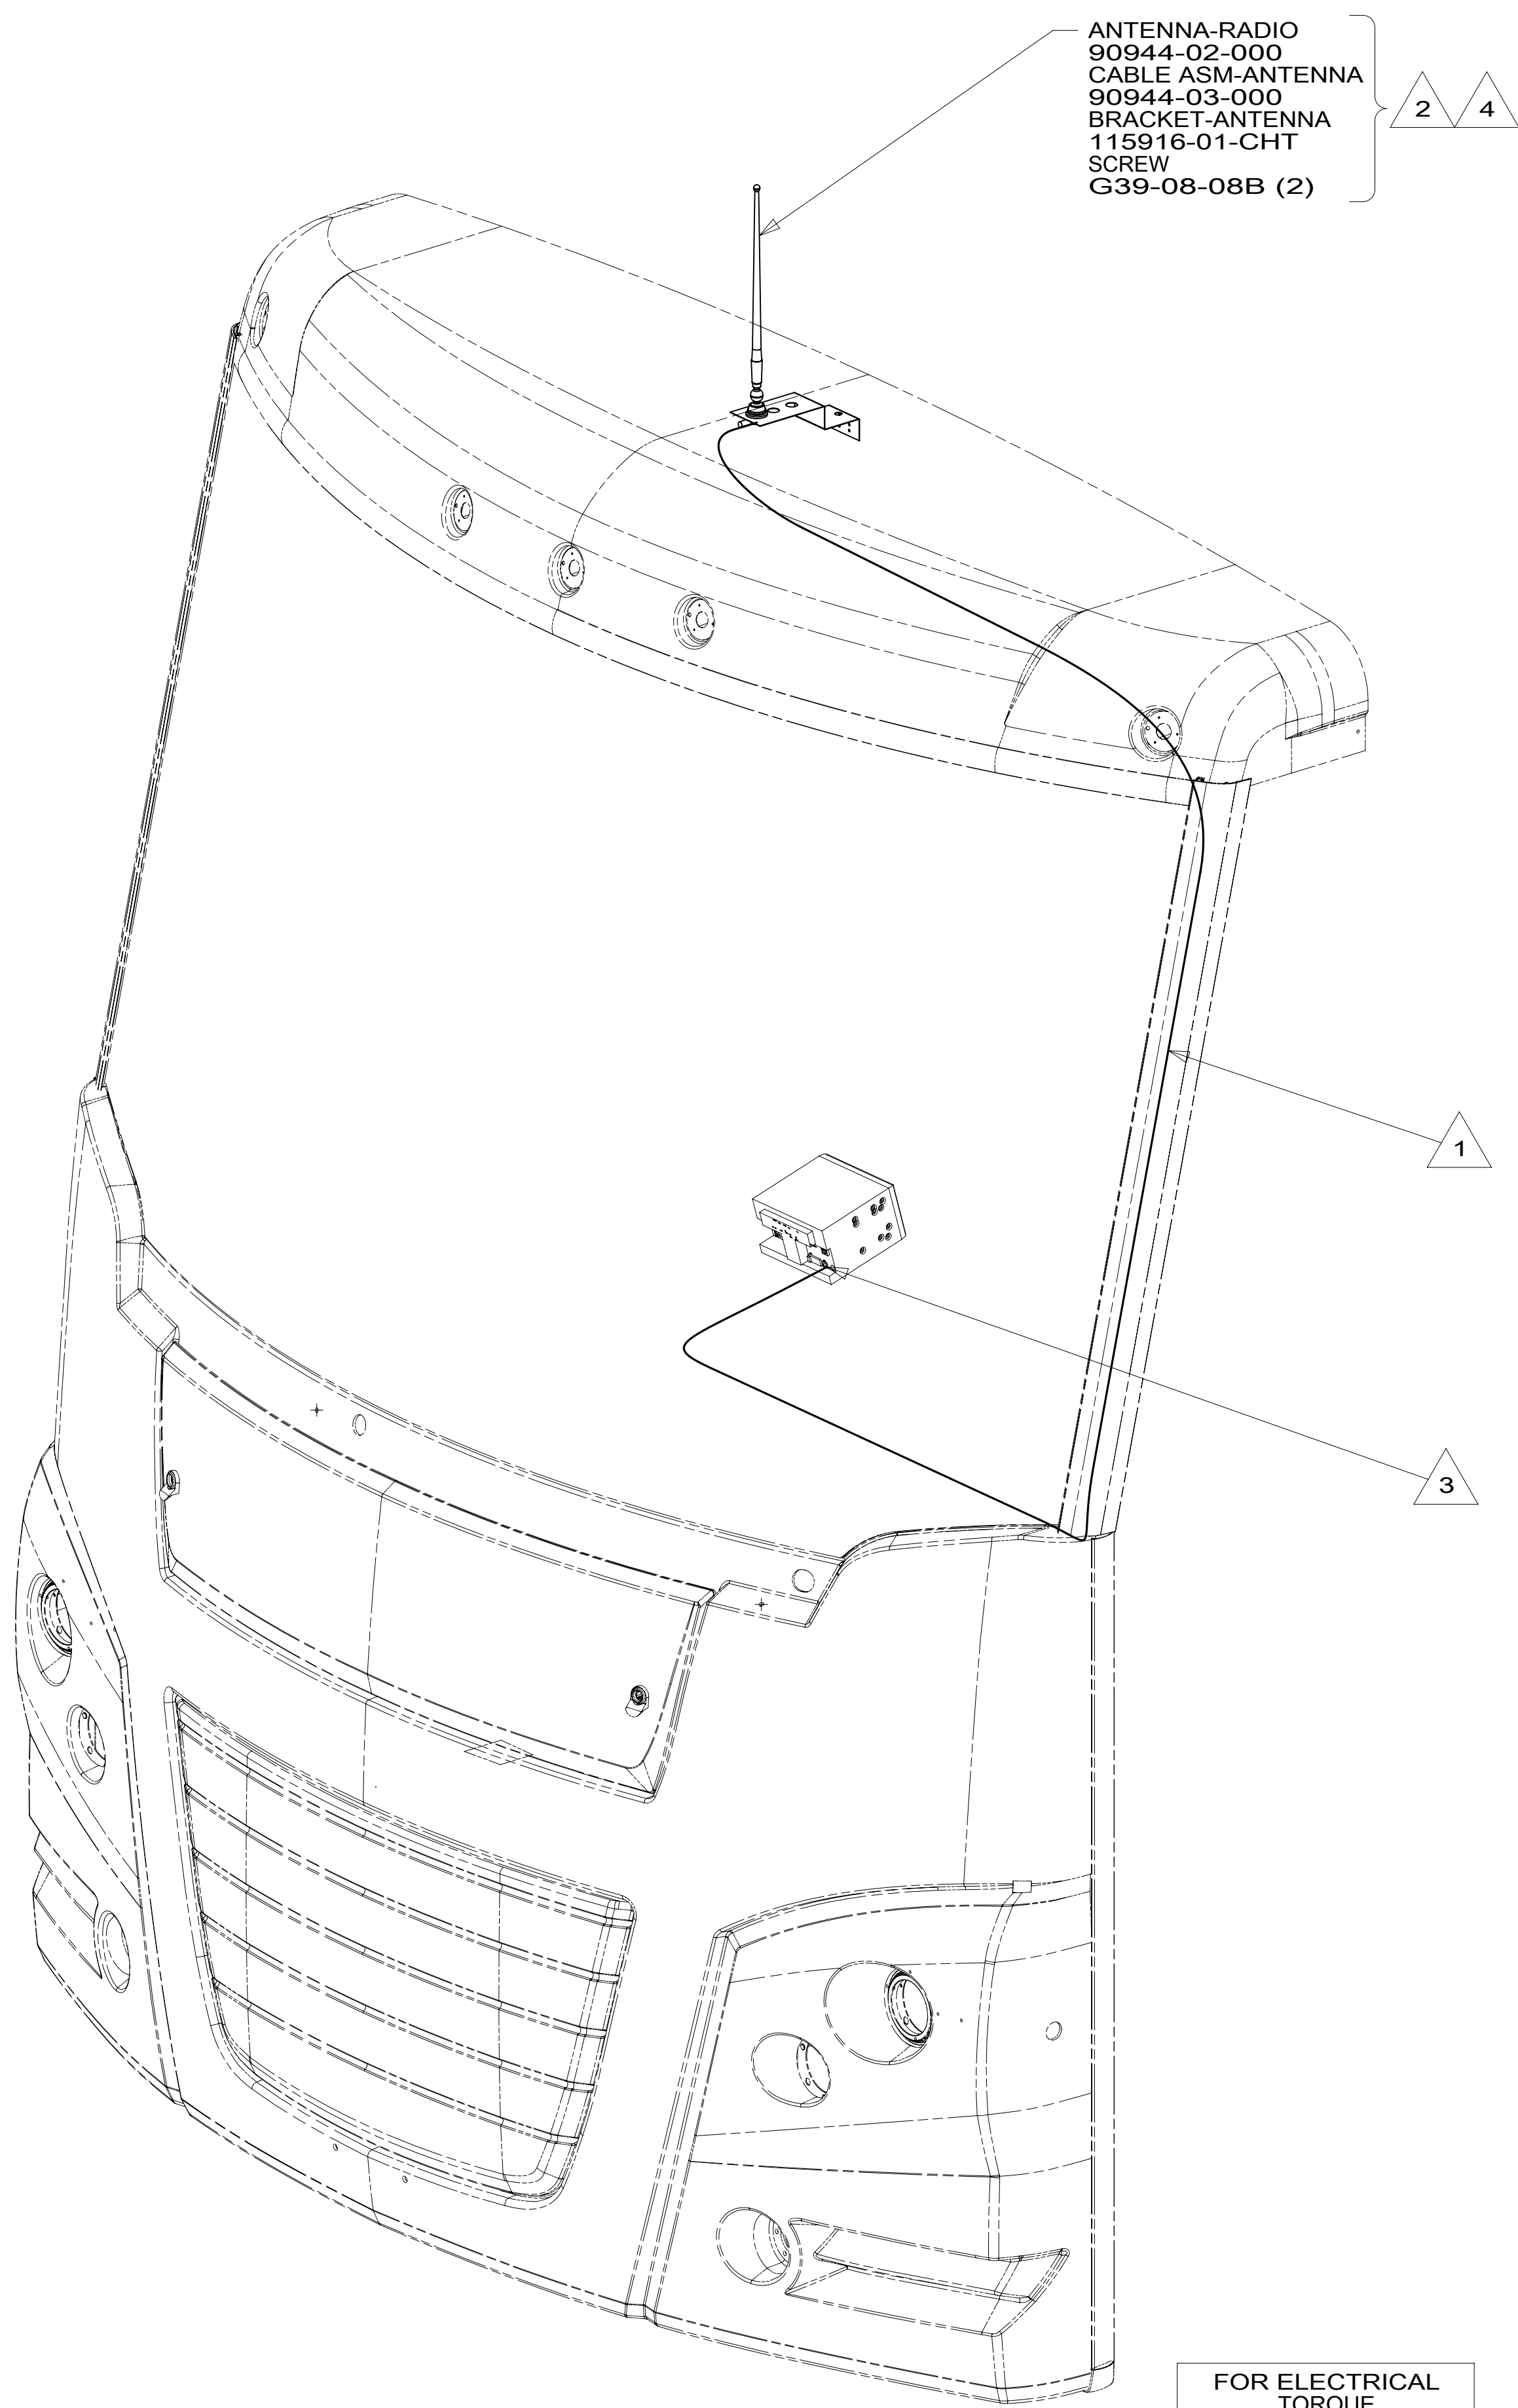

- 4 USE HOLE IN BRACKET AS GUIDE TO DRILL 13 MM DIAMETER HOLE IN FIBERGLASS.
- 3 TO RADIO.
- 2 SEAL AROUND ANTENNA BASE.
- 1 ROUTE CABLES ALONG A-POST, UNDER TRIM COVER.


NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

DESCRIPTION:	
WIRING INSTL-FRONT END	
SHEET:	ITEM/PART NO:
6 OF 9	000024287 / 31495401000

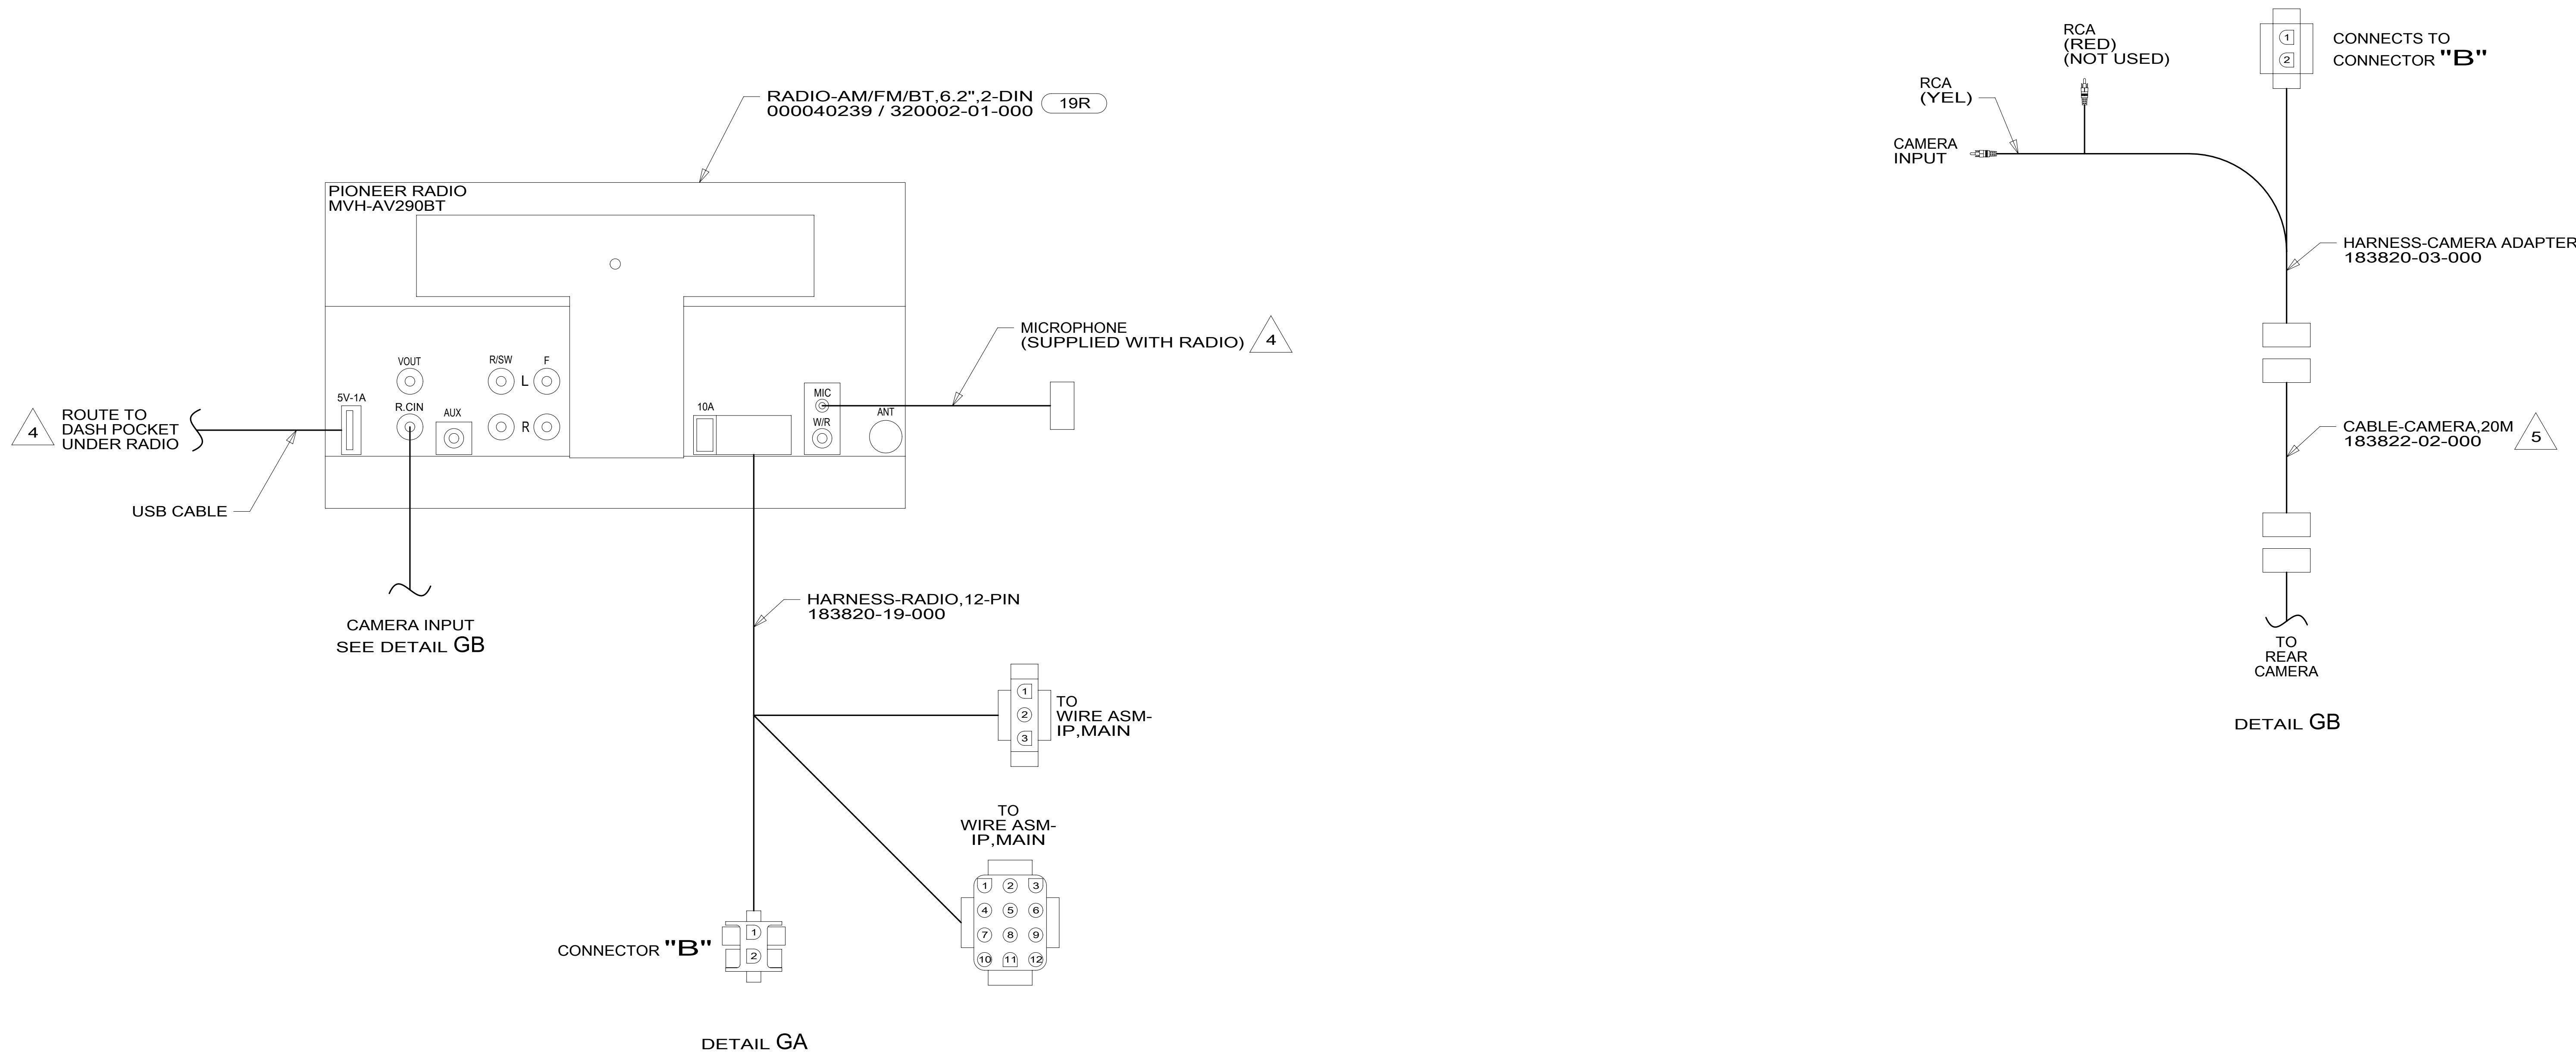

- NOTES:**
- 5 CABLE ROUTED FROM RADIO UP LEFT "A" PILLAR, THEN THROUGH LEFT HAND COVE TO REAR OF UNIT. SEE SHEET 8.
 - 4 WIRE TIE EXCESS CABLE UNDER DASH LEAVING 200 MM EXTENDING INTO POCKET IN DASH.
 - 3 WIRE TIE TO RADIO WIRING.
 - 2 SEE WIRING INSTL-TV/DVD FOR ADDITIONAL INFORMATION.
 - 1 CABLE IS PART OF WIRE ASM-IP, MAIN.

- 19R VIDEO CAMERA SYSTEM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA




FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:		1B1 265	
WIRING INSTL-FRONT END			
SHEET:	ITEM/PART NO.:	REV	
7 OF 9	000024287 / 31495401000		

8 7 6 5 4 3 2 1

D
C
B
A

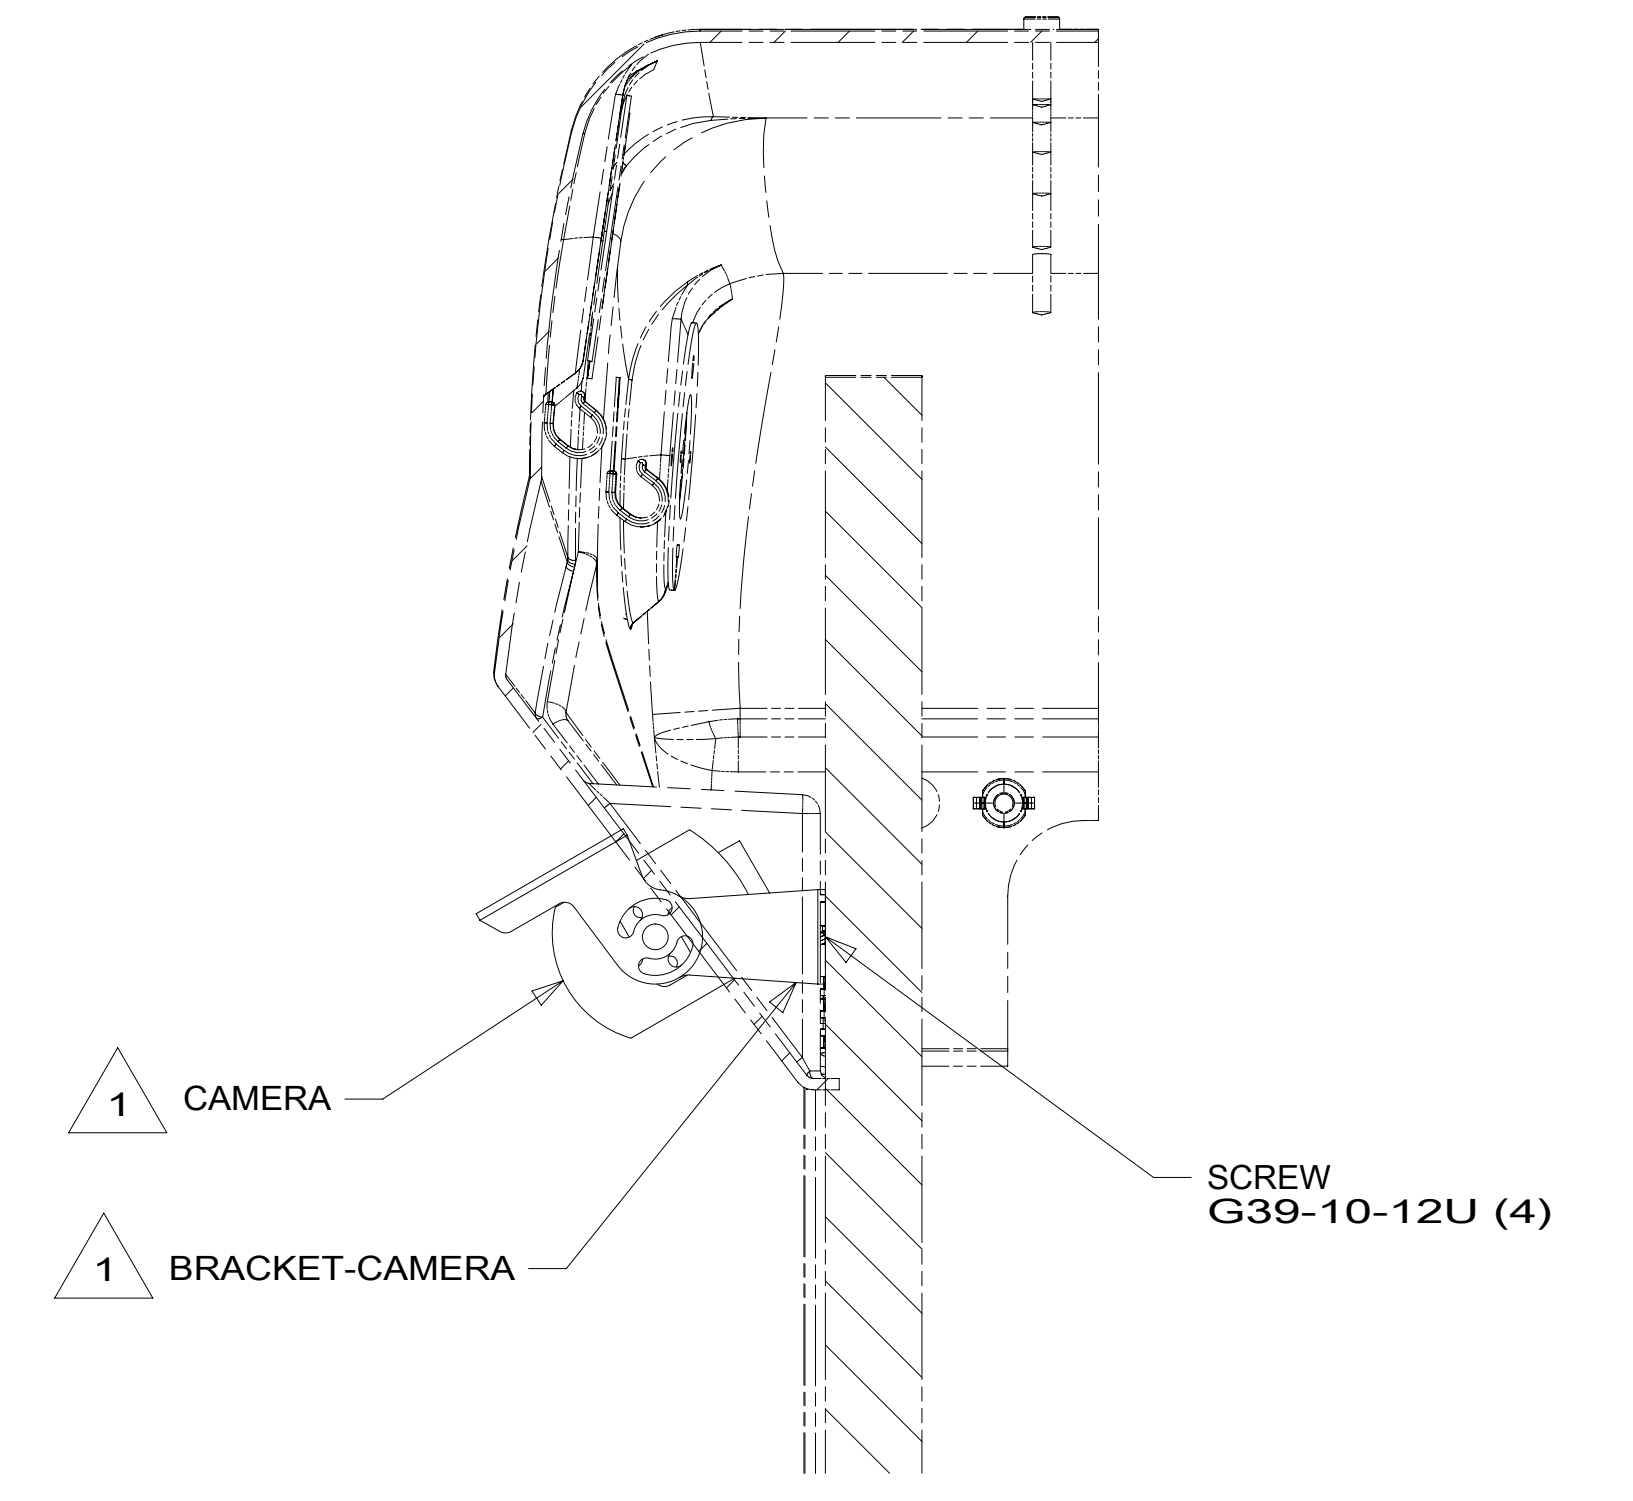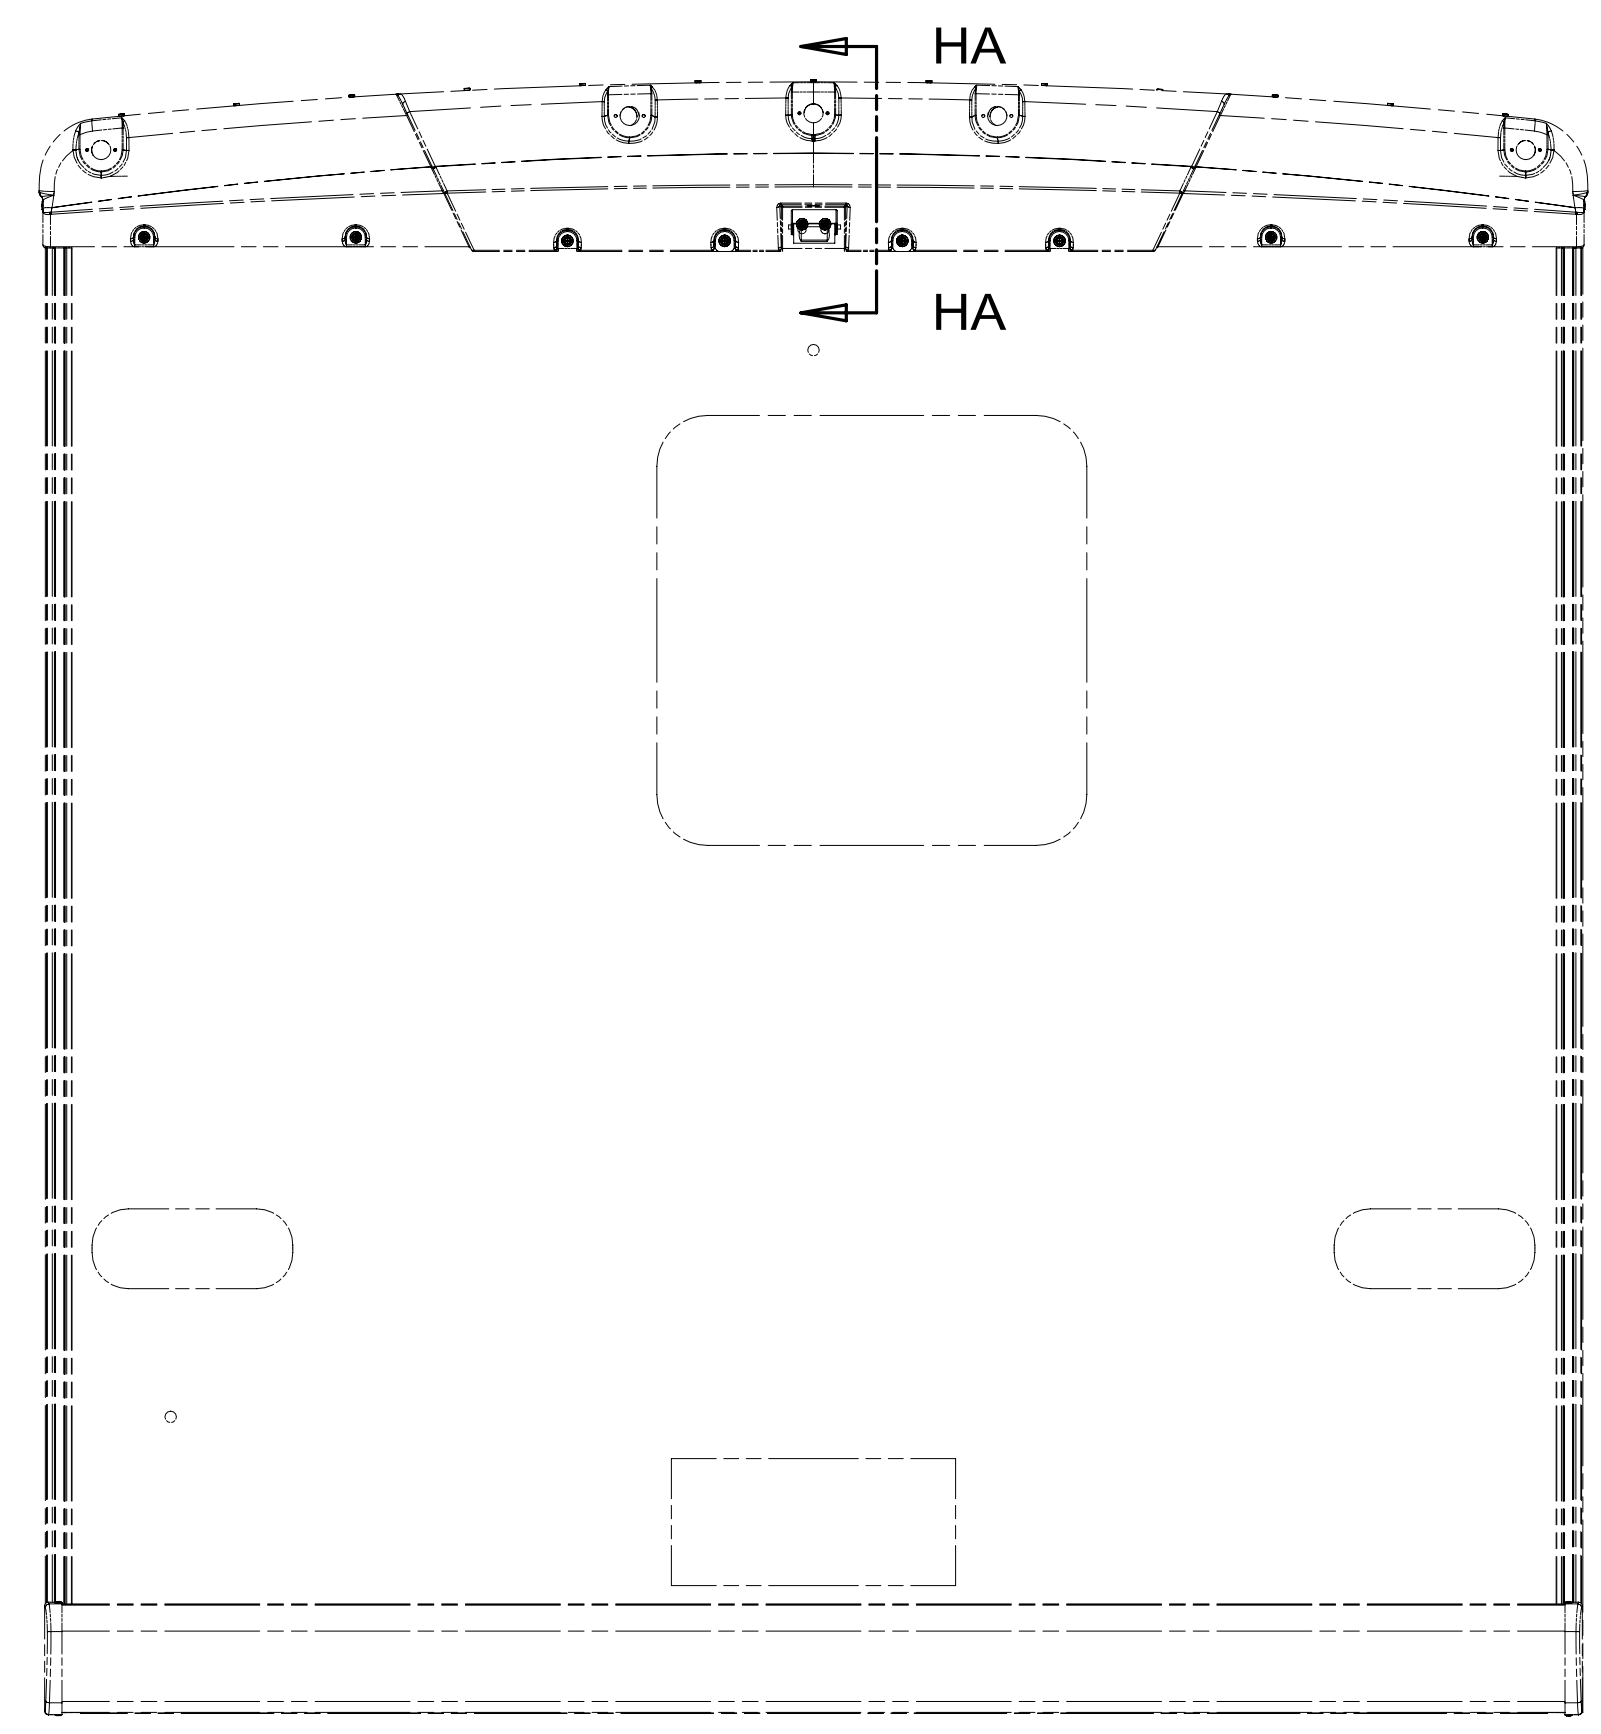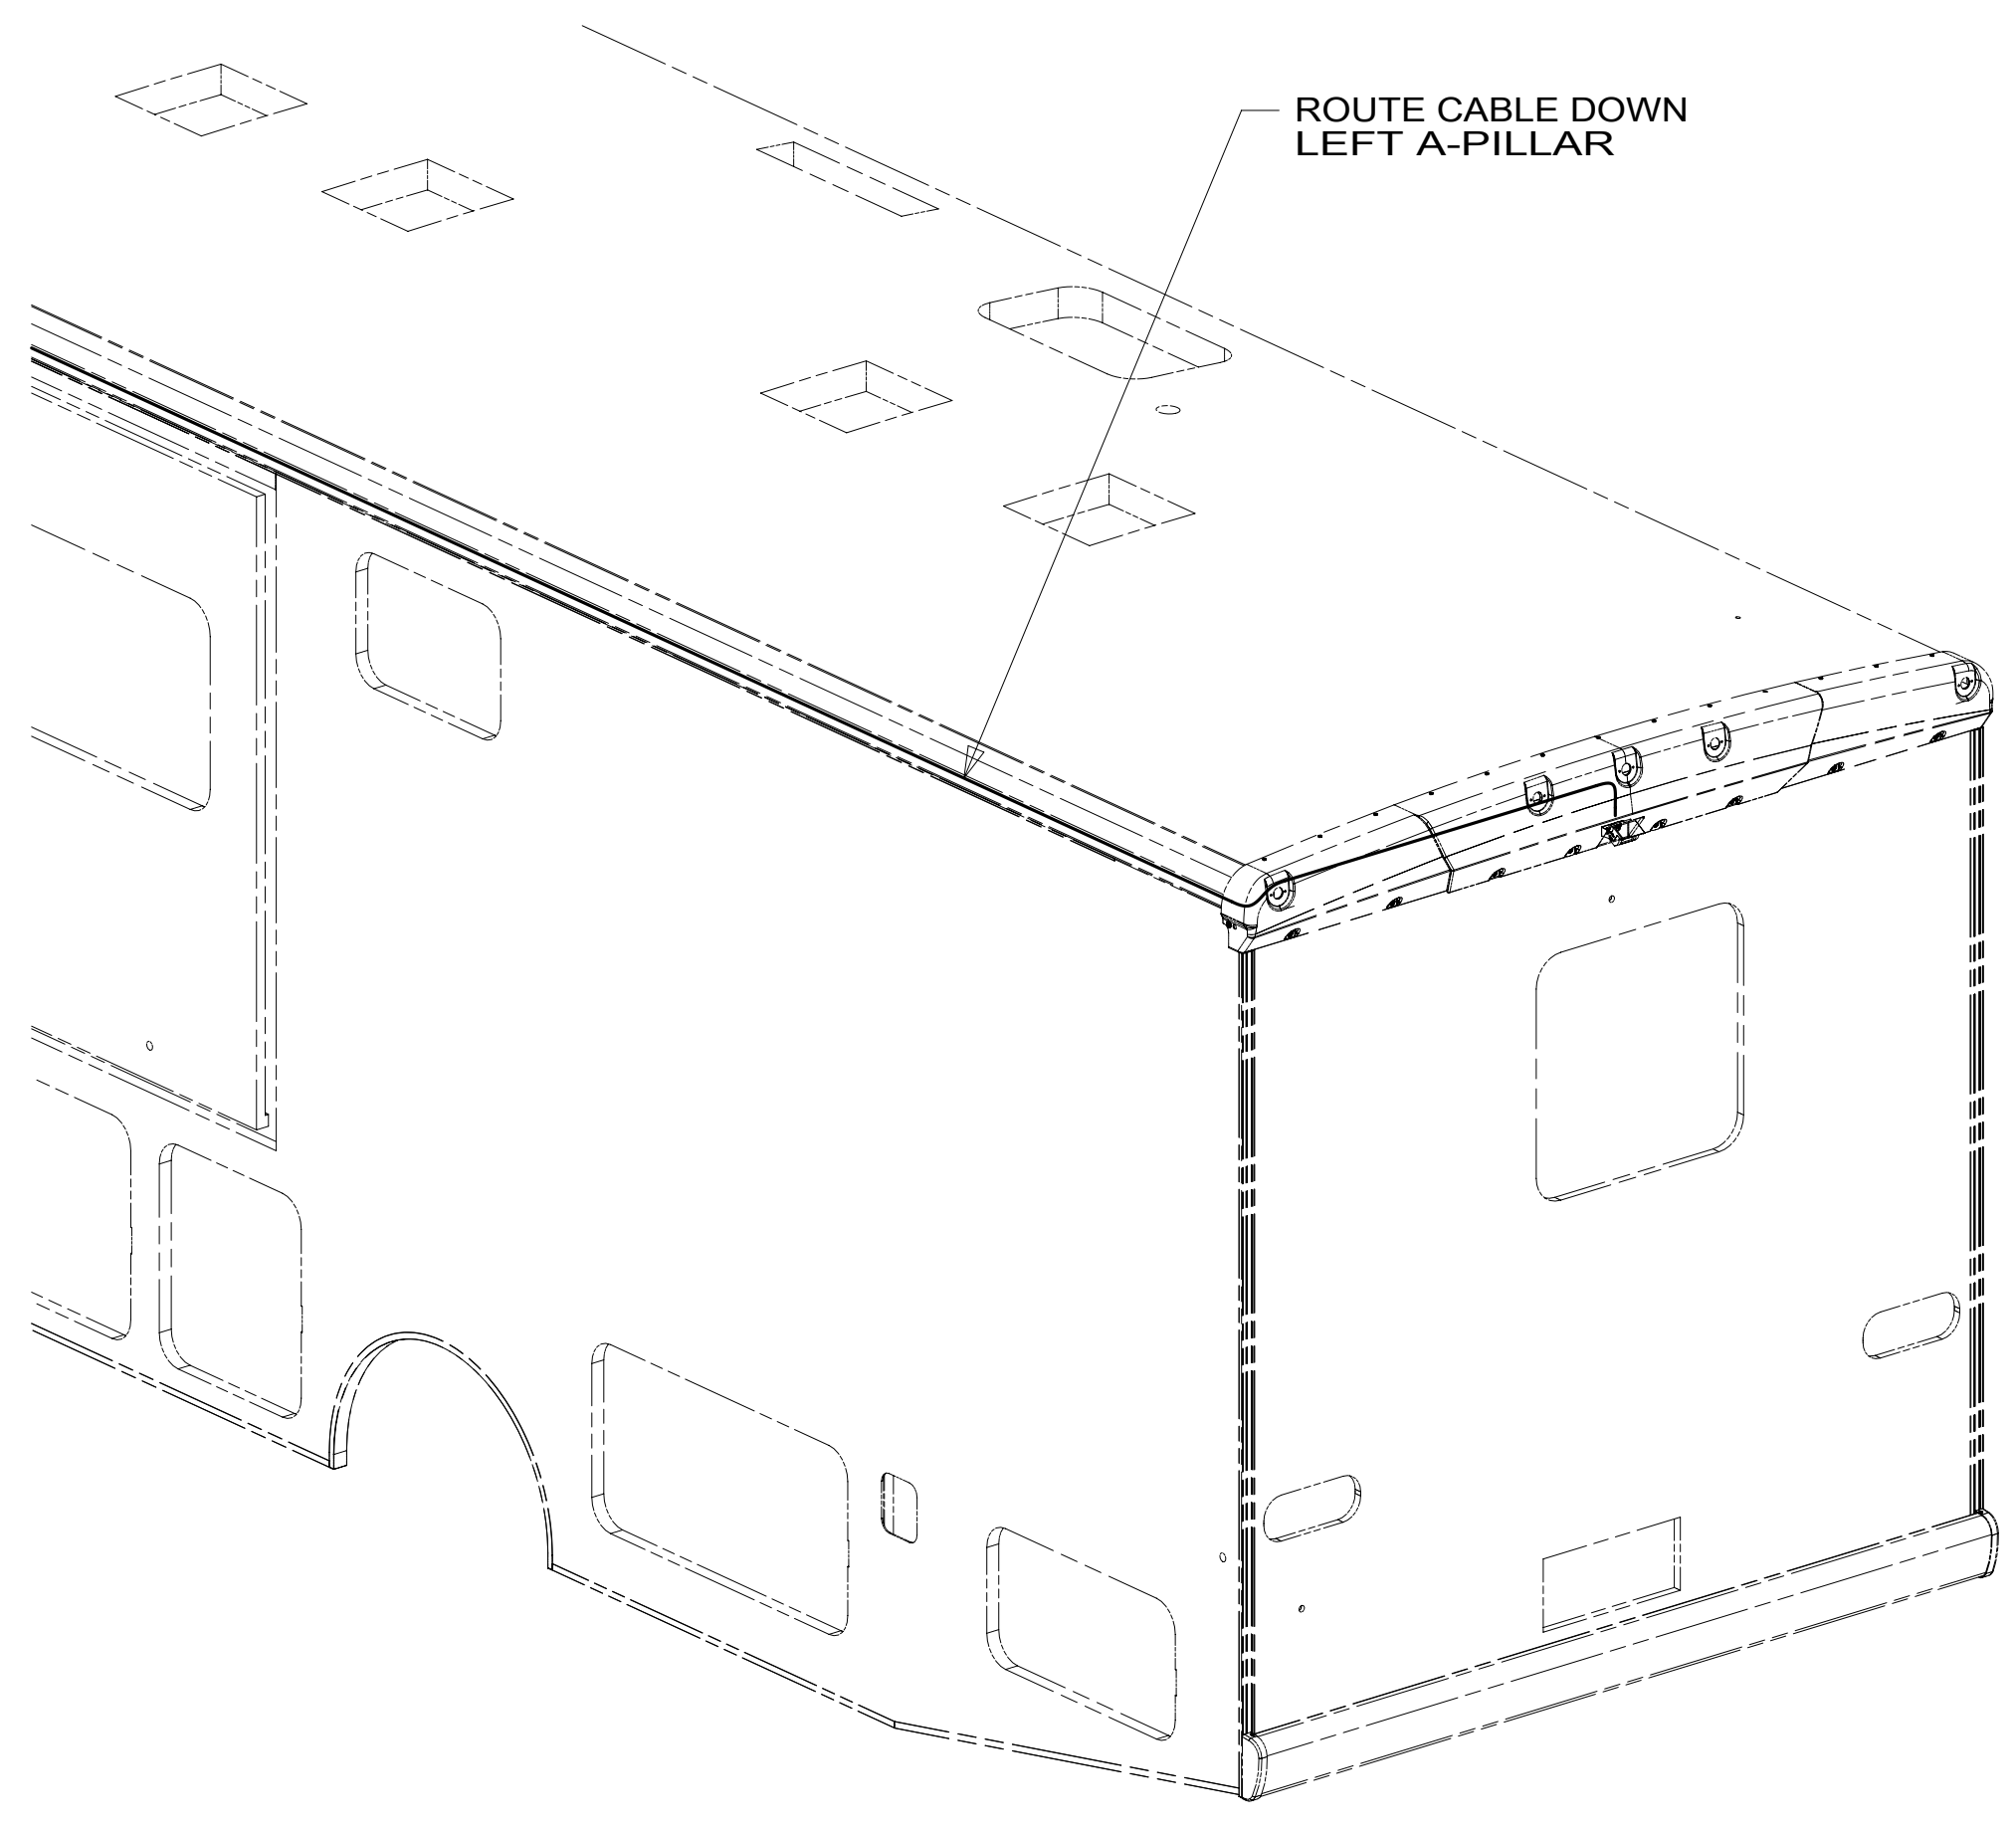

SECTION HA-HA

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


DESCRIPTION:	
WIRING INSTL-FRONT END	
SHEET:	ITEM/PART NO. REV
8 OF 9	000024287 / 31495401000

NOTES:
1 PARTS SUPPLIED WITH CAMERA KIT P/N 183822-01-000.

8 7 6 5 4 3 2 1

D
C
B
A

8 7 6 5 4 3 2 1

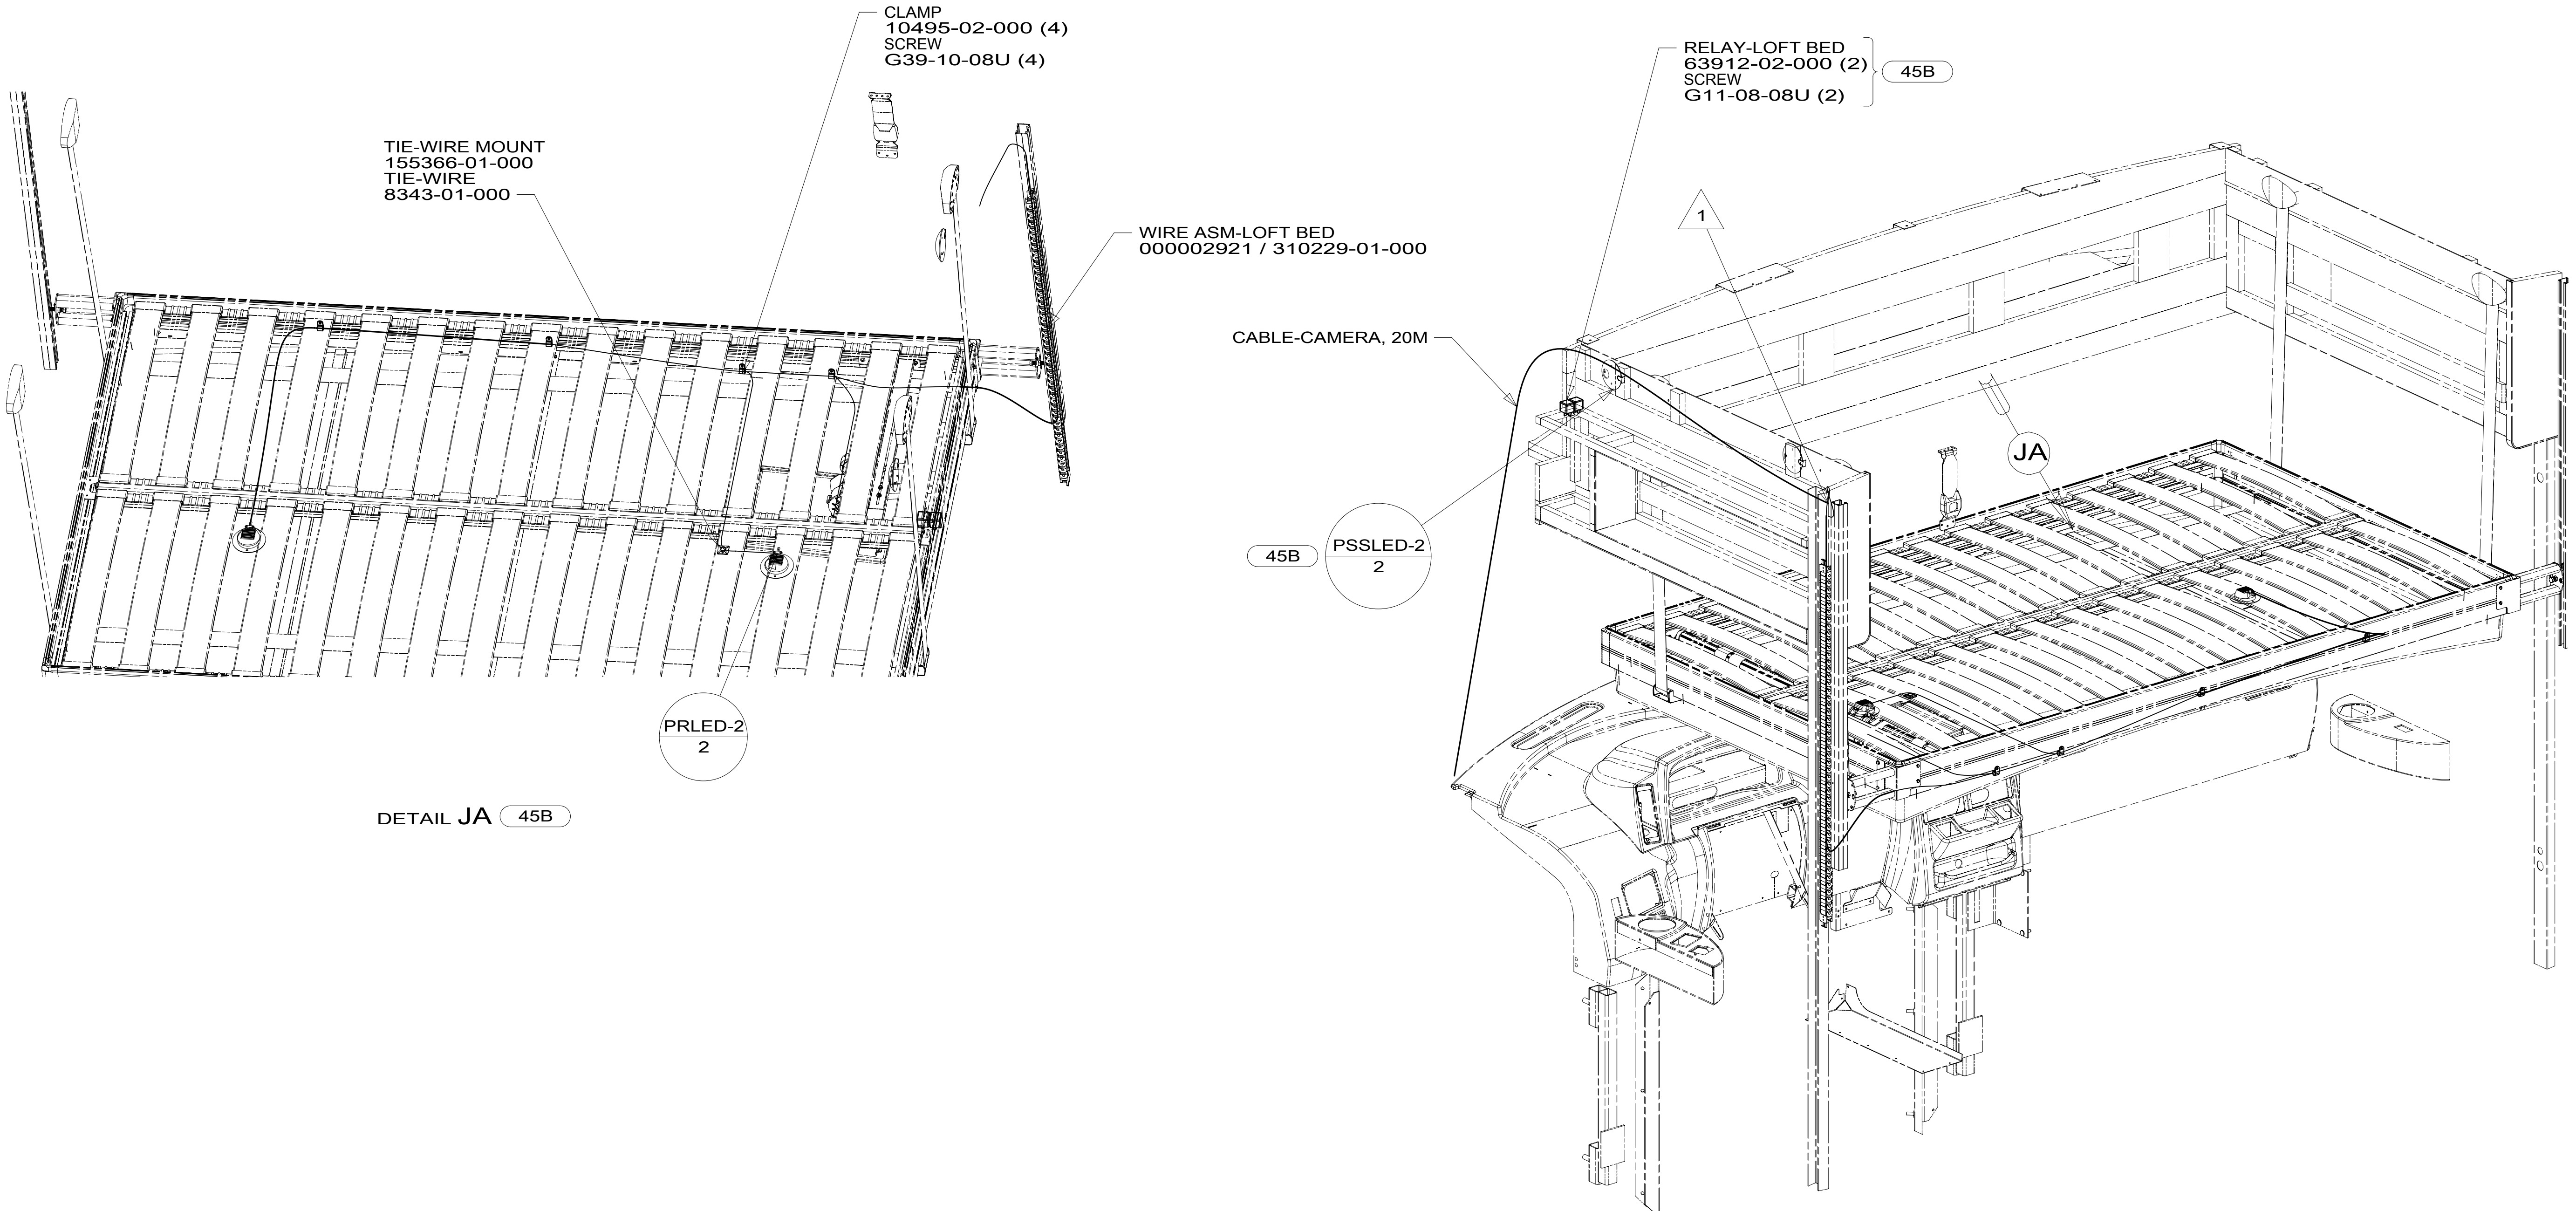

DETAIL JA 45B

- 45B LOFT BED
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:	
WIRING INSTL-FRONT END	
SHEET:	ITEM/PART NO. REV
9 OF 9	000024287 / 31495401000

NOTES:
 1 RUN CABLE THRU LEFT-HAND COVE TO REAR OF UNIT. SEE SHEET 8.

8 7 6 5 4 3 2 1 05-May-2017