


RED	1B1	136135-07-080
	265	136136-07-080
YEL	1B1	136131-05-042
	265	136134-05-042
YEL-2	1B1	136131-13-051
	265	136134-13-051
BRN	1B1	136131-03-133
	265	136134-03-133
BLU	1B1	136131-02-191
	265	136134-02-191
MAIN	1B1	136139-01-100
	265	136140-01-100
GRN	1B1	136135-08-080
	265	136136-08-080
BLK	1B1	136131-06-064
	265	136134-06-064
THROW IN WIRE #1	1B1	136131-03-004
	265	136134-03-004
THROW IN WIRE #2	1B1	136131-03-006
	265	136134-03-006
THROW IN WIRE #3	1B1	136131-03-075
	265	136134-03-075
GROUND ATS		136145-01-010


2
2
2
2
2

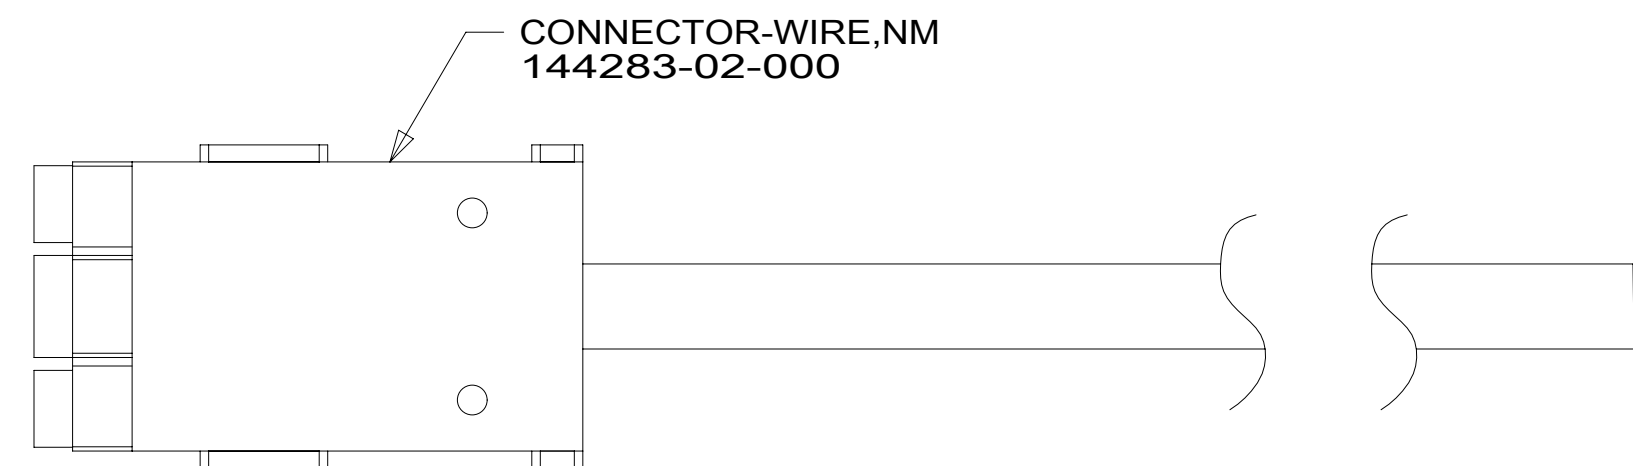

DETAIL AA

- 073 COOLING UPGRADE PACKAGE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265 073

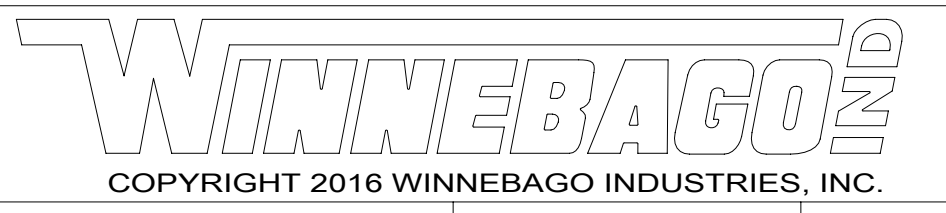


DSNR:		ALL DIMENSIONS ARE IN MILLIMETERS	
DFFR:		MATERIAL:	
UNSPECIFIED TOLERANCES:			
WHOLE DIM (X)	: 3		
ONE-PLACE (X.X)	: 1.5		
TWO-PLACE (X.XX)	: 0.50		
ANGLE	: 1°		
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES		WEIGHT: (LBS)	FIRST USED:
			17 E32YE



DESCRIPTION: LOAD CENTER/ATS ASM		
SHEET: 1 OF 3	ITEM/PART NO: 000026587 / 31570501000	REV:
REF:		1 12-Dec-2016

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

2 SEE DETAIL AA FOR CONNECTOR INSTALLATION.
1. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.

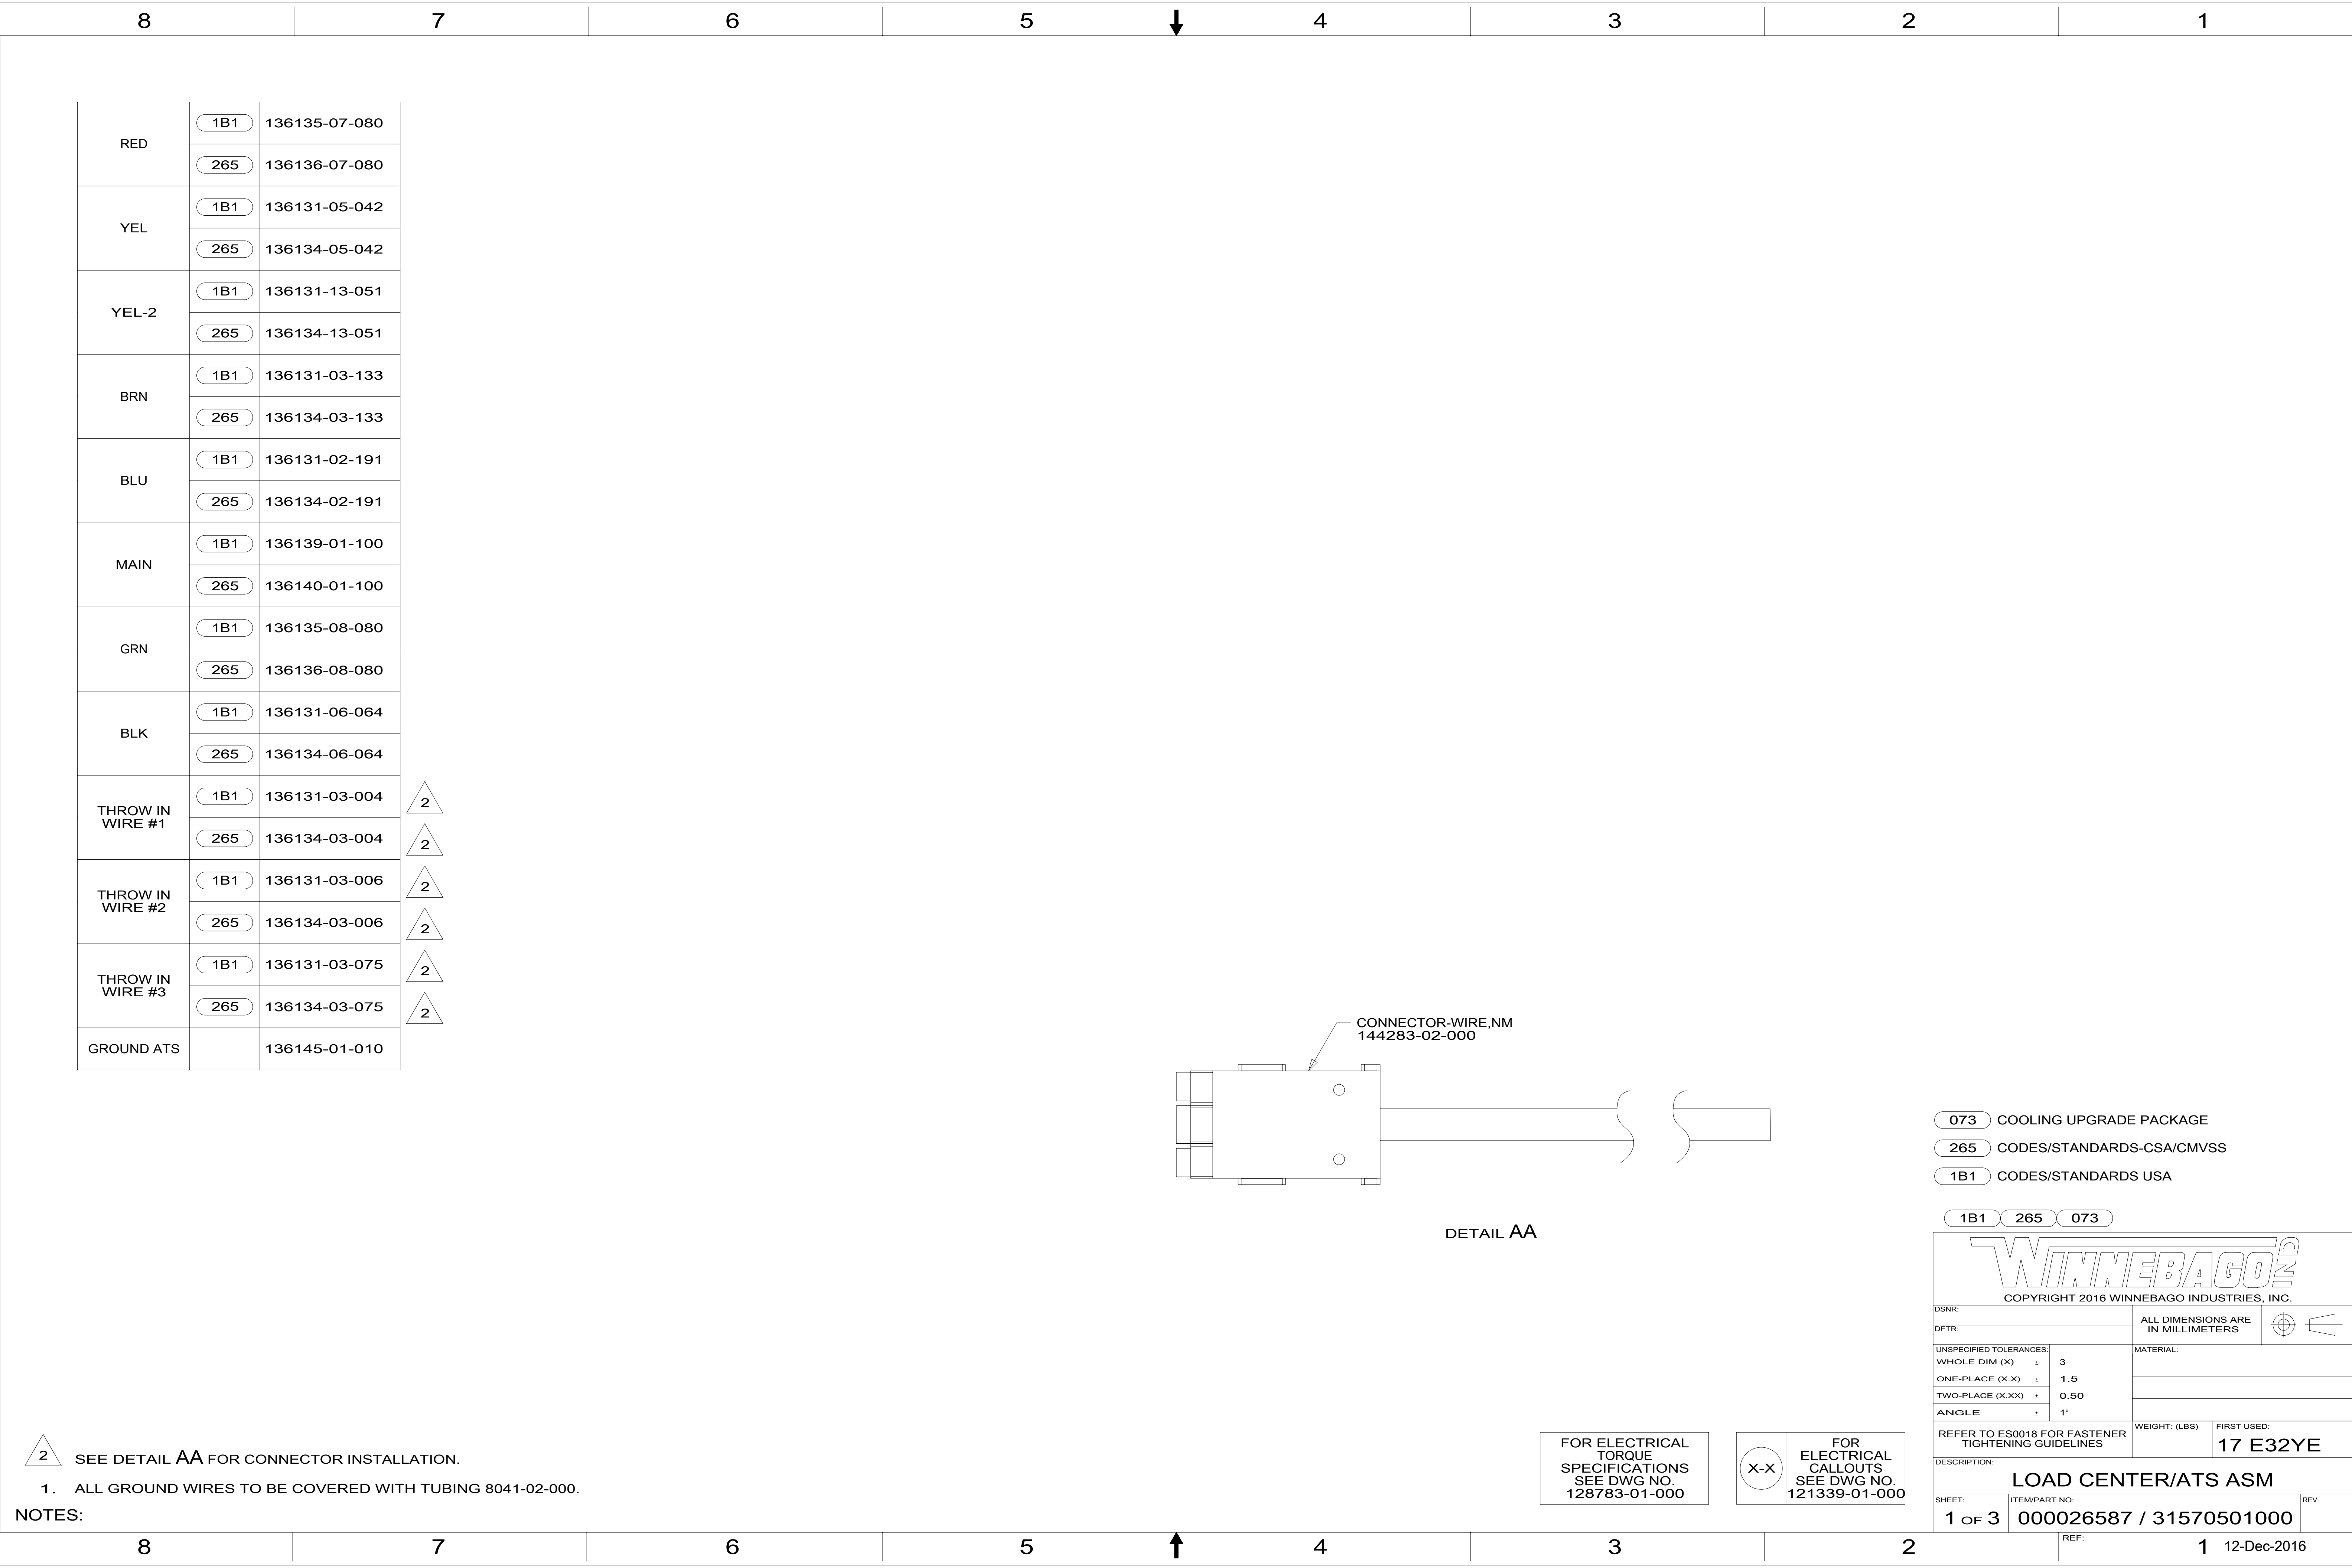

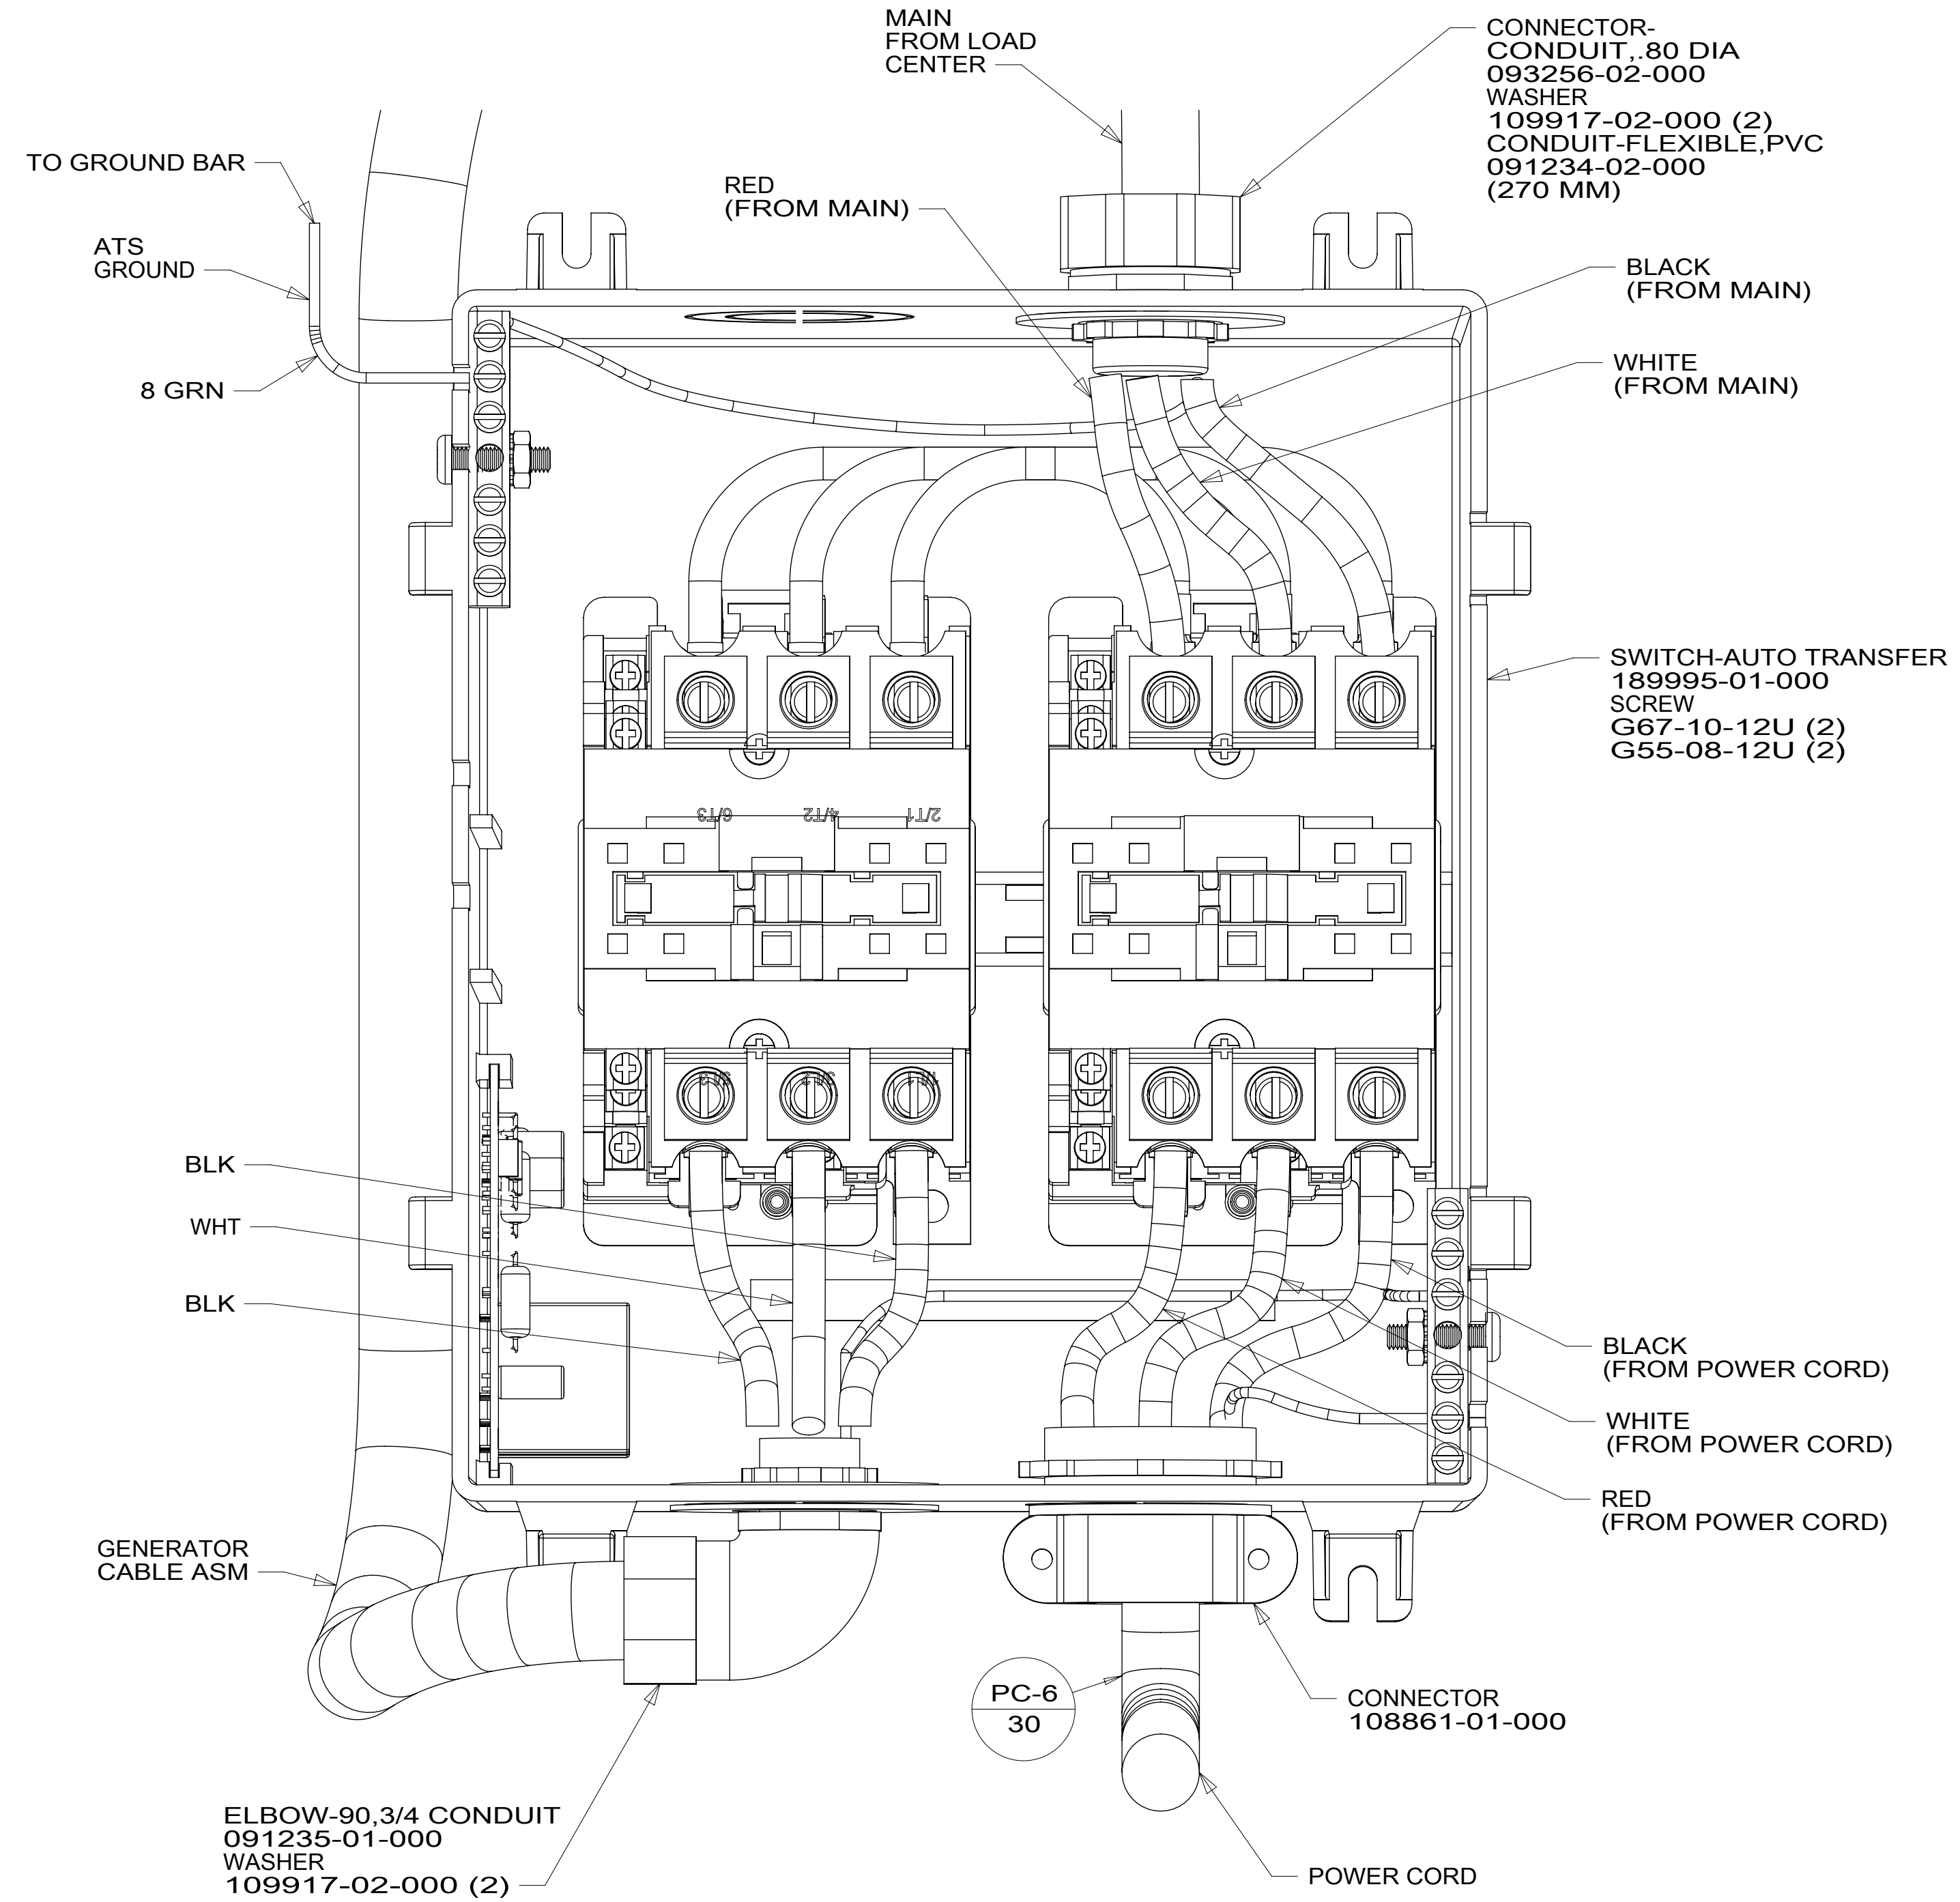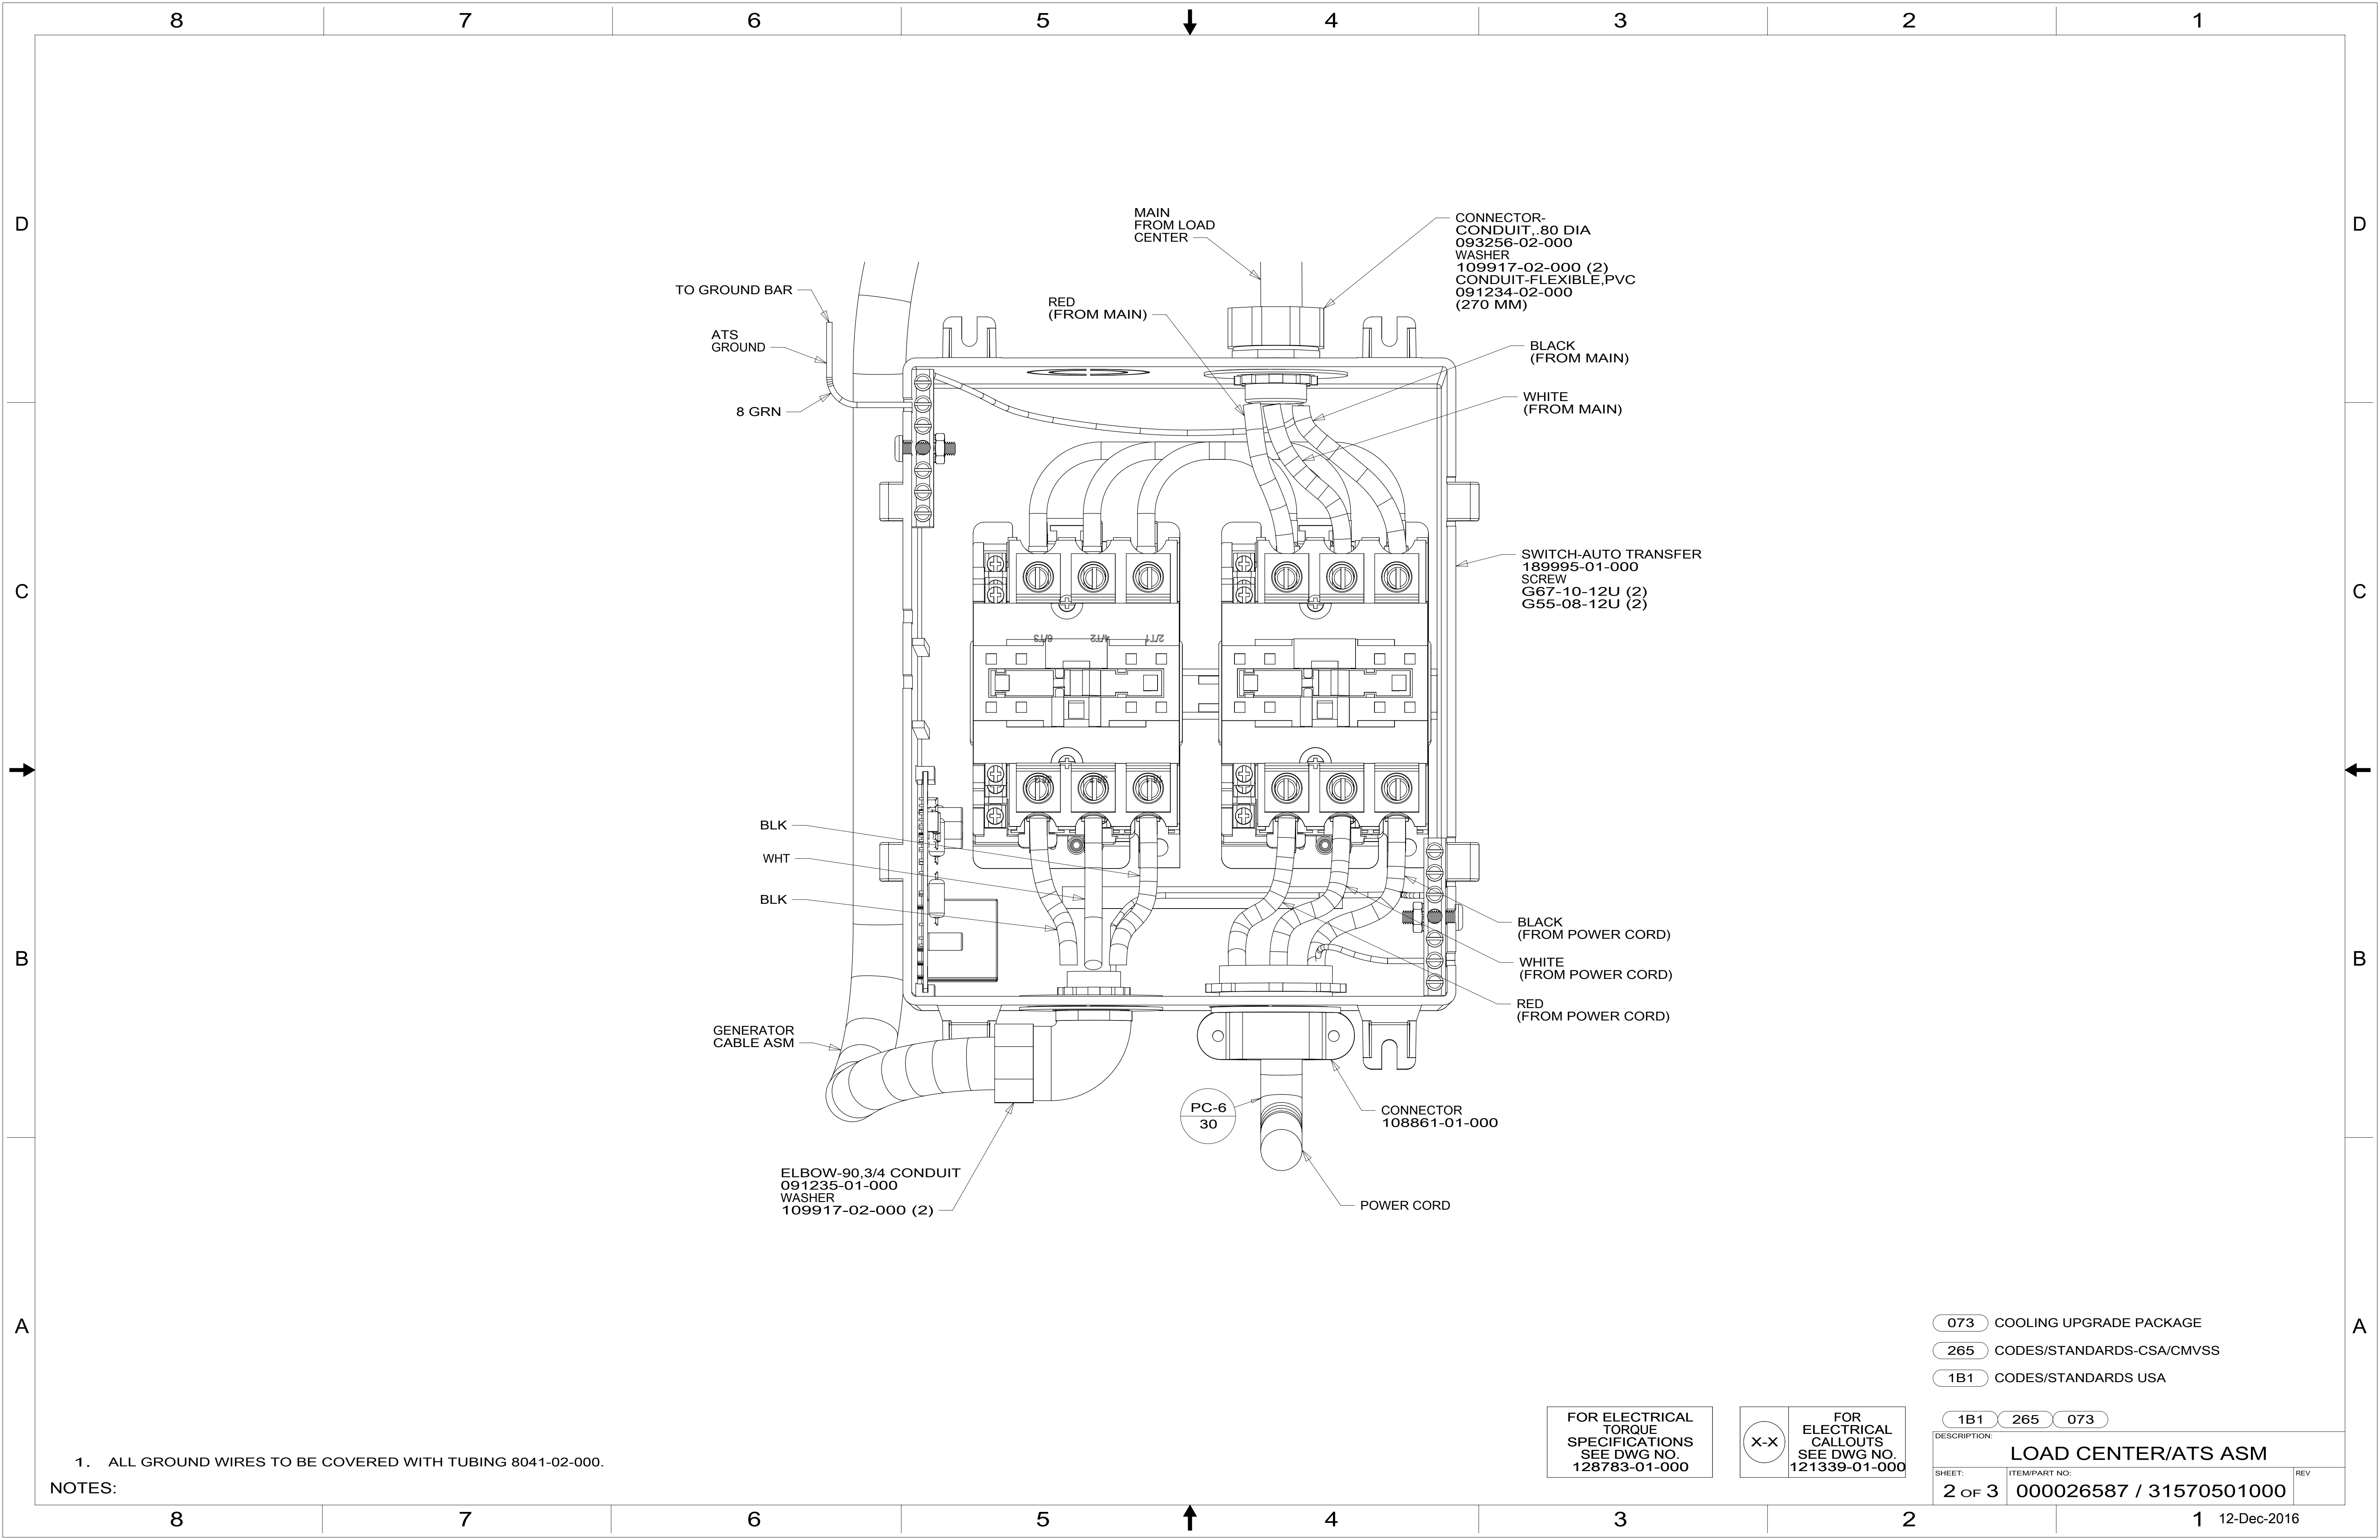




NOTES:
 1. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 073 COOLING UPGRADE PACKAGE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION: LOAD CENTER/ATS ASM		
SHEET: 2 OF 3	ITEM/PART NO: 000026587 / 31570501000	REV

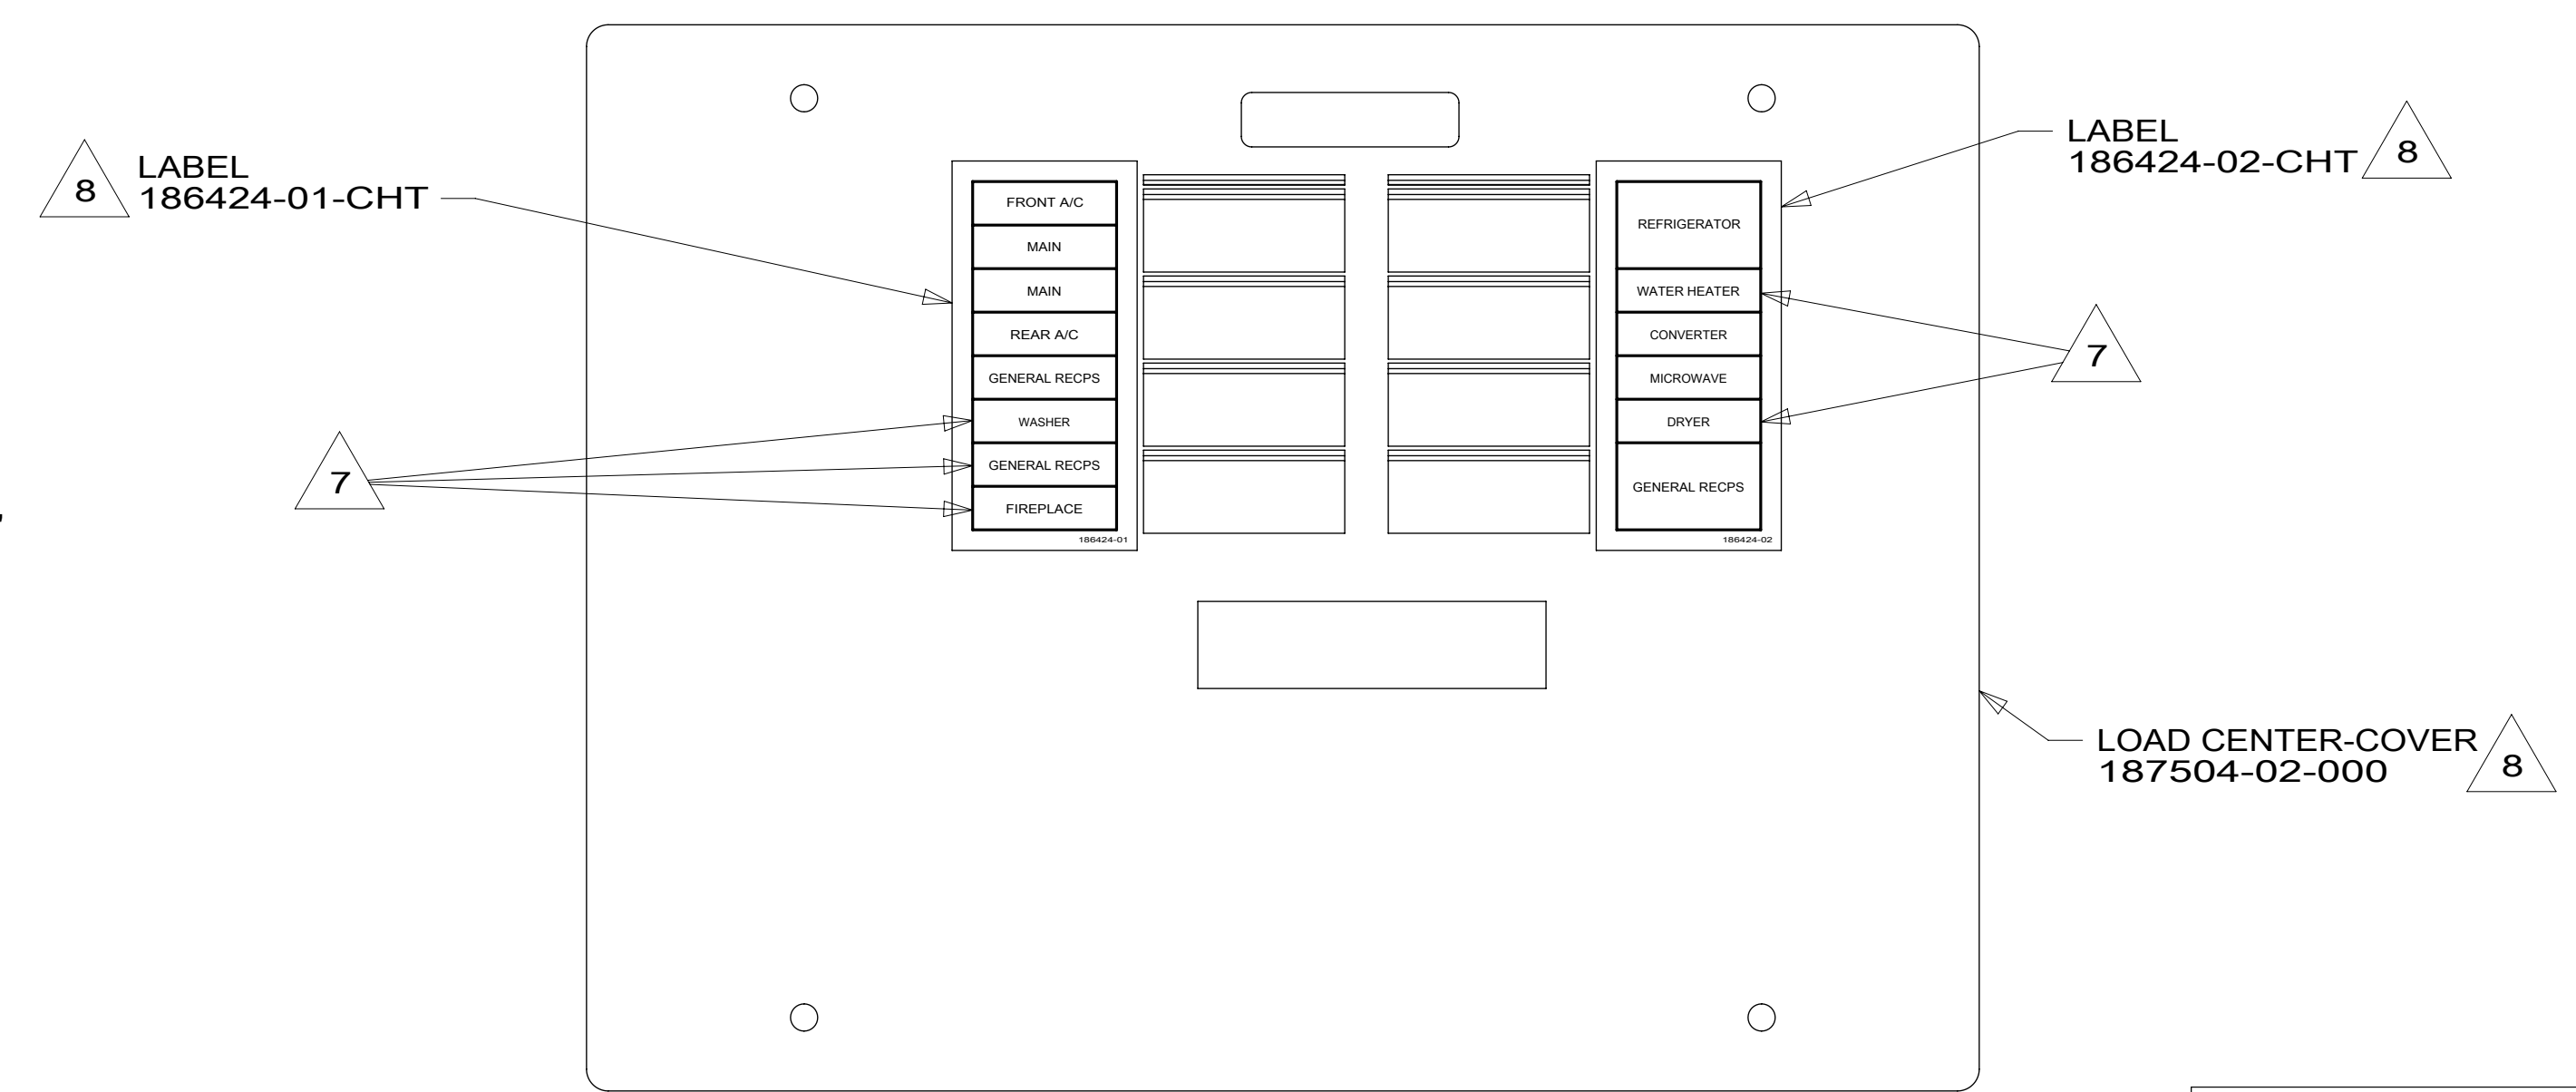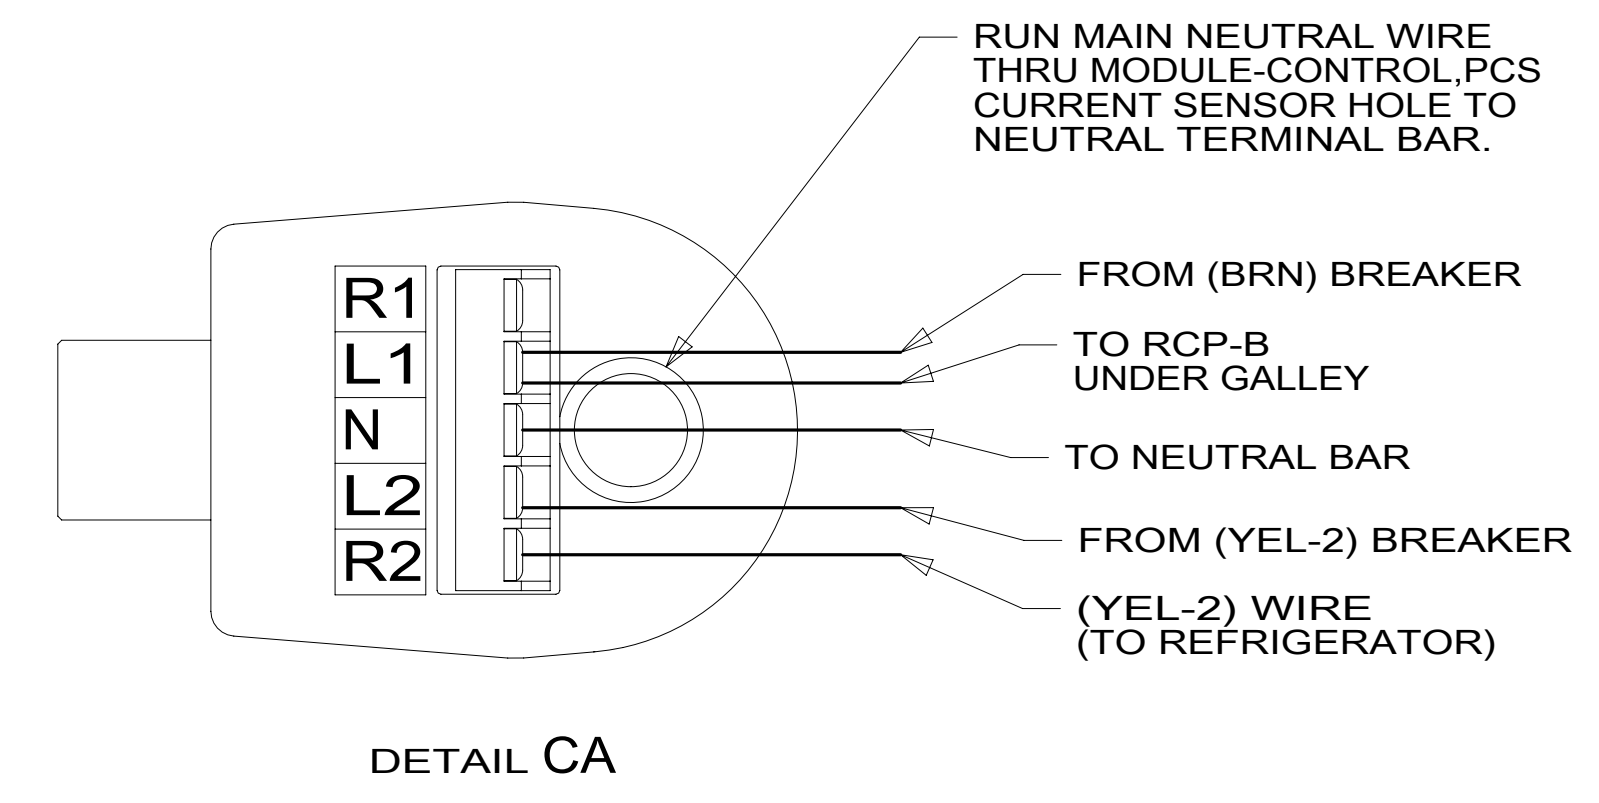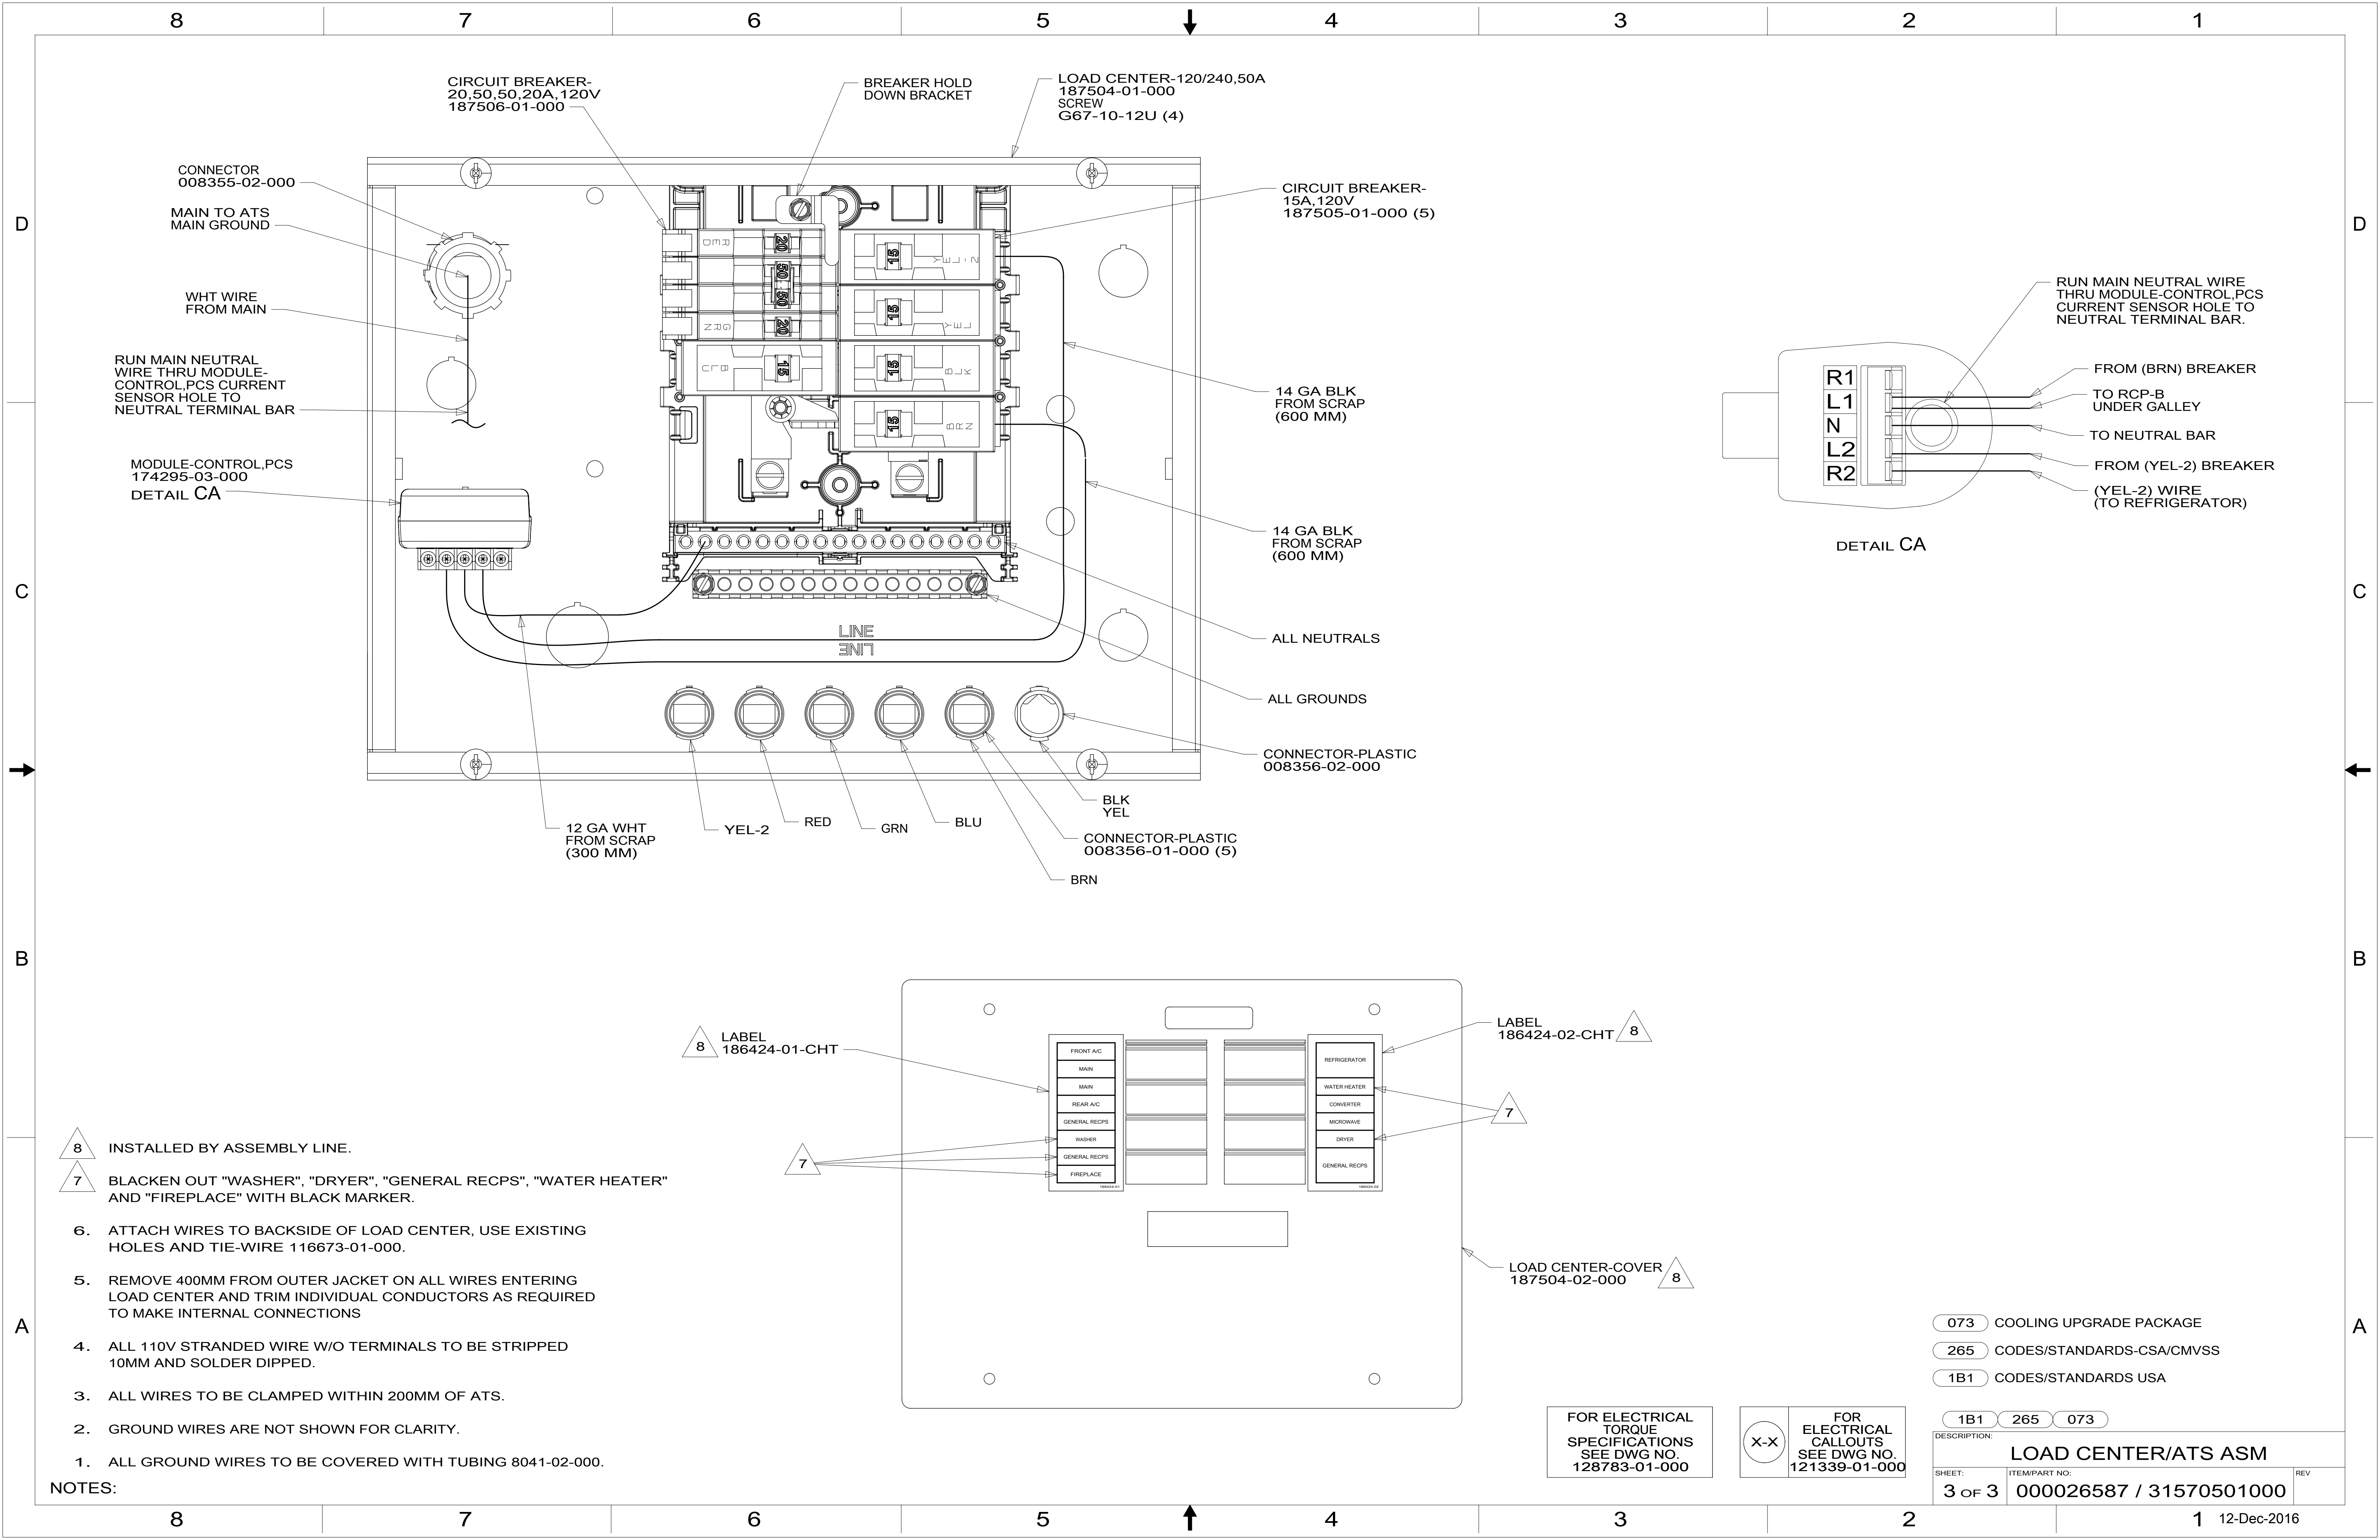

- 8** INSTALLED BY ASSEMBLY LINE.
7 BLACKEN OUT "WASHER", "DRYER", "GENERAL RECPS", "WATER HEATER" AND "FIREPLACE" WITH BLACK MARKER.
6. ATTACH WIRES TO BACKSIDE OF LOAD CENTER, USE EXISTING HOLES AND TIE-WIRE 116673-01-000.
5. REMOVE 400MM FROM OUTER JACKET ON ALL WIRES ENTERING LOAD CENTER AND TRIM INDIVIDUAL CONDUCTORS AS REQUIRED TO MAKE INTERNAL CONNECTIONS
4. ALL 110V STRANDED WIRE W/O TERMINALS TO BE STRIPPED 10MM AND SOLDER DIPPED.
3. ALL WIRES TO BE CLAMPED WITHIN 200MM OF ATS.
2. GROUND WIRES ARE NOT SHOWN FOR CLARITY.
1. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 073** COOLING UPGRADE PACKAGE
- 265** CODES/STANDARDS-CSA/CMVSS
- 1B1** CODES/STANDARDS USA

DESCRIPTION:		
LOAD CENTER/ATS ASM		
SHEET:	ITEM/PART NO.:	REV
3 OF 3	000026587 / 31570501000	