


- 8 REMOVE REAR VIEW MIRROR & MOUNT CAMERA TO CENTER OF WINDSHIELD AND 25 MM BELOW REAR VIEW MIRROR BUTTON. ROUTE CABLE UP ABOVE HEADLINER THEN LEFT DOWN LEFT A-POST COVER TO CENTER DASH TO CONNECT TO WIRE ASM-CHASSIS.
- 7 NOTCH A-POST COVER WHERE IT MEETS THE DASH TO ALLOW DISPLAY CABLE THROUGH. MOUNT DISPLAY TO A-POST COVER AND ADJUST FOR DRIVER'S VIEWING. ROUTE DISPLAY CABLE TO CENTER DASH AND CONNECT TO CAMERA HARNESS.
- 6 REMOVE PLASTIC TRAY AND DISCARD.
- 5 REMOVE PAINT AND UNDER COATING FROM GROUND BOLT AND NUT TO INSURE PROPER CONTACT.
- 4 SEE WIRING INSTL-BODY, 12V FOR ADDITIONAL INFORMATION.
- 3 CUT WIRE TIE AROUND SPRINTER SEAL, ROUTE THE CHASSIS WIRING THROUGH HOLE AND WIRE TIE SEAL WITH WIRE TIE 8343-04-000.
2. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

- 12 INSTALL NUT SO THAT IT IS FLUSH WITH TOP OF EXTENDER-SHAFT.
- 11 DRILL 12.3 MM HOLE INTO DASH PANEL.
- 10 SEE SHT 5 & SHT 6 FOR ADDITIONAL INFORMATION.
- 9 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.

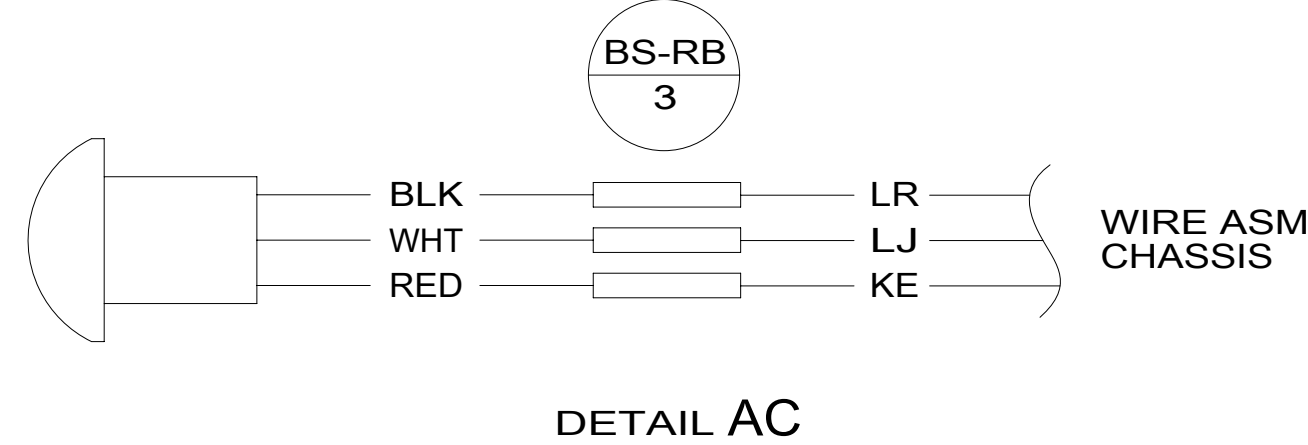


- 36C COLLISION AVOIDANCE SYSTEM
- 1MV MERCEDES-11030#DSL,4CYL,VAN
- 1MM MERCEDES-11,030# DIESEL, VAN
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

- 1B1 265 1MM 1MV


WINNEBAGO COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.	
DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS
DFFR:	
UNSPECIFIED TOLERANCES:	MATERIAL:
WHOLE DIM (X) : 3	
ONE-PLACE (X.X) : 1.5	
TWO-PLACE (X.XX) : 0.50	
ANGLE : 1°	
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS) FIRST USED: 17 170A
DESCRIPTION: WIRING INSTL-CHASSIS	
SHEET: 1 OF 7	ITEM/PART NO.: 000027483 / 31598201000
REF:	

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

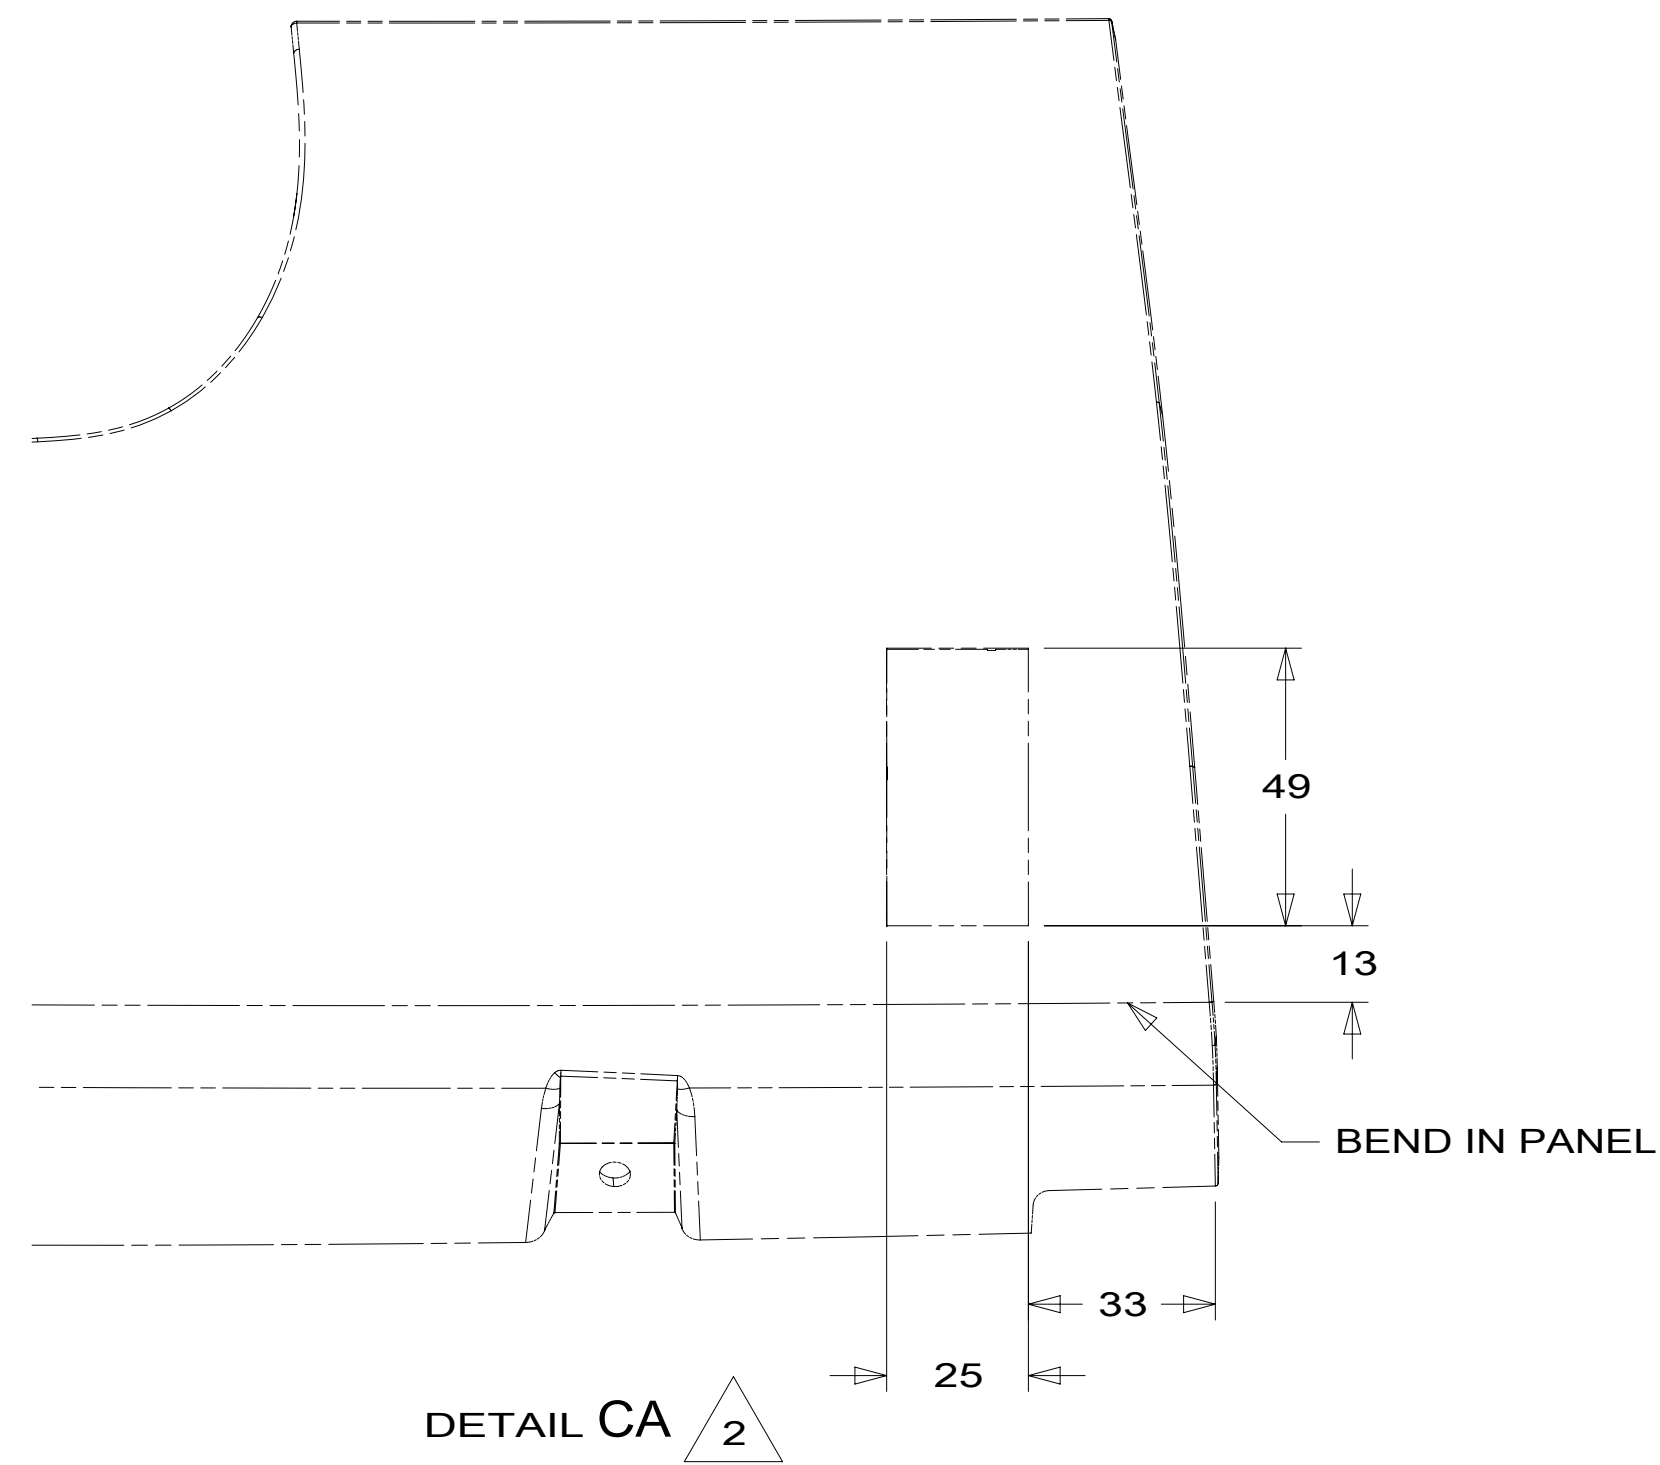


DETAIL CA 2

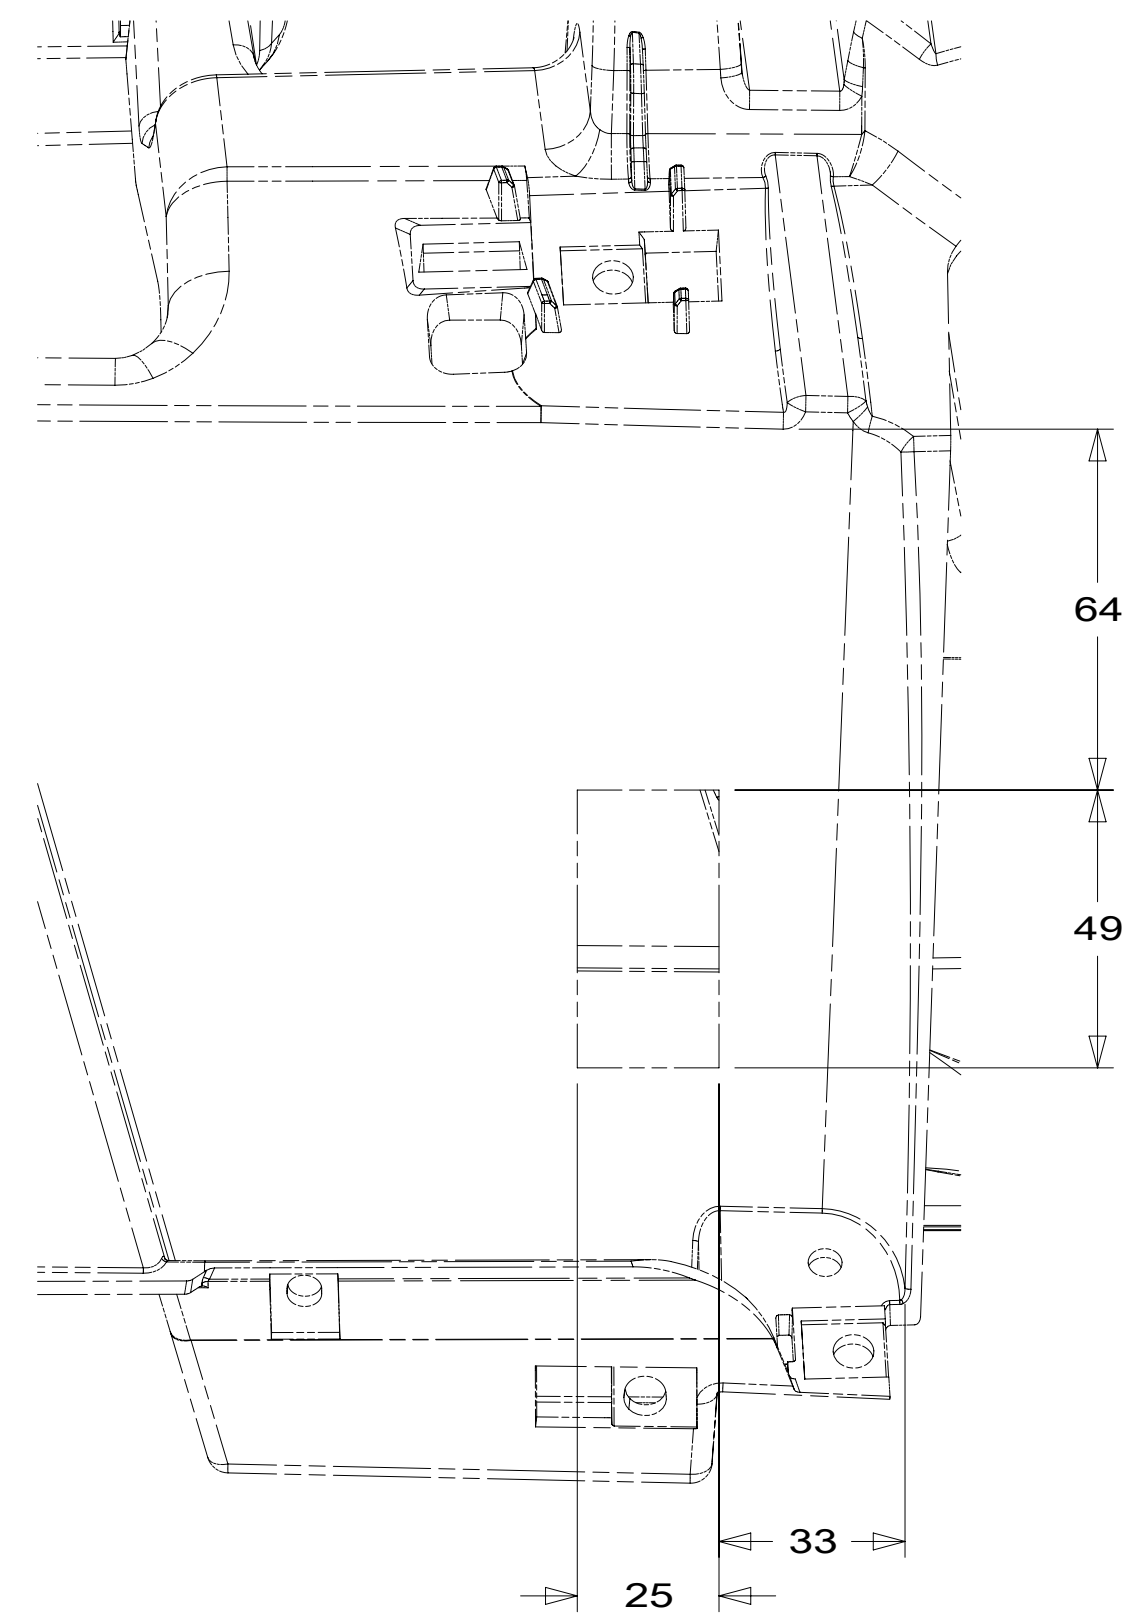


VIEW CB 6

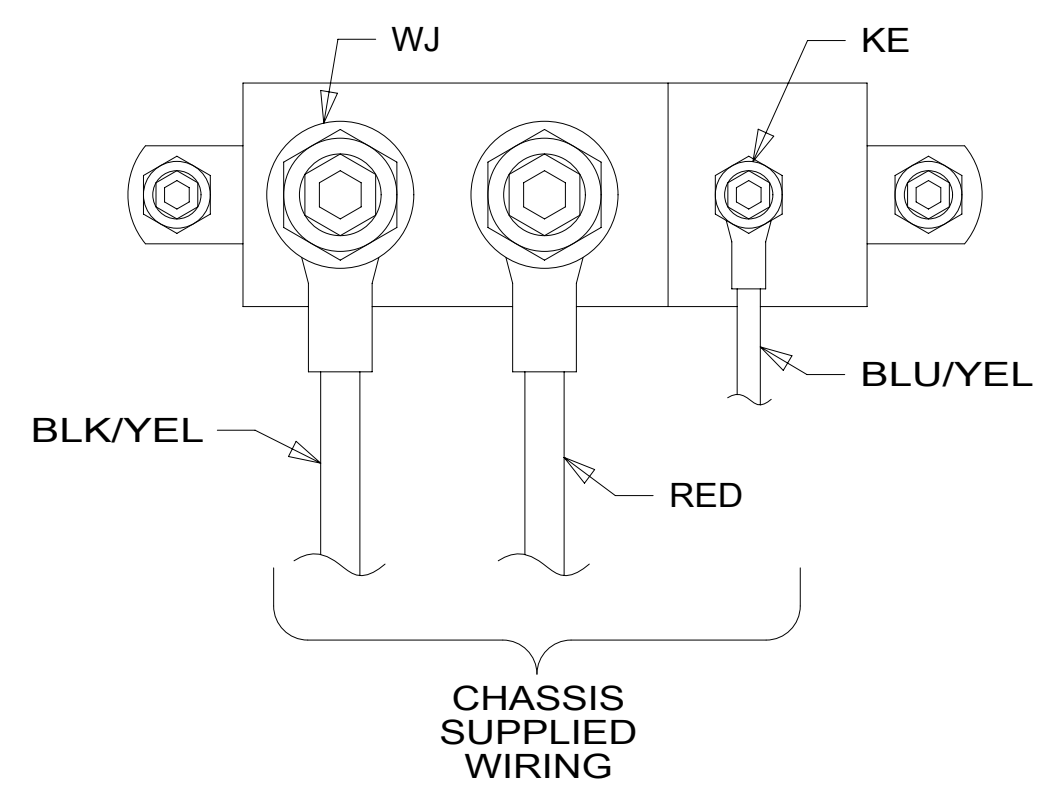

DETAIL CC 3

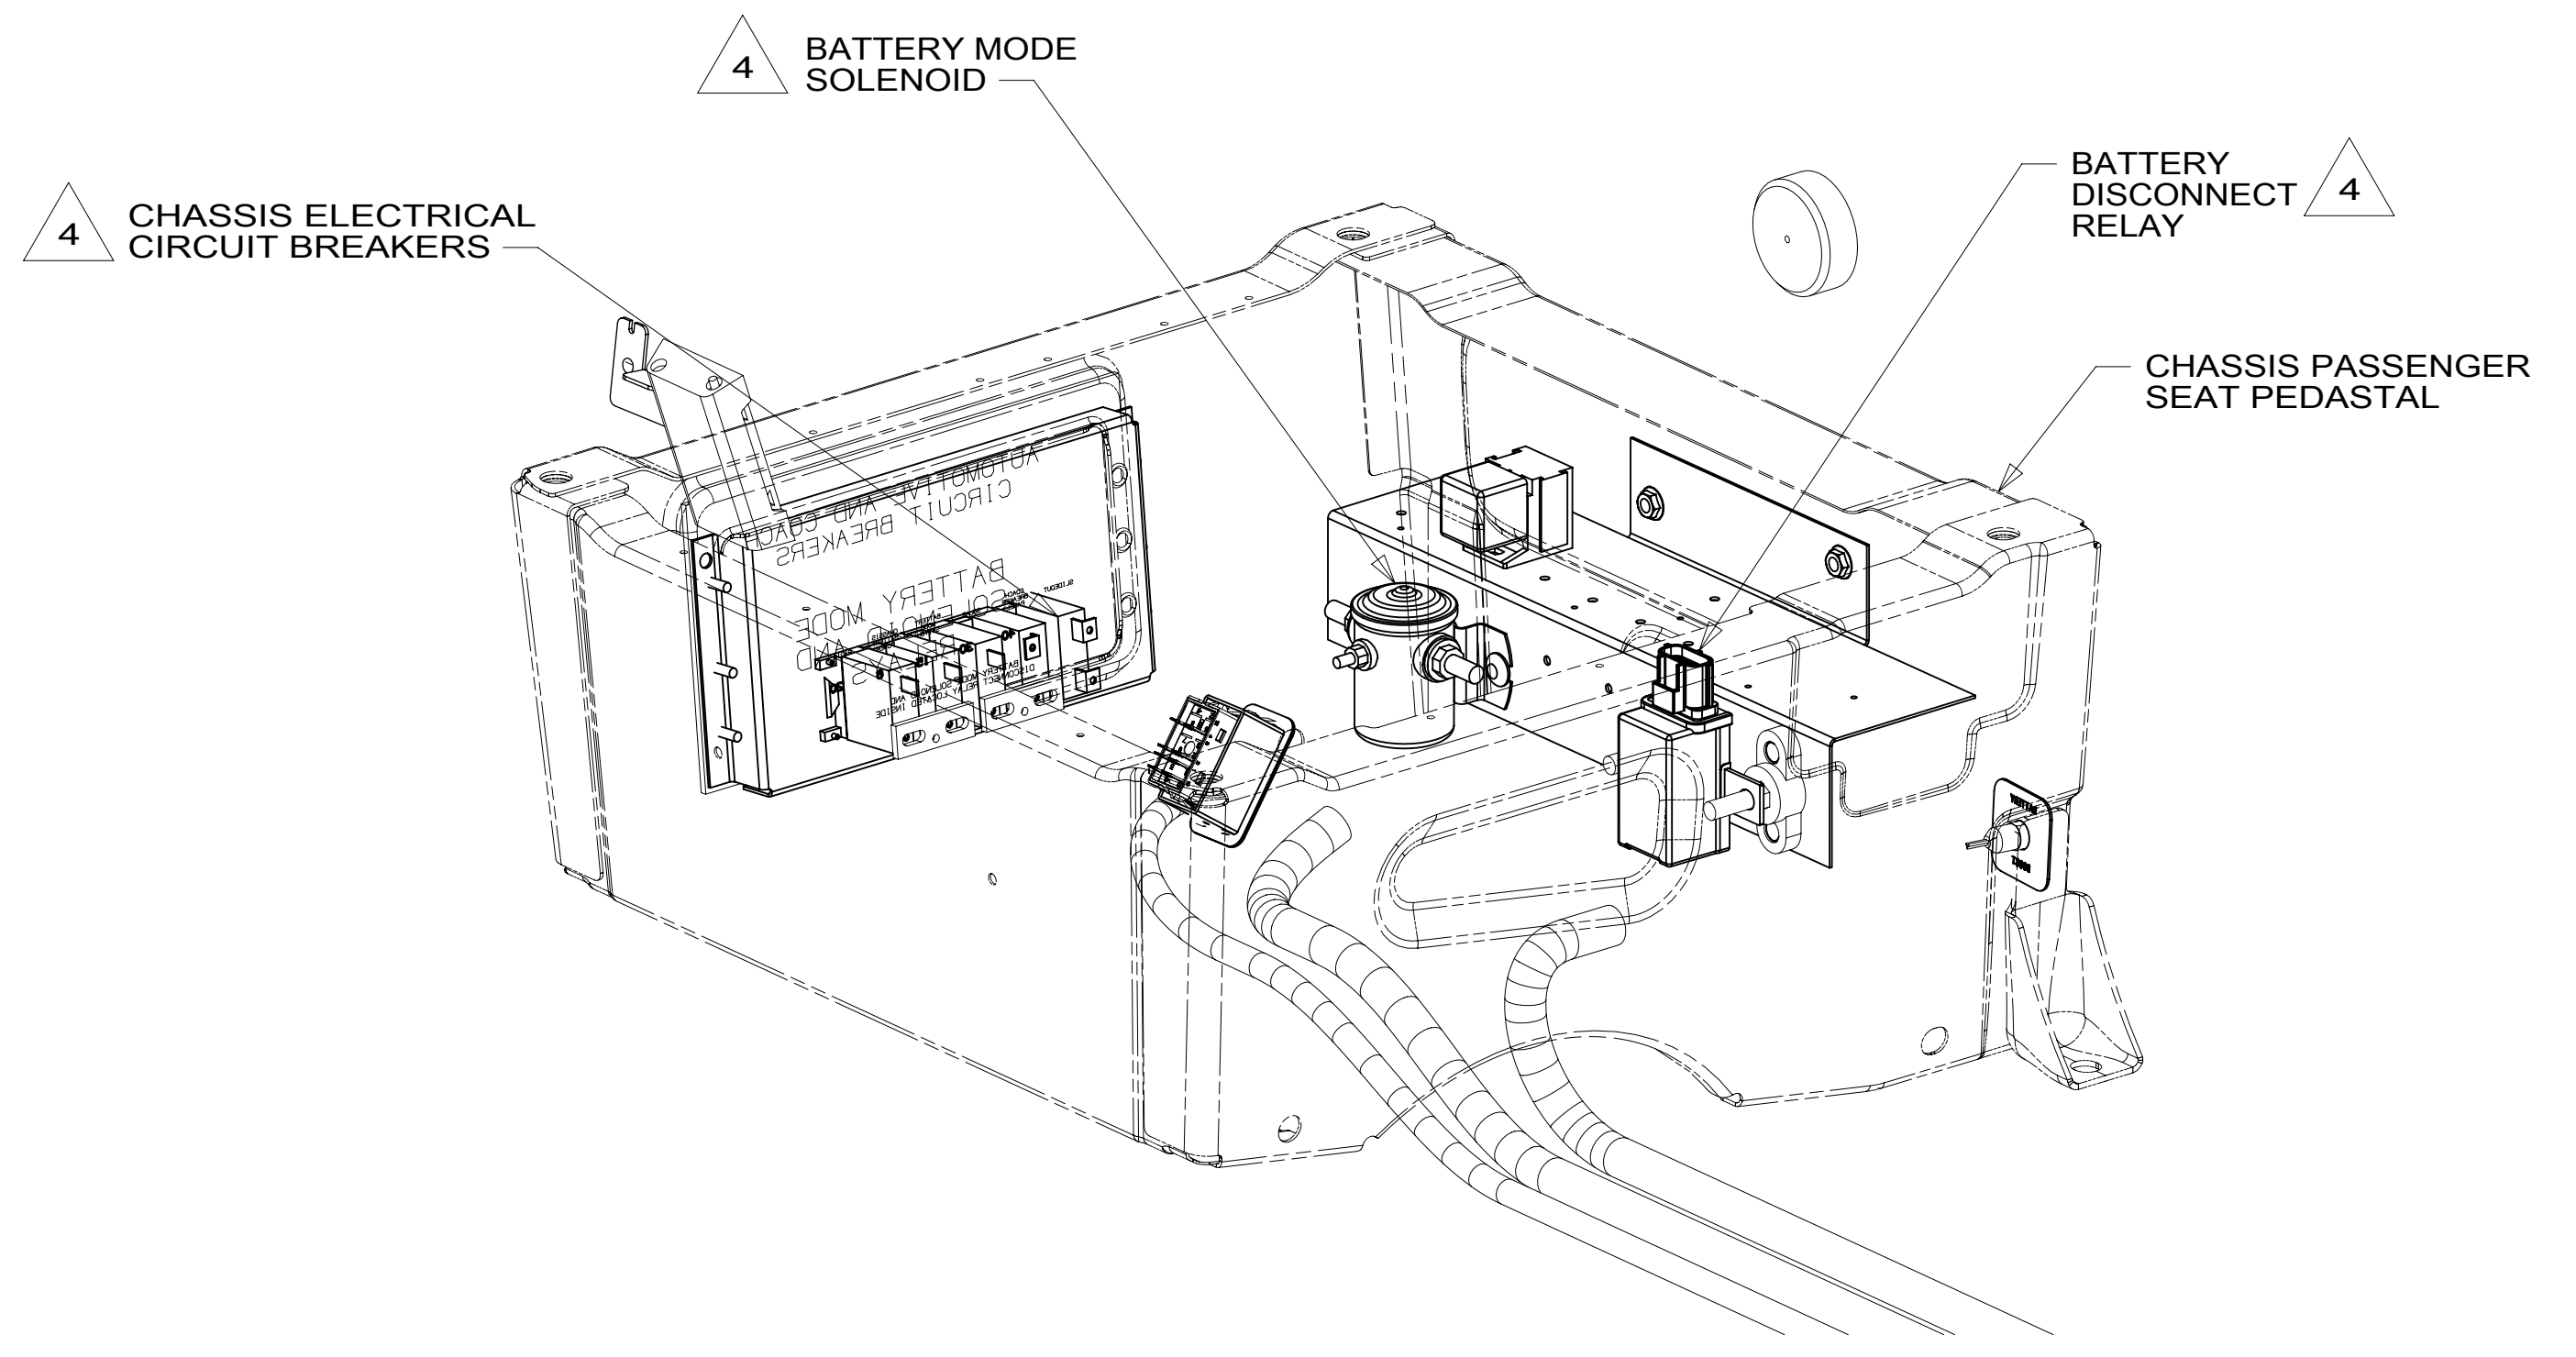

DETAIL CD

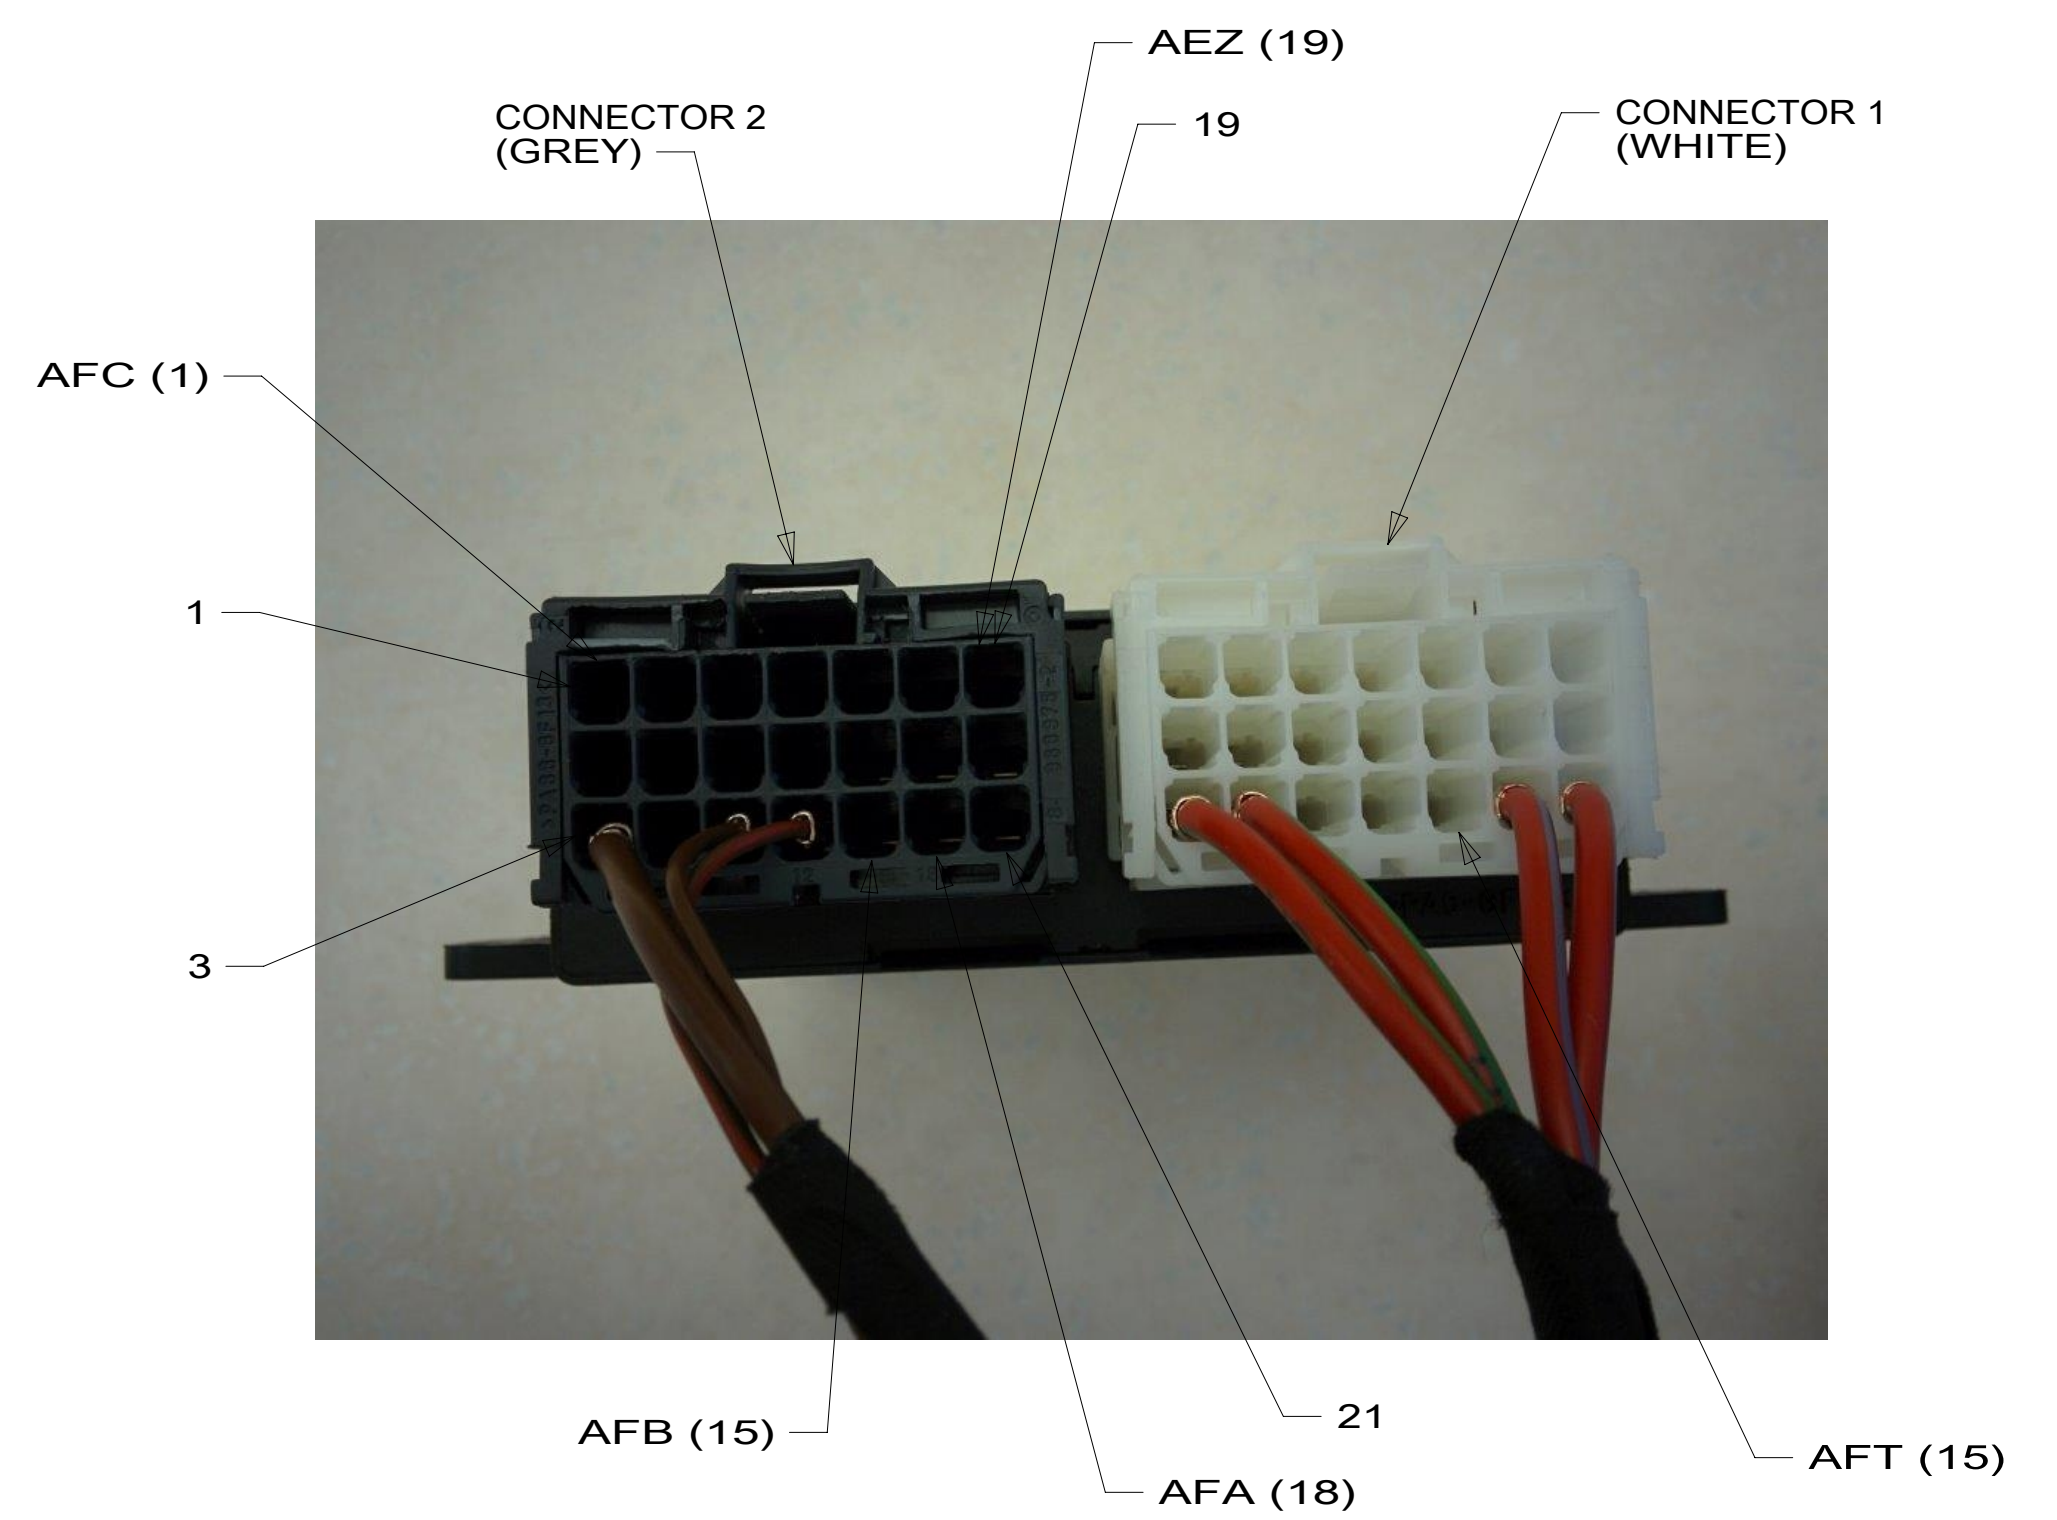

DETAIL CE 5

- 6 DASH STRUCTURE LOCATED BEHIND LOWER DASH PANEL.
- 5 LOCATED UNDER DRIVER'S SEAT.
- 4 SEE CHASSIS ELECTRICAL BOX ASM FOR ADDITIONAL INFORMATION.
- 3 CONNECTION POINT IS LOCATED UNDER DRIVERS SEAT.
- 2 LOWER DASH PANEL.


NOTES:
1. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

- 1MV MERCEDES-11030#DSL,4CYL,VAN
- 1MM MERCEDES-11,030# DIESEL, VAN
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:	
WIRING INSTL-CHASSIS	
SHEET: 3 OF 7	ITEM/PART NO: 000027483 / 31598201000
REV	12-Jul-2017

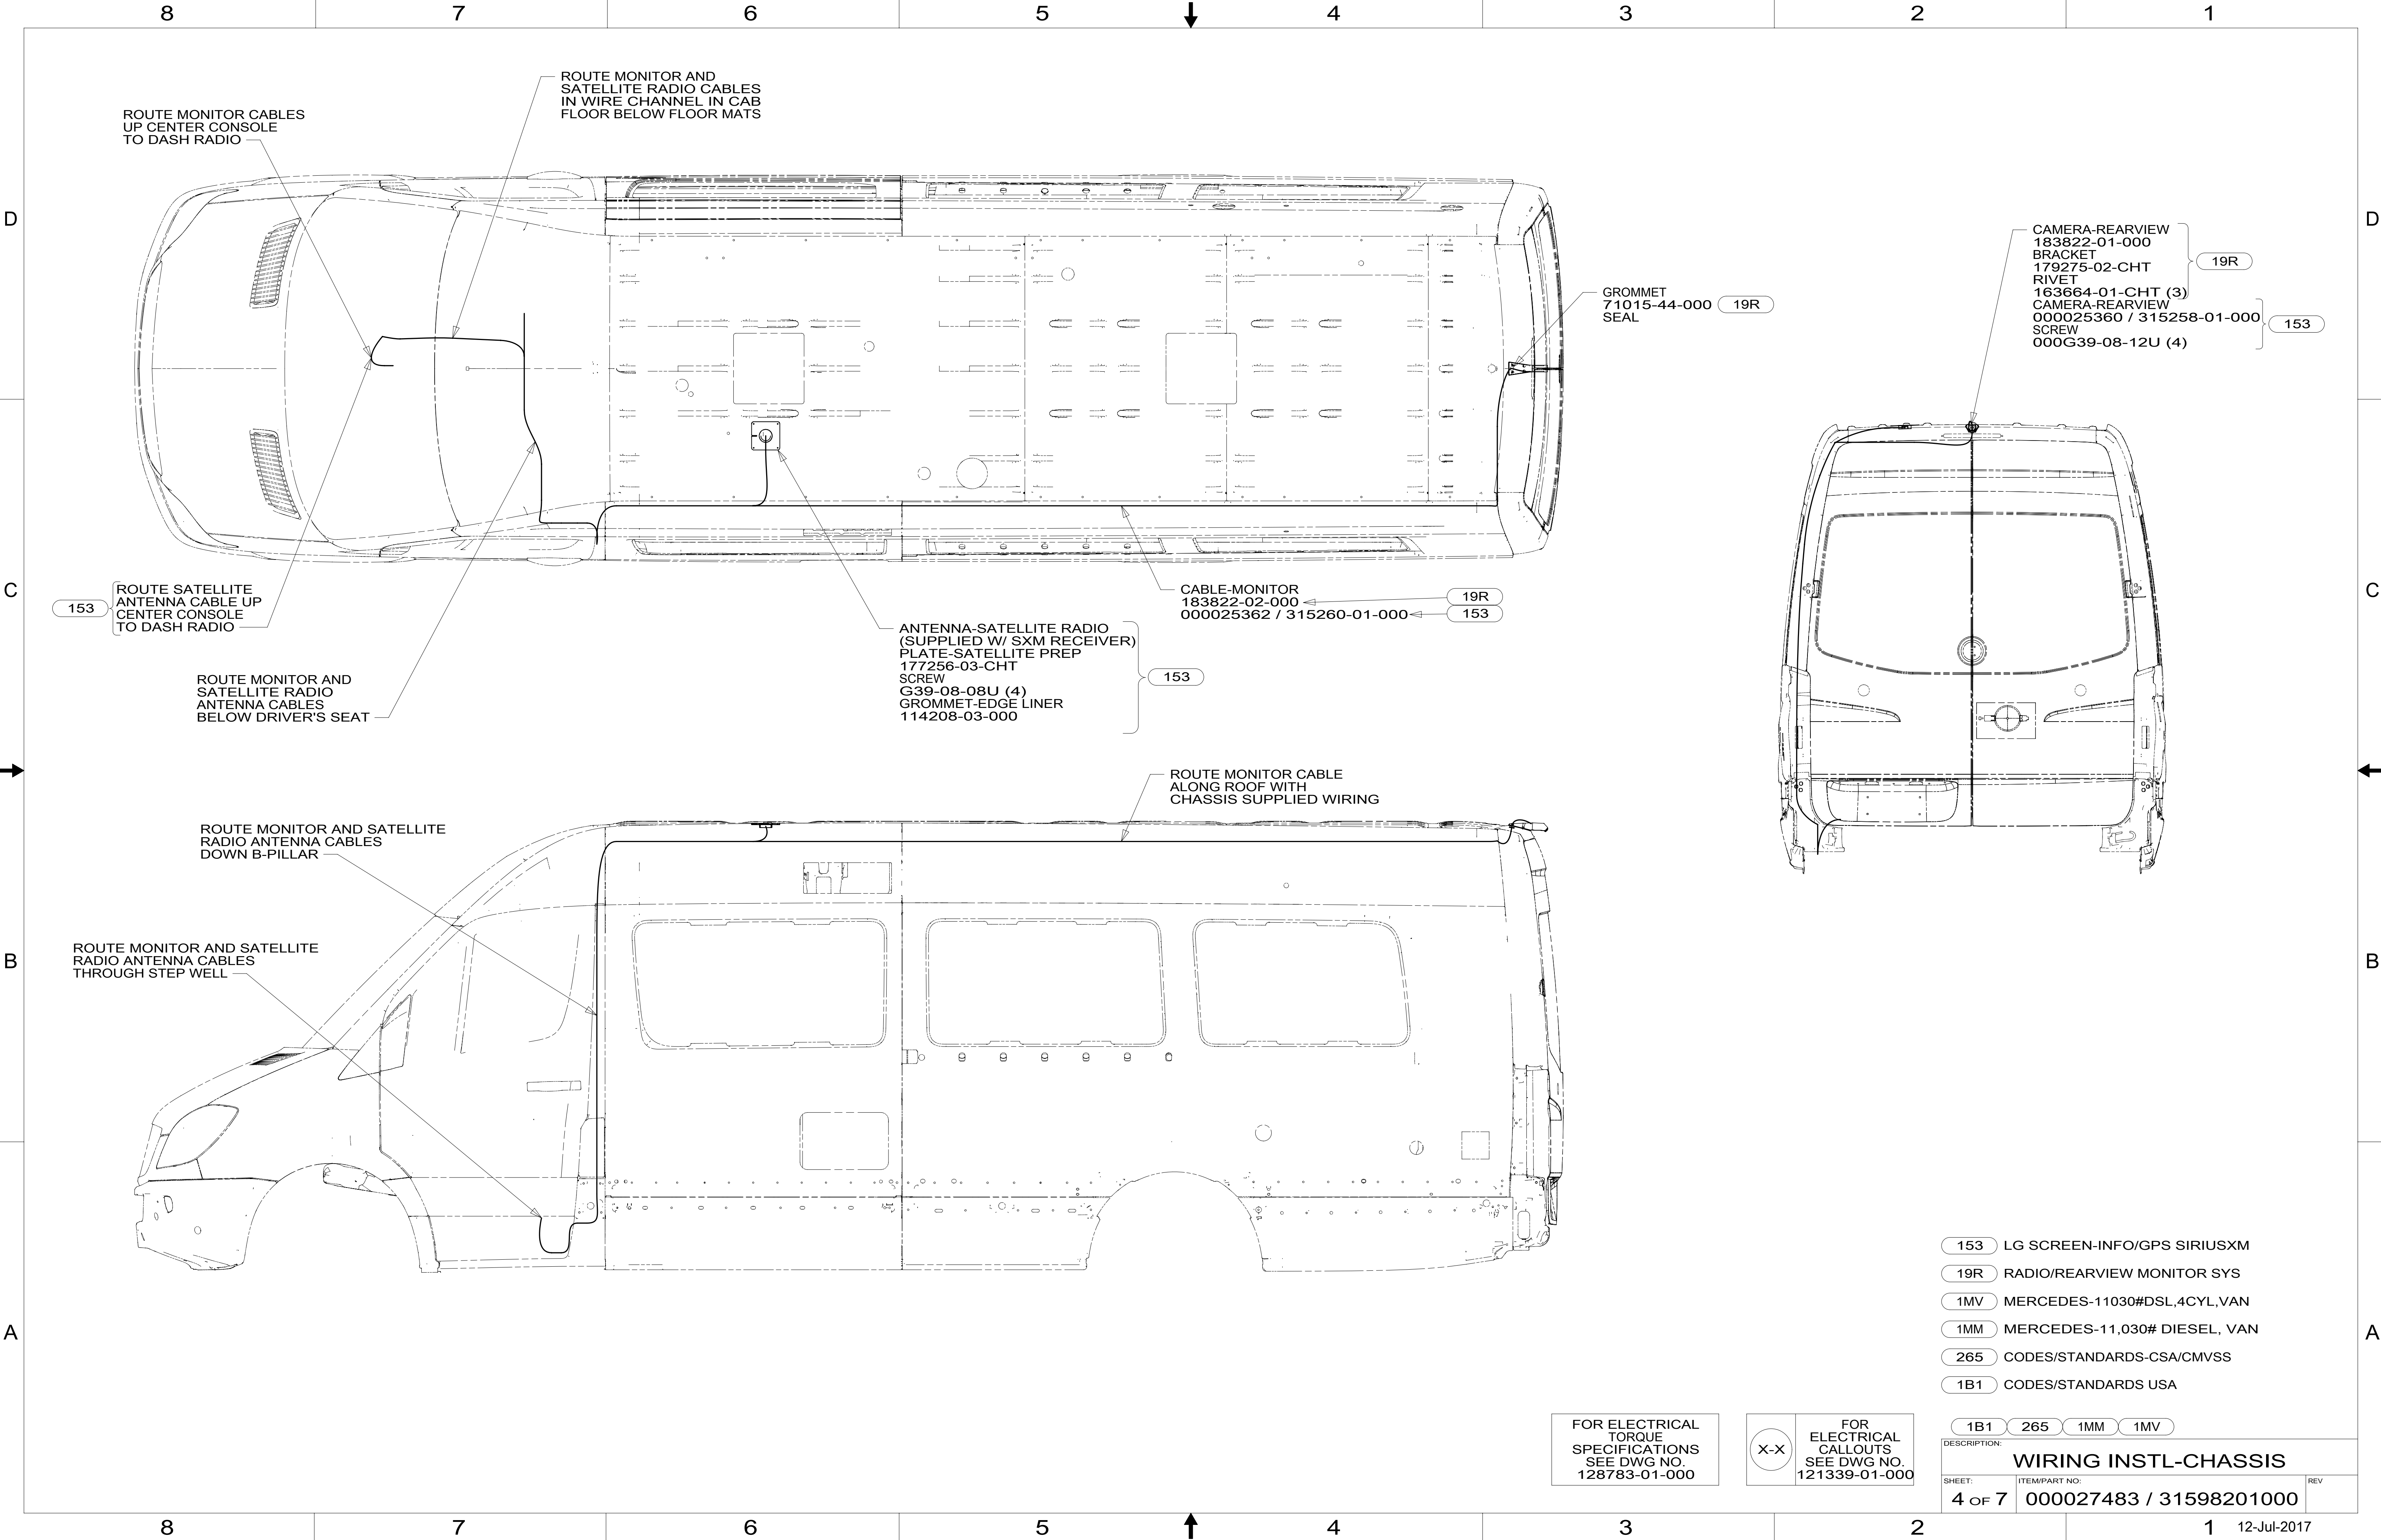

ROUTE MONITOR CABLES UP CENTER CONSOLE TO DASH RADIO

ROUTE MONITOR AND SATELLITE RADIO CABLES IN WIRE CHANNEL IN CAB FLOOR BELOW FLOOR MATS

GROMMET 71015-44-000 19R SEAL

CAMERA-REARVIEW 183822-01-000 BRACKET 179275-02-CHT RIVET 163664-01-CHT (3) CAMERA-REARVIEW 000025360 / 315258-01-000 SCREW 000G39-08-12U (4) 153

153 ROUTE SATELLITE ANTENNA CABLE UP CENTER CONSOLE TO DASH RADIO

ANTENNA-SATELLITE RADIO (SUPPLIED W/ SXM RECEIVER) PLATE-SATELLITE PREP 177256-03-CHT SCREW G39-08-08U (4) GROMMET-EDGE LINER 114208-03-000 153

CABLE-MONITOR 183822-02-000 19R 000025362 / 315260-01-000 153

ROUTE MONITOR AND SATELLITE RADIO ANTENNA CABLES BELOW DRIVER'S SEAT

ROUTE MONITOR CABLE ALONG ROOF WITH CHASSIS SUPPLIED WIRING

ROUTE MONITOR AND SATELLITE RADIO ANTENNA CABLES DOWN B-PILLAR

ROUTE MONITOR AND SATELLITE RADIO ANTENNA CABLES THROUGH STEP WELL


- 153 LG SCREEN-INFO/GPS SIRIUSXM
- 19R RADIO/REARVIEW MONITOR SYS
- 1MV MERCEDES-11030#DSL,4CYL,VAN
- 1MM MERCEDES-11,030# DIESEL, VAN
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000



DESCRIPTION:	1B1 265 1MM 1MV	
WIRING INSTL-CHASSIS		
SHEET:	ITEM/PART NO.:	REV
4 OF 7	000027483 / 31598201000	

RADIO-AM/FM/DVD,
TOUCH,2-DIN
000102678 / 321438-01-000
BRACKET
178610-01-000
APPLIQUE-RADIO
185341-01-CHT
ADAPTOR-ANTENNA
114366-01-000

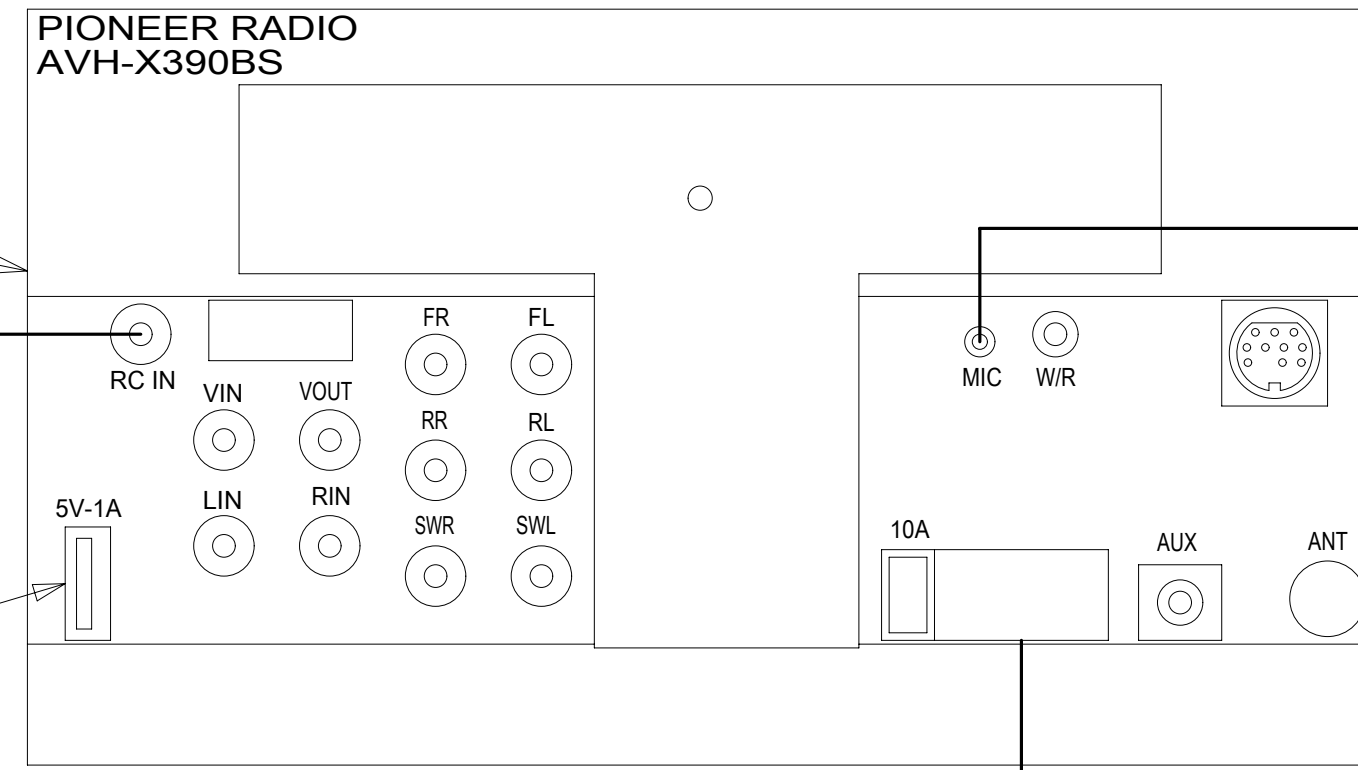


MICROPHONE CABLE
ROUTE TO DASH POCKET
ABOVE RADIO

HARNES-RADIO,12 PIN
183820-19-000

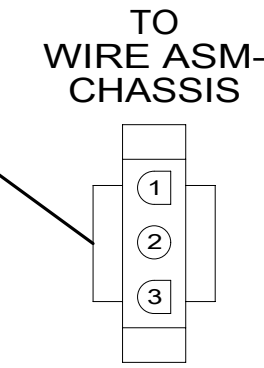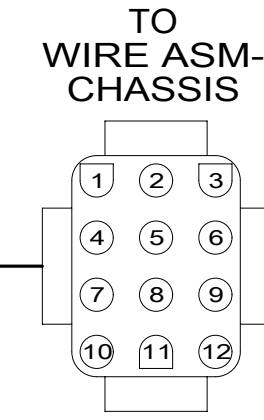

TO WIRE ASM-
CHASSIS



HARNES-CAMERA ADAPTER
183820-03-000

CABLE-CAMERA,20M
(REF)

TO REAR
CAMERA

1 PLUG USB CABLE SUPPLIED WITH RADIO INTO LEAD ON BACK OF RADIO MARKED 'USB'. DRILL 16MM DIAMETER HOLE IN THE TRAY ABOVE RADIO. THE HOLE IS TO BE LOCATED ON THE PASSENGER SIDE OF THE TRAY 50MM FROM THE END NEAREST THE WINDSHIELD. ROUTE CABLE INTO THE TRAY AND LEAVE 200MM OF CABLE IN THE TRAY.




NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 19R RADIO/REARVIEW MONITOR SYS
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION: WIRING INSTL-CHASSIS		
SHEET: 5 OF 7	ITEM/PART NO: 000027483 / 31598201000	REV

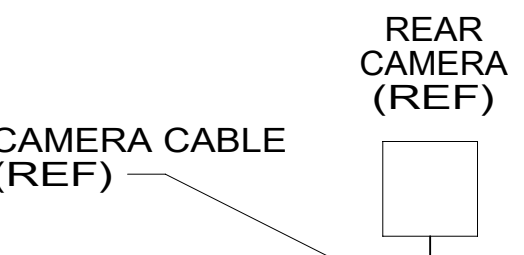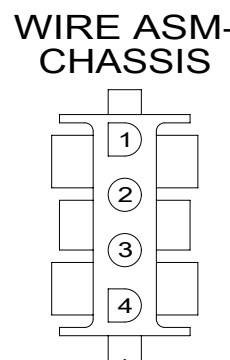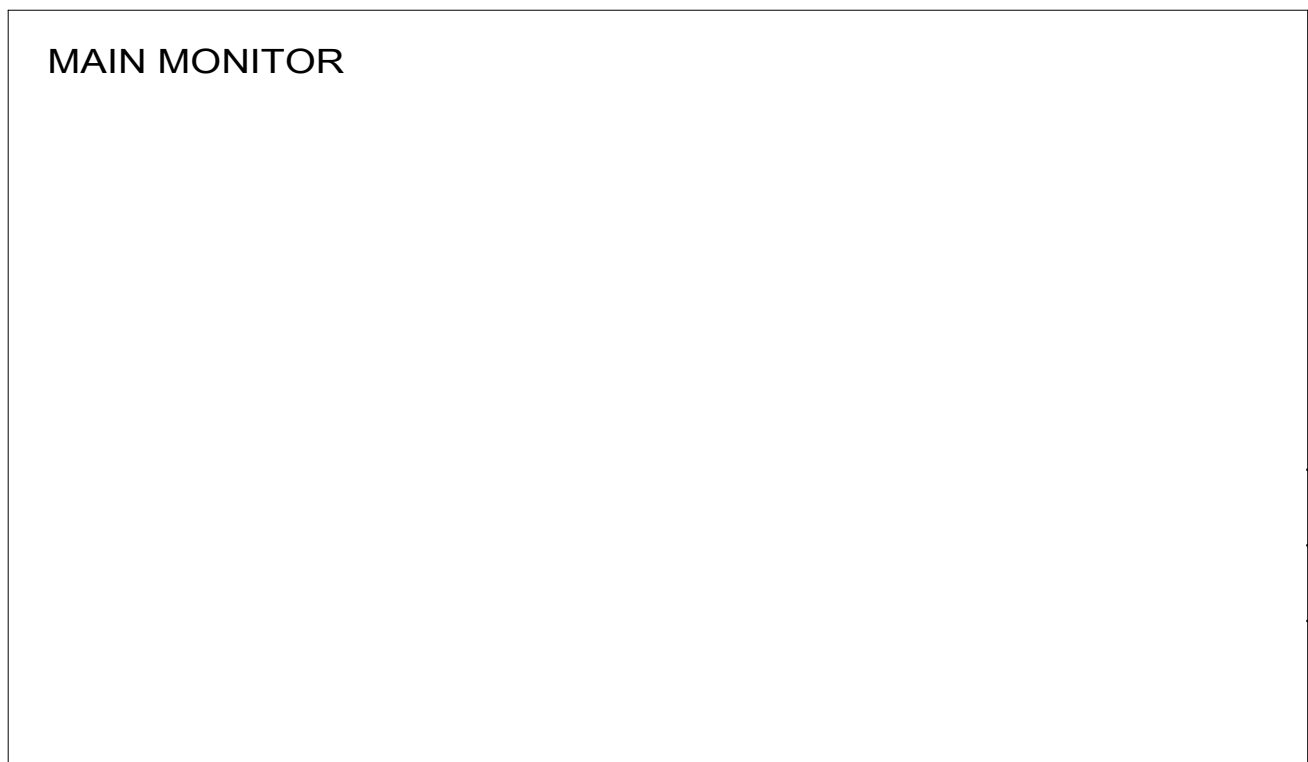

BRACKET-CLAMP,HDMI
000038736 / 318986-01-CHT
TAPE-FOAM DBL COATED
076322-22-000 (40 MM)

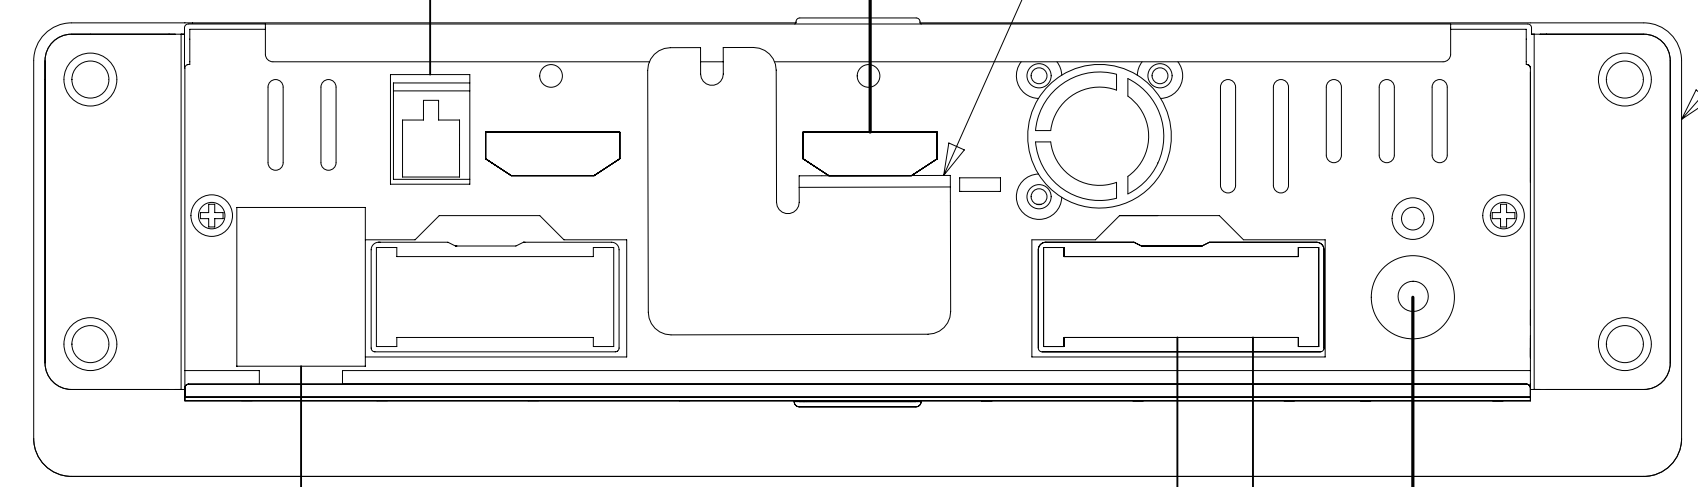


RADIO-INFOTAINMENT, 9"
000025353 /315254-01-000
REMOTE
176654-04-000
RADIO-KIT,SXM
000111632 / 321635-01-000
TEMP SENSOR
176654-13-000
ADAPTOR-ANTENNA
114366-01-000







GPS ANTENNA


DETAIL FA

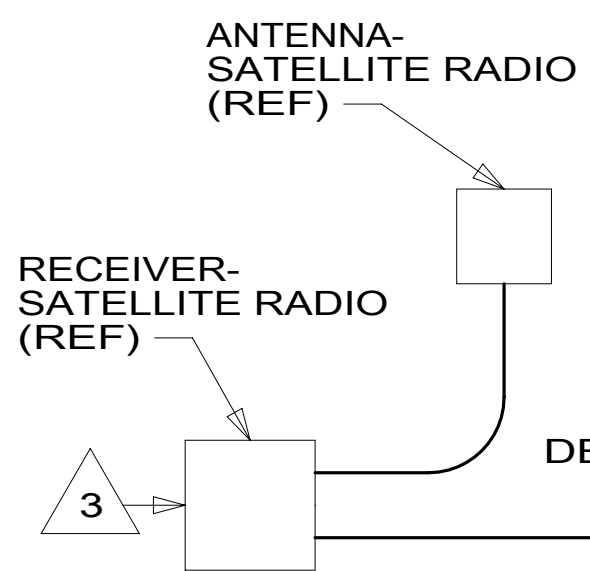

DETAIL FA



PSM/CAN CONNECTION



BLU/WHT WIRE

BUTT SPLICE

FN

CONNECTS TO WIRE ASM-CHASSIS

NO CONNECTION

- NOTES:
- 4 WIRE TIE TO DASH RADIO WIRING BEHIND THE RADIO.
 - 3 PLUG CABLE INTO LEAD ON BACK OF RADIO.
 - 2 SEE SHT 2 FOR ADDITIONAL INFORMATION.
 - 1 MOUNT GPS ANTENNA TO TOP OF DEFROST PLENUM BEHIND RADIO.


- 153 LG SCREEN-INFO/GPS SIRIUSXM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 1B1 265 153

DESCRIPTION: WIRING INSTL-CHASSIS		
SHEET: 6 OF 7	ITEM/PART NO: 000027483 / 31598201000	REV

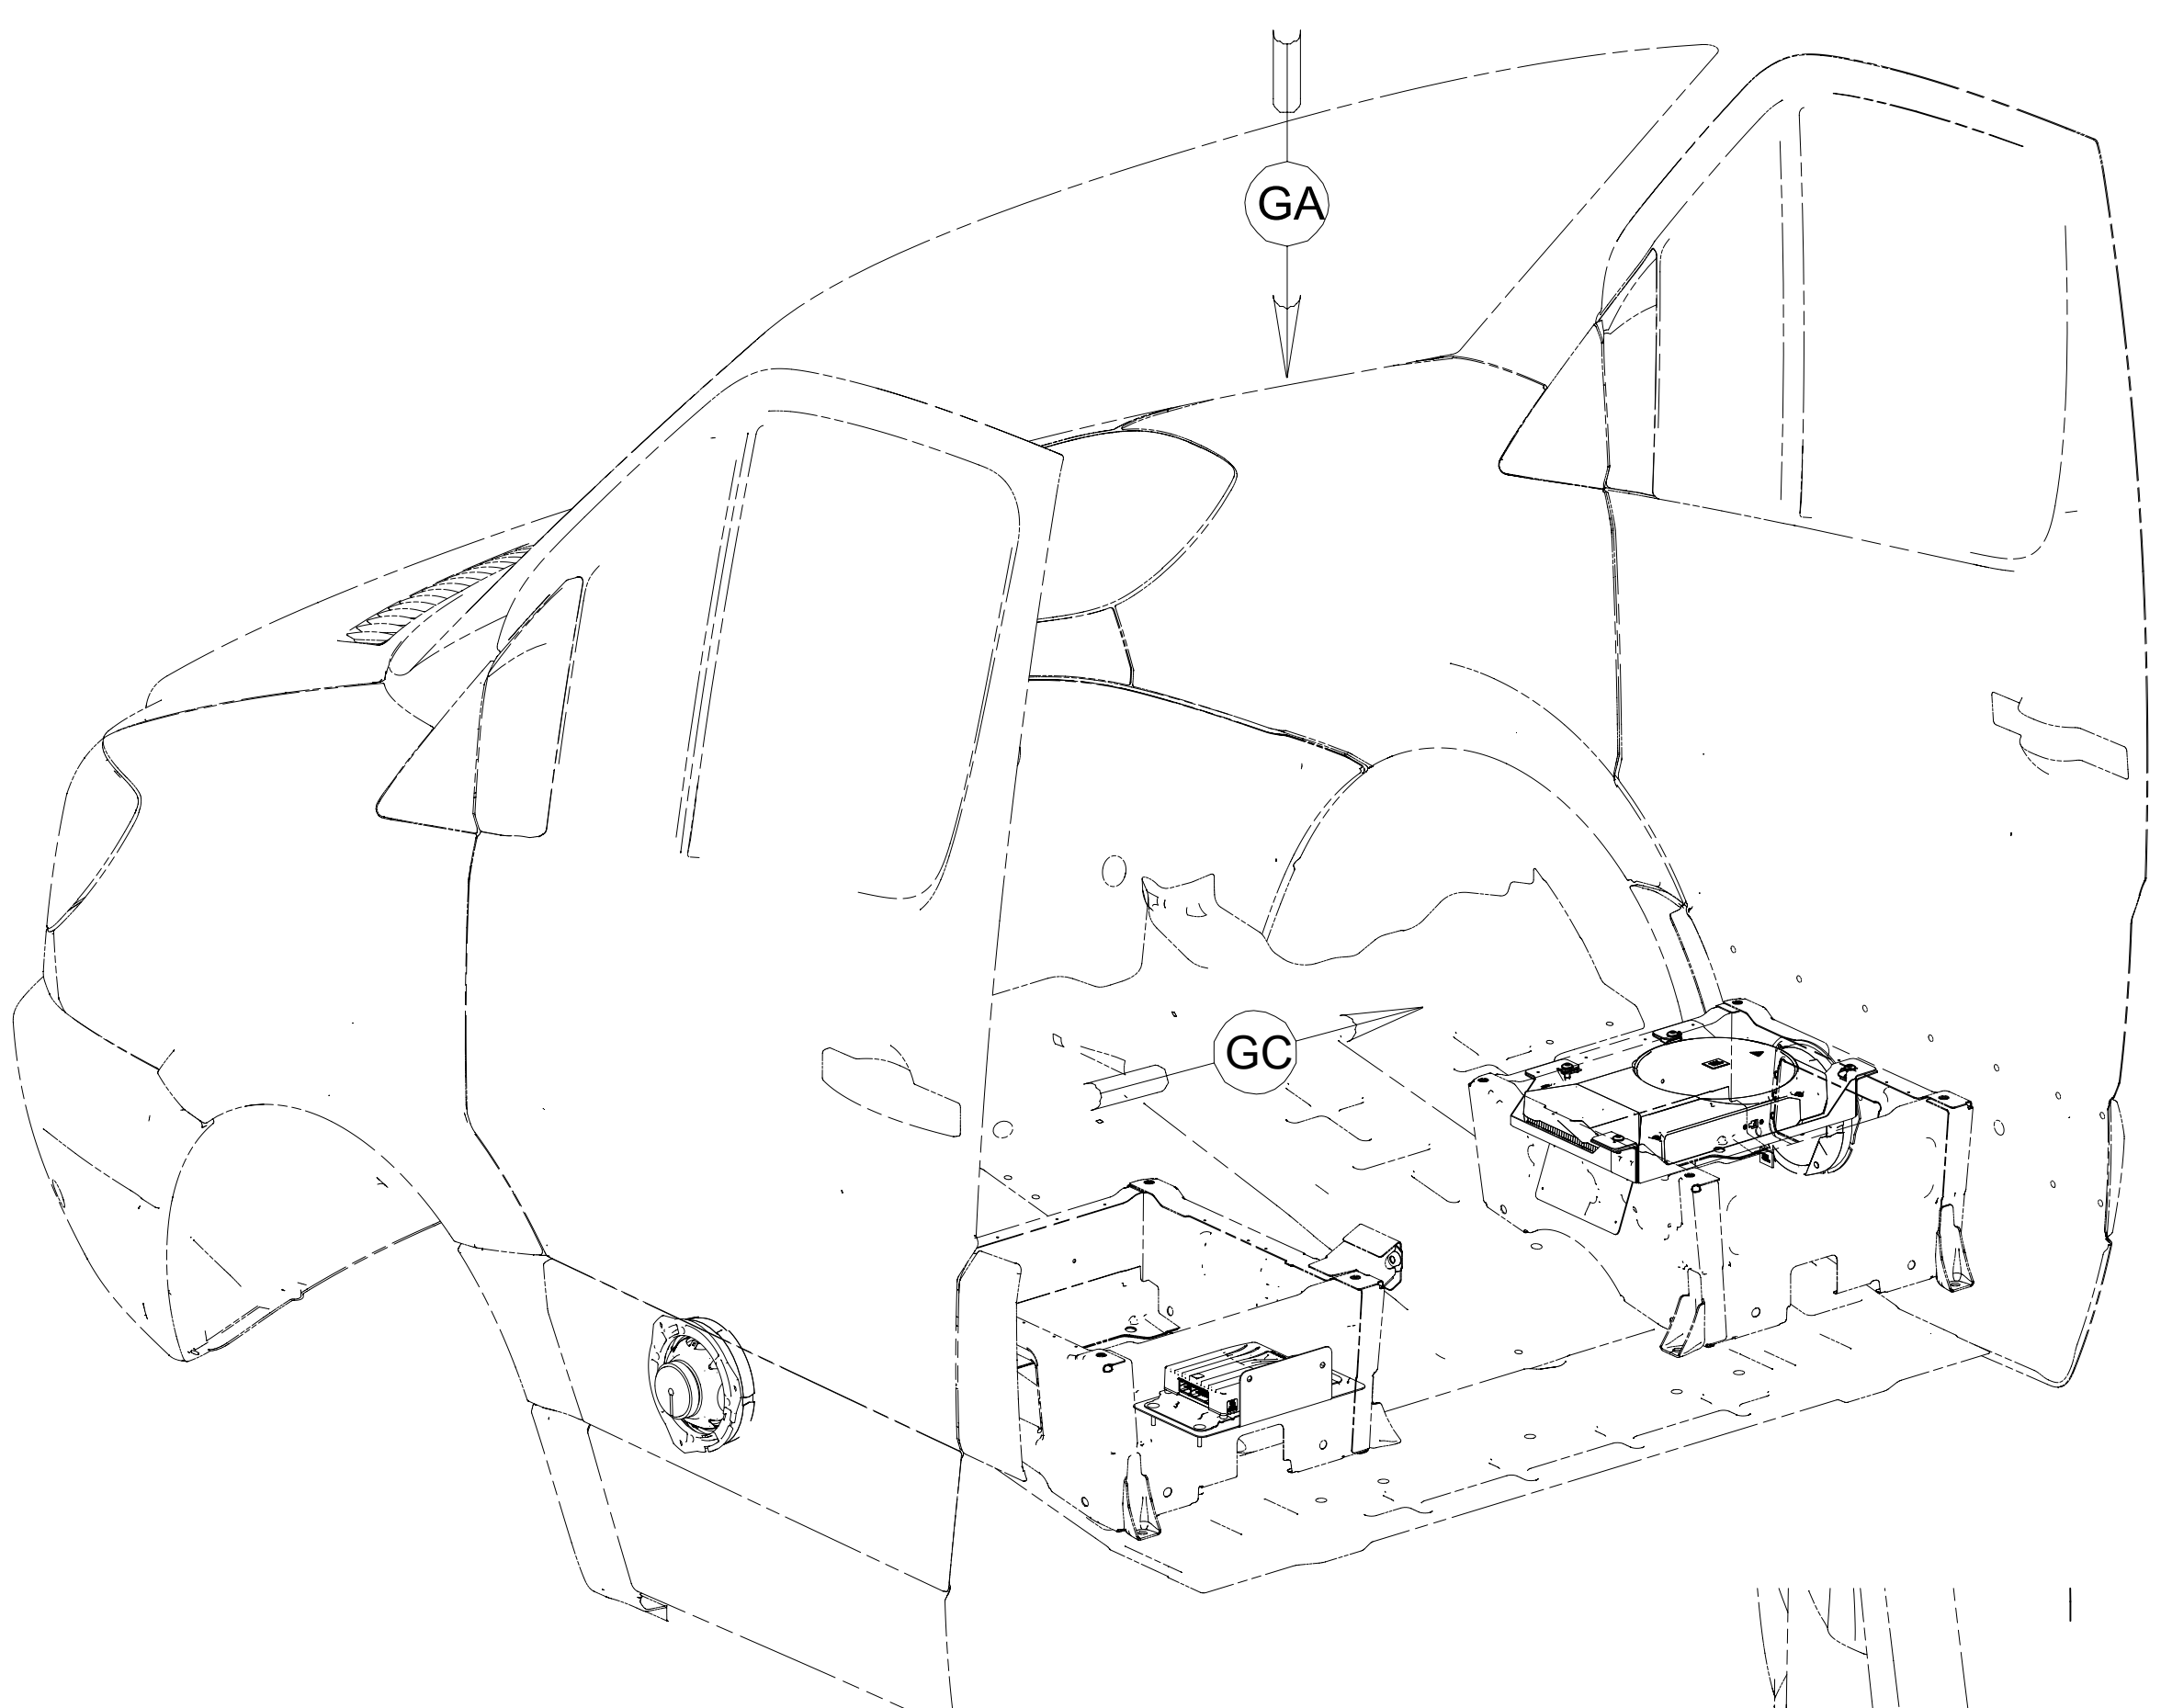

DETAIL GC
 LOGO-JBL
 302951-01-000 (2) 1



VELCRO - 1/2"
 088792-08-000 (50 MM)
 TAPE - DOUBLE SIDED
 086276-01-000 (2) (50 MM)

DETAIL GD 4 57P

2
 SPEAKER-6.25",
 MIDRANGE,JBL
 194528-01-000
 SPACER-SPEAKER
 000025517 / 315320-01-000
 ADAPTER-SPEAKER,
 SPRINTER
 194530-01-000

WIRE ASM-CHASSIS
 (REFERENCE)

3
 WIRE ASM-AMP, INPUT
 194532-01-000
 WIRE ASM-AMP, OUTPUT
 194532-02-000

AMPLIFIER-PREMIUM
 AUDIO,500
 000031855 / 312664-02-000
 PANEL-AMPLIFIER
 195229-01-CHT
 RIVET
 165072-01-CHT (3)
 NUT
 0MD54F-06-000 (2)

2
 SPEAKER-6.25",
 MIDRANGE,JBL
 194528-01-000
 SPACER-SPEAKER
 000025517 / 315320-01-000
 ADAPTER-SPEAKER,
 SPRINTER
 194530-01-000

5
 SUBWOOFER ASM-SUB W/ BRACKETS
 000025680 / 315383-01-XXX

COVER-SEAT
 DETAIL GD

- NOTES:
- 5 RELOCATE 4WD MODULE TO SUBWOOFER BRACKET WHEN NEEDED.
 - 4 CUT SEAT PEDESTAL COVER THAT IS SUPPLIED WITH CHASSIS. PLACE COVER SO THAT IT DOES NOT COVER SUBWOOFER. SECURE COVER IN PLACE WITH VELCRO.
 - 3 WITH 57P CONNECT 15 PIN HSGS FROM WIRE ASM-CHASSIS TO WIRE ASM-AMP WITHOUT 57P CONNECT 15 PIN HSGS IN WIRE ASM-CHASSIS TOGETHER.
 - 2 REPLACE FACTORY DOOR SPEAKER WITH SPEAKER CALLED OUT.
 - 1 CENTER ON BOTTOM OF SPEAKER GRILL ON DOOR PANEL. CLEAN SURFACE WITH PROMOTER 087211-01-000.

VIEW GA

FOR ELECTRICAL
 TORQUE
 SPECIFICATIONS
 SEE DWG NO.
 128783-01-000

FOR ELECTRICAL
 CALLOUTS
 SEE DWG NO.
 121339-01-000

- 57P RADIO SPEAKERS-PREMIUM SOUND
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION: WIRING INSTL-CHASSIS		
SHEET: 7 OF 7	ITEM/PART NO: 000027483 / 31598201000	REV