

- NOTES:**
- 1 SEE WIRING INSTL-BODY,12V FOR ADDITIONAL INFORMATION.
 - 2. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
 - 3 CUT WIRE TIE AROUND SPRINTER SEAL, ROUTE THE CHASSIS WIRING THROUGH HOLE AND WIRE TIE SEAL WITH WIRE TIE 8343-04-000.
 - 4 COIL AND SECURE WIRES TO BEHIND DASH PANEL WITH (60T)
 - 5 CABLE SUPPLIED WITH DIESEL GENERATOR.
 - 6 10 PIN HOUSING CONNECTS TO GENERATOR.
 - 7 12 PIN HOUSING TO BE ROUTED ABOVE FLOOR TO CONTROL PANEL.
 - 8 CONNECT THE TWO 15 PIN HOUSINGS TOGETHER WITHOUT (57P)
 - 9 REMOVE PLASTIC TRAY AND DISCARD.
 - 10 NOTCH A-POST COVER WHERE IT MEETS THE DASH TO ALLOW DISPLAY CABLE THROUGH. MOUNT DISPLAY TO A-POST COVER AND ADJUST FOR DRIVER'S VIEWING. ROUTE DISPLAY CABLE TO CENTER DASH AND CONNECT TO CAMERA HARNESS.
 - 11 REMOVE REAR VIEW MIRROR AND MOUNT CAMERA TO CENTER OF WINDSHIELD AND 25 MM BELOW REAR VIEW MIRROR BUTTON. ROUTE CABLE UP ABOVE HEADLINER THEN LEFT DOWN LEFT A-POST TO CENTER DASH TO CONNECT TO WIRE ASM-CHASSIS.
 - 12 COIL AND SECURE WIRES TO CHASSIS WITH (60T)
 - 13 INSTALL NUT SO THAT IT IS FLUSH WITH TOP OF EXTENDER-SHAFT.


- (60T) JACKS-STABILIZING,ELECT W/O
- (64A) JACKS-STABILIZING, ELECTRIC
- (36C) COLLISION AVOIDANCE SYSTEM
- (57P) RADIO SPEAKERS-PREMIUM SOUND
- (33F) GEN-3.5 KW ONAN DIESEL
- (52G) GEN-3.6KW ONAN LP MICROQUIET
- (265) CODES/STANDARDS-CSA/CMVSS
- (1B1) CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000



FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

WINNEBAGO
COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.

DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS
DIFTR:	MATERIAL:
UNSPECIFIED TOLERANCES:	
WHOLE DIM (X) :	3
ONE-PLACE (X.X) :	1.5
TWO-PLACE (X.XX) :	0.50
ANGLE :	1°
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS) FIRST USED:
	17 524J
DESCRIPTION: WIRING INSTL-CHASSIS	
SHEET: 1 OF 7	ITEM/PART NO: 000027615 / 31603101000
REF:	1 15-Jun-2017

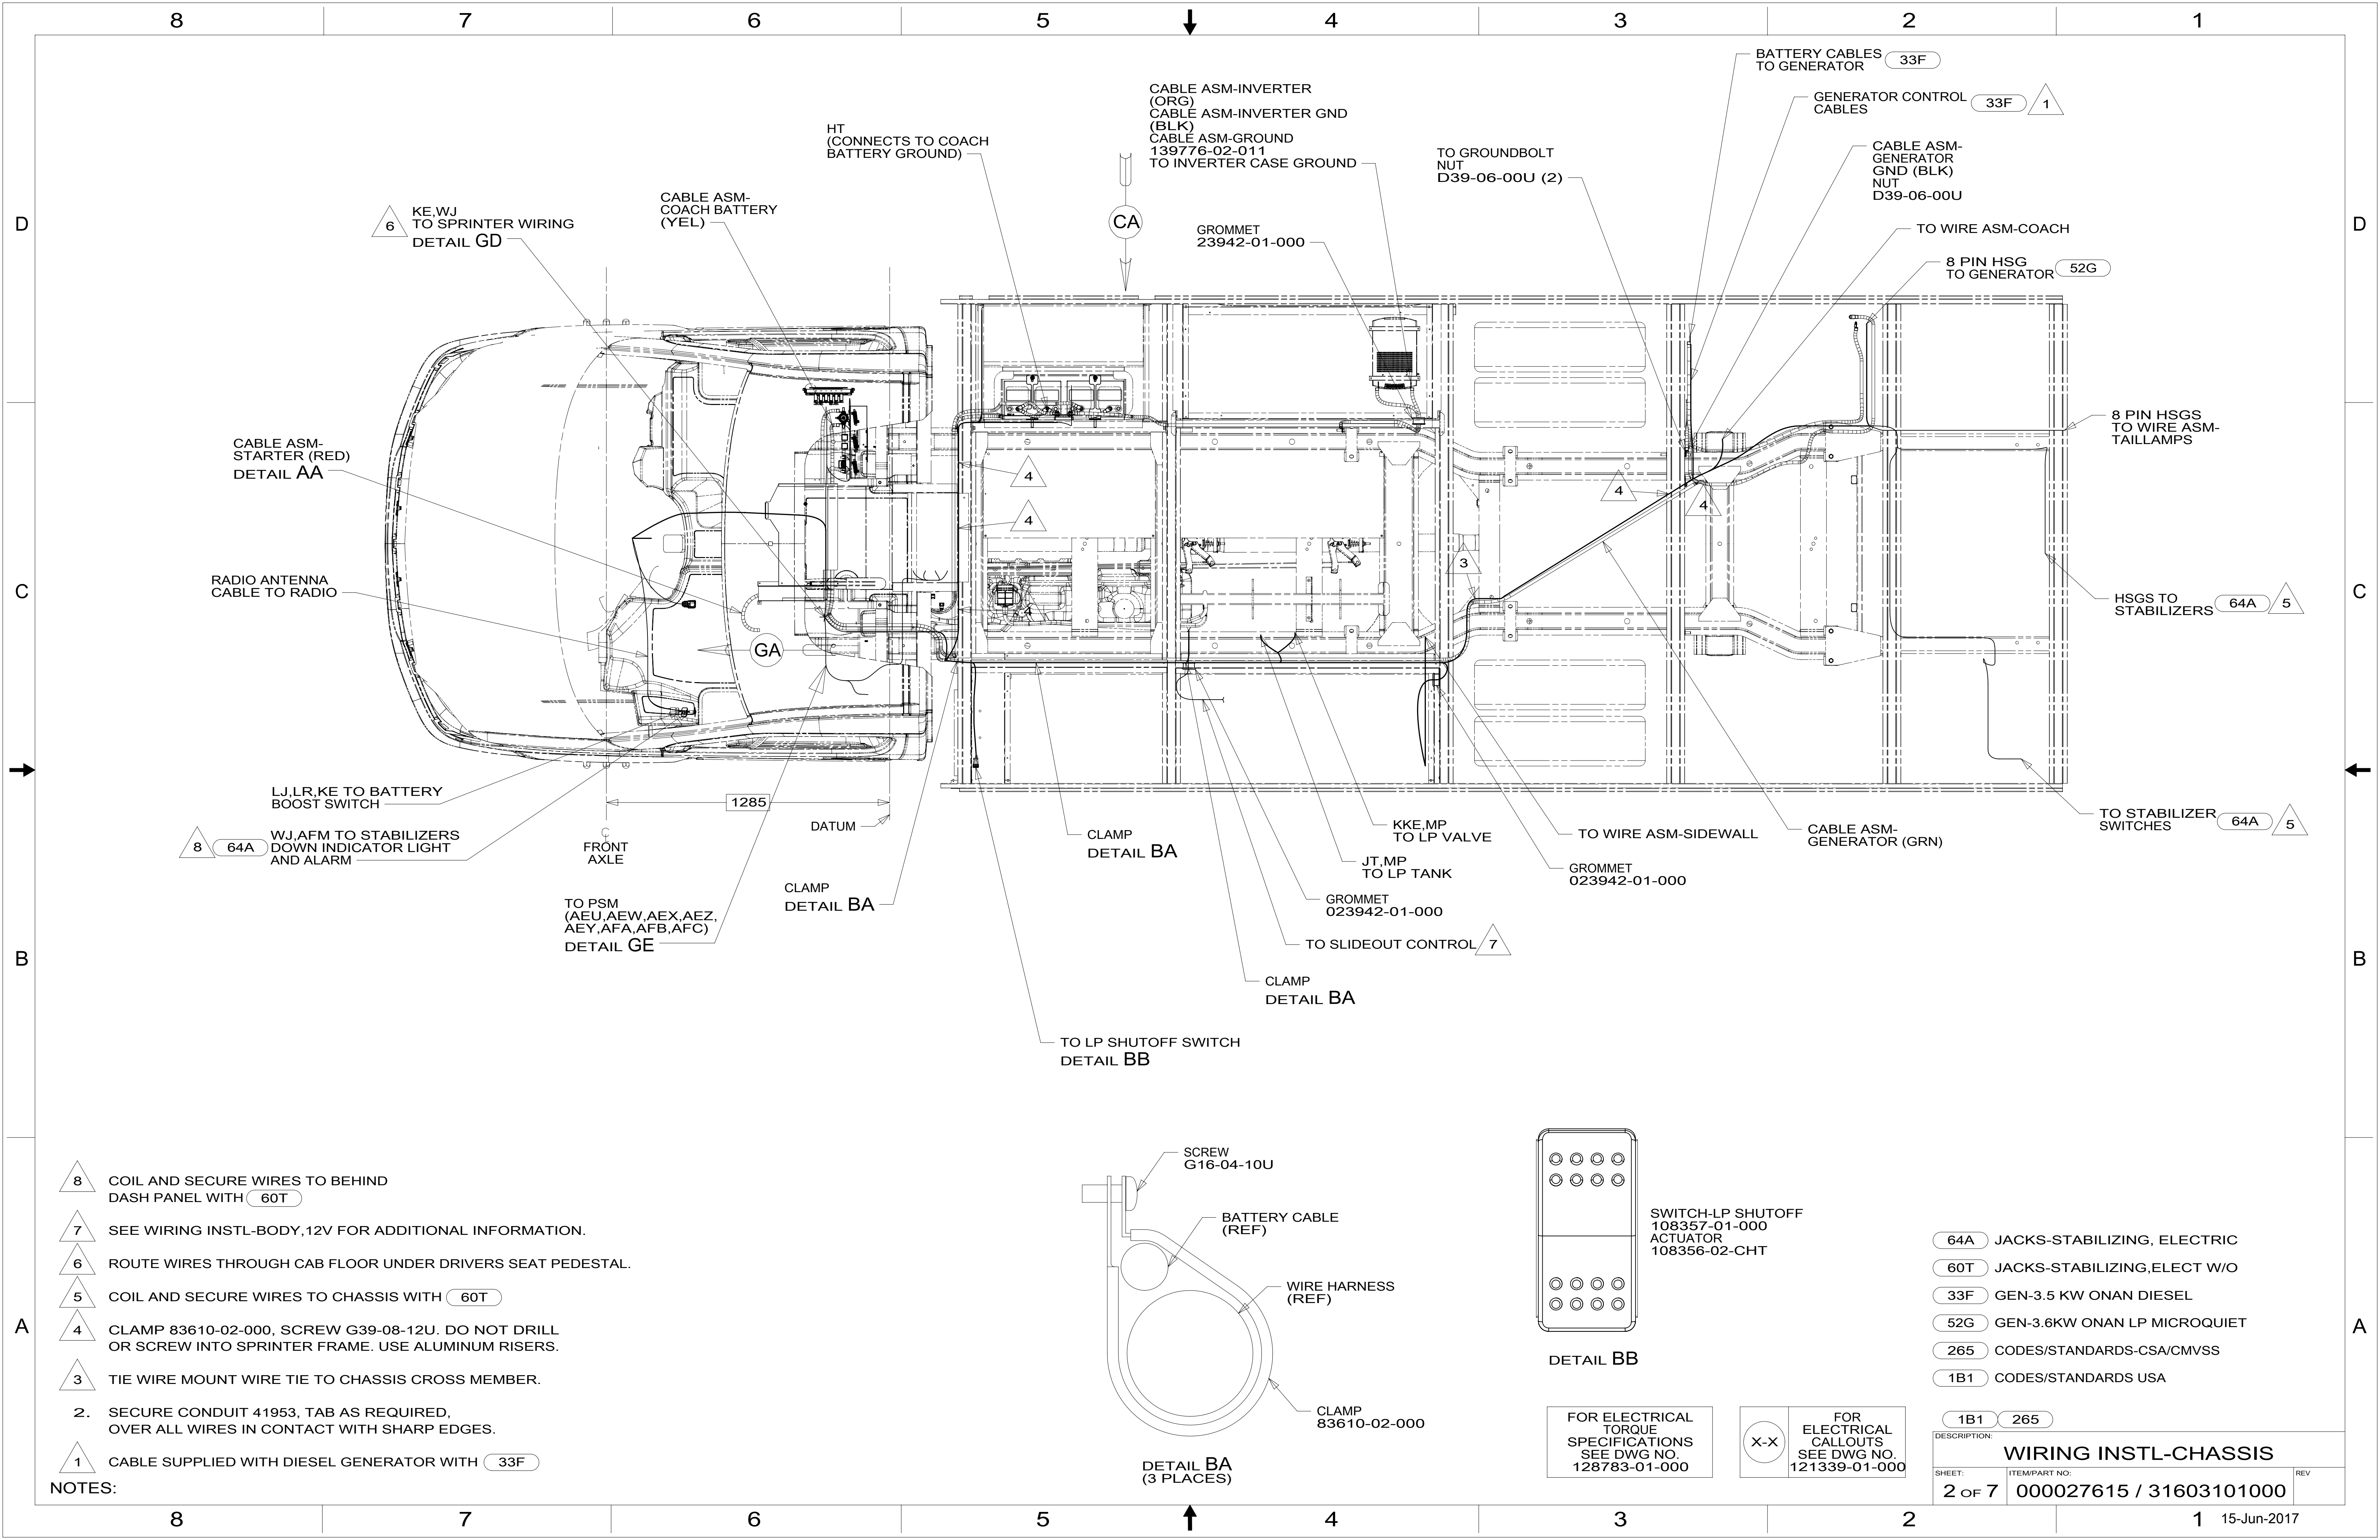

- NOTES:**
- 1 CABLE SUPPLIED WITH DIESEL GENERATOR WITH (33F)
 - 2. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
 - 3 TIE WIRE MOUNT WIRE TIE TO CHASSIS CROSS MEMBER.
 - 4 CLAMP 83610-02-000, SCREW G39-08-12U. DO NOT DRILL OR SCREW INTO SPRINTER FRAME. USE ALUMINUM RISERS.
 - 5 COIL AND SECURE WIRES TO CHASSIS WITH (60T)
 - 6 ROUTE WIRES THROUGH CAB FLOOR UNDER DRIVERS SEAT PEDESTAL.
 - 7 SEE WIRING INSTL-BODY, 12V FOR ADDITIONAL INFORMATION.
 - 8 COIL AND SECURE WIRES TO BEHIND DASH PANEL WITH (60T)

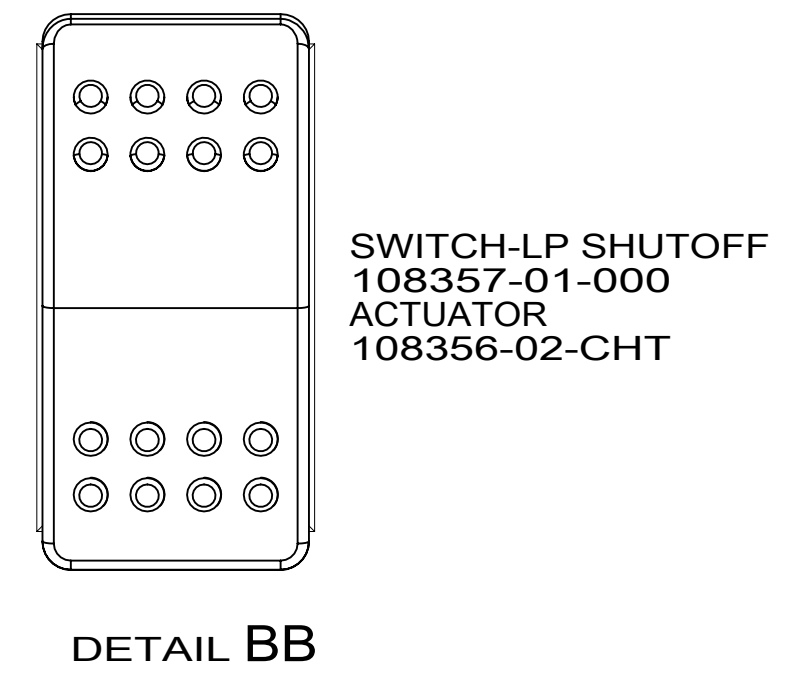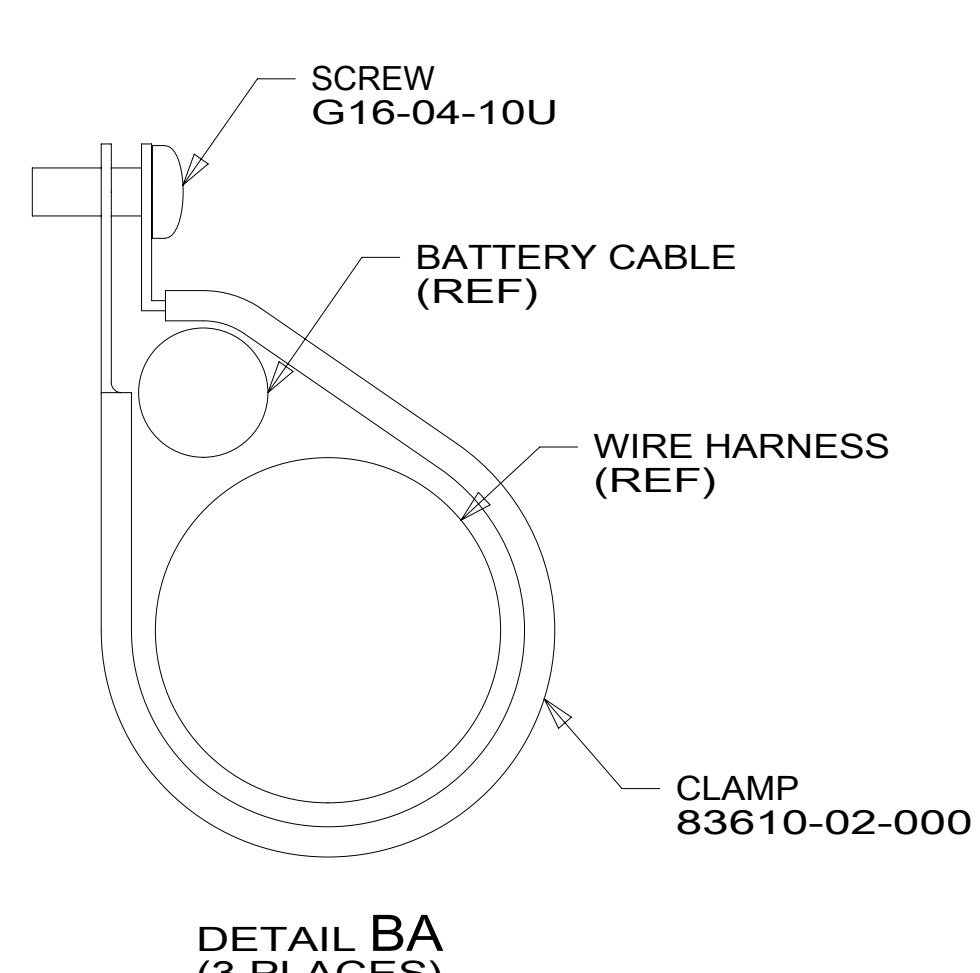


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- (64A) JACKS-STABILIZING, ELECTRIC
- (60T) JACKS-STABILIZING,ELECT W/O
- (33F) GEN-3.5 KW ONAN DIESEL
- (52G) GEN-3.6KW ONAN LP MICROQUIET
- (265) CODES/STANDARDS-CSA/CMVSS
- (1B1) CODES/STANDARDS USA

DESCRIPTION: WIRING INSTL-CHASSIS		REV
SHEET: 2 OF 7	ITEM/PART NO: 000027615 / 31603101000	

CABLE ASM-STARTER (RED)	141415-37-013
CABLE ASM-COACH BATTERY (YEL)	141415-52-041
CABLE ASM-COACH BATTERY GND (BLK)	133567-12-006
CABLE ASM-GENERATOR (GRN) 321	141415-42-076
CABLE ASM-GENERATOR GND (BLK) 321	133566-12-017
CABLE ASM-GENERATOR (GRN) 33F	141416-42-069
CABLE ASM-GENERATOR GND (BLK) 33F	133567-12-011
CABLE ASM-INVERTOR FUSE (ORG)	141415-62-003
CABLE ASM-INVERTOR (ORG)	141415-62-024
CABLE ASM-INVERTOR GND (BLK)	133566-12-009

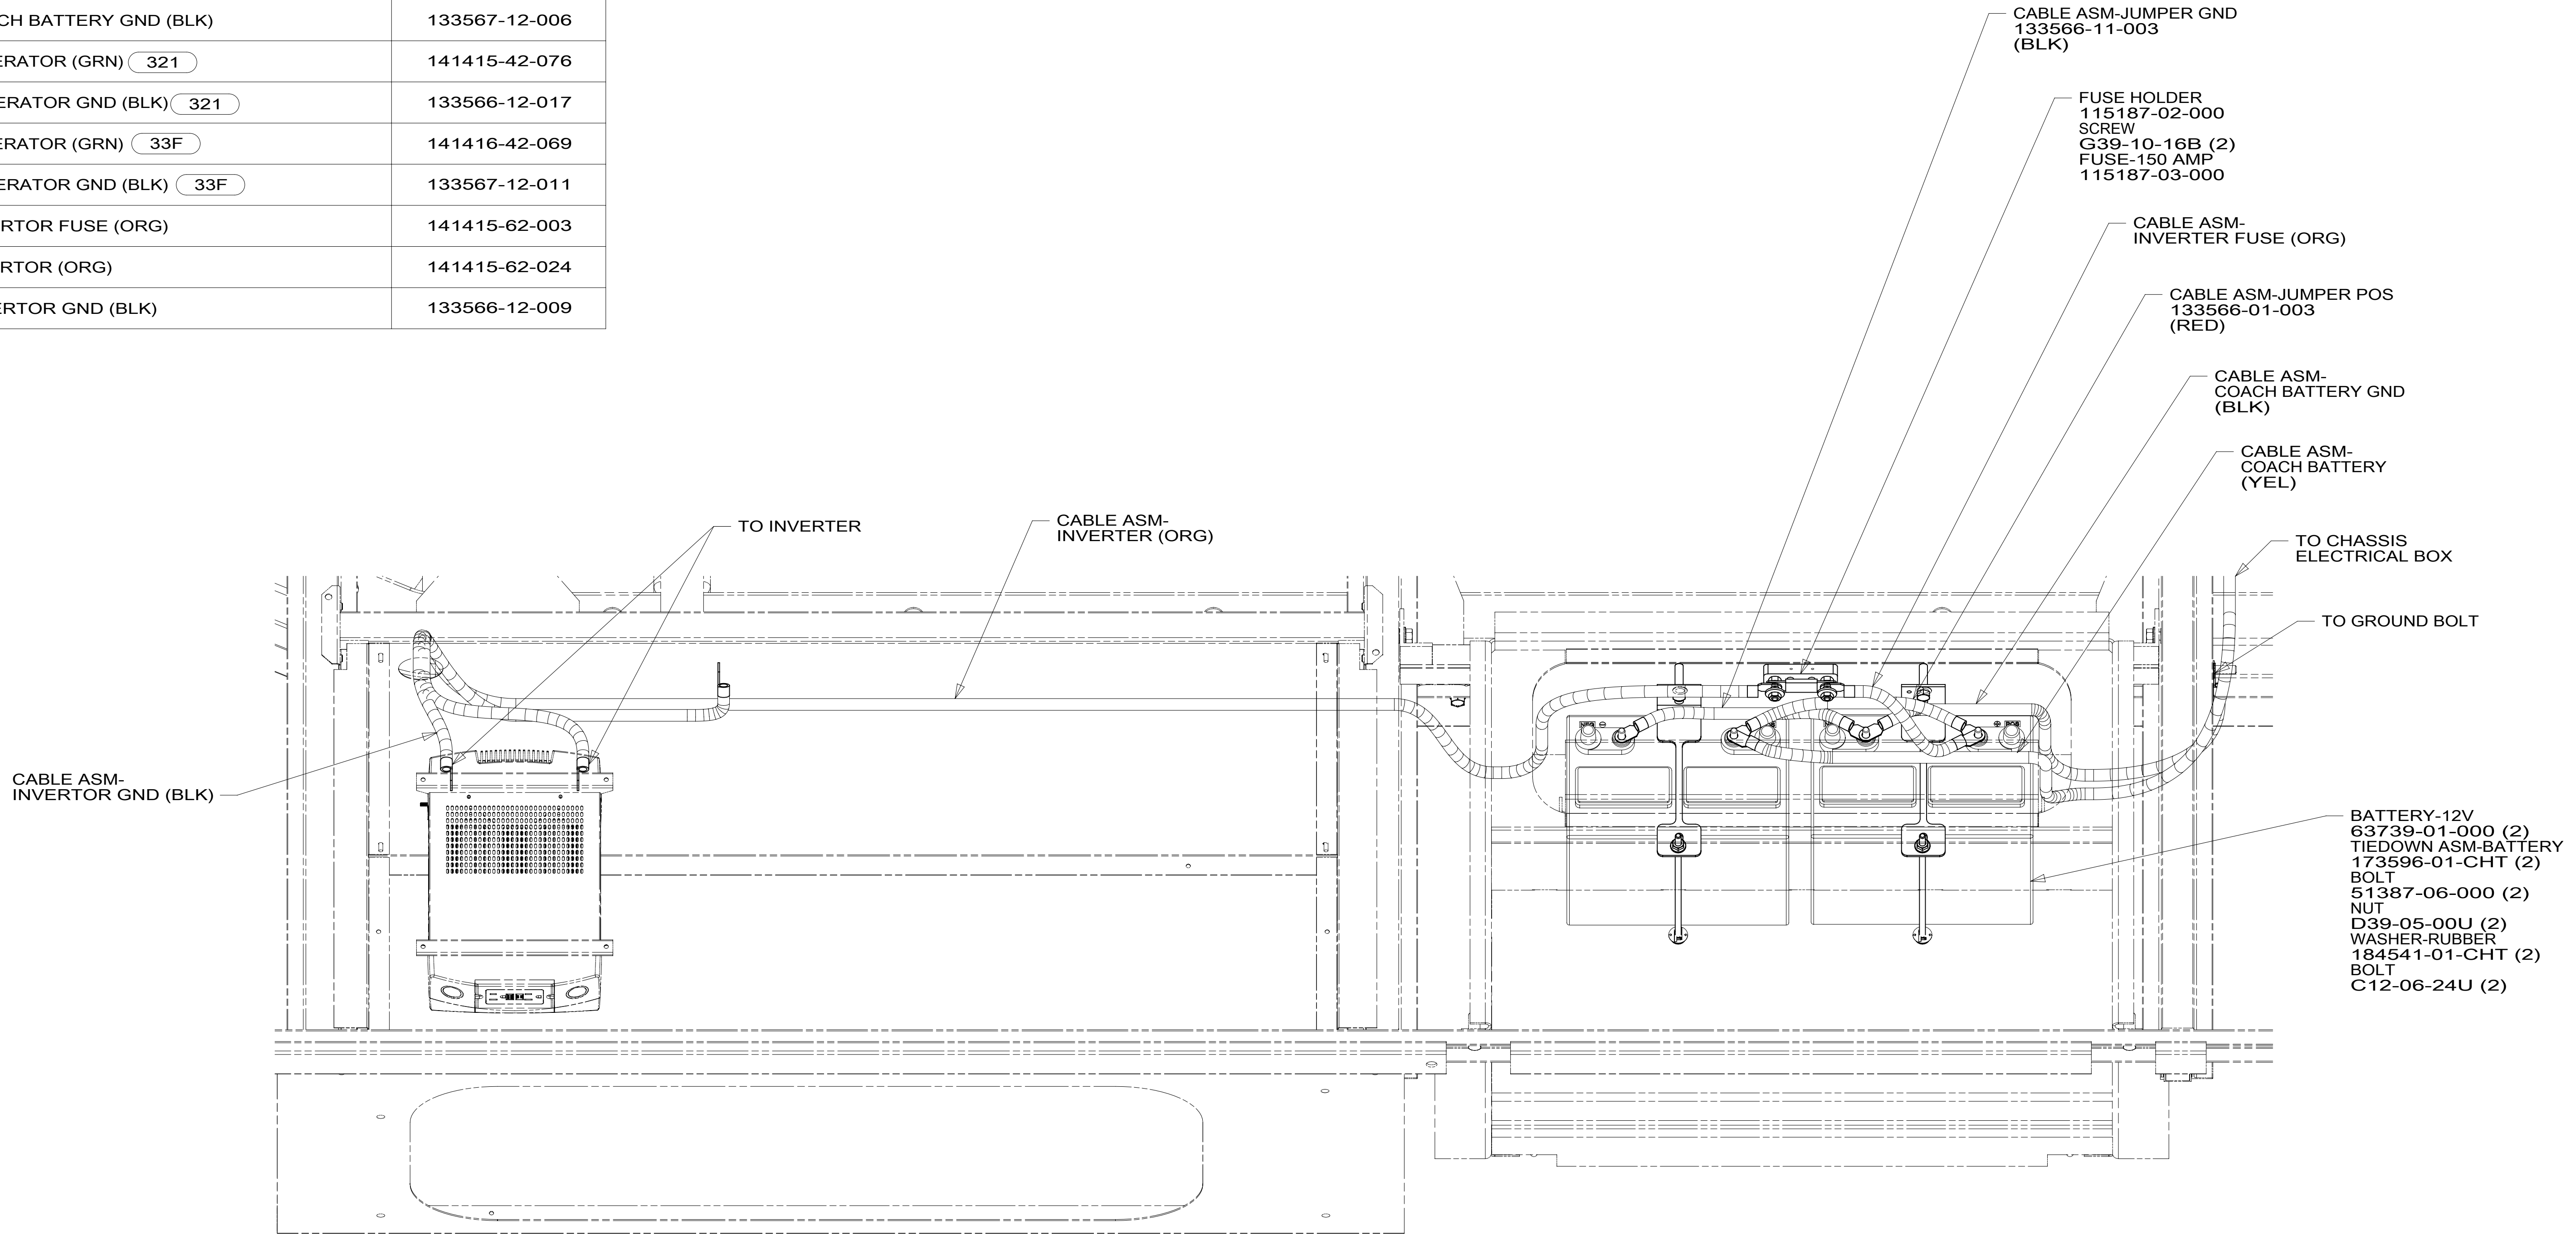

- NOTES:
1. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
 2. BATTERY CABLES ARE NOT TO BE ROUTED OVER BATTERY FILL CAPS.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 33F GEN-3.2 KW ONAN DIESEL
- 321 GENERATOR PREP KIT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION: WIRING INSTL-CHASSIS	
SHEET: 3 OF 7	ITEM/PART NO.: 000027615 / 31603101000
REV	

8 7 6 5 4 3 2 1

D
C
B
A

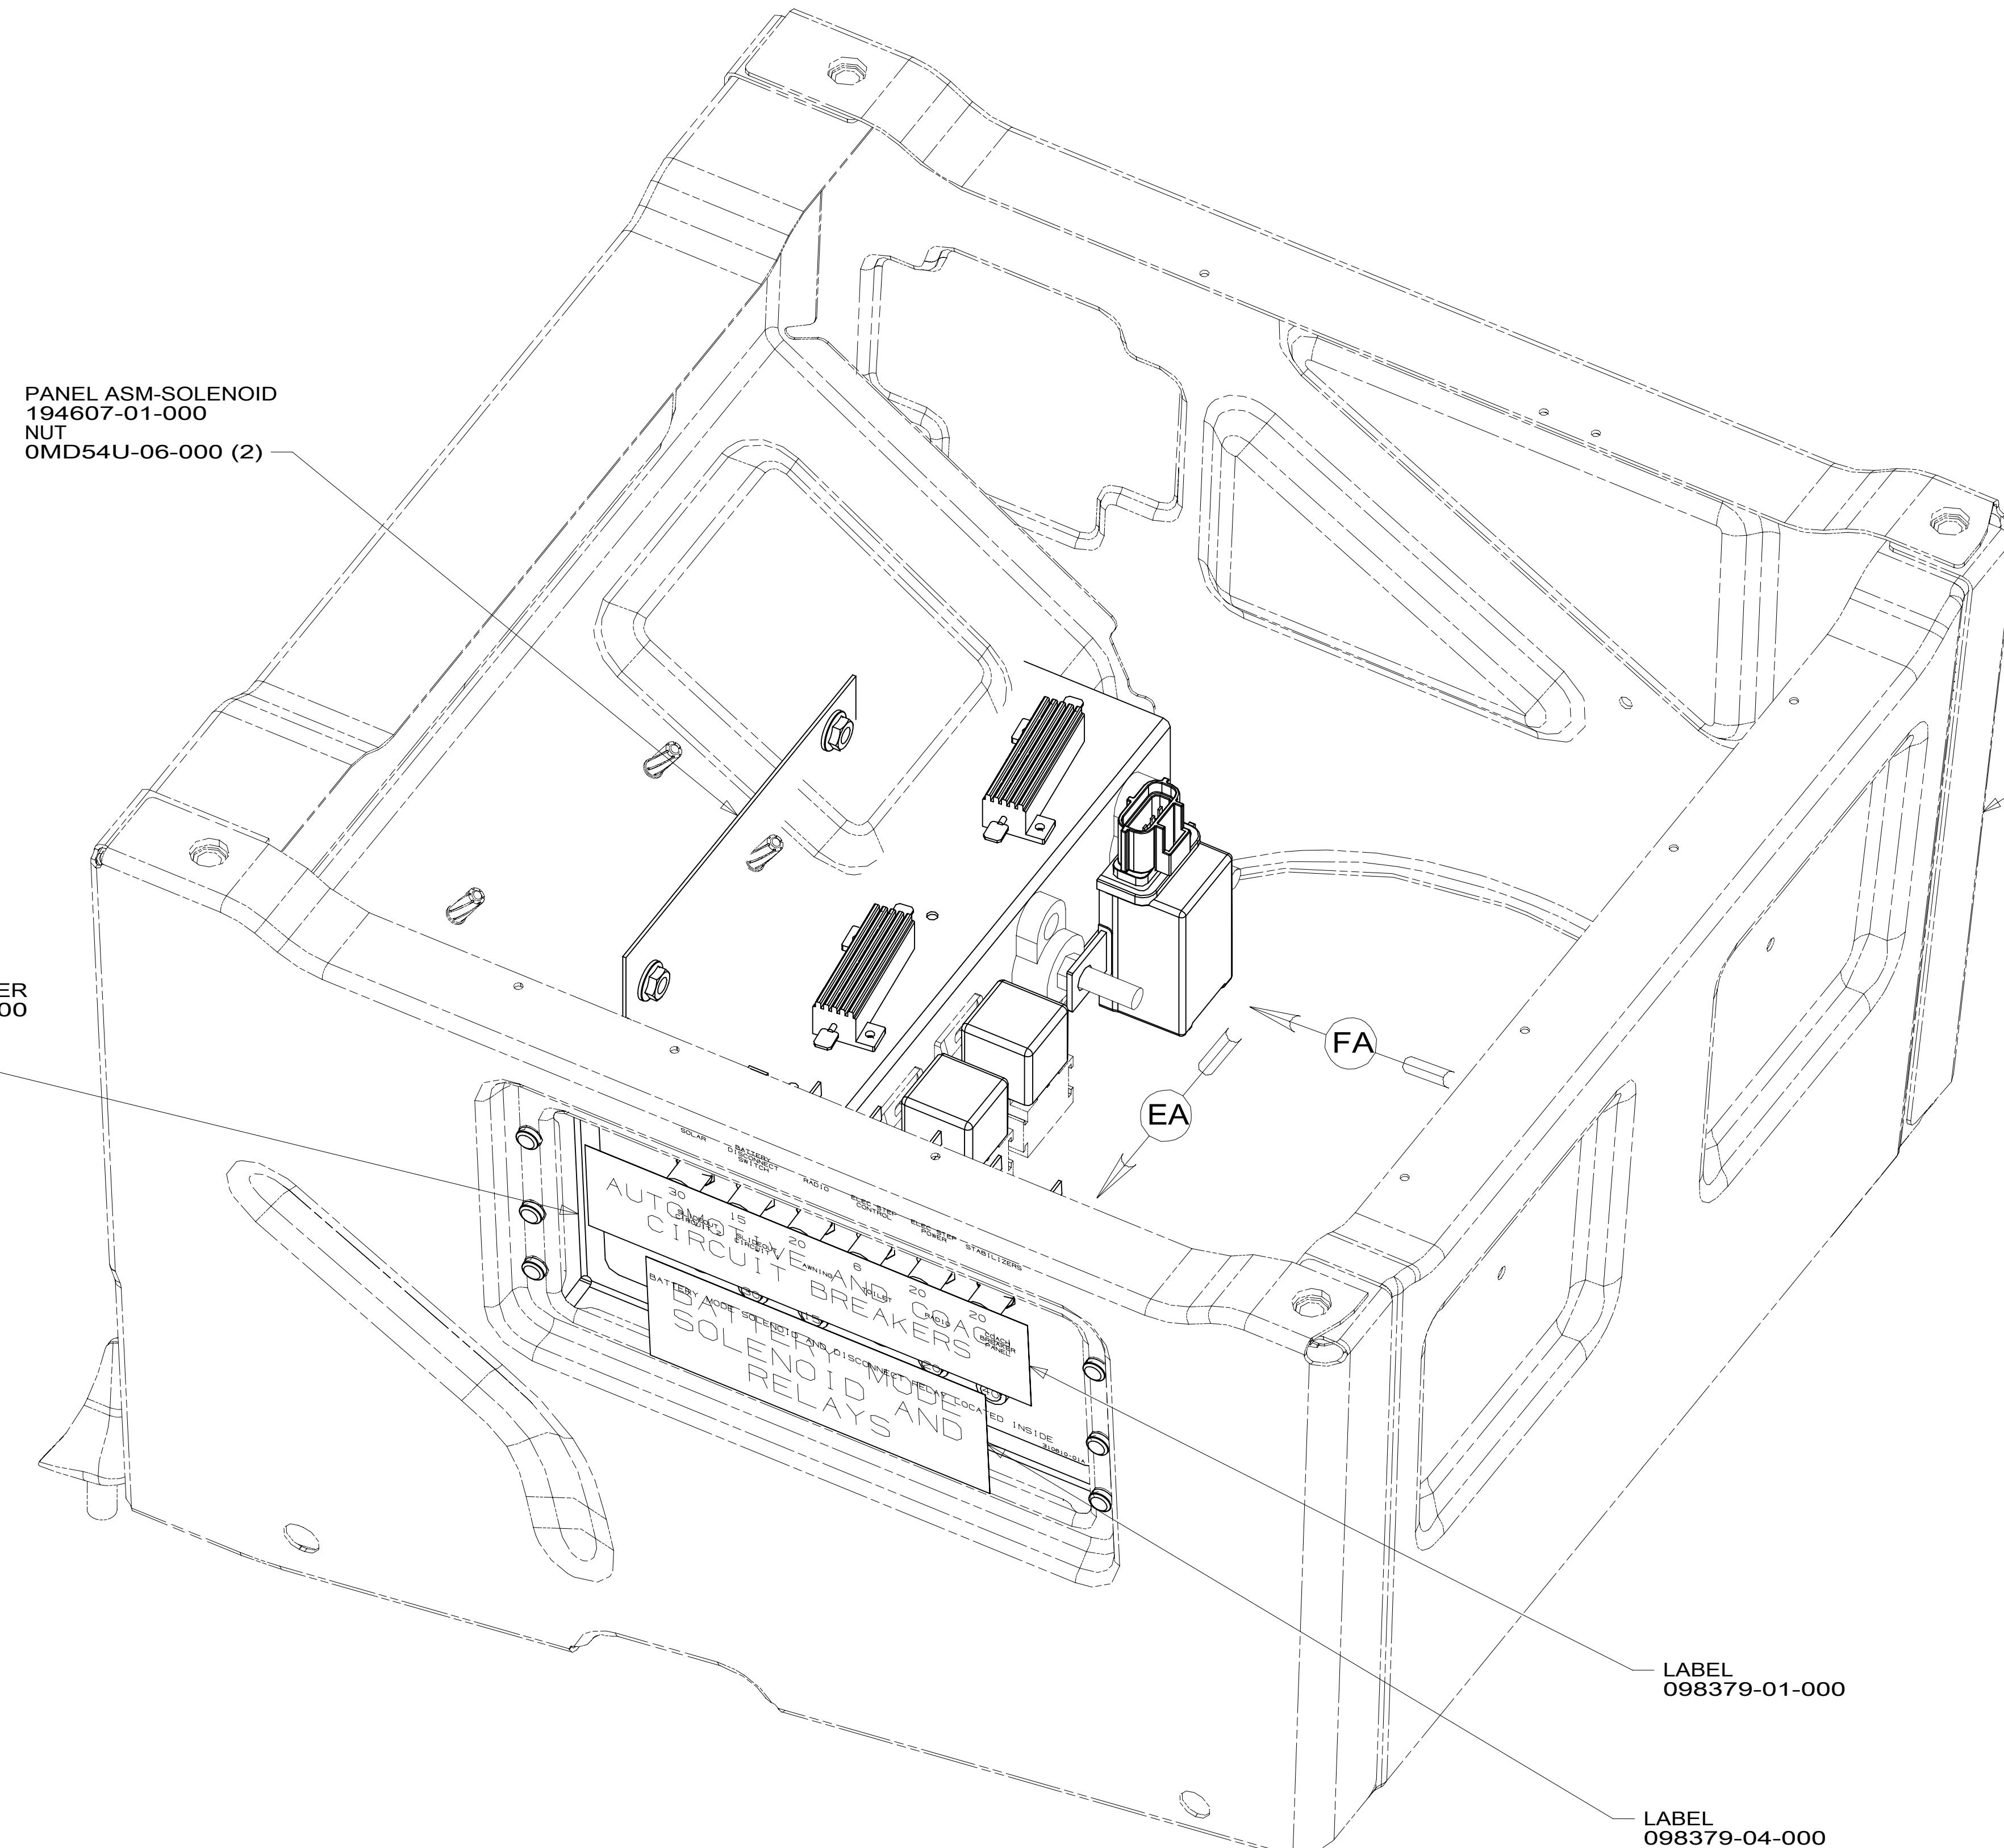

PANEL ASM-SOLENOID
194607-01-000
NUT
OMD54U-06-000 (2)

PANEL ASM-CIRCUIT BREAKER
000029754 / 316511-01-000
SCREW-PAN,HEAD
G39-08-08U (6)

PASSENGER SIDE
SEAT PEDESTAL
(REF)

LABEL
098379-01-000

LABEL
098379-04-000

AUTOMATIC AND COAG
CIRCUIT BREAKERS
SOLENOID AND
RELAYS

VIEW DA

NOTES:
1. SECURE CONDUIT 41953, TAB AS REQUIRED,
OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

DESCRIPTION: WIRING INSTL-CHASSIS	
SHEET: 4 OF 7	ITEM/PART NO: 000027615 / 31603101000
REV	

8 7 6 5 4 3 2 1 15-Jun-2017

D

D

C


C

B

B

A

A

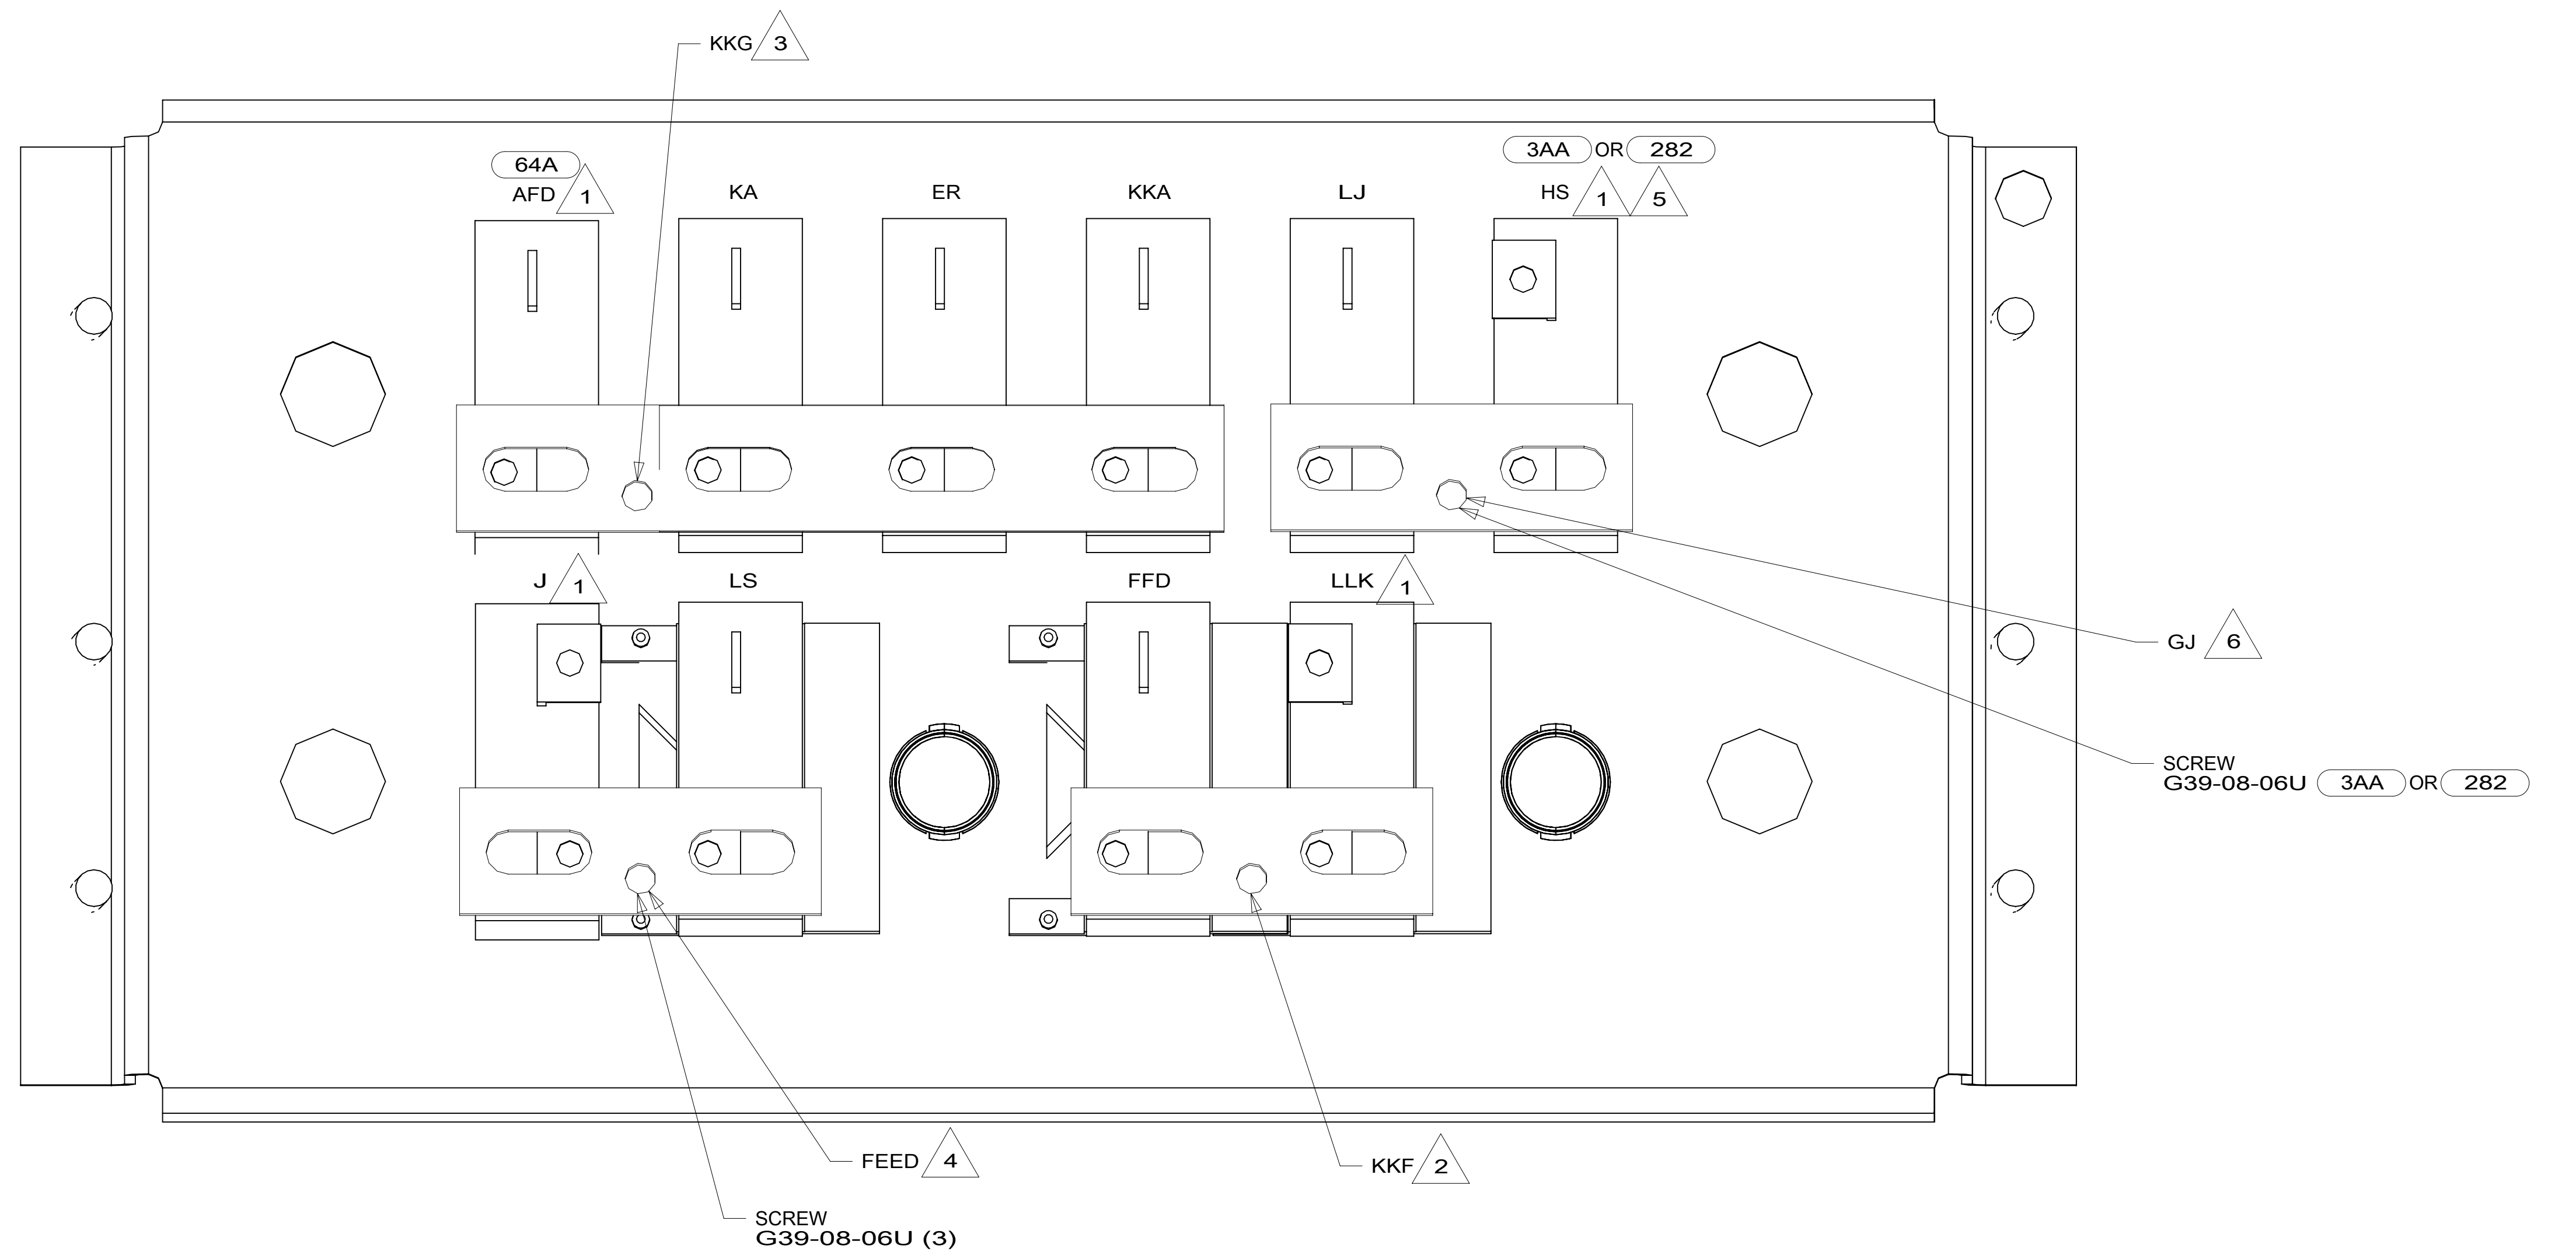

VIEW EA


- NOTES:
- 7. TAPE BACK UNUSED WIRES TO HARNESS.
 - 6 MARKED WITH RED TAPE.
 - 5 MARKED WITH WHITE TAPE.
 - 4 MARKED WITH 2 WRAPS OF YELLOW TAPE.
 - 3 MARKED WITH PURPLE TAPE.
 - 2 MARKED WITH YELLOW TAPE.
 - 1 CIRCUIT FROM WIRE ASM-CHASSIS.

- 64A JACKS-STABILIZING, ELECTRIC
- 282 SOLAR PANEL - 100 WATT
- 3AA SOLAR PANEL/BATT CHARGER SYS
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:	1B1 265	
WIRING INSTL-CHASSIS		
SHEET:	ITEM/PART NO.:	REV
5 OF 7	000027615 / 31603101000	

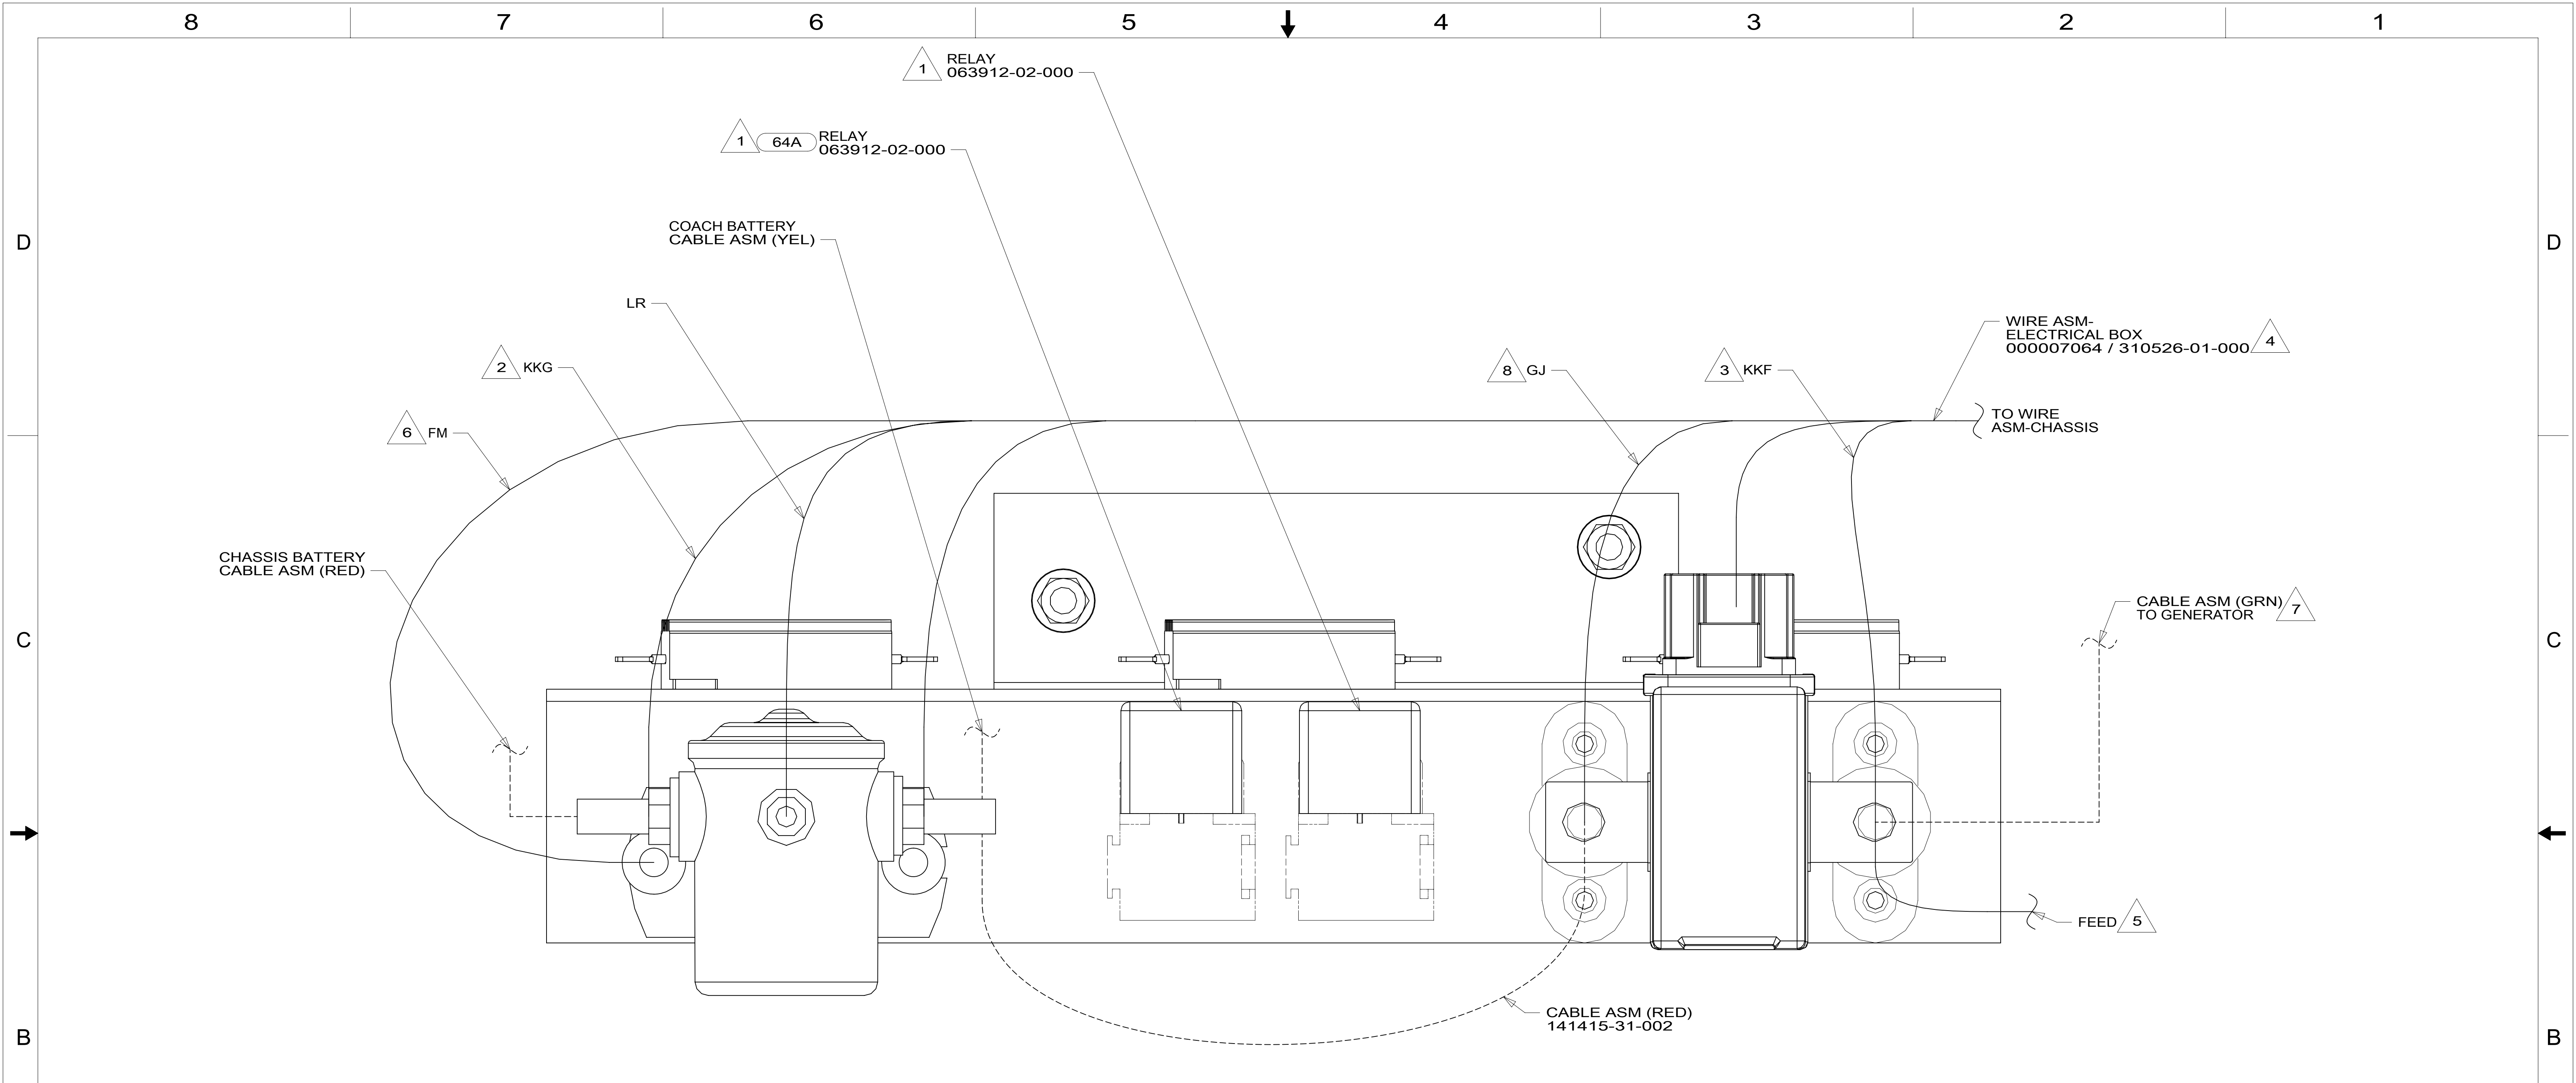

VIEW FA


- NOTES:
- 8 MARKED WITH RED TAPE.
 - 7 WITH FEATURE 321 OR 323 NOT CONNECT CABLE ASM-GENERATOR (GRN) TO SOLENOID. TAPE END WITH TAPE 8363-01-000 AND LEAVE CABLE END LOOSE IN ELECTRICAL BOX.
 - 6 SECURE WITH SOLENOID MOUNTING SCREW.
 - 5 MARKED WITH 2 WRAPS OF YELLOW TAPE.
 - 4 TAPE BACK UNUSED WIRES TO HARNESS.
 - 3 WIRE IS MARKED WITH YELLOW TAPE.
 - 2 WIRE IS MARKED WITH PURPLE TAPE.
 - 1 SEE WIRE ASM-CHASSIS FOR ADDITIONAL INFORMATION.

- 64A JACKS-STABILIZING, ELECTRIC
- 323 GENERATOR PREP KIT - DIESEL
- 321 GENERATOR PREP KIT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


DESCRIPTION:		1B1 265	
WIRING INSTL-CHASSIS			
SHEET:	ITEM/PART NO.:	REV	
6 OF 7	000027615 / 31603101000		

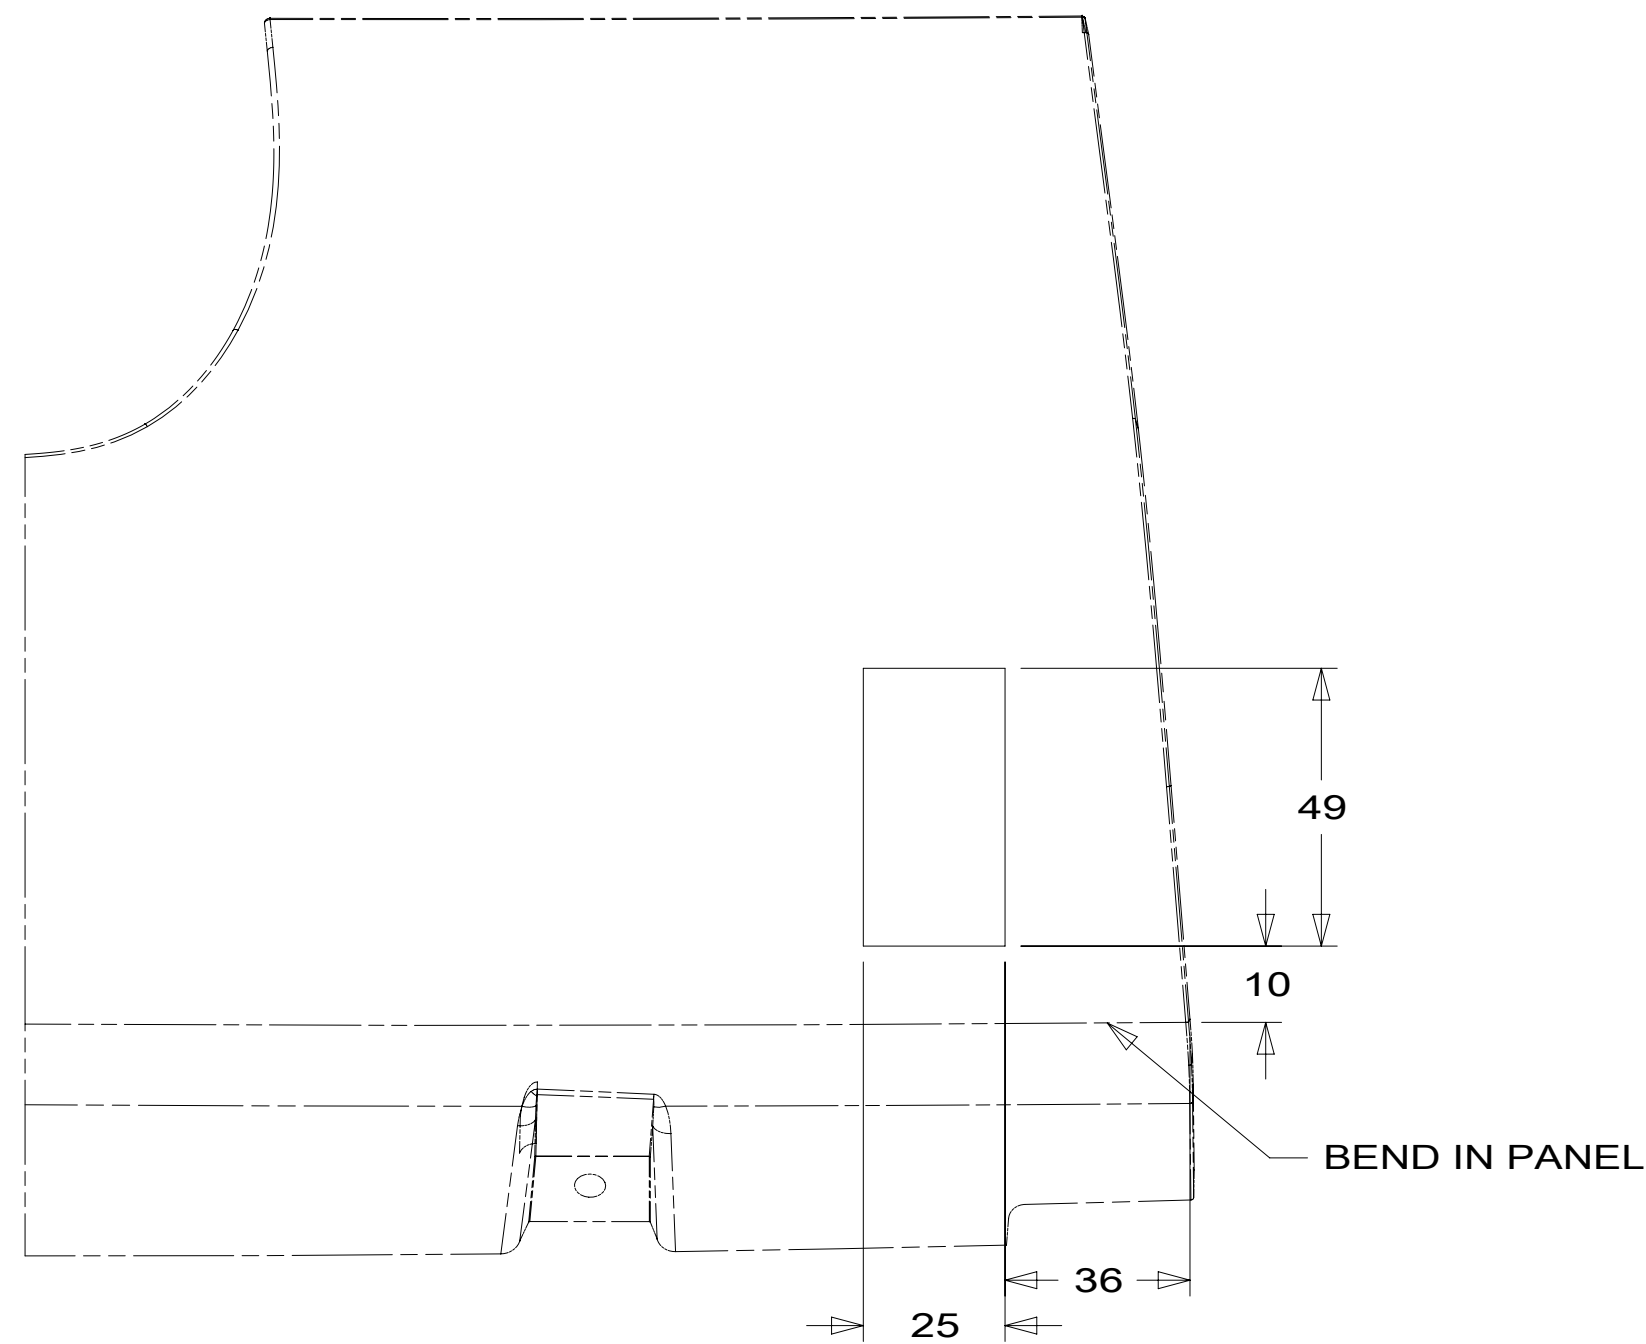


DETAIL GB \triangle 5

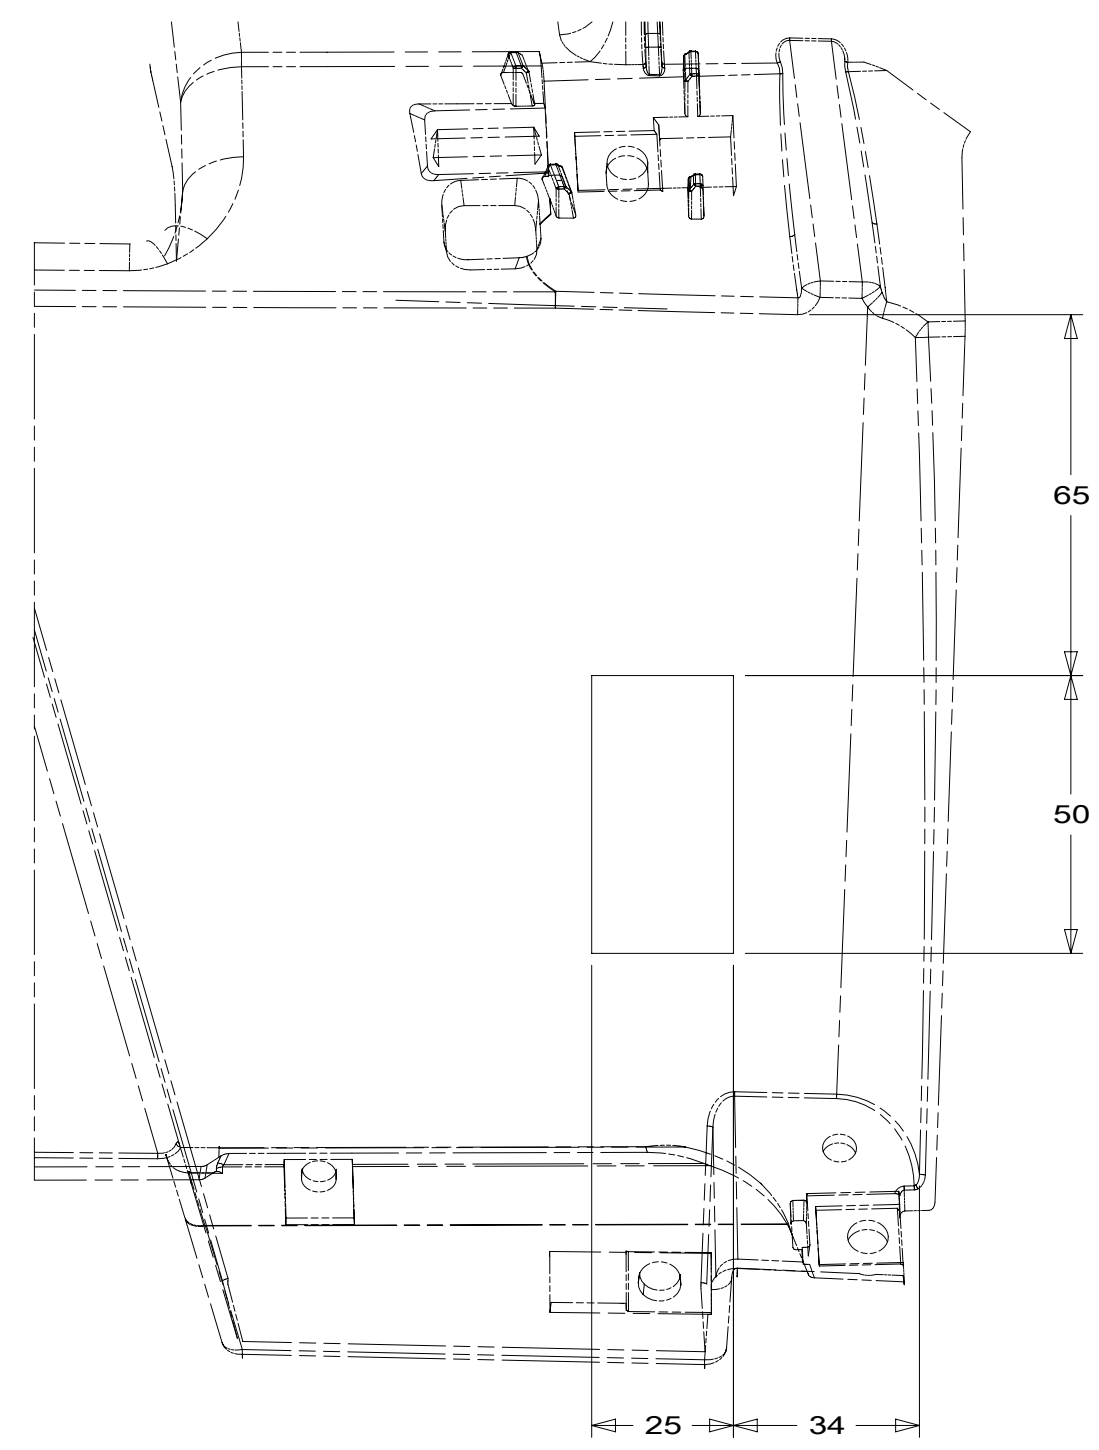


VIEW GC \triangle 6

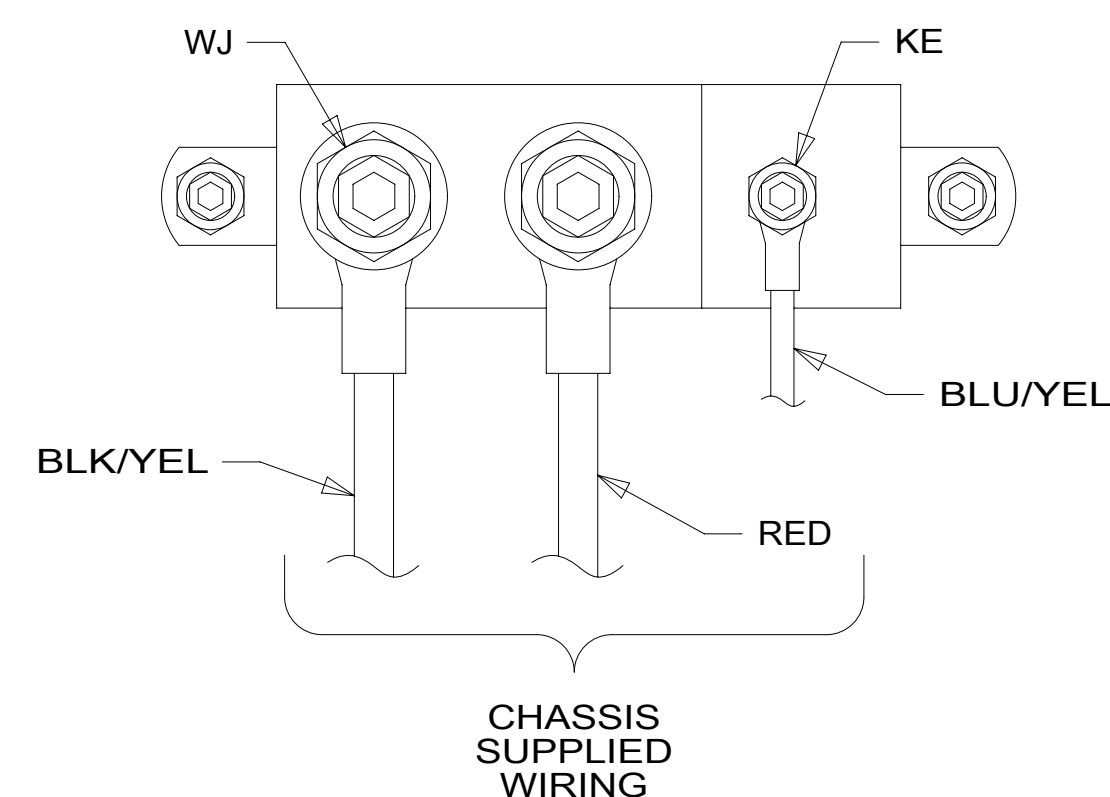


DETAIL GD \triangle 3

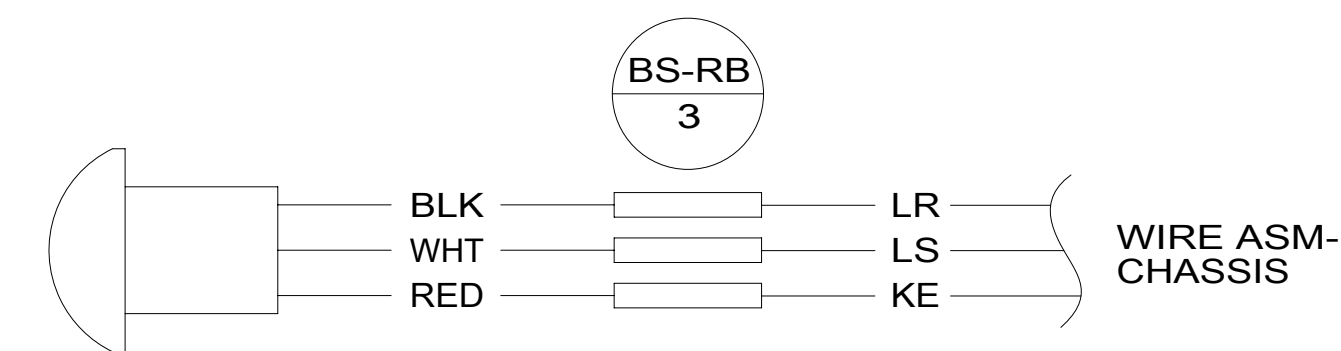

DETAIL GF

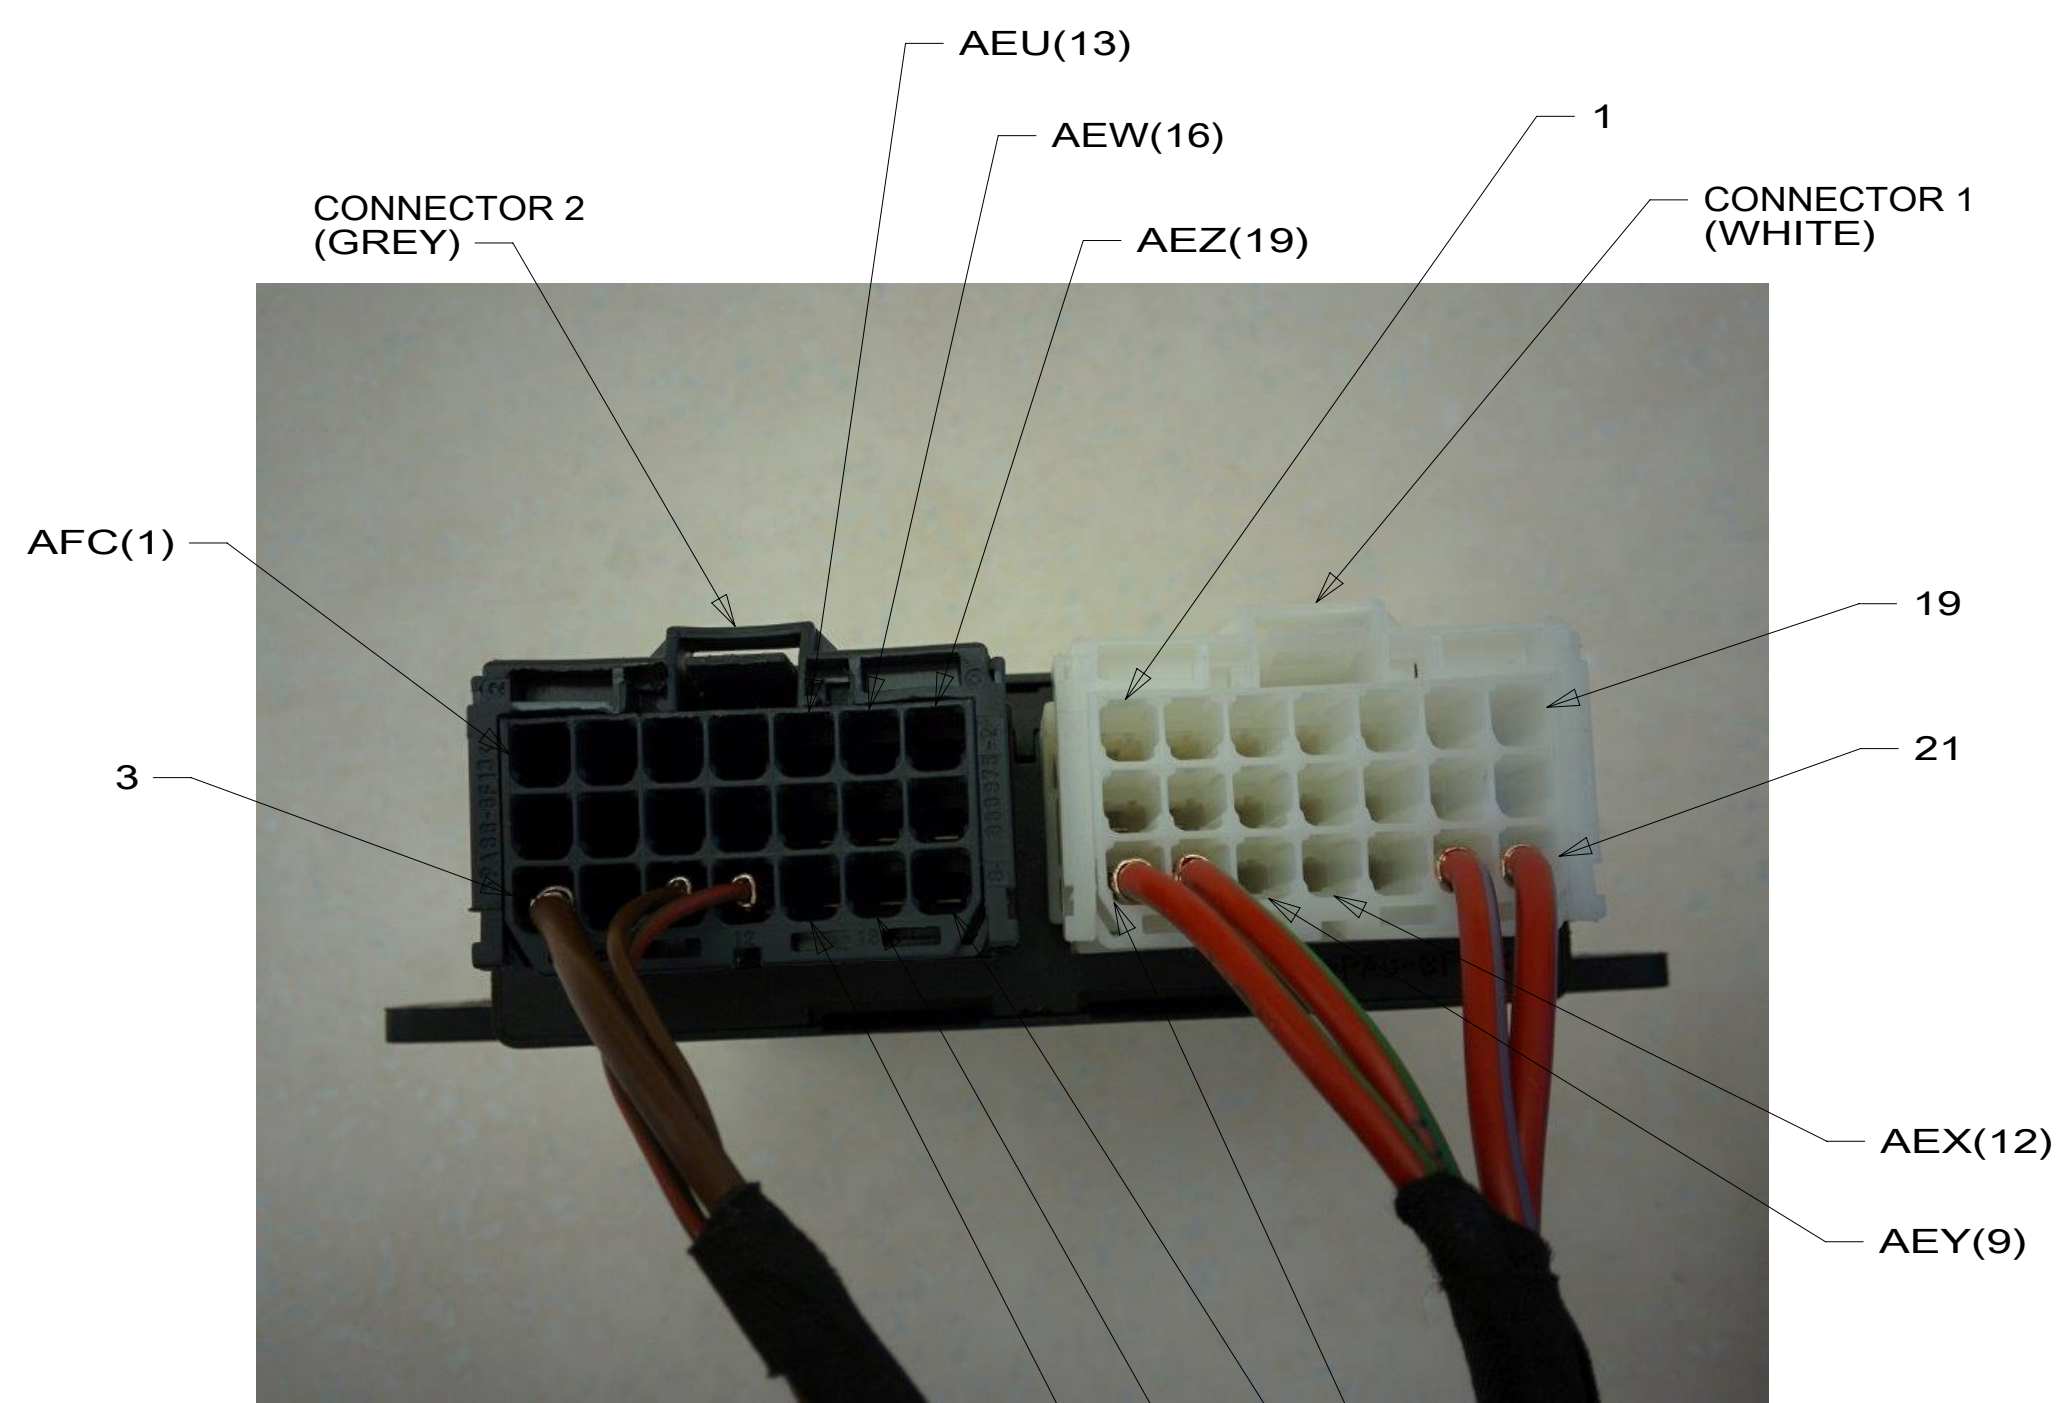

DETAIL GE \triangle 1

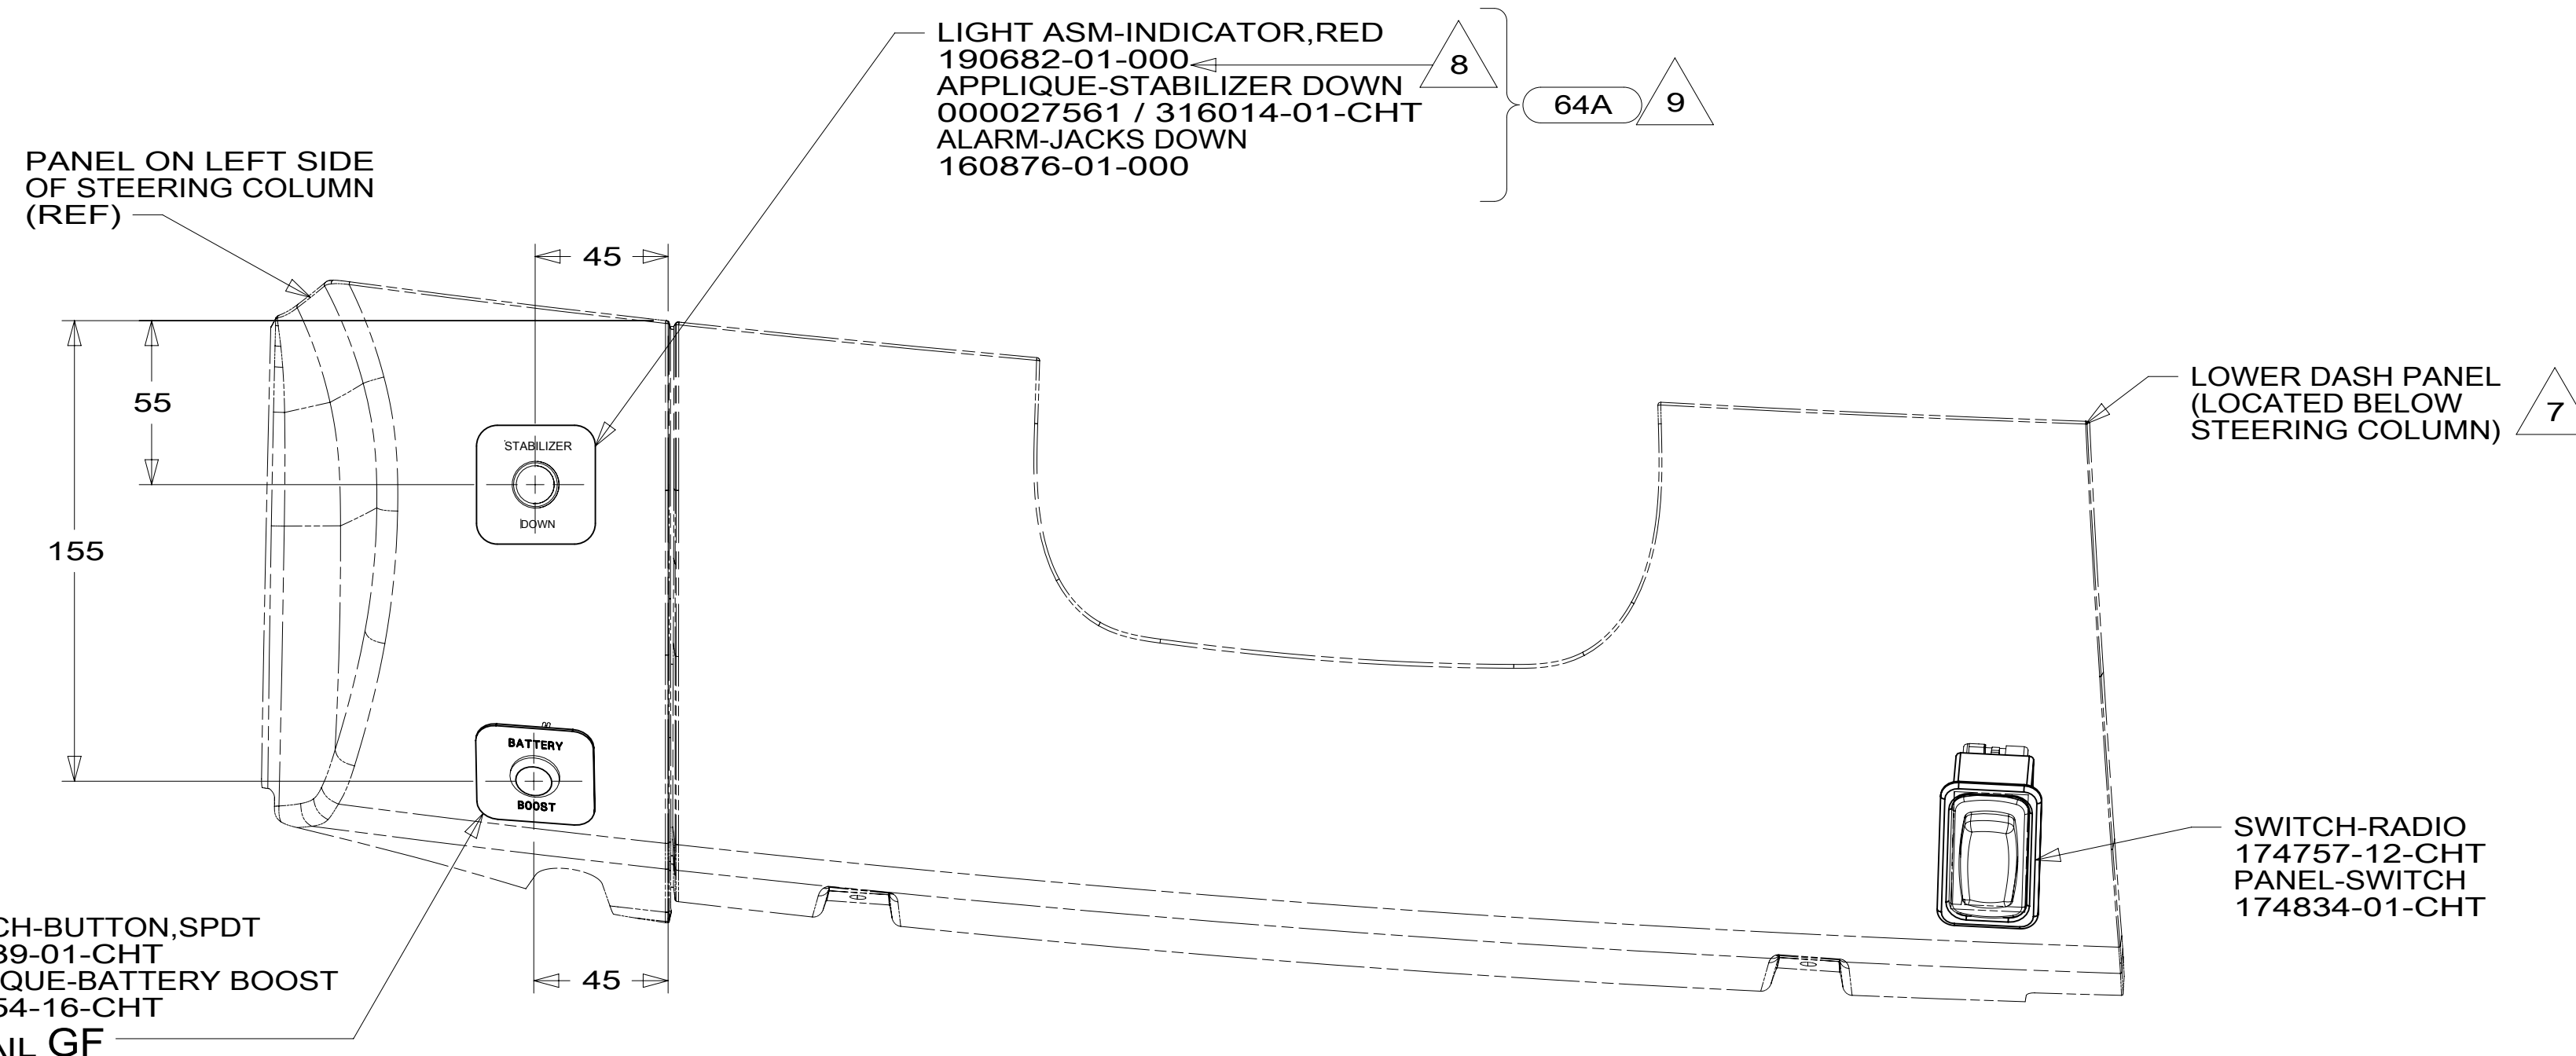

VIEW GA

- NOTES:
- \triangle 6 DASH STRUCTURE LOCATED BEHIND LOWER DASH PANEL.
 - \triangle 5 LOWER DASH PANEL.
 - \triangle 4 DRILL 12.3 MM HOLE INTO DASH PANEL.
 - \triangle 3 CONNECTION POINT IS LOCATED UNDER DRIVERS SEAT.
 - 2. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
 - \triangle 1 PSM IS LOCATED UNDER DRIVERS SEAT.

- \triangle 9 CONNECT YELLOW WIRES TO MARKED TERMINAL ON THE ALARM AND LIGHT. KEEP LIKE TERMINALS TOGETHER. USE 008343-01-000 TO SECURE ALARM BACK TO LOOM.
- \triangle 8 DRILL A 1/2 INCH HOLE AT DIMENSIONS SHOWN TO INSERT LIGHT. DISCARD RUBBER GASKET THAT COMES WITH LIGHT AND INSTALL LIGHT INTO HOLE.
- \triangle 7 FOR CUTOUT DIMENSIONS SEE DETAIL GB AND DETAIL GC.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- \square 64A JACKS-STABILIZING, ELECTRIC
- \square 265 CODES/STANDARDS-CSA/CMVSS
- \square 1B1 CODES/STANDARDS USA

DESCRIPTION:		WIRING INSTL-CHASSIS	
SHEET:	ITEM/PART NO.:	REV	
7 OF 7	000027615 / 31603101000		