

8 7 6 5 4 3 2 1

D

D

C


C

B

B

A

A

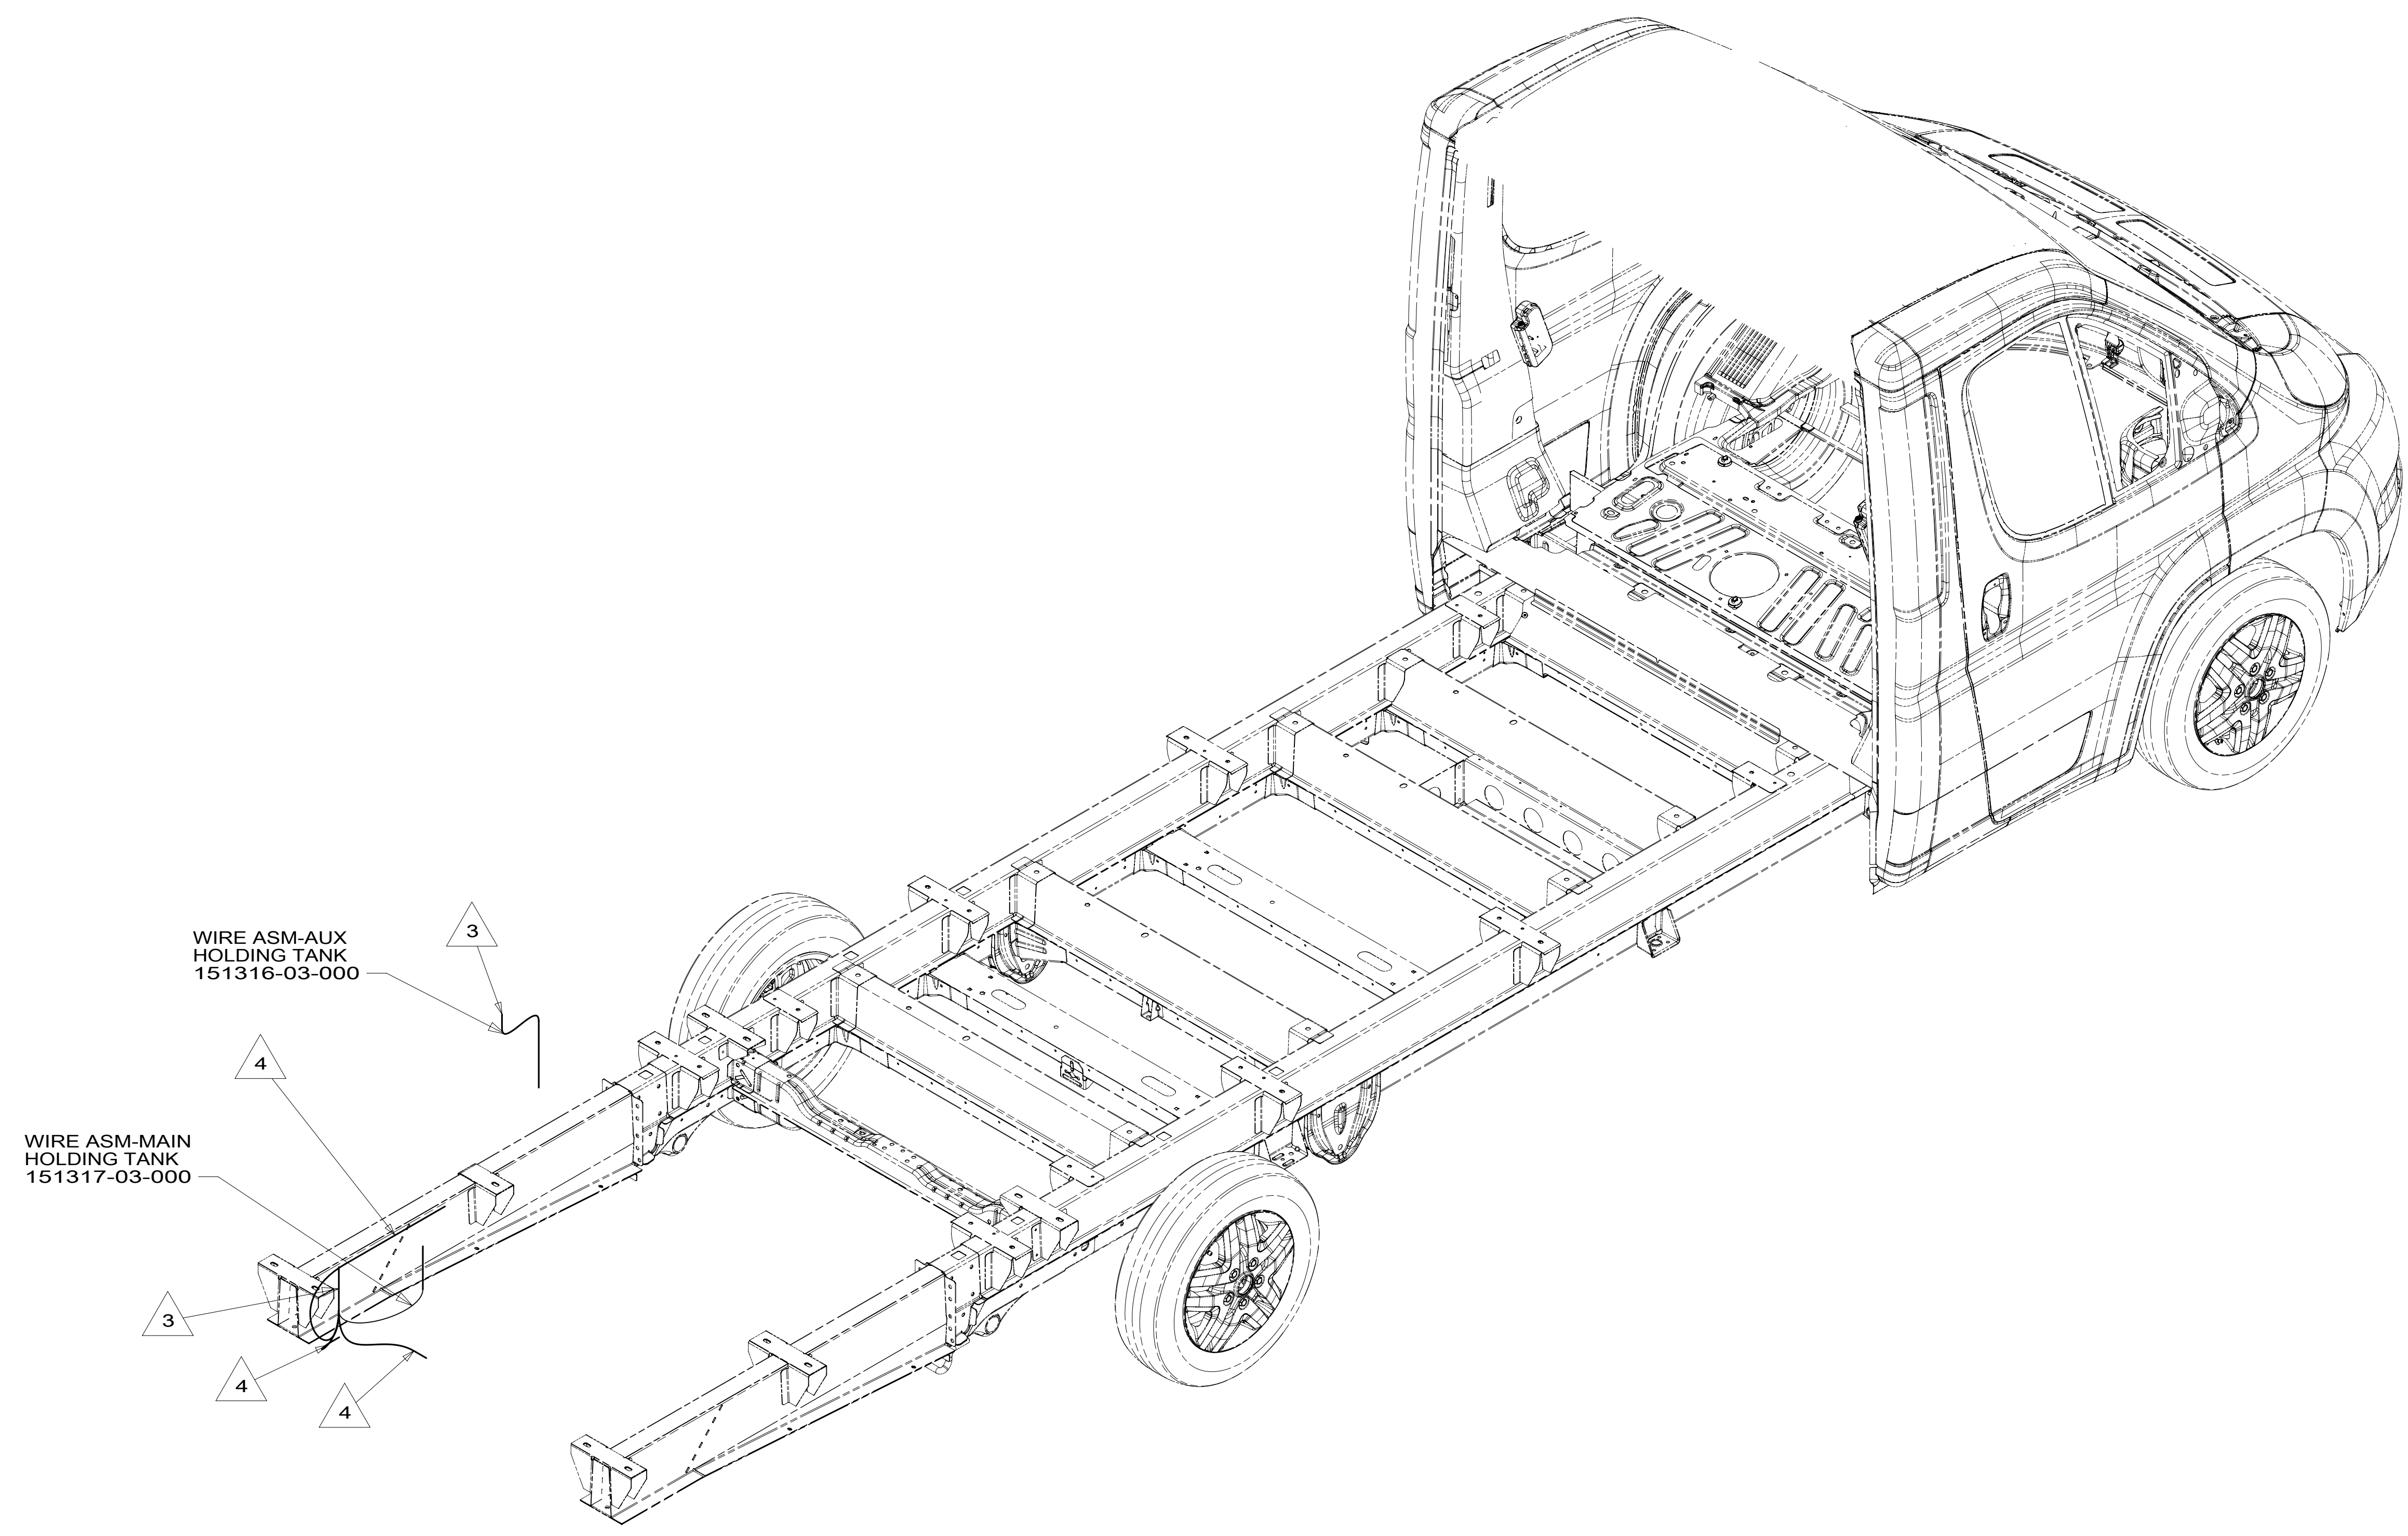

WIRE ASM-AUX
HOLDING TANK
151316-03-000

WIRE ASM-MAIN
HOLDING TANK
151317-03-000

- 4 TO TANK HEATER PADS WITH 23R OR 23T
 - 3 WIRE PASSES THROUGH FLOOR IN THIS AREA.
2. ROUTE TANK SENSOR WIRES SO THEY DO NOT PASSOVER SENSORS. USE WIRE TIE MOUNT 155366-01-000 AND WIRE TIE 8343-01-000 AS NEEDED. TANK SURFACE MUST BE CLEANED USING ISOPROPYL ALCOHOL AND PRIMED WITH PRIMER 94.
 1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

- 23R DRAINAGE SYSTEM/HEAT-PREWIRE
- 23T DRAINAGE SYSTEM-HEATED
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265

WINNEBAGO
COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.

DSNR:		ALL DIMENSIONS ARE IN MILLIMETERS	
DFFR:		MATERIAL:	
UNSPECIFIED TOLERANCES:		WEIGHT: (LBS)	FIRST USED:
WHOLE DIM (X)	3		17 623D
ONE-PLACE (X.X)	1.5		
TWO-PLACE (X.XX)	0.50		
ANGLE	1°		

REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES

DESCRIPTION: **WIRING INSTL-BODY, 12V**


SHEET:	ITEM/PART NO.:	REF:
1 OF 6	000031226 / 31692201000	1 01-Mar-2017

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

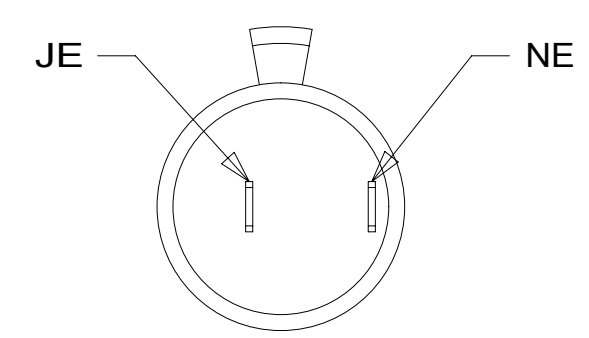

DETAIL BA

SPEAKER
171547-01-CHT
SPACER
178966-01-CHT
SCREW
G11-08-16U (4)

THERMOSTAT
115764-01-CHT
SCREW
G13-07-12U (2)

LIGHT-TAPE,LED
187693-10-CHT (2)

USB-CHARGER
188312-01-000
DETAIL BA

SWITCH
DETAIL DE

SWITCH-WATER PUMP
108357-21-000
ACTUATOR
108356-23-CHT
PLATE-SWITCH
144363-02-CHT
SCREW
G11-08-12U (2)

WIRE ASM-HEATER,RELAY
153891-01-000
WIRE ASM-HTR TANKS
134551-03-000
RELAY
063912-02-000
SCREW
G11-08-12U

23R OR 23T

WIRE ASM-OVHD,SOFA
193218-01-000

USB-CHARGER
188312-01-000
DETAIL BA

LIGHT-TAPE,LED
187693-20-CHT

PSSLED-2
2

PSSLED-2
2

ED

TO WIRE ASM-SIDEWALL 5

TO REFRIGERATOR 5


SWITCH
DETAIL DA

PLATE-COAX
149557-03-CHT
SCREW
G39-08-08U (2)

PORT-SOLAR,SINGLE
191558-01-000
SCREW
G11-08-12U (4)
DETAIL BB

WIRE ASM-COACH
000031253 / 316933-01-000

TO RIGHT SIDE

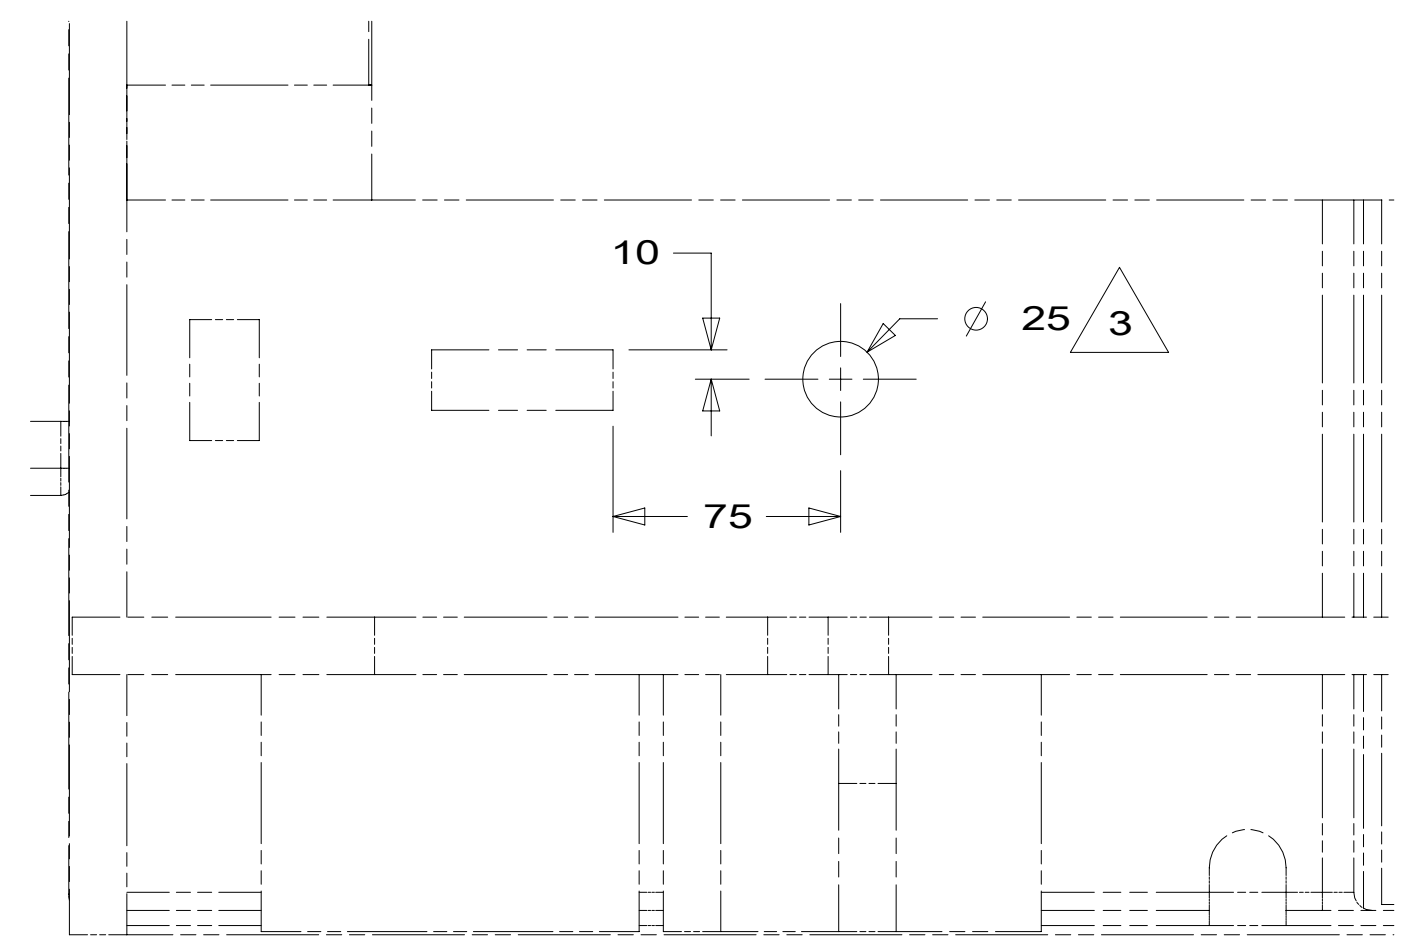

DETAIL BB 282 3

- 5 PART OF WIRE ASM-CHASSIS.
- 4 WIRE PASSES THROUGH FLOOR IN THIS AREA.
- 3 WITH FEATURE 282 DRILL HOLE AT DIMENSIONS SHOWN.
- 2 LOCATED IN POWER CORD BOX.

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 282 SOLAR PANEL - 100 WATT
- 23T DRAINAGE SYSTEM-HEATED
- 23R DRAINAGE SYSTEM/HEAT-PREWIRE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION:		1B1 265
WIRING INSTL-BODY, 12V		
SHEET:	ITEM/PART NO.:	REV:
2 OF 6	000031226 / 31692201000	

8 7 6 5 4 3 2 1 01-Mar-2017

D

D

C




C

B

B

A

A

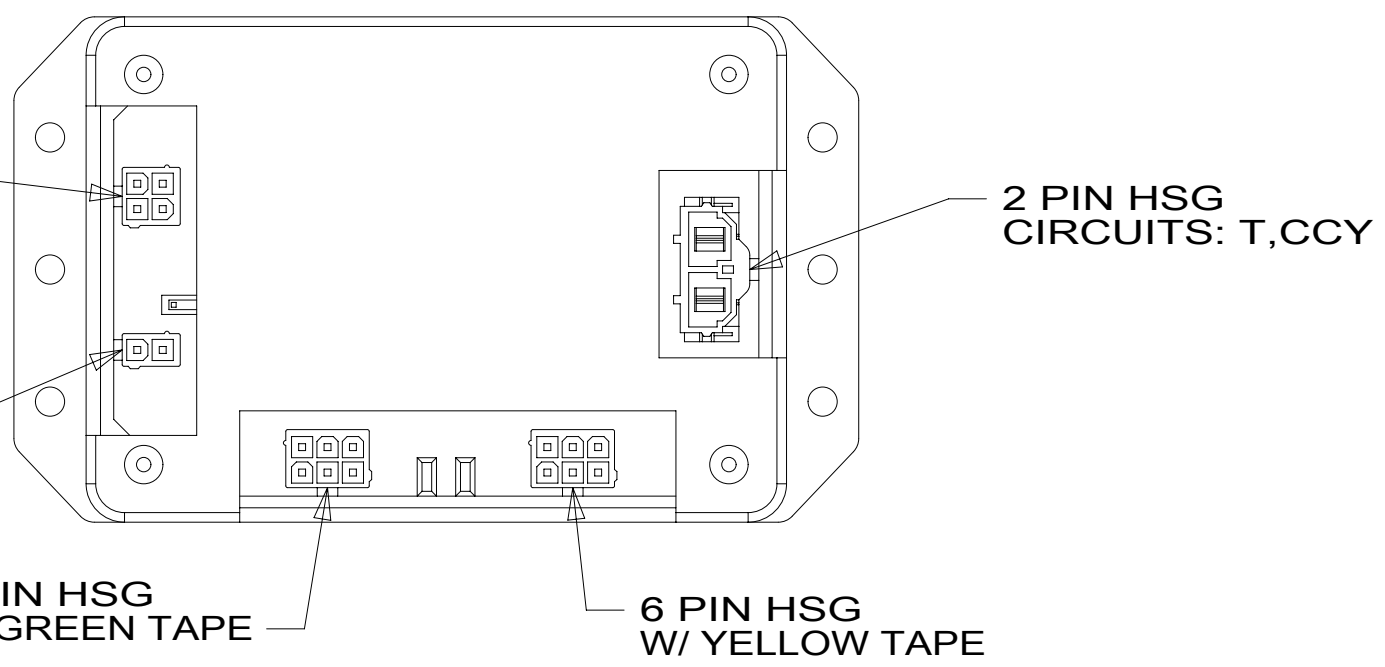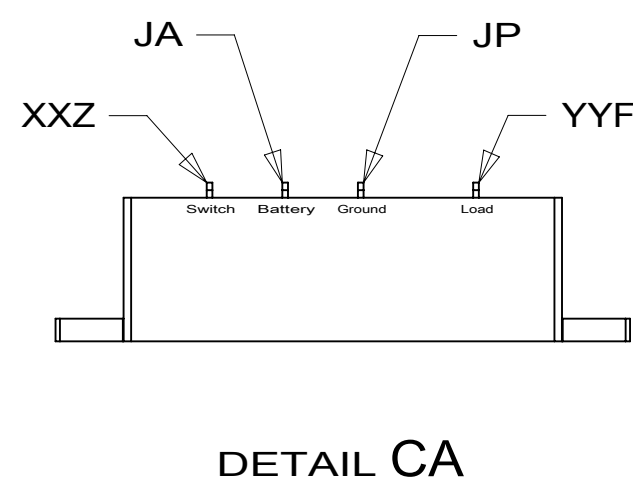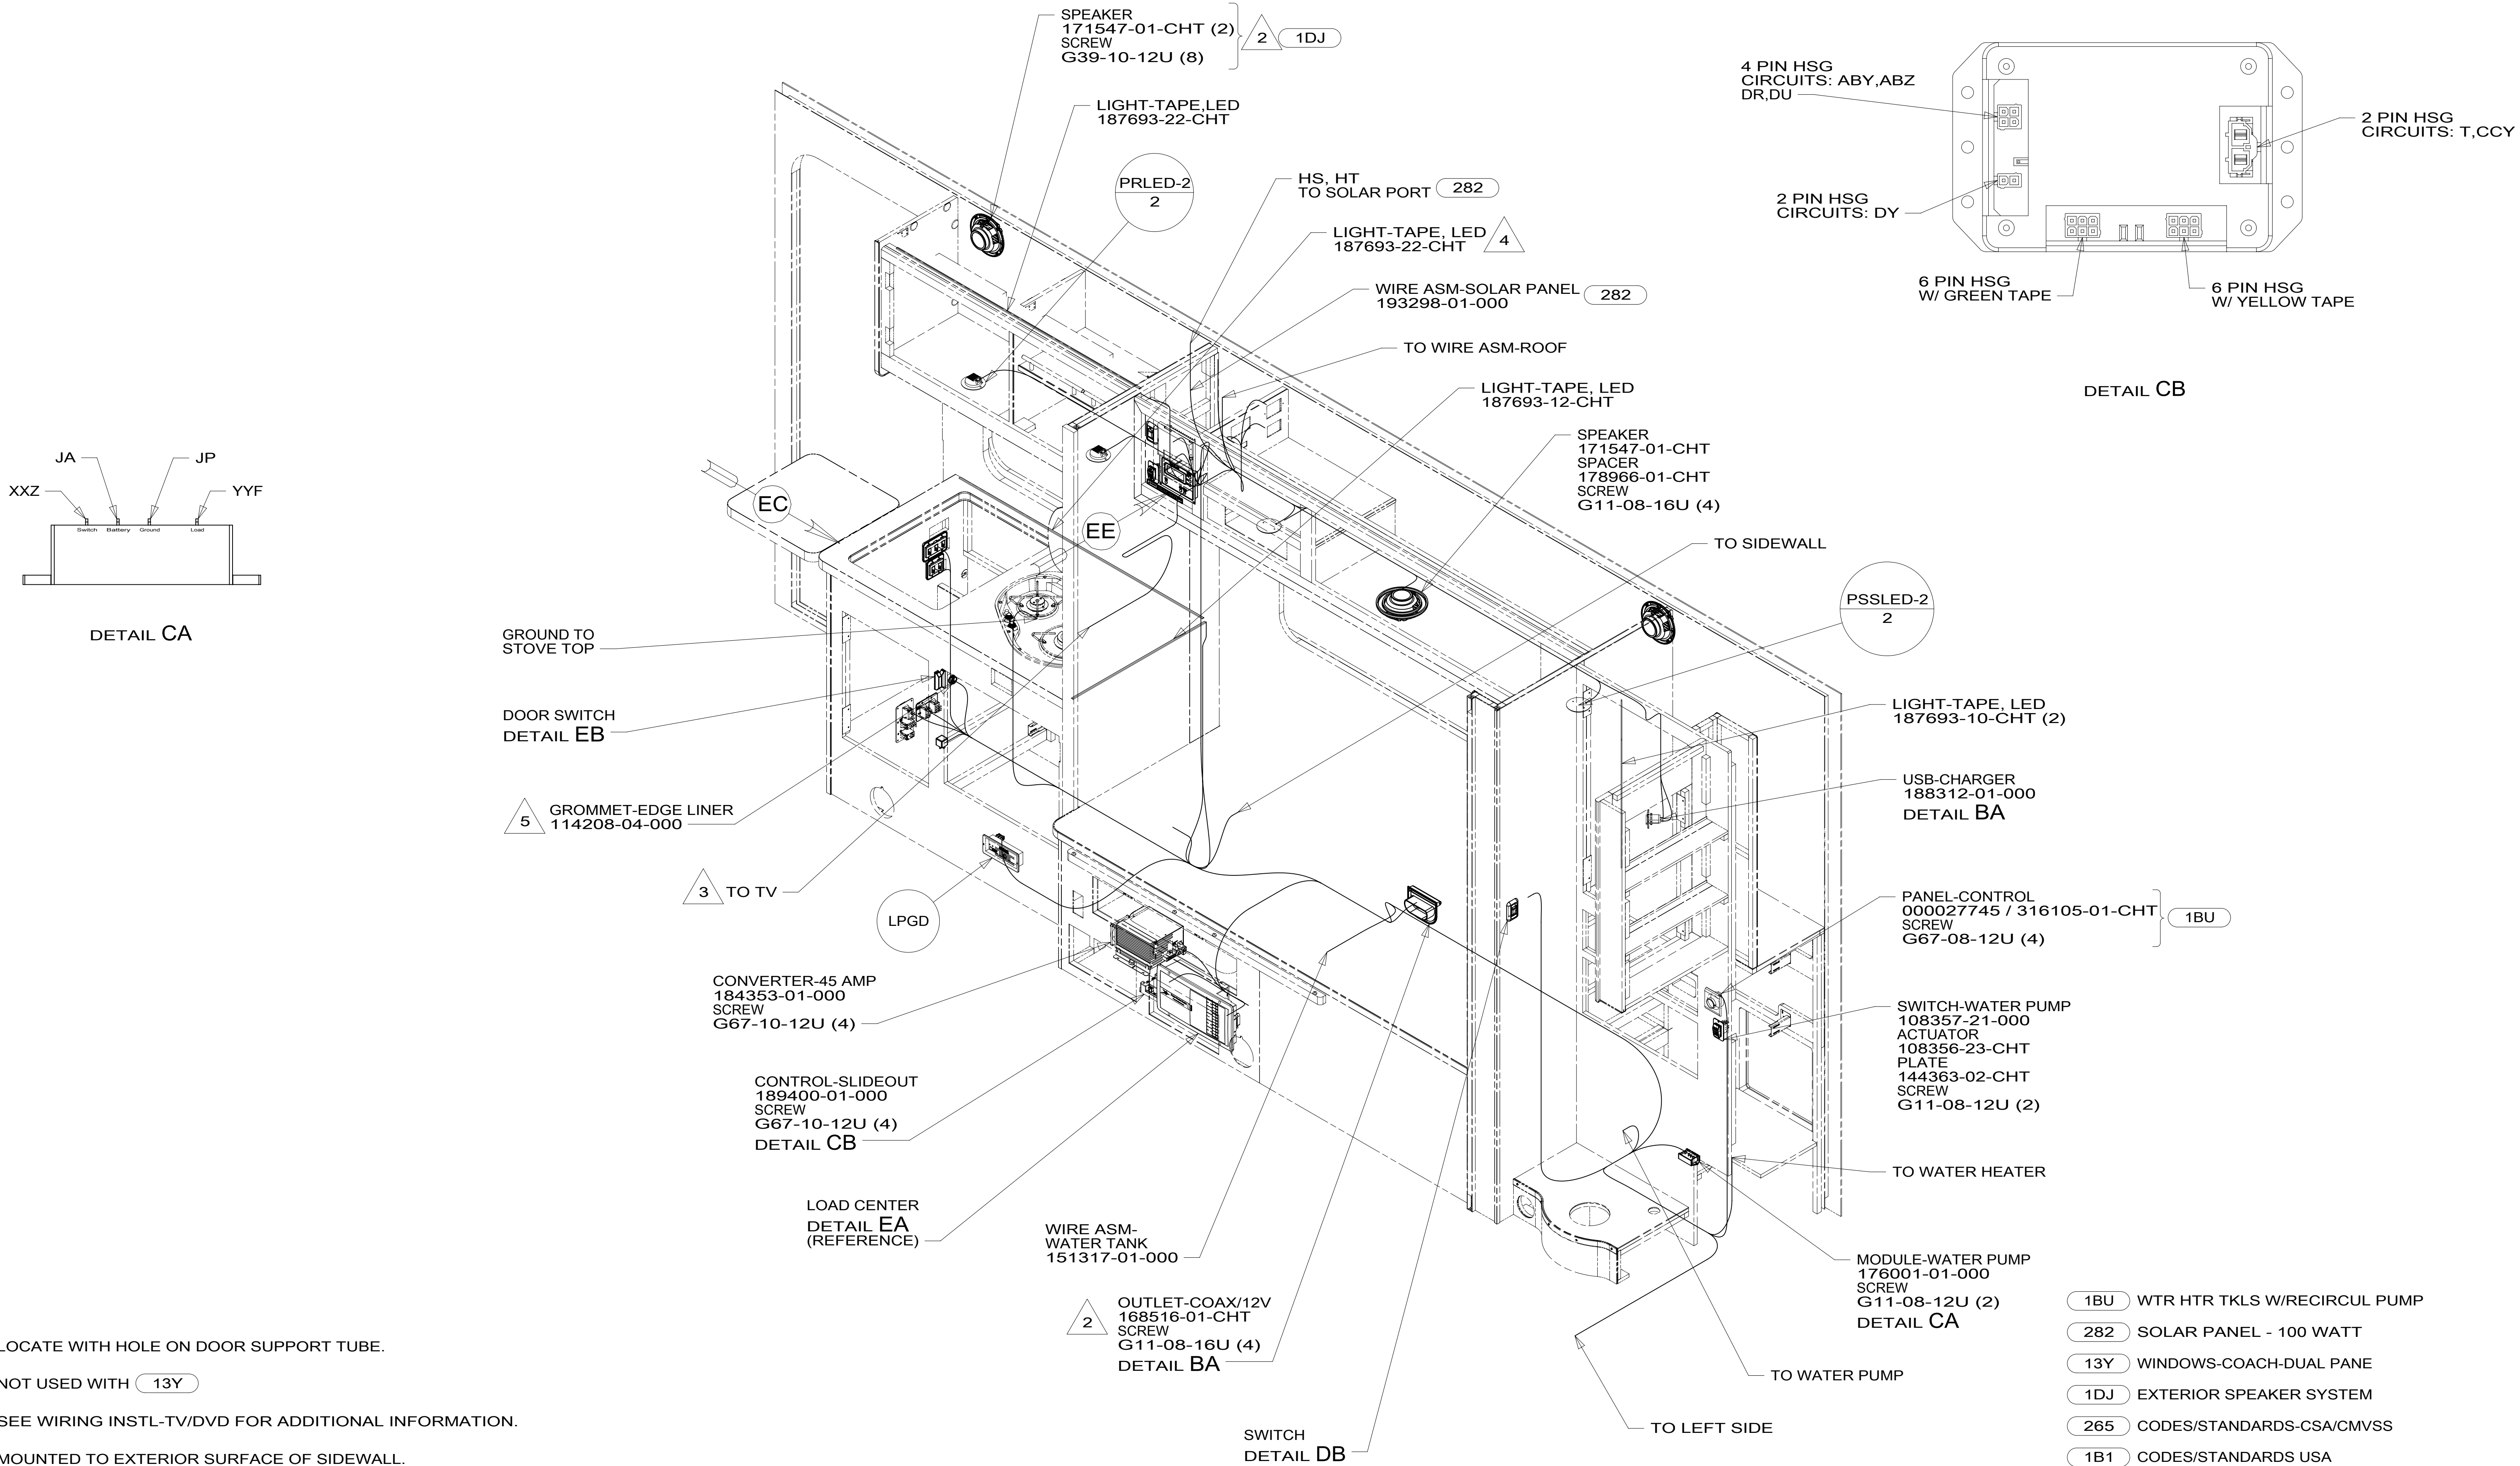

- 5 LOCATE WITH HOLE ON DOOR SUPPORT TUBE.
- 4 NOT USED WITH 13Y
- 3 SEE WIRING INSTL-TV/DVD FOR ADDITIONAL INFORMATION.
- 2 MOUNTED TO EXTERIOR SURFACE OF SIDEWALL.

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.


NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


- 1BU WTR HTR TKLS W/RECIRCUL PUMP
- 282 SOLAR PANEL - 100 WATT
- 13Y WINDOWS-COACH-DUAL PANE
- 1DJ EXTERIOR SPEAKER SYSTEM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION: 1B1 265		
WIRING INSTL-BODY, 12V		
SHEET: 3 OF 6	ITEM/PART NO: 000031226 / 31692201000	REV:

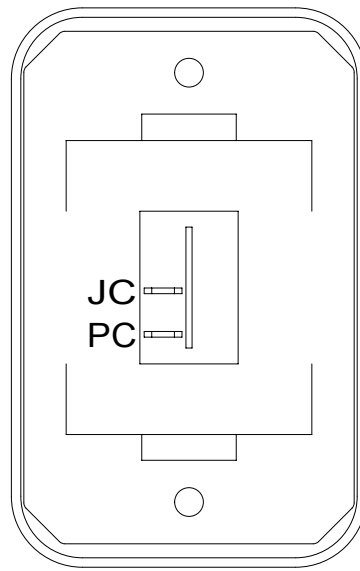


SWITCH-ROCKER
135740-01-CHT
SWITCH-BASE
135741-01-CHT
SWITCH-BEZEL
135742-01-CHT
SCREW
G11-08-08U (2)


DETAIL DA

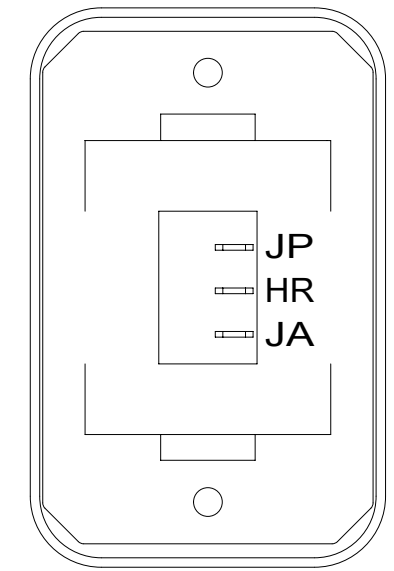

SWITCH-ROCKER
135740-06-CHT
SWITCH-BLANK
138253-01-CHT
SWITCH-BASE
135741-01-CHT
SWITCH-BEZEL
135742-01-CHT
SCREW
G11-08-08U (2)

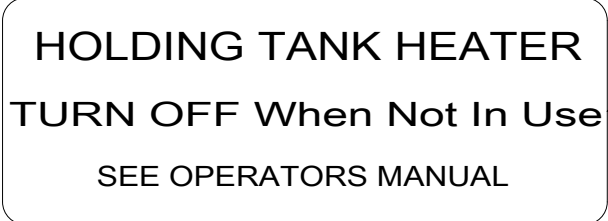


DETAIL DE

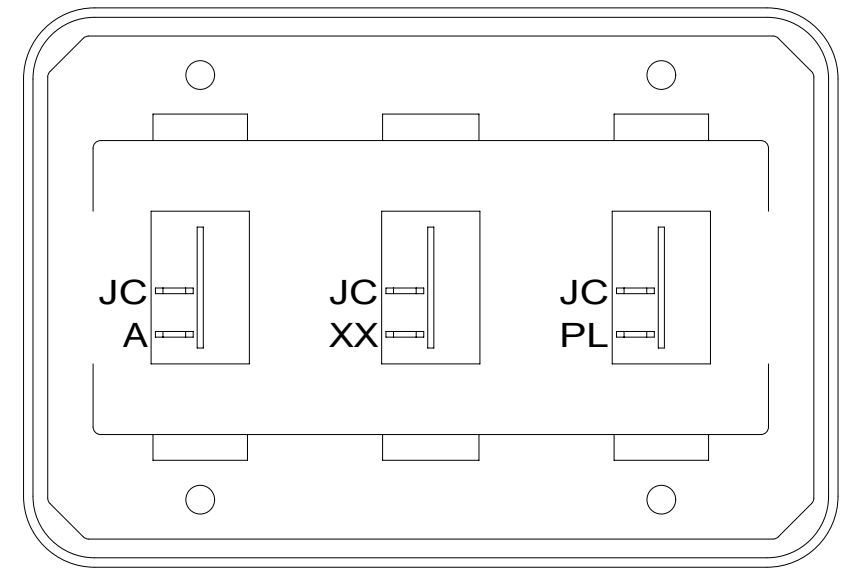


SWITCH-ROCKER
135740-01-CHT (3)
SWITCH-BASE
135741-03-CHT
SWITCH-BEZEL
135742-03-CHT
SCREW
G11-08-08U (4)

DETAIL DH

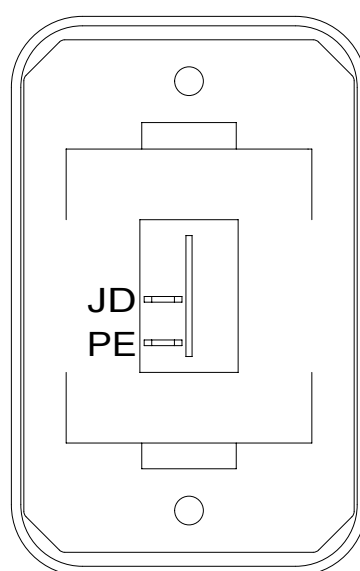

SWITCH-ROCKER
135740-01-CHT
SWITCH-BASE
135741-01-CHT
SWITCH-BEZEL
135742-01-CHT
SCREW
G11-08-08U (2)

DETAIL DB

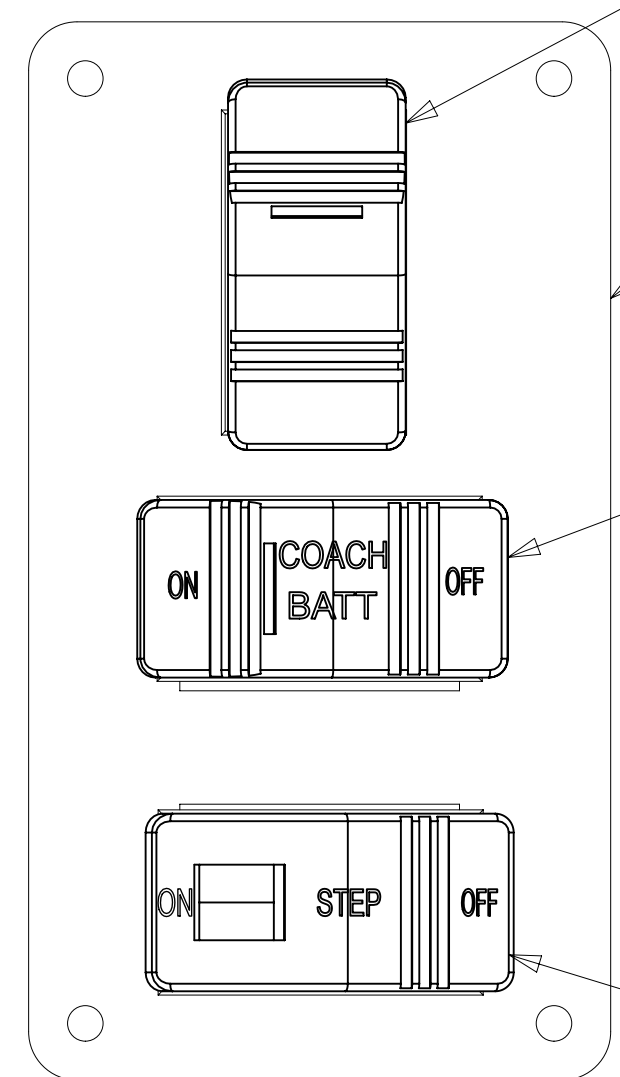


SWITCH
108357-14-000
ACTUATOR
108356-03-CHT
(CIRCUITS JC,AES)

PLATE
158431-31-CHT
SCREW
G11-06-10U (4)

SWITCH-BATTERY
108357-18-000
ACTUATOR
108356-19-CHT
(CIRCUITS LH,LJ
LG,NC,JC)
WIRE ASM-THERM
186796-01-000


SWITCH-STEP
108357-19-000
(CIRCUITS ER,ES)

DETAIL DF

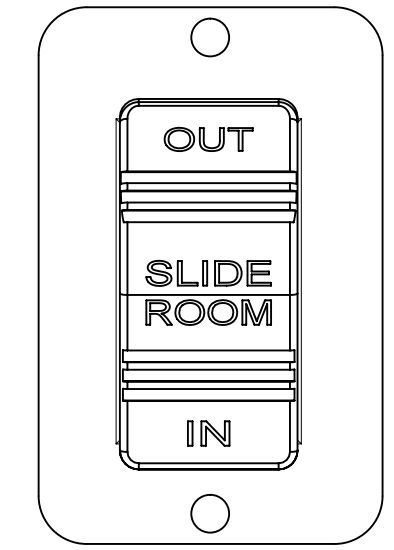


SWITCH
108357-18-000
ACTUATOR
108356-24-CHT
PLATE
144363-02-CHT
SCREW
G11-06-10U (2)

DETAIL DJ

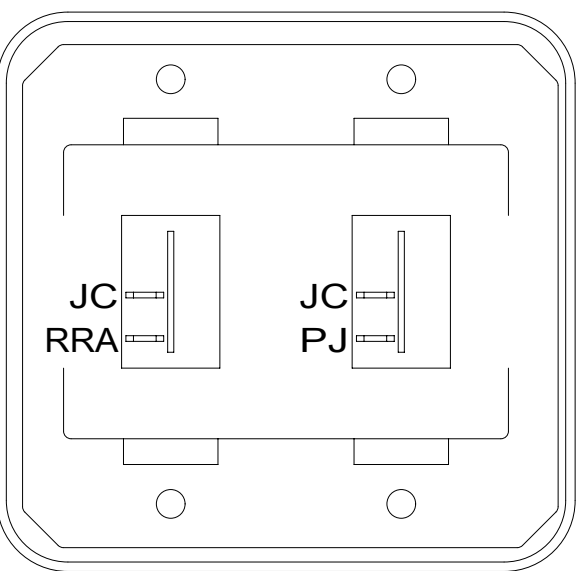


SWITCH-ROCKER
135740-01-CHT (2)
SWITCH-BASE
135741-02-CHT
SWITCH-BEZEL
135742-02-CHT
SCREW
G11-08-08U (4)

DETAIL DC

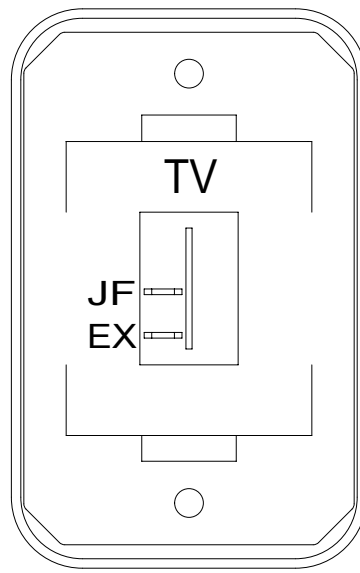

SWITCH-ROCKER
135740-01-CHT
SWITCH-BASE
135741-01-CHT
SWITCH-BEZEL
135742-45-CHT
SCREW
G11-08-08U (2)

DETAIL DD

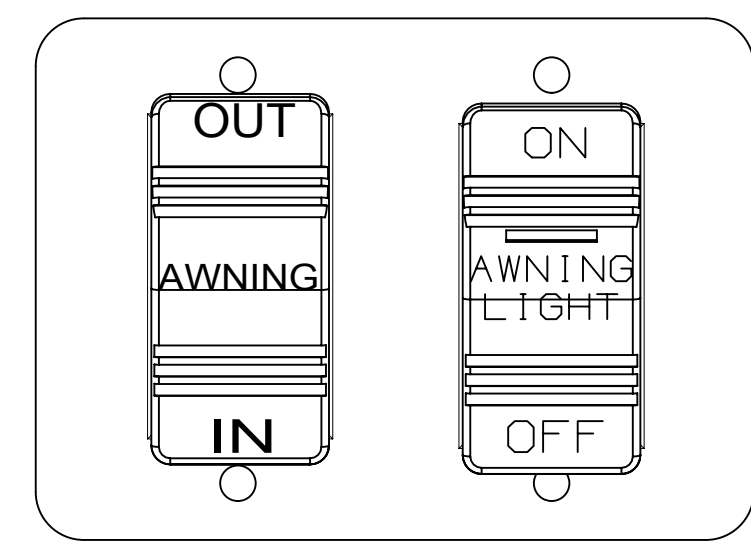

SWITCH-AWNING
108357-06-000
ACTUATOR
108356-12-000
SWITCH-AWNING LIGHT
108357-14-000
ACTUATOR
108356-28-CHT
PLATE
158431-17-CHT
SCREW
G11-08-10U (2)
RELAY-AWNING
063912-02-000
FUSE-AWNING LIGHT
062901-02-000

DETAIL DG

1 WITHOUT 23T OR 23R


NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 23R DRAINAGE SYSTEM/HEAT-PREWIRE
- 23T DRAINAGE SYSTEM-HEATED
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


DESCRIPTION: WIRING INSTL-BODY, 12V	
SHEET: 4 OF 6	ITEM/PART NO: 000031226 / 31692201000
REV	

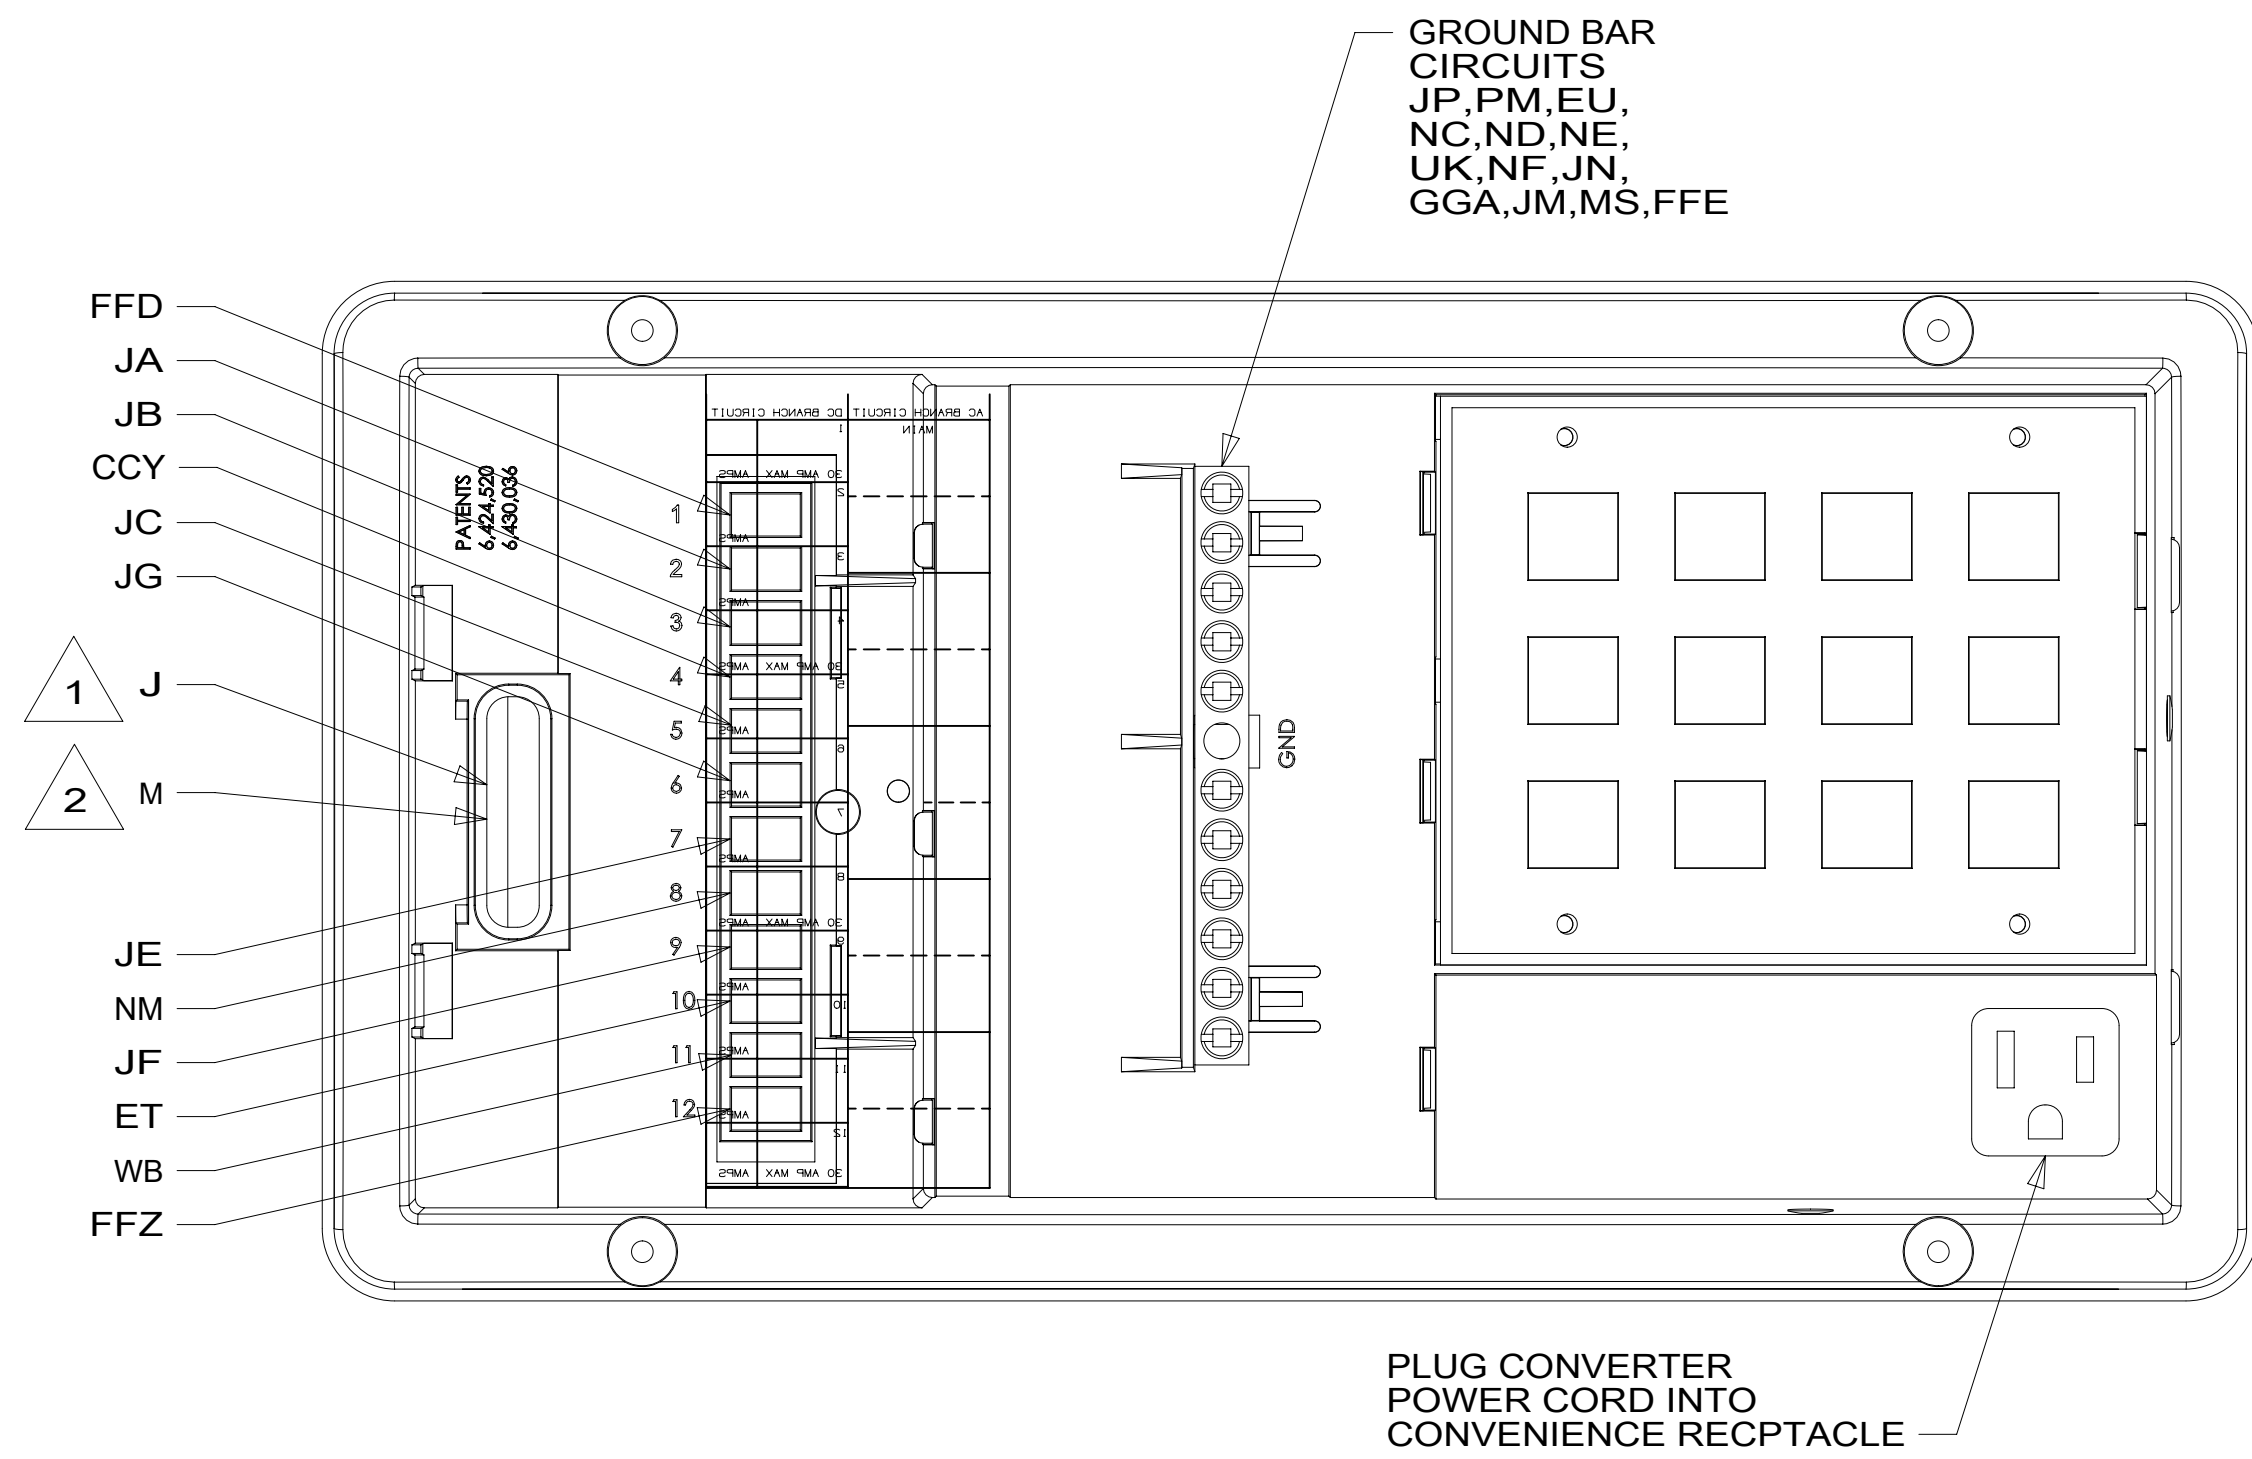


DETAIL EA

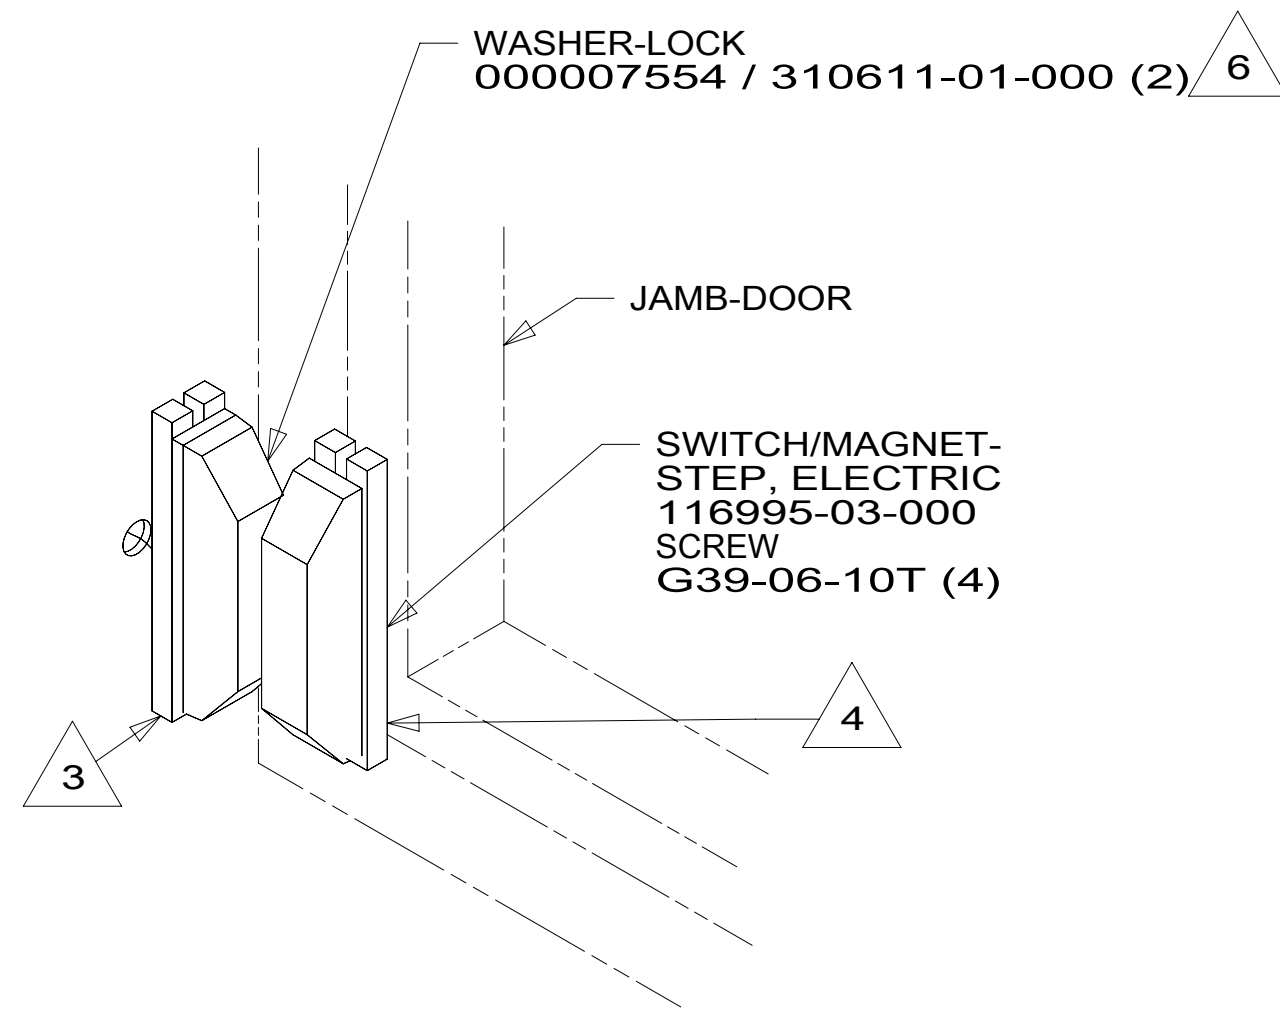


DETAIL EB 1E2

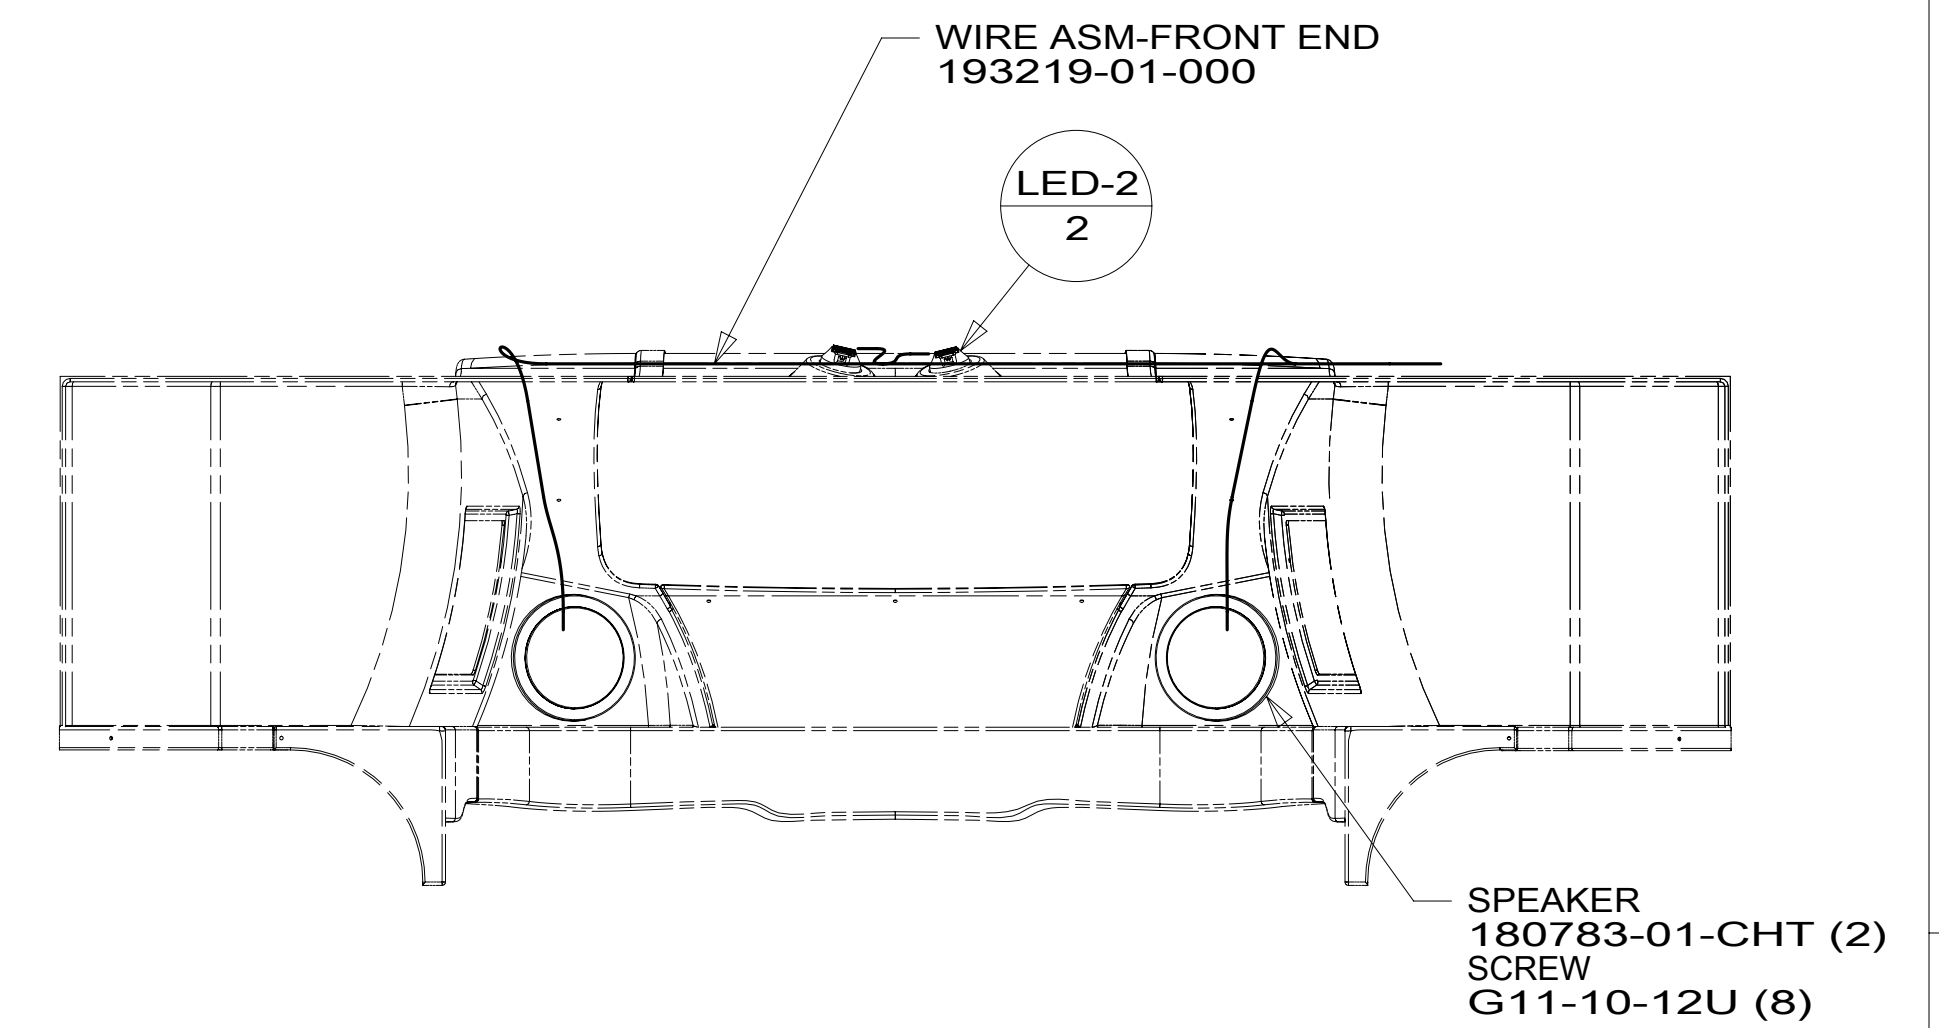


DETAIL ED

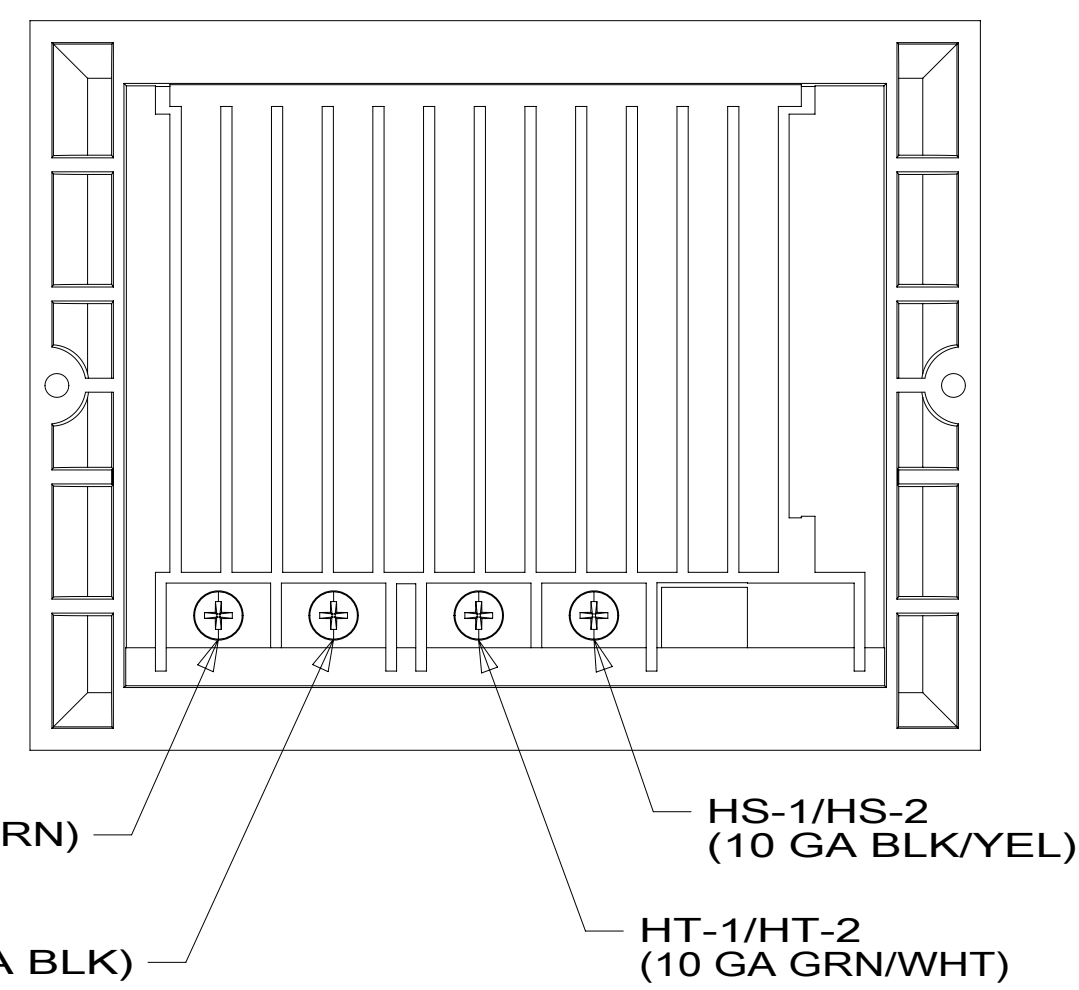

DETAIL EF 282 5

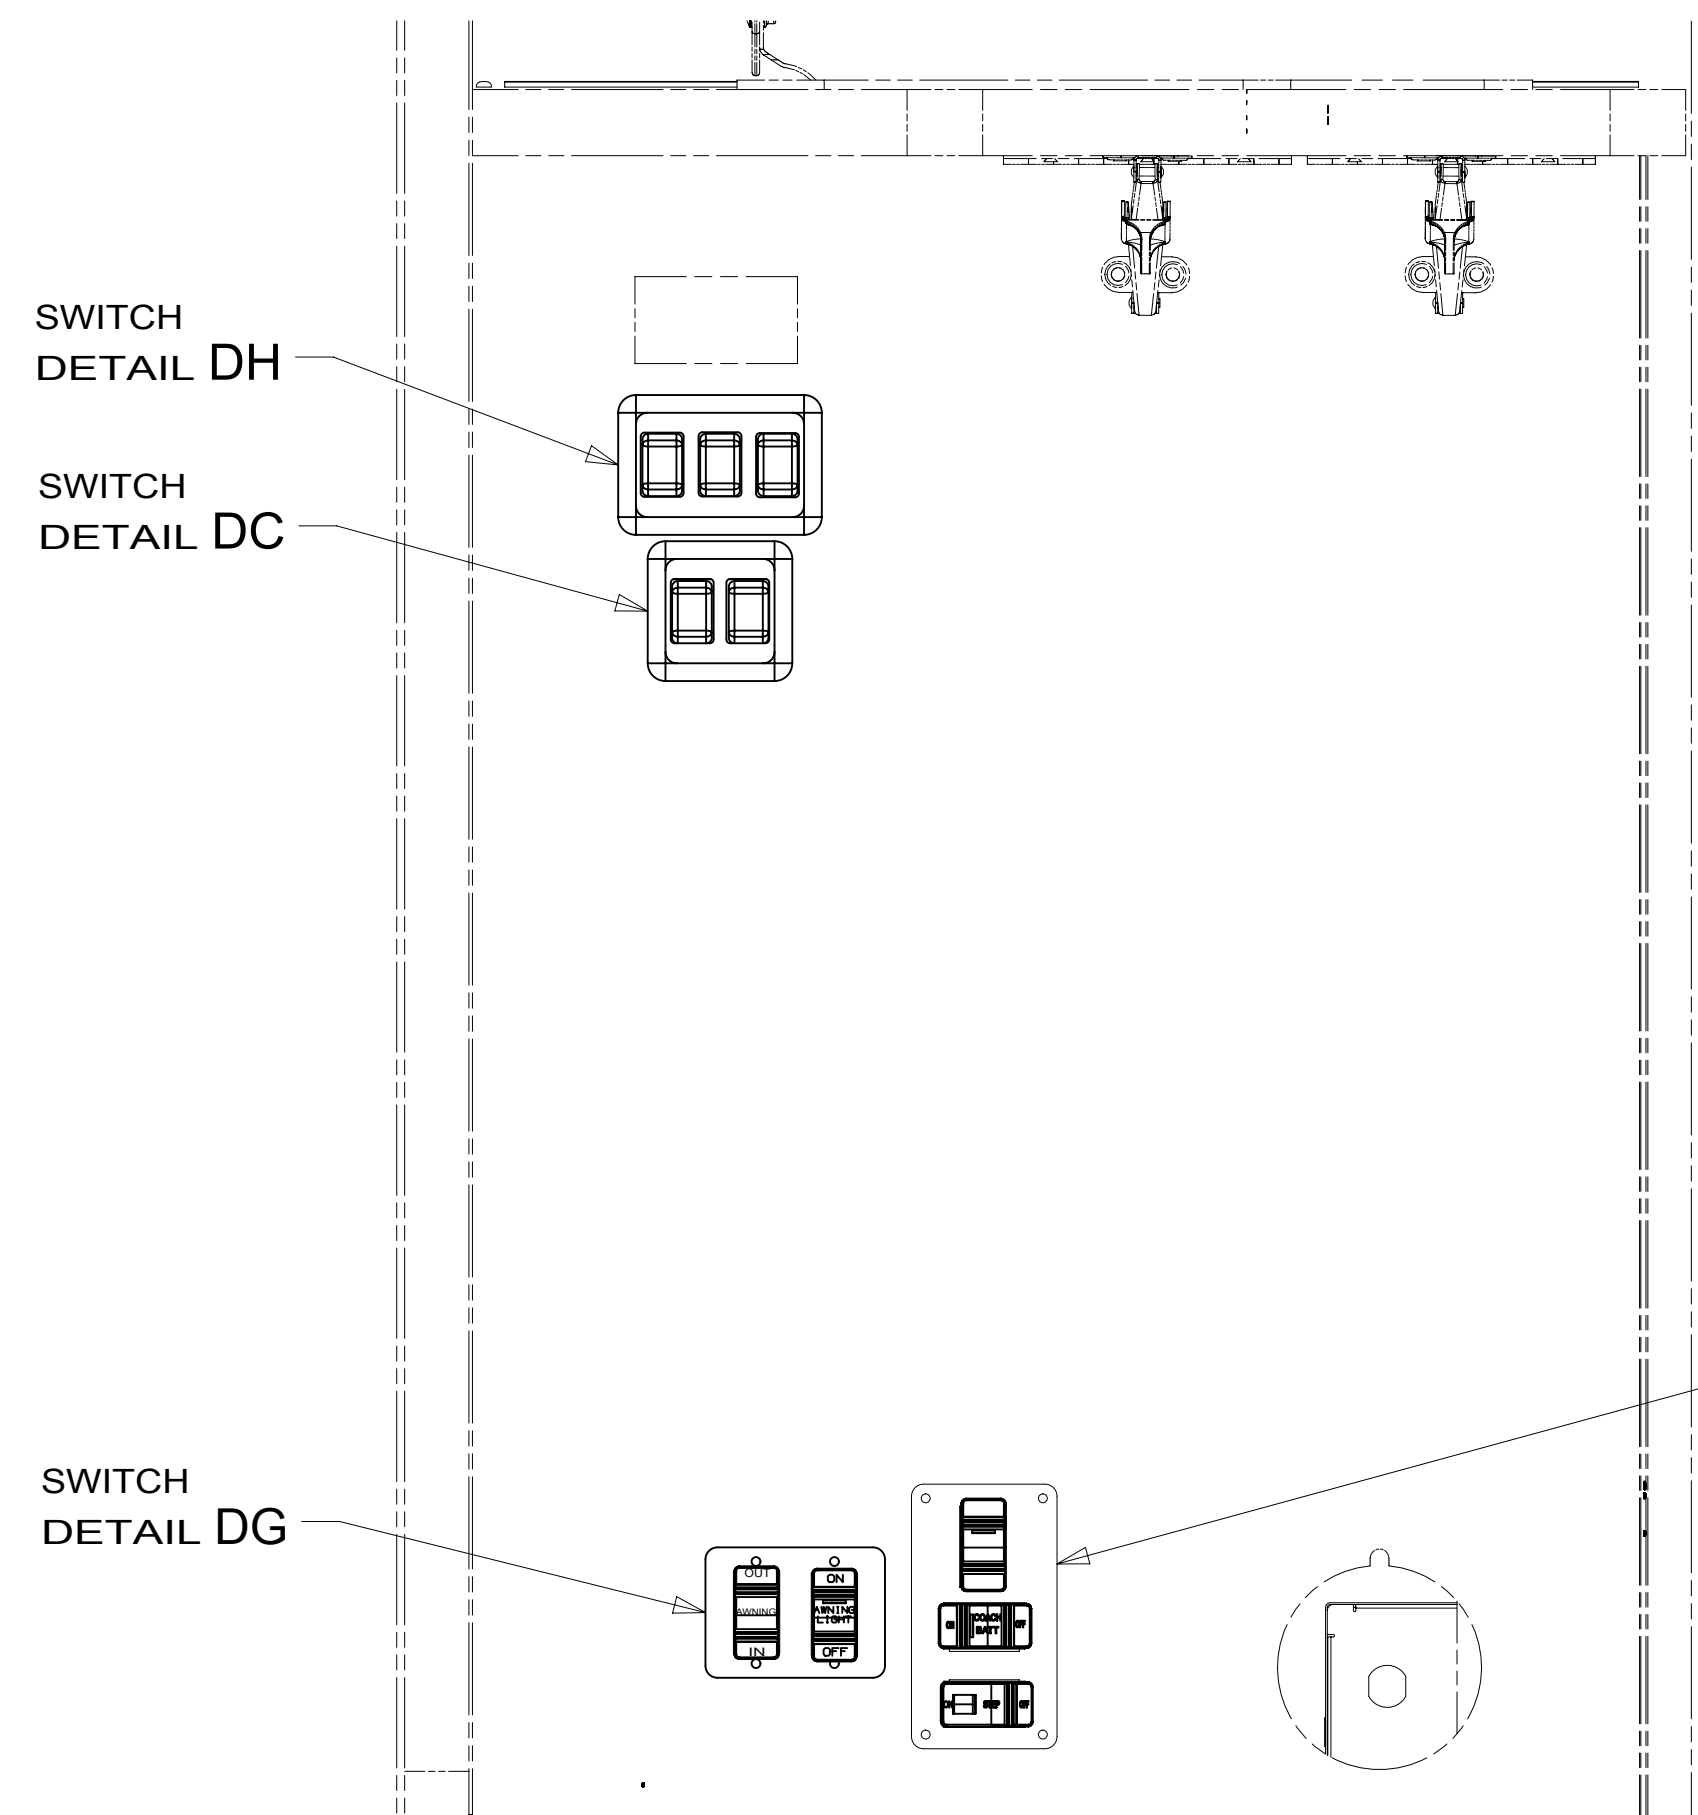

DETAIL EC

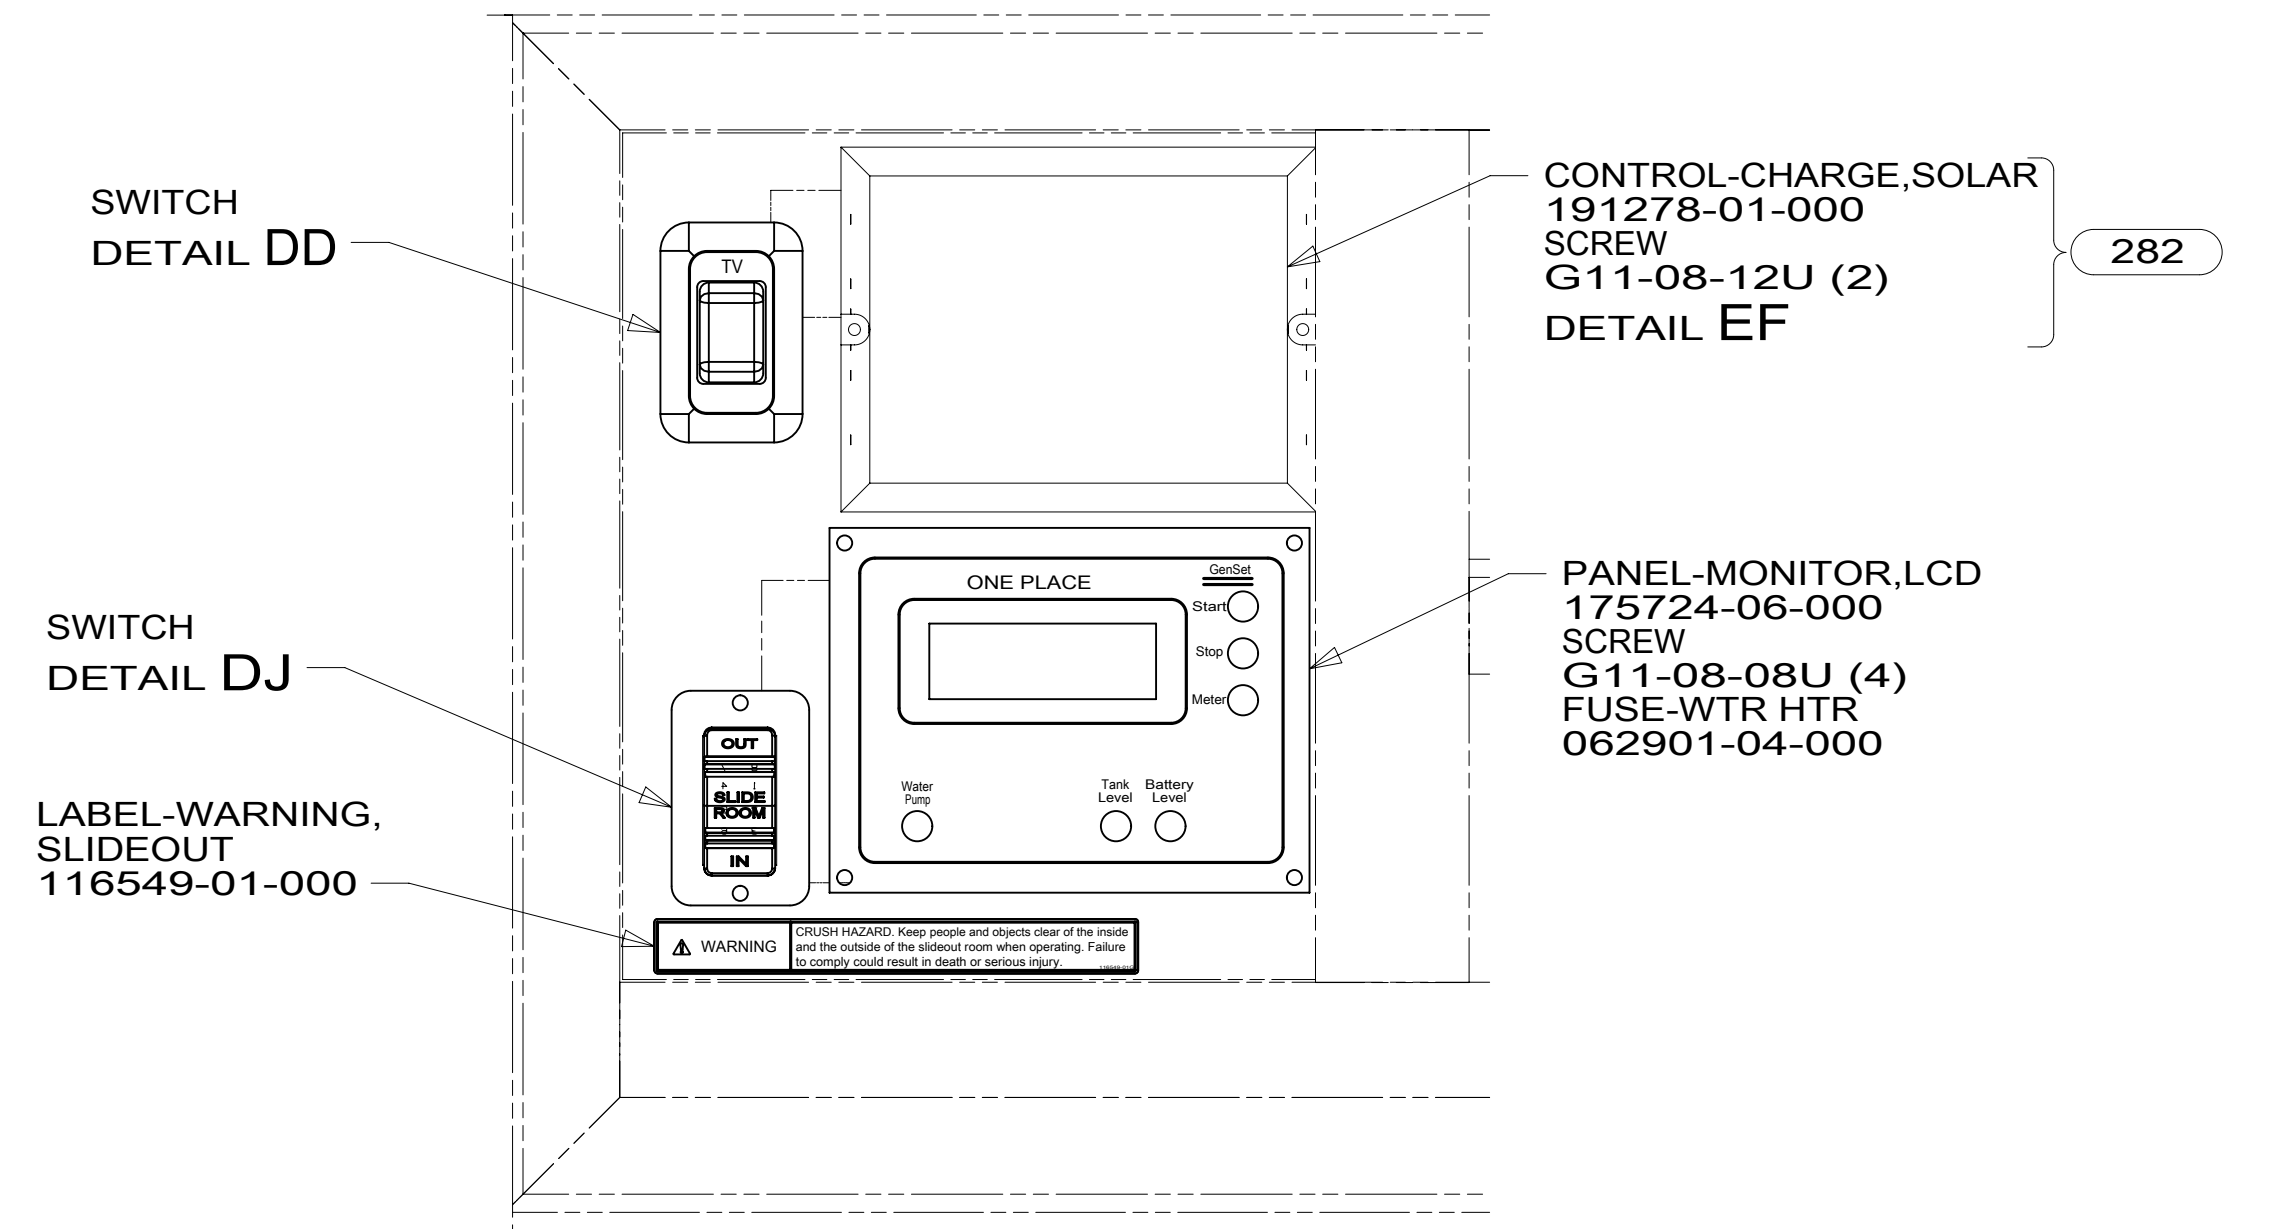

VIEW EE


- NOTES:
- 6 REMOVE SCREWS FROM MAGNET SWITCH TO INSTALL LOCK WASHER AND RING TERMINALS.
 - 5 SEE WIRE ASM-SOLAR AND WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
 - 4 MOUNT MAGNET USING PILOT HOLES IN SCREEN DOOR FRAME. MOUNT WITH MAGNET TOWARD SWITCH.
 - 3 MOUNT SWITCH AND SPACER TO BLOCK ON JAMB. ADJUST HEIGHT TO MATCH MAGNET.
 - 2 CIRCUIT FROM WIRE ASM-COACH.
 - 1 CIRCUIT FROM WIRE ASM-CHASSIS.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 282 SOLAR PANEL - 100 WATT
- 1E2 ENTRANCE STEP-ELEC.
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


DESCRIPTION:		1B1 265	
WIRING INSTL-BODY, 12V			
SHEET:	ITEM/PART NO.:	REV	
5 OF 6	000031226 / 31692201000		

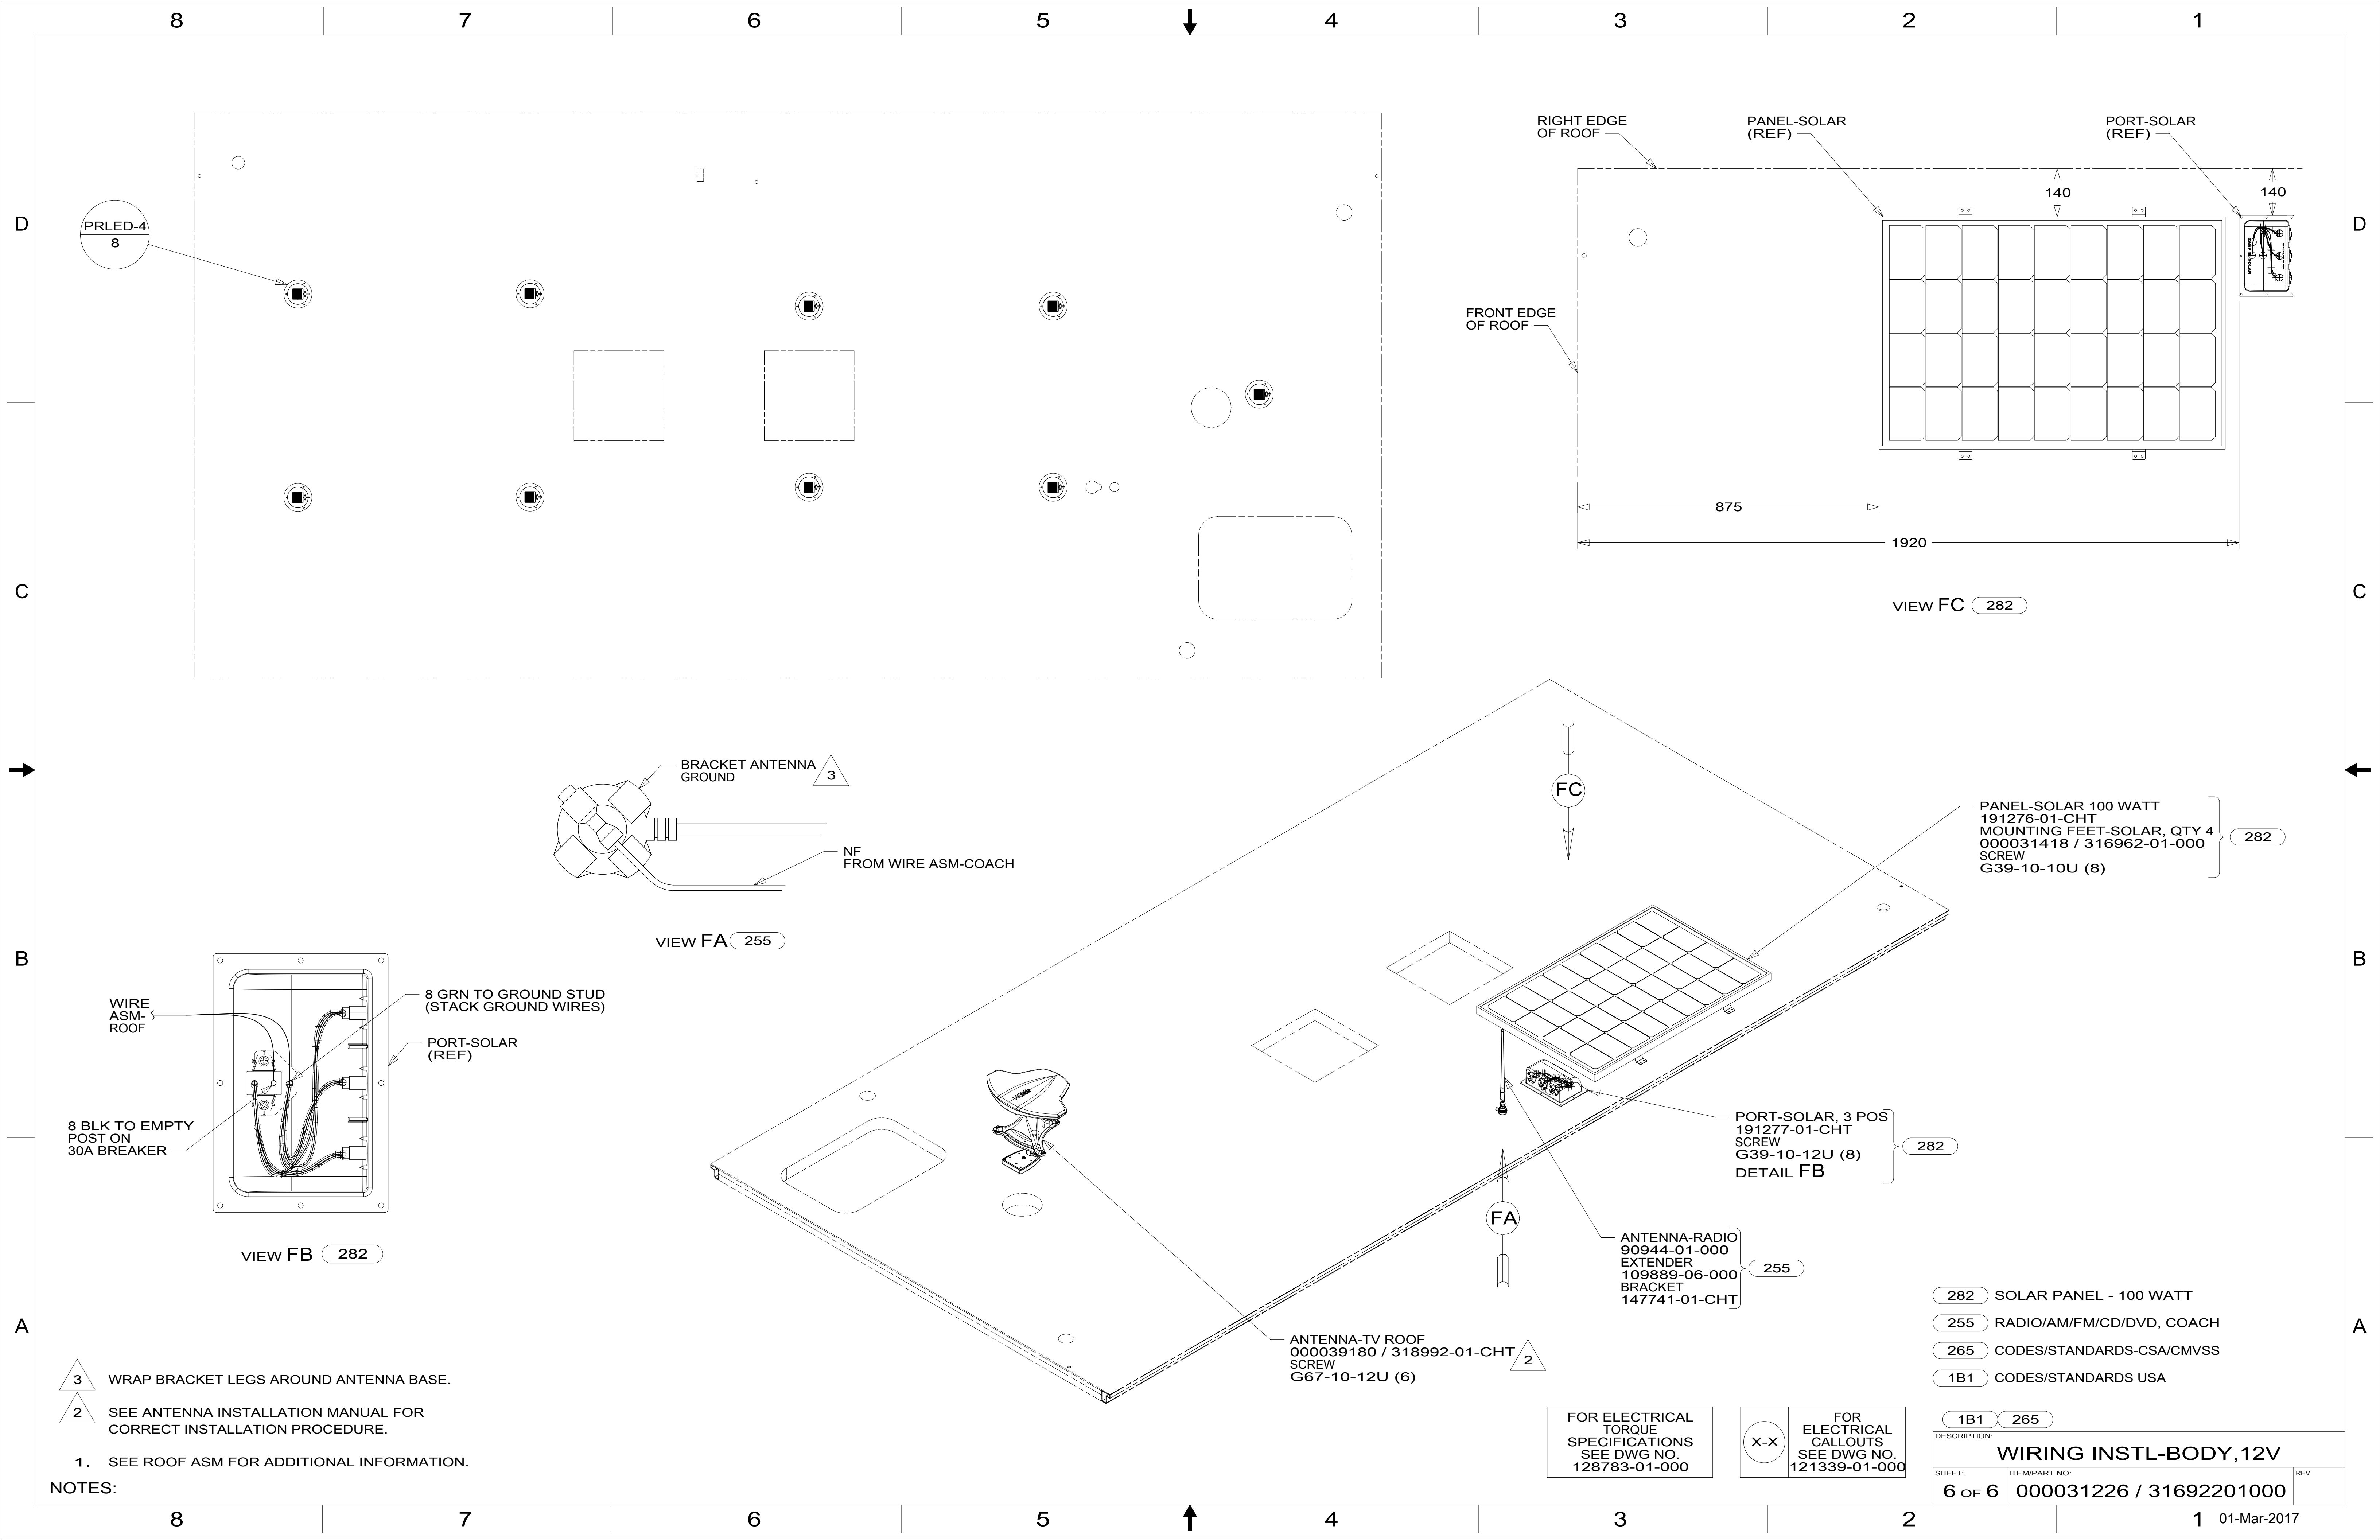


PRLED-4
8

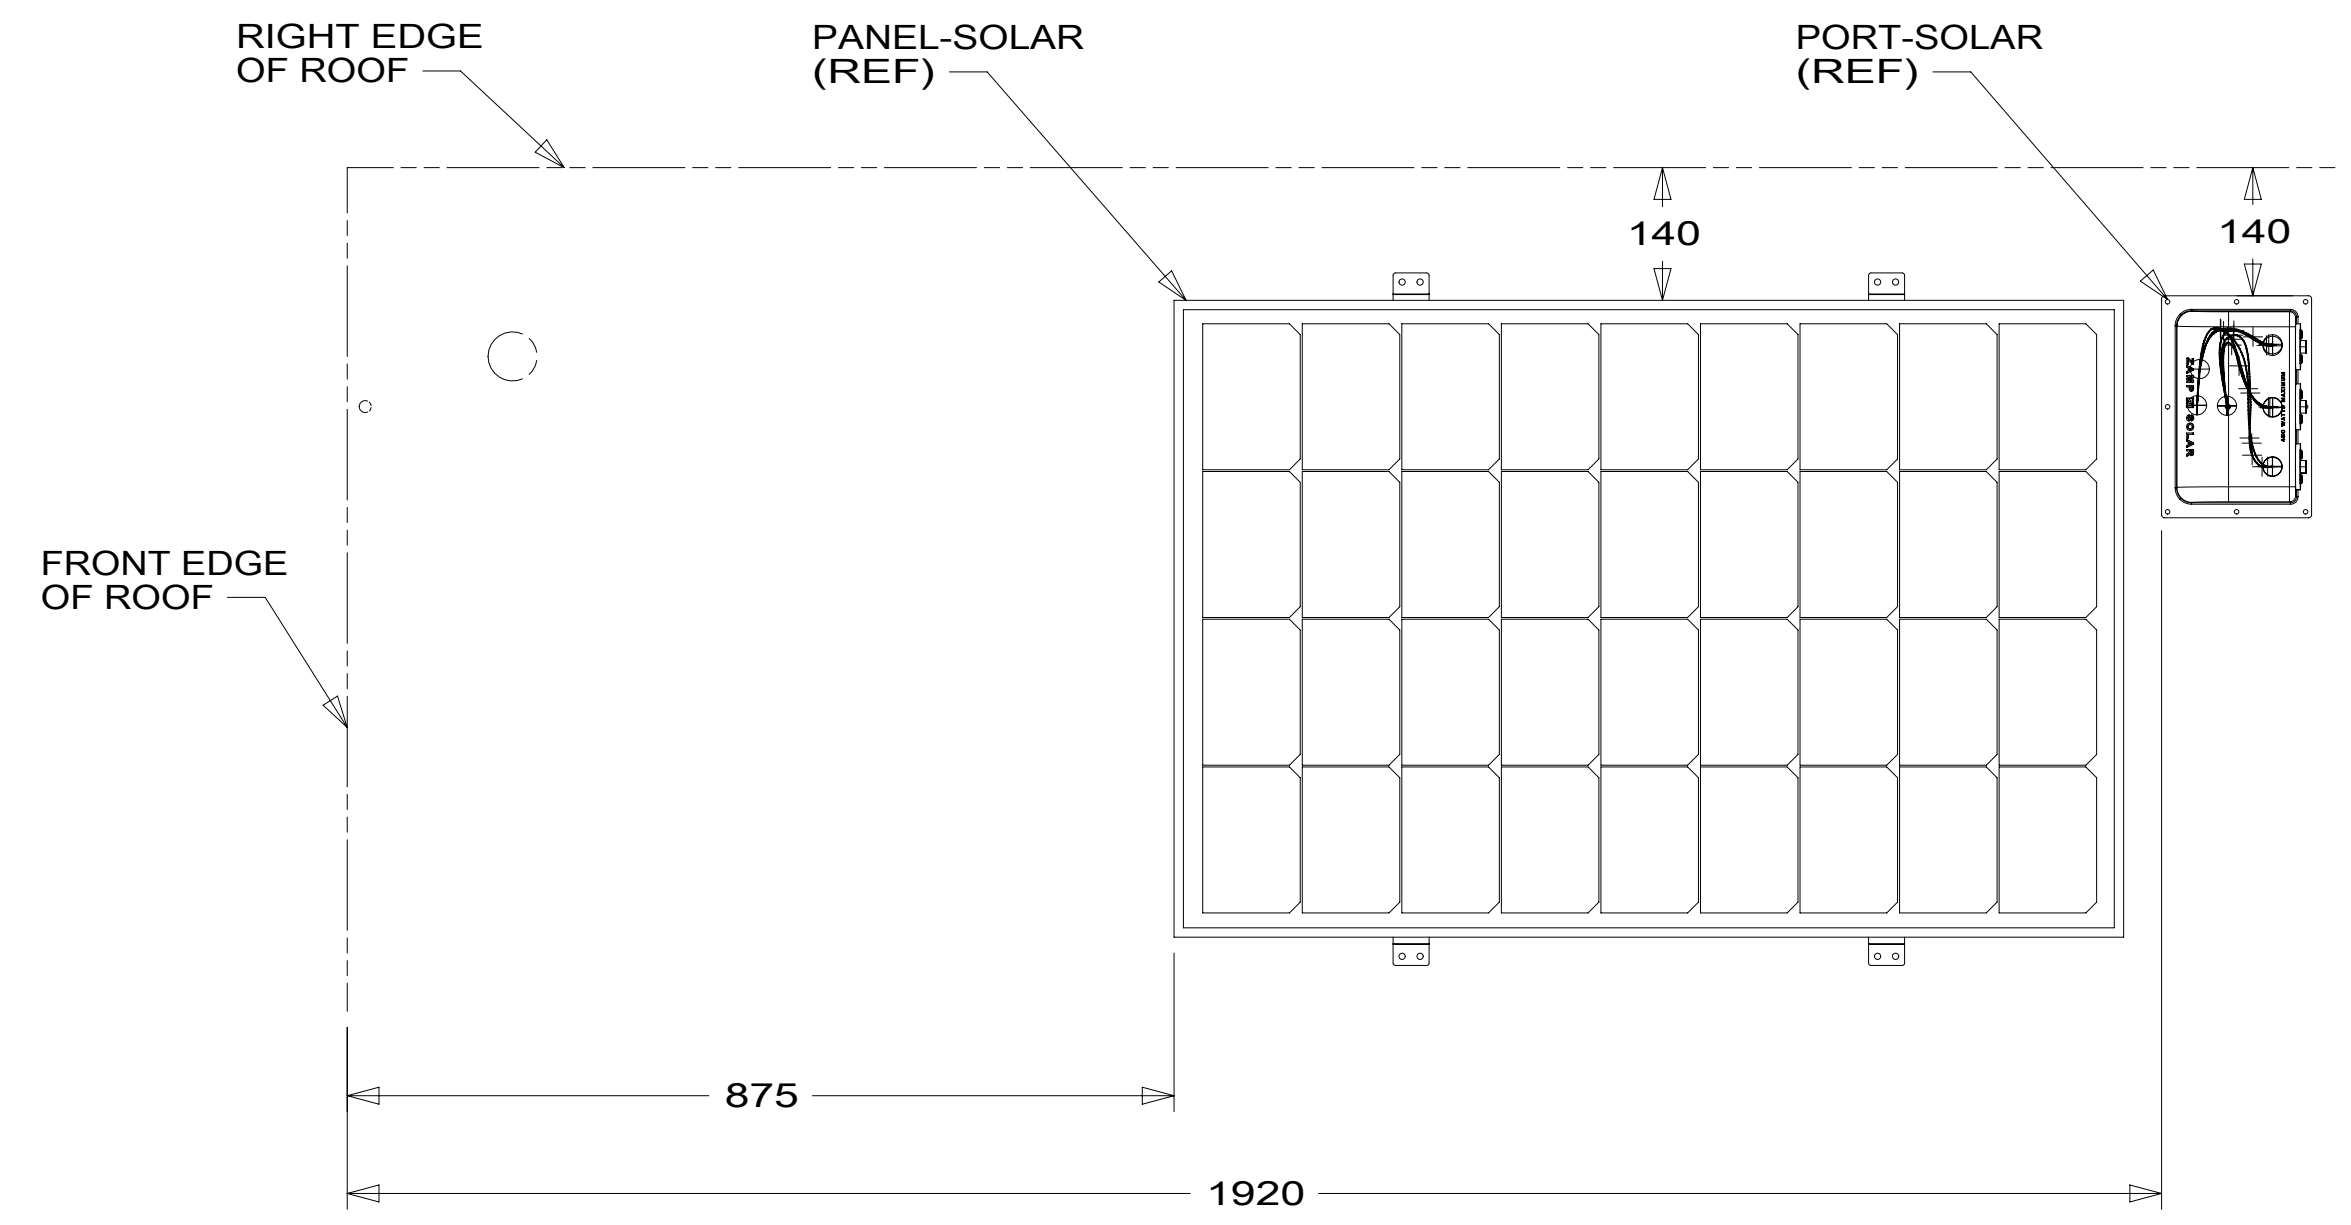


VIEW FC 282

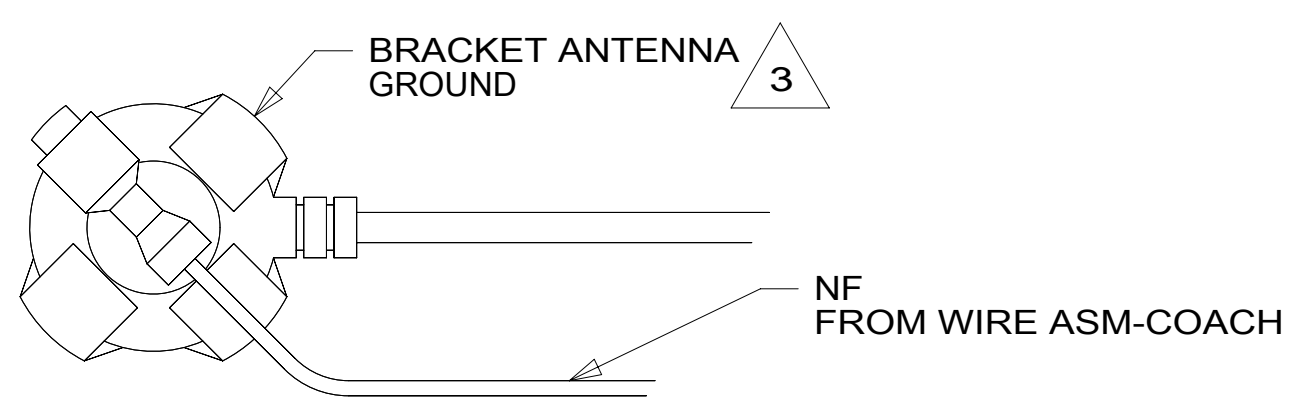

VIEW FA 255

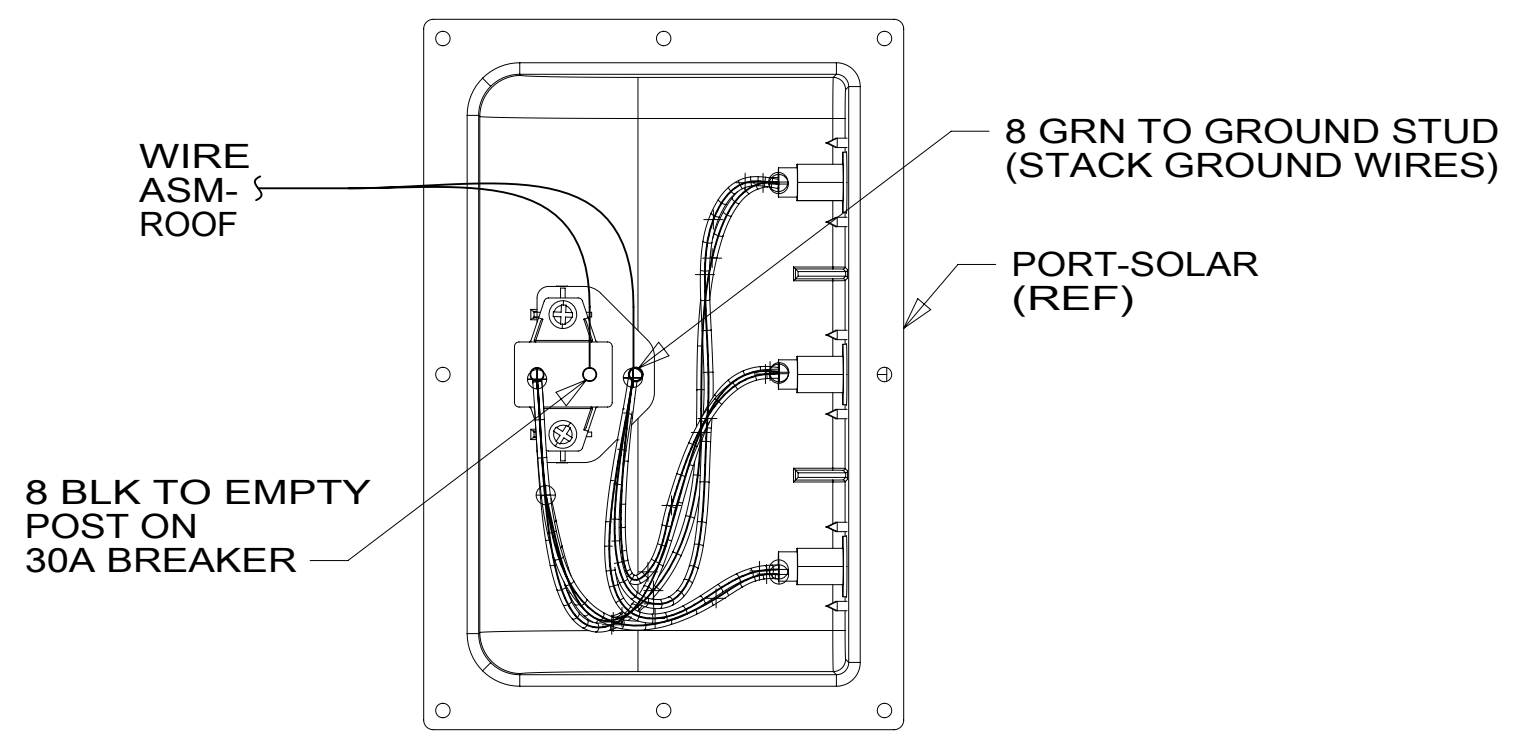

VIEW FB 282

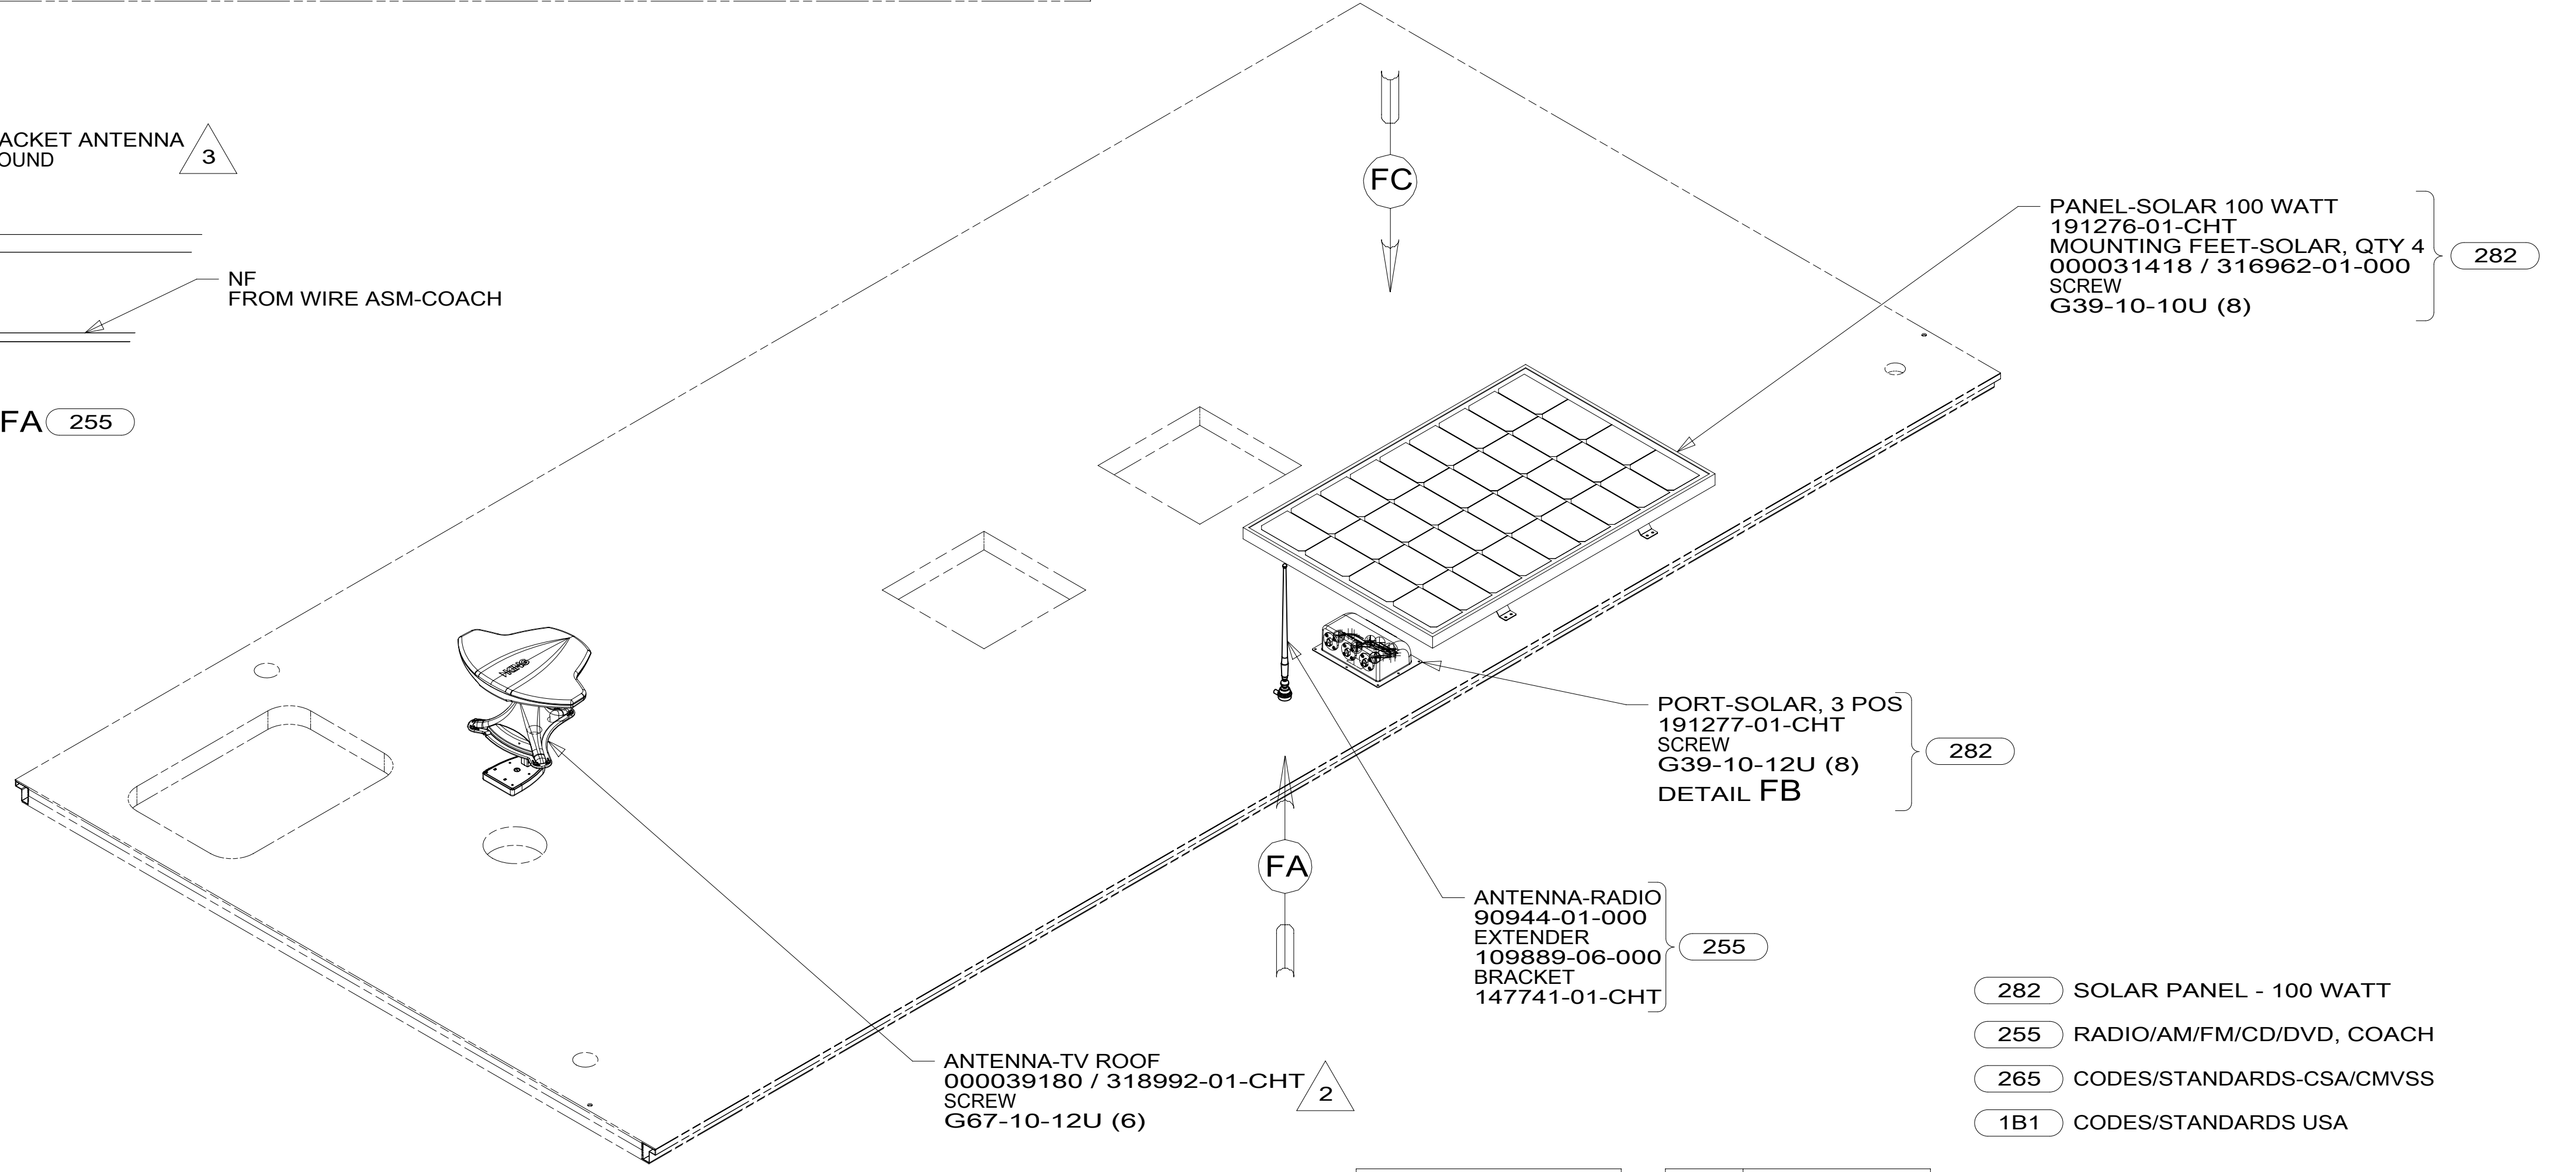

- 3 WRAP BRACKET LEGS AROUND ANTENNA BASE.
- 2 SEE ANTENNA INSTALLATION MANUAL FOR CORRECT INSTALLATION PROCEDURE.
- 1. SEE ROOF ASM FOR ADDITIONAL INFORMATION.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 282 SOLAR PANEL - 100 WATT
- 255 RADIO/AM/FM/CD/DVD, COACH
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION:	1B1 265	
WIRING INSTL-BODY, 12V		
SHEET:	ITEM/PART NO.:	REV
6 OF 6	000031226 / 31692201000	