
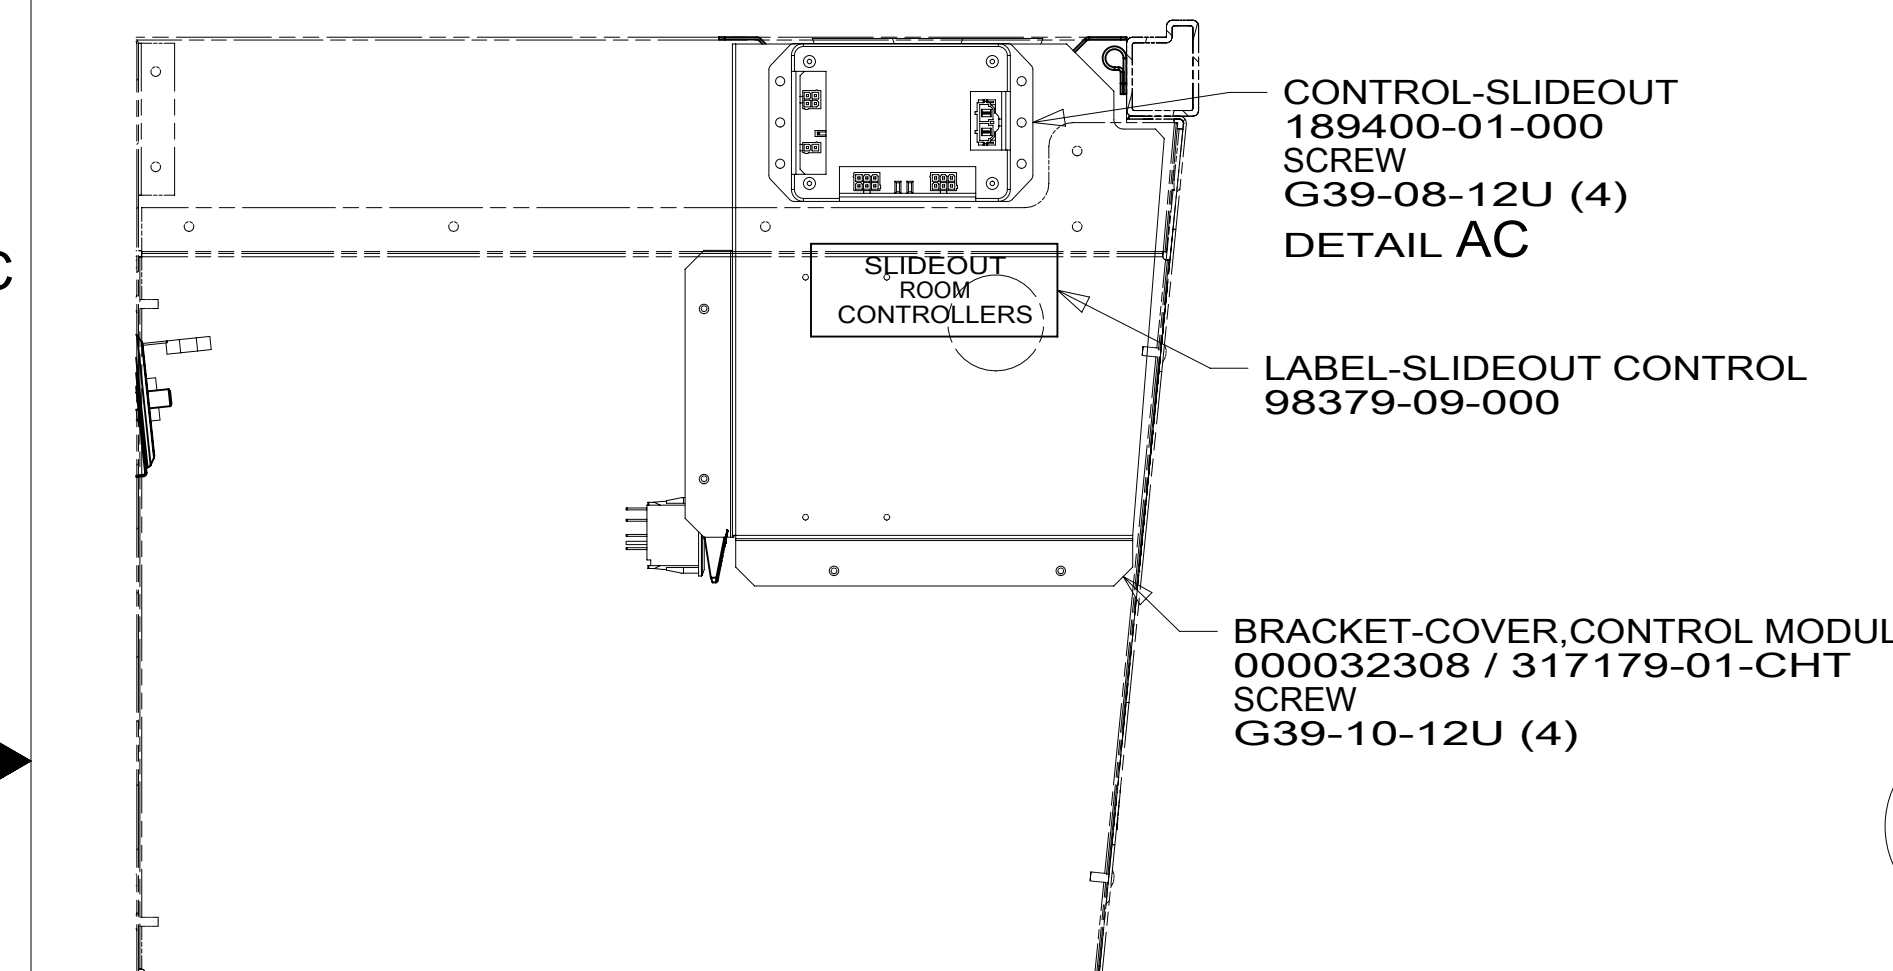
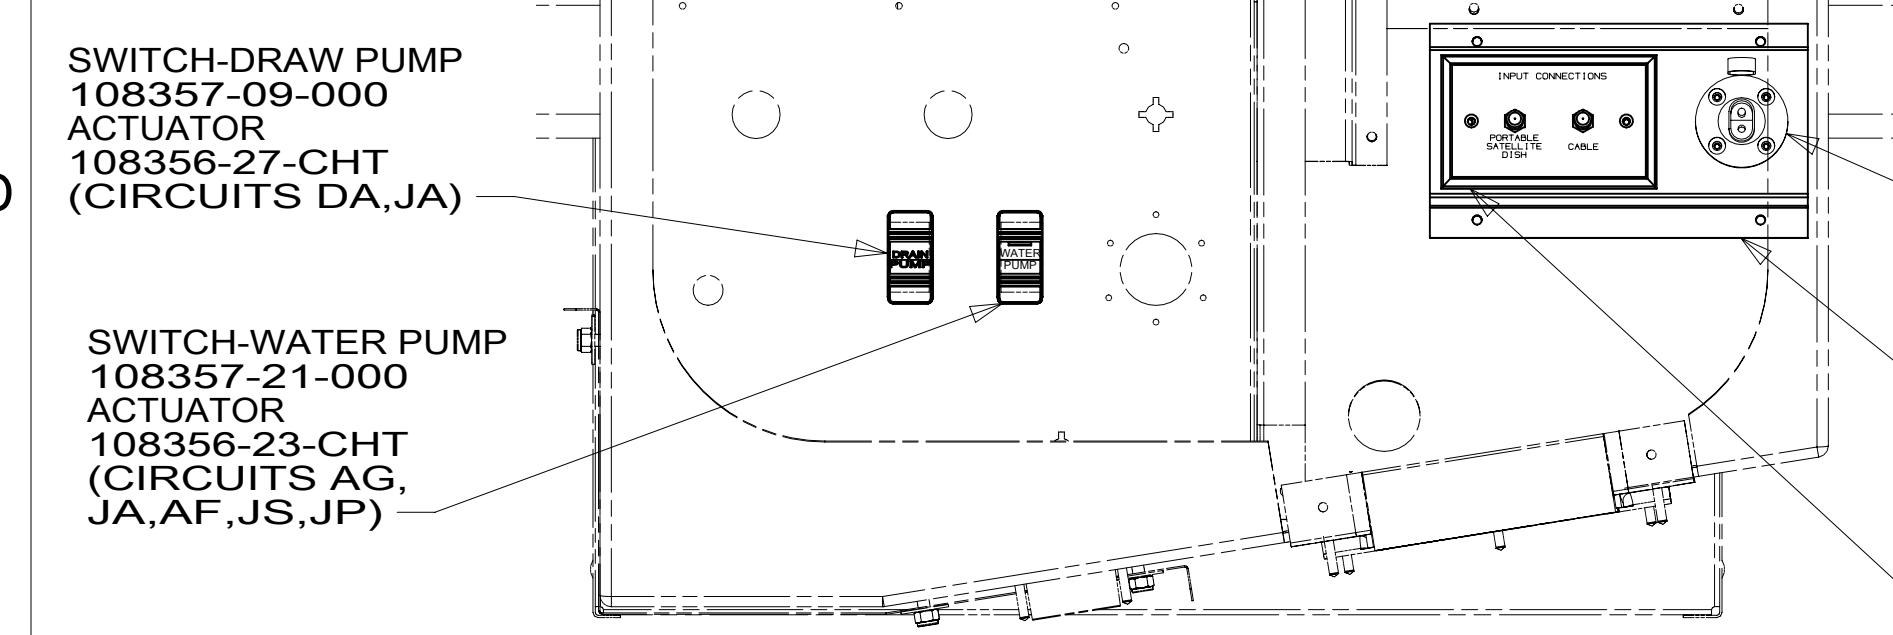


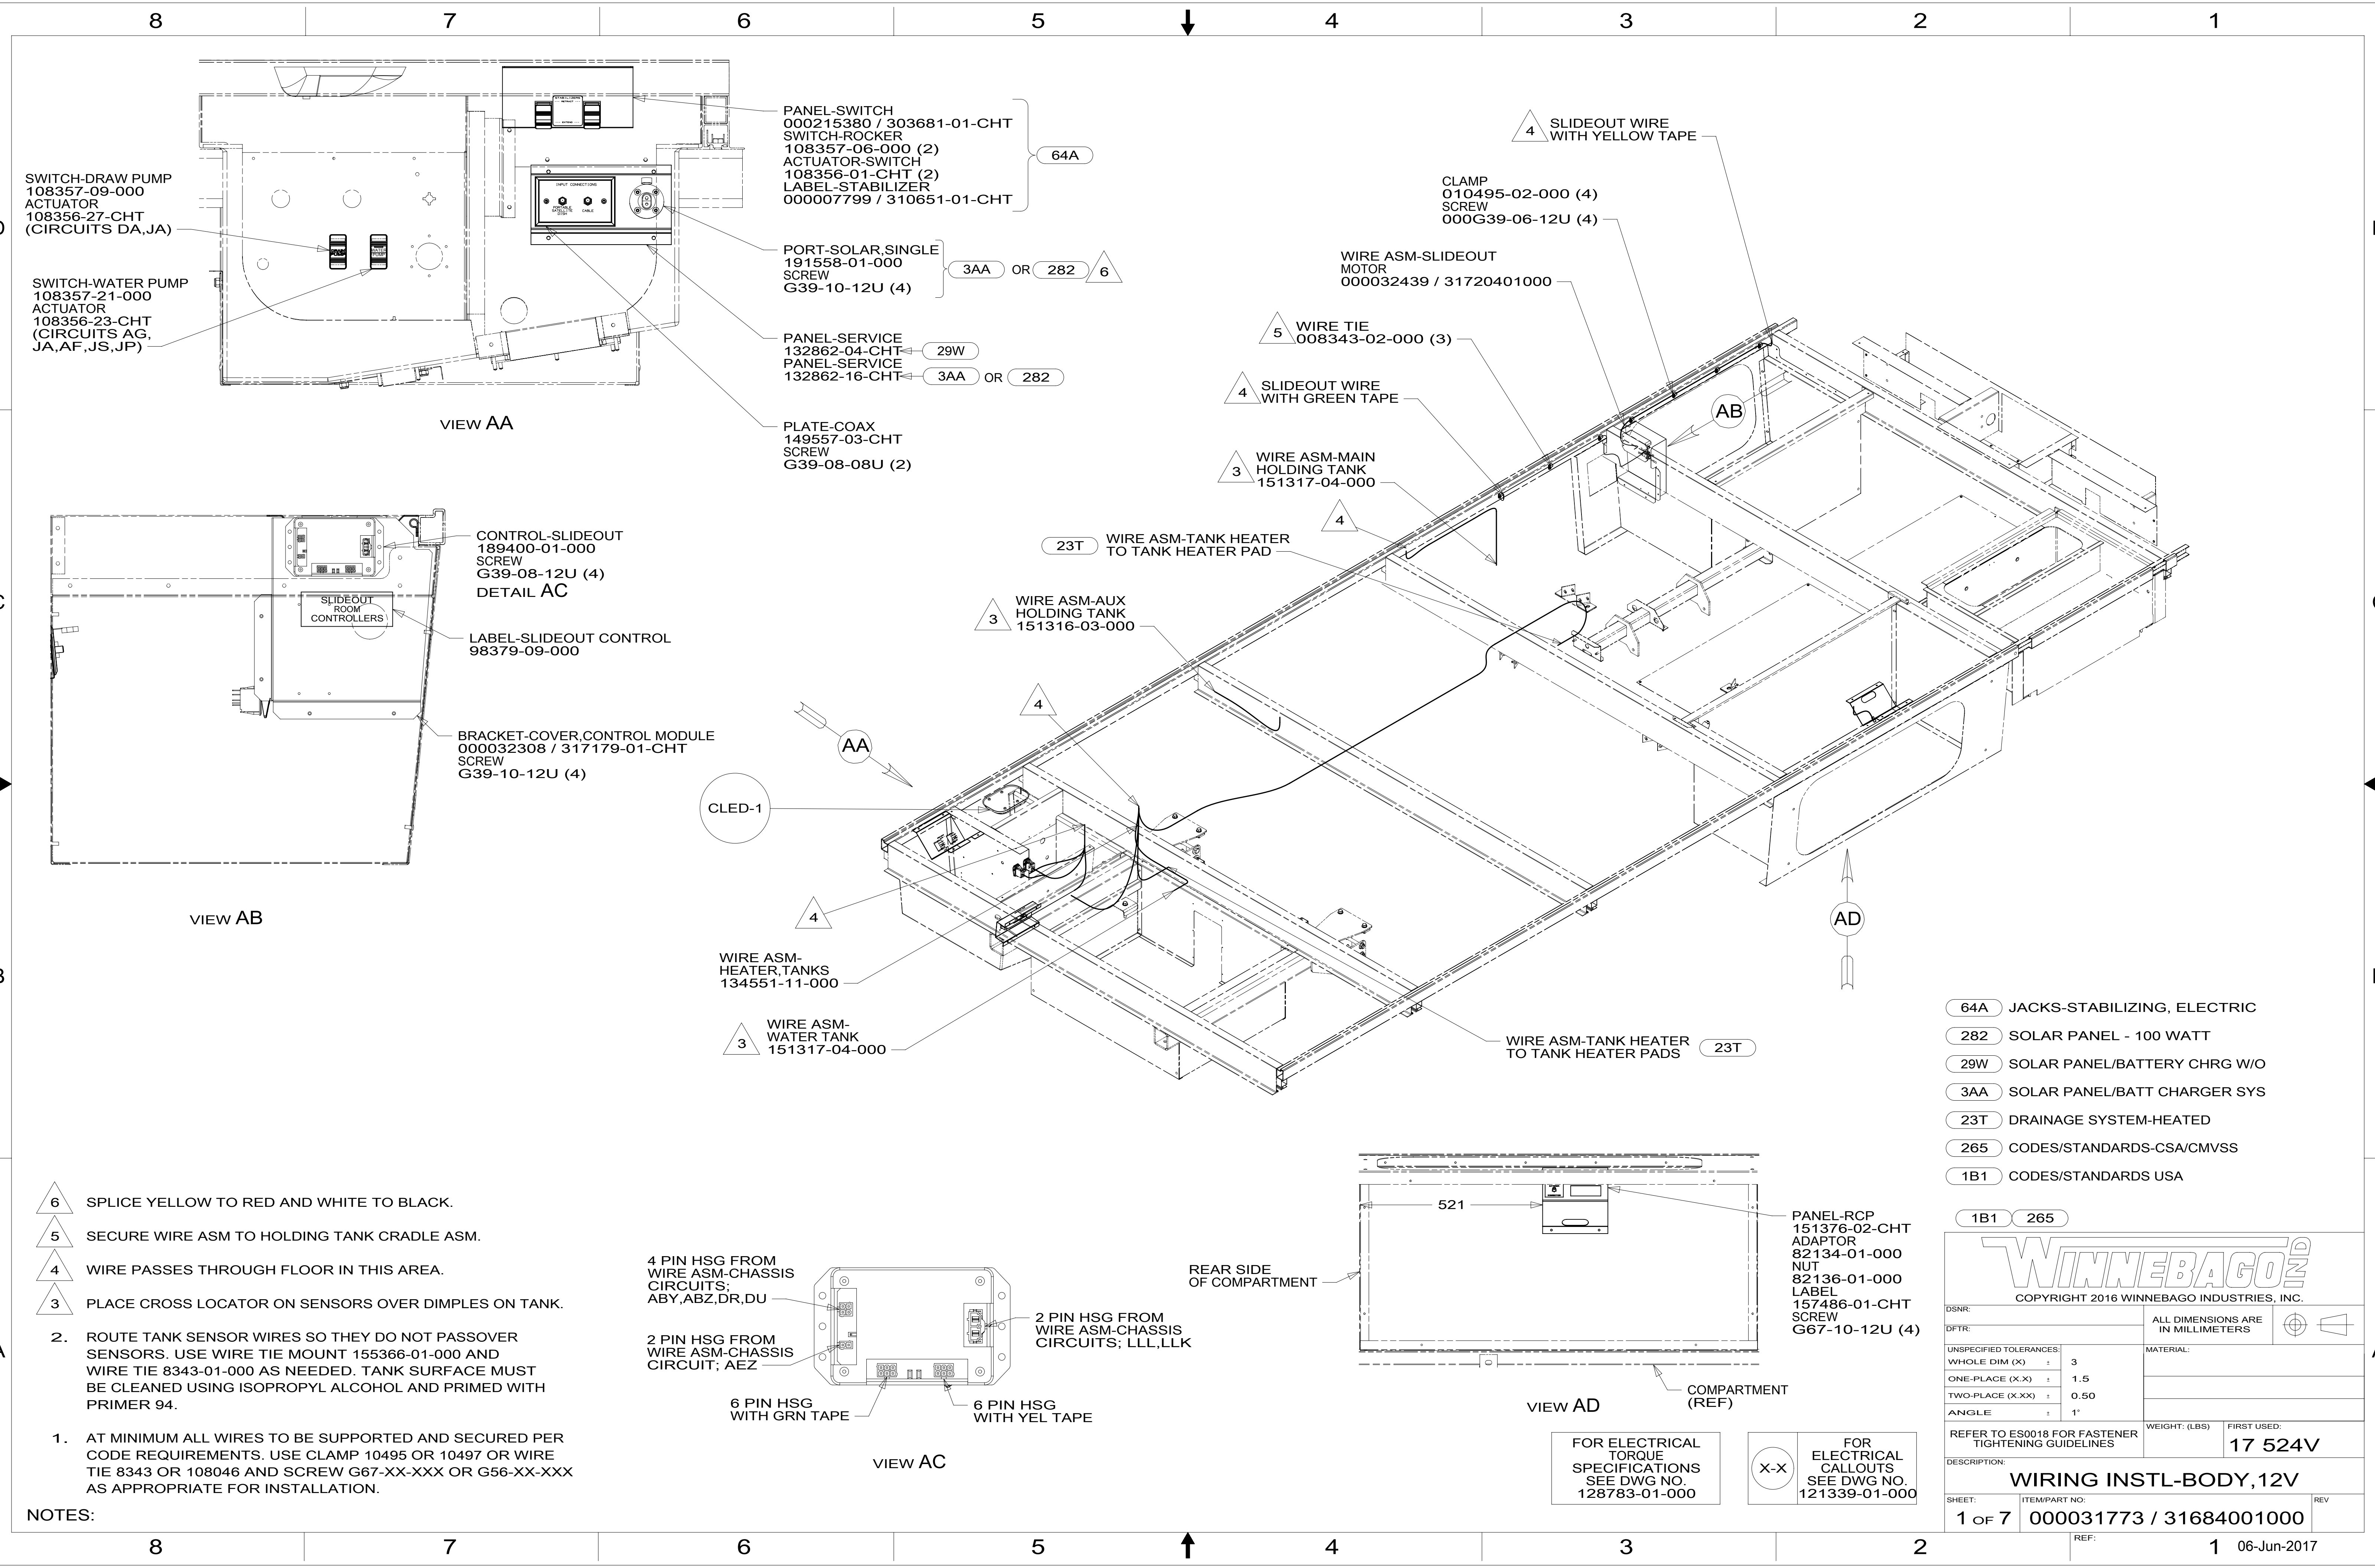

- 6

SPLICE YELLOW TO RED AND WHITE TO BLACK.
- 5

SECURE WIRE ASM TO HOLDING TANK CRADLE ASM.
- 4



WIRE PASSES THROUGH FLOOR IN THIS AREA.
- 3

PLACE CROSS LOCATOR ON SENSORS OVER DIMPLES ON TANK.
2.

ROUTE TANK SENSOR WIRES SO THEY DO NOT PASSOVER SENSORS. USE WIRE TIE MOUNT 155366-01-000 AND WIRE TIE 8343-01-000 AS NEEDED. TANK SURFACE MUST BE CLEANED USING ISOPROPYL ALCOHOL AND PRIMED WITH PRIMER 94.
1.

AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

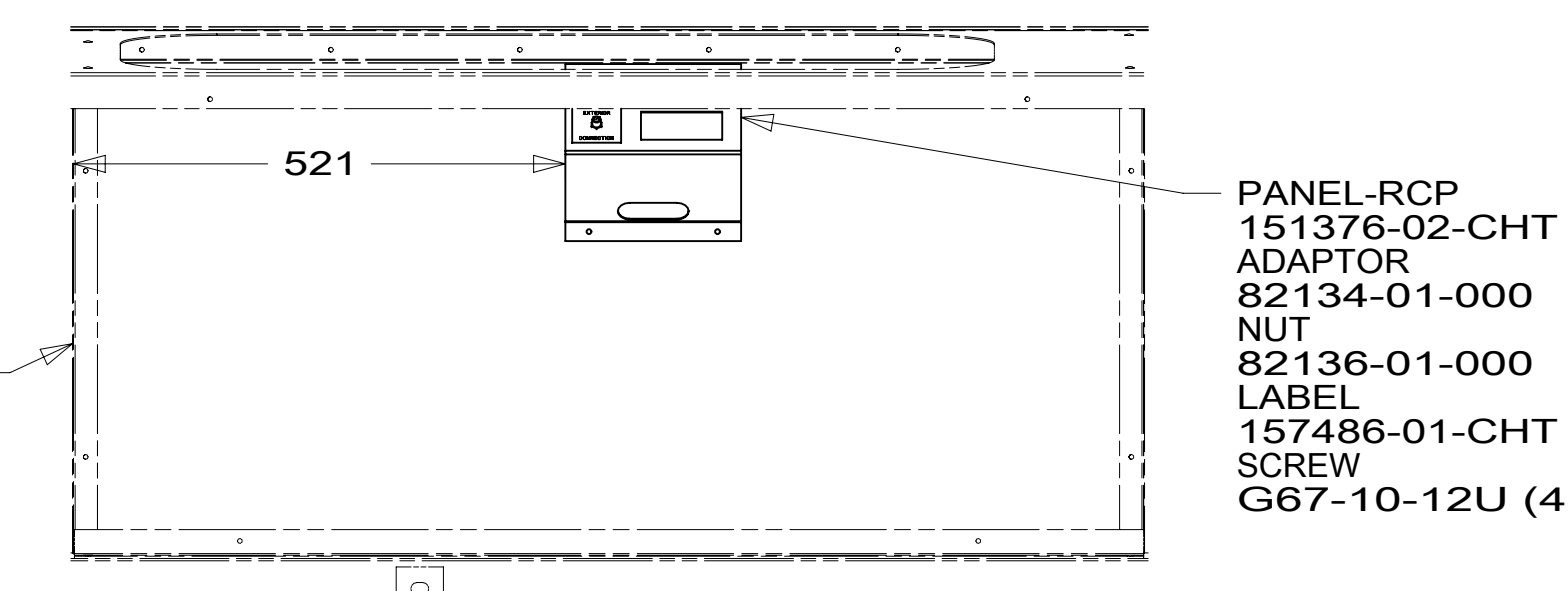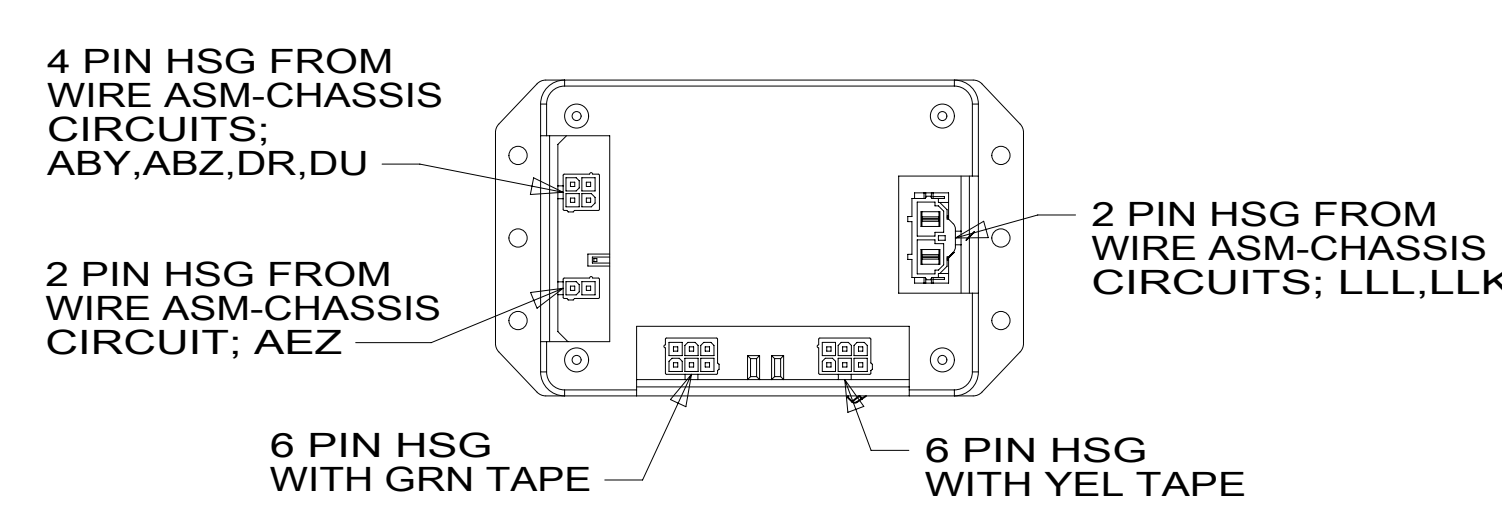

- 64A

JACKS-STABILIZING, ELECTRIC
- 282

SOLAR PANEL - 100 WATT
- 29W

SOLAR PANEL/BATTERY CHRG W/O
- 3AA

SOLAR PANEL/BATT CHARGER SYS
- 23T

DRAINAGE SYSTEM-HEATED
- 265

CODES/STANDARDS-CSA/CMVSS
- 1B1

CODES/STANDARDS USA

WINNEBAGO


COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.


DSNR:		ALL DIMENSIONS ARE IN MILLIMETERS	
DFTR:		MATERIAL:	
UNSPECIFIED TOLERANCES:			
WHOLE DIM (X)	± 3		
ONE-PLACE (X.X)	± 1.5		
TWO-PLACE (X.XX)	± 0.50		
ANGLE	± 1°		
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES		WEIGHT: (LBS)	FIRST USED:
			17 524V
DESCRIPTION:			
WIRING INSTL-BODY, 12V			
SHEET:	ITEM/PART NO:	REV	
1 OF 7	000031773 / 31684001000		
REF:		1 06-Jun-2017	

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

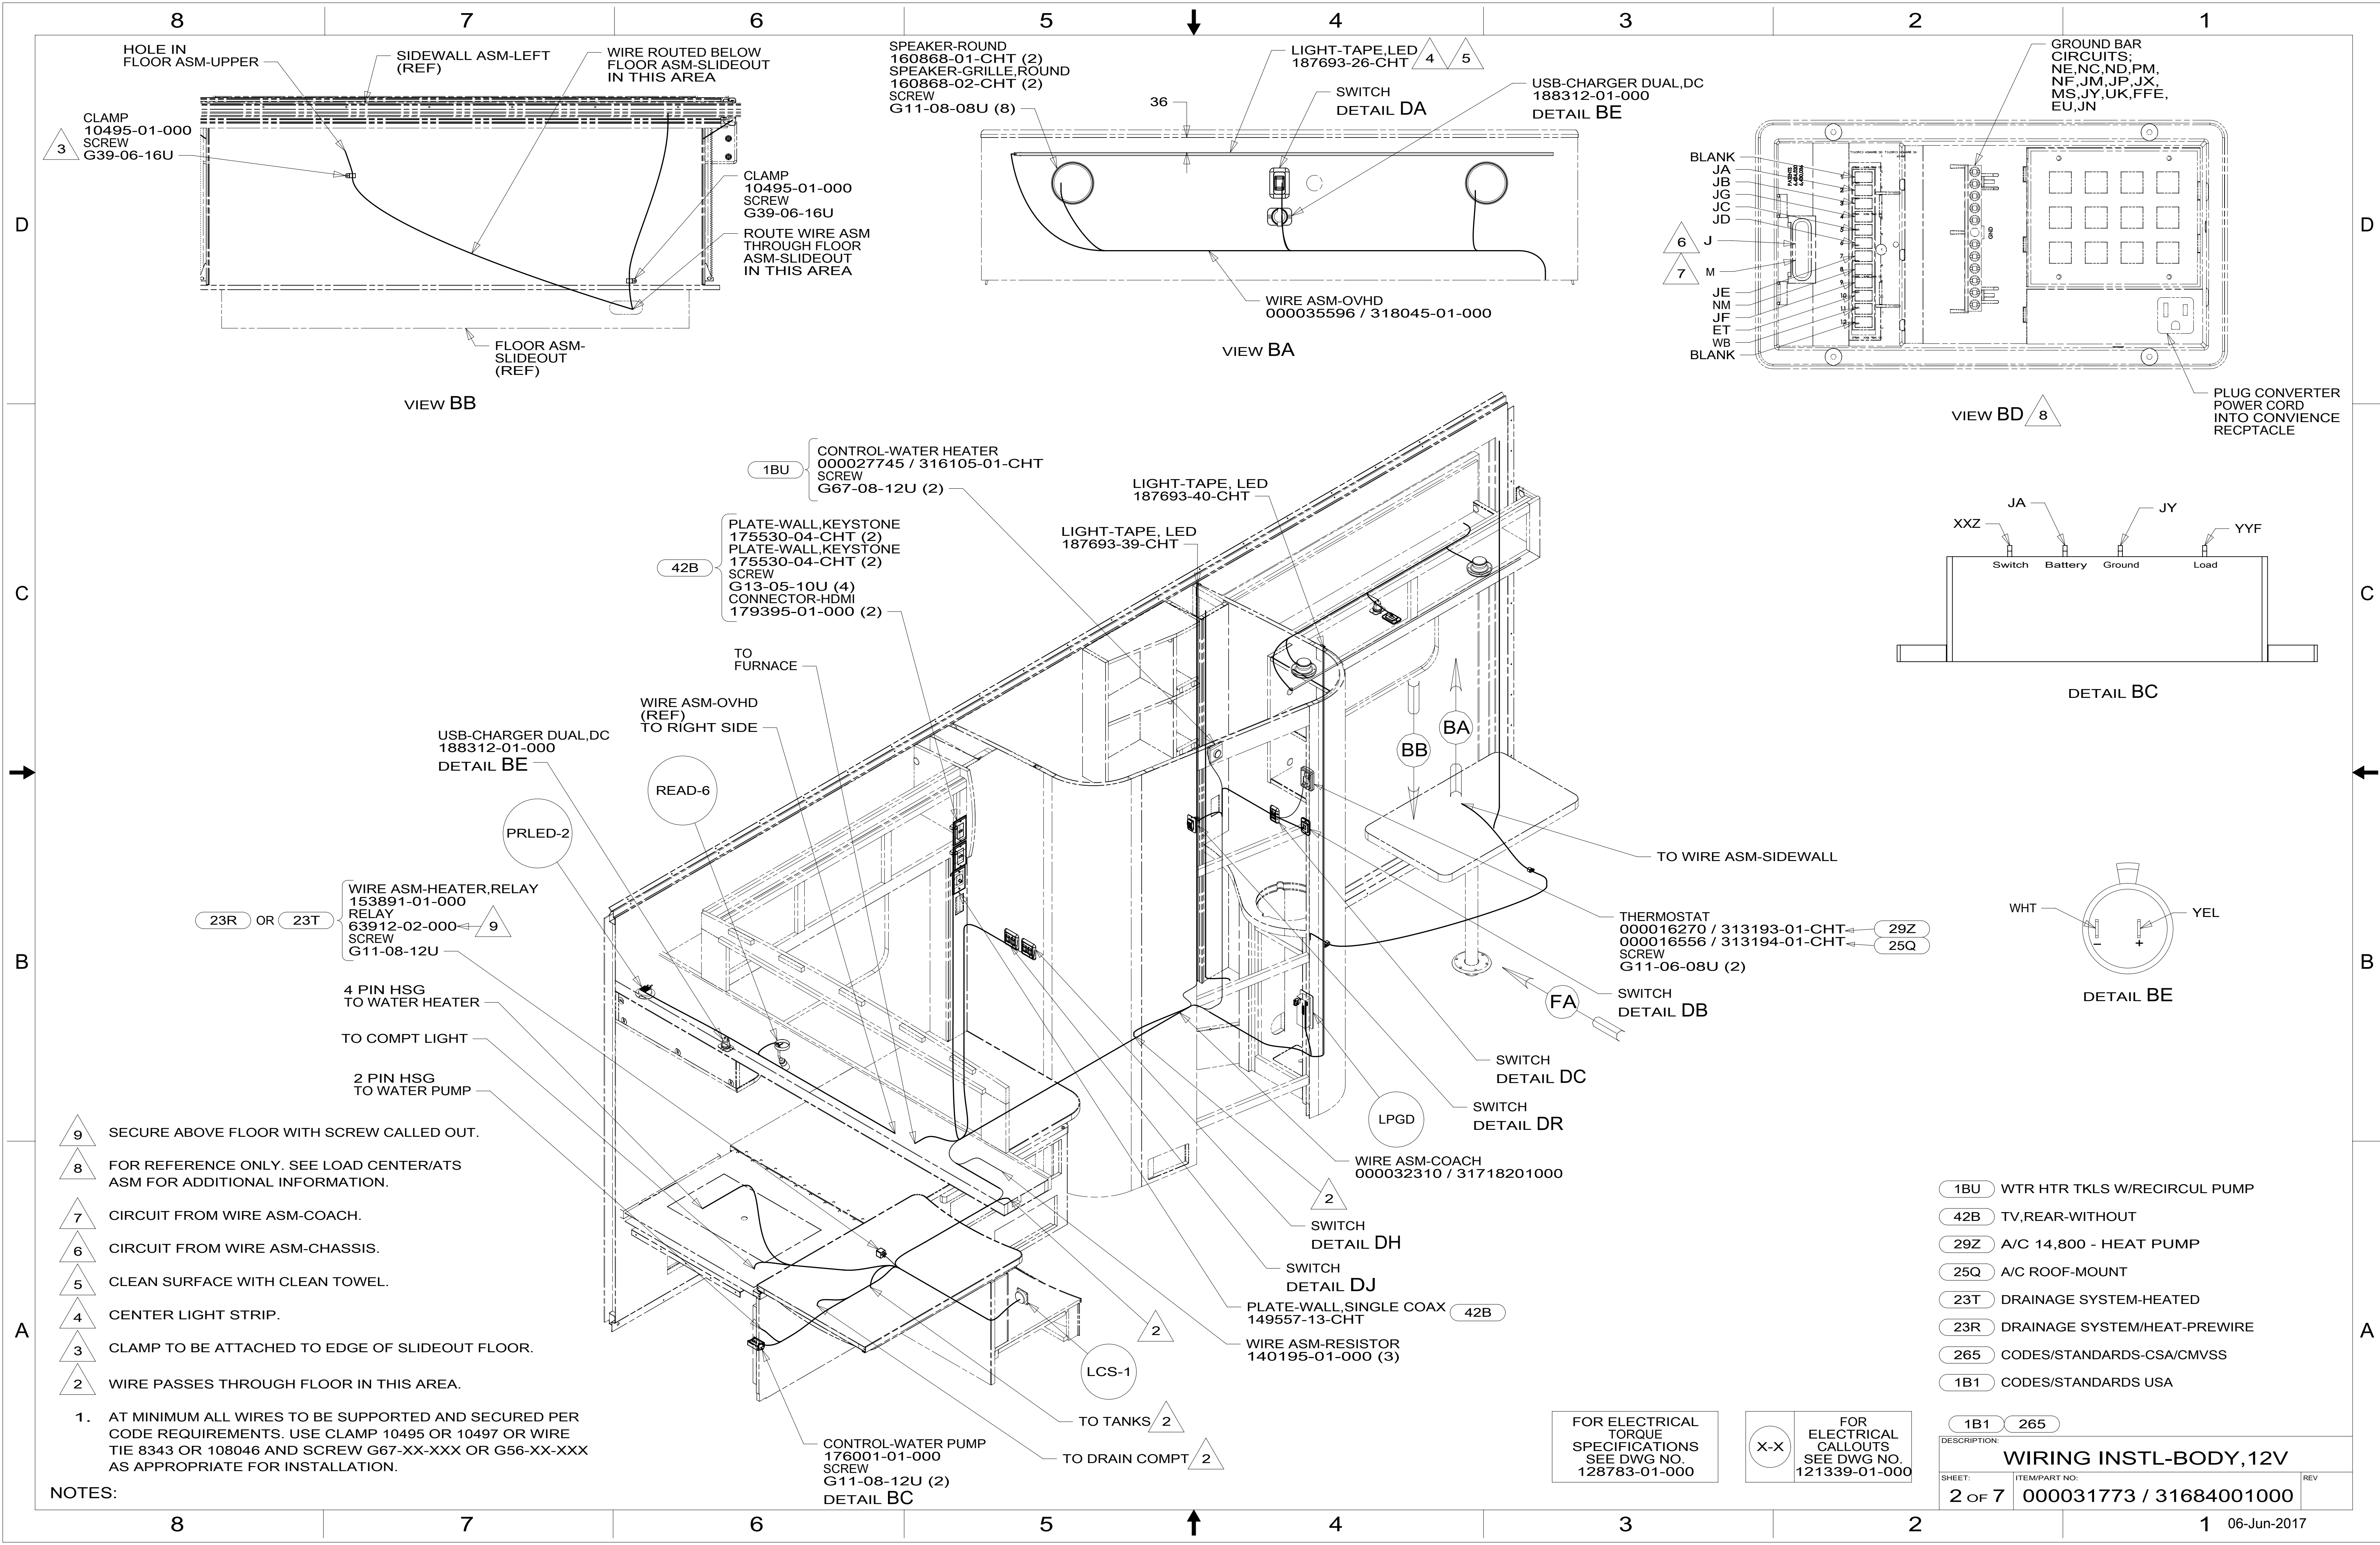

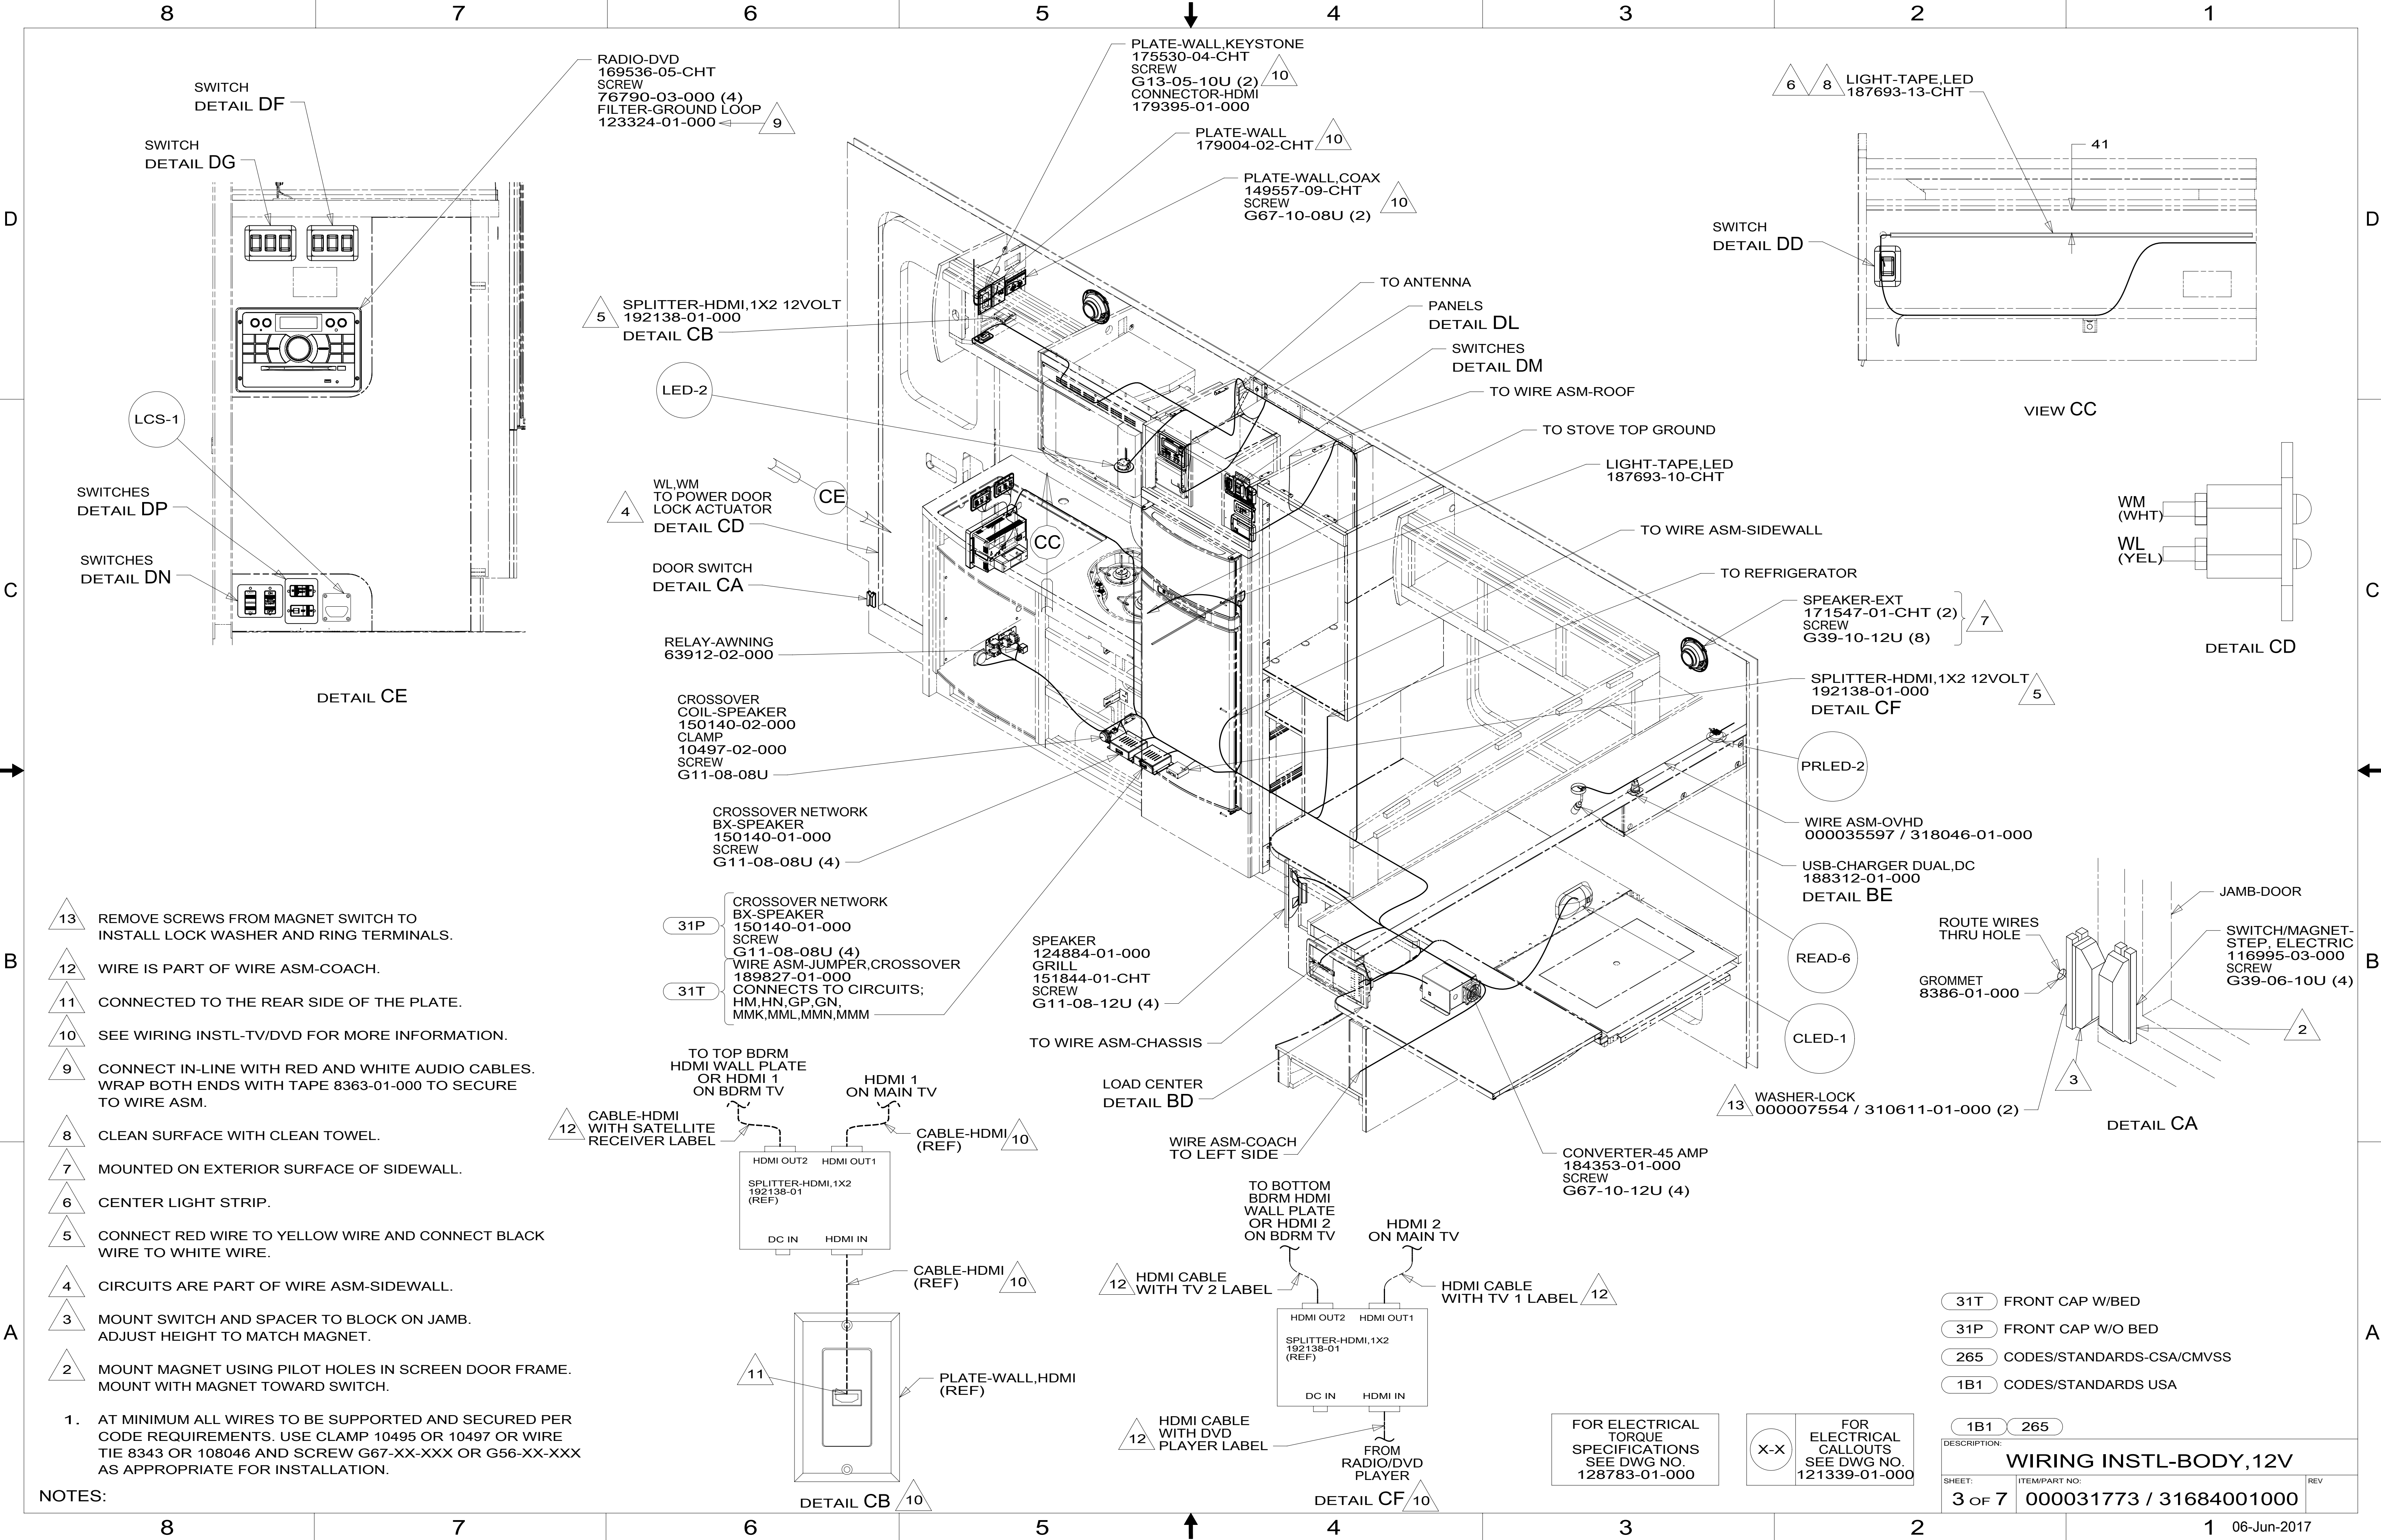

- 13 REMOVE SCREWS FROM MAGNET SWITCH TO INSTALL LOCK WASHER AND RING TERMINALS.
- 12 WIRE IS PART OF WIRE ASM-COACH.
- 11 CONNECTED TO THE REAR SIDE OF THE PLATE.
- 10 SEE WIRING INSTL-TV/DVD FOR MORE INFORMATION.
- 9 CONNECT IN-LINE WITH RED AND WHITE AUDIO CABLES. WRAP BOTH ENDS WITH TAPE 8363-01-000 TO SECURE TO WIRE ASM.
- 8 CLEAN SURFACE WITH CLEAN TOWEL.
- 7 MOUNTED ON EXTERIOR SURFACE OF SIDEWALL.
- 6 CENTER LIGHT STRIP.
- 5 CONNECT RED WIRE TO YELLOW WIRE AND CONNECT BLACK WIRE TO WHITE WIRE.
- 4 CIRCUITS ARE PART OF WIRE ASM-SIDEWALL.
- 3 MOUNT SWITCH AND SPACER TO BLOCK ON JAMB. ADJUST HEIGHT TO MATCH MAGNET.
- 2 MOUNT MAGNET USING PILOT HOLES IN SCREEN DOOR FRAME. MOUNT WITH MAGNET TOWARD SWITCH.

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.


NOTES:


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 31T FRONT CAP W/BED
- 31P FRONT CAP W/O BED
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION:		
WIRING INSTL-BODY, 12V		
SHEET:	ITEM/PART NO:	REV
3 OF 7	000031773 / 31684001000	

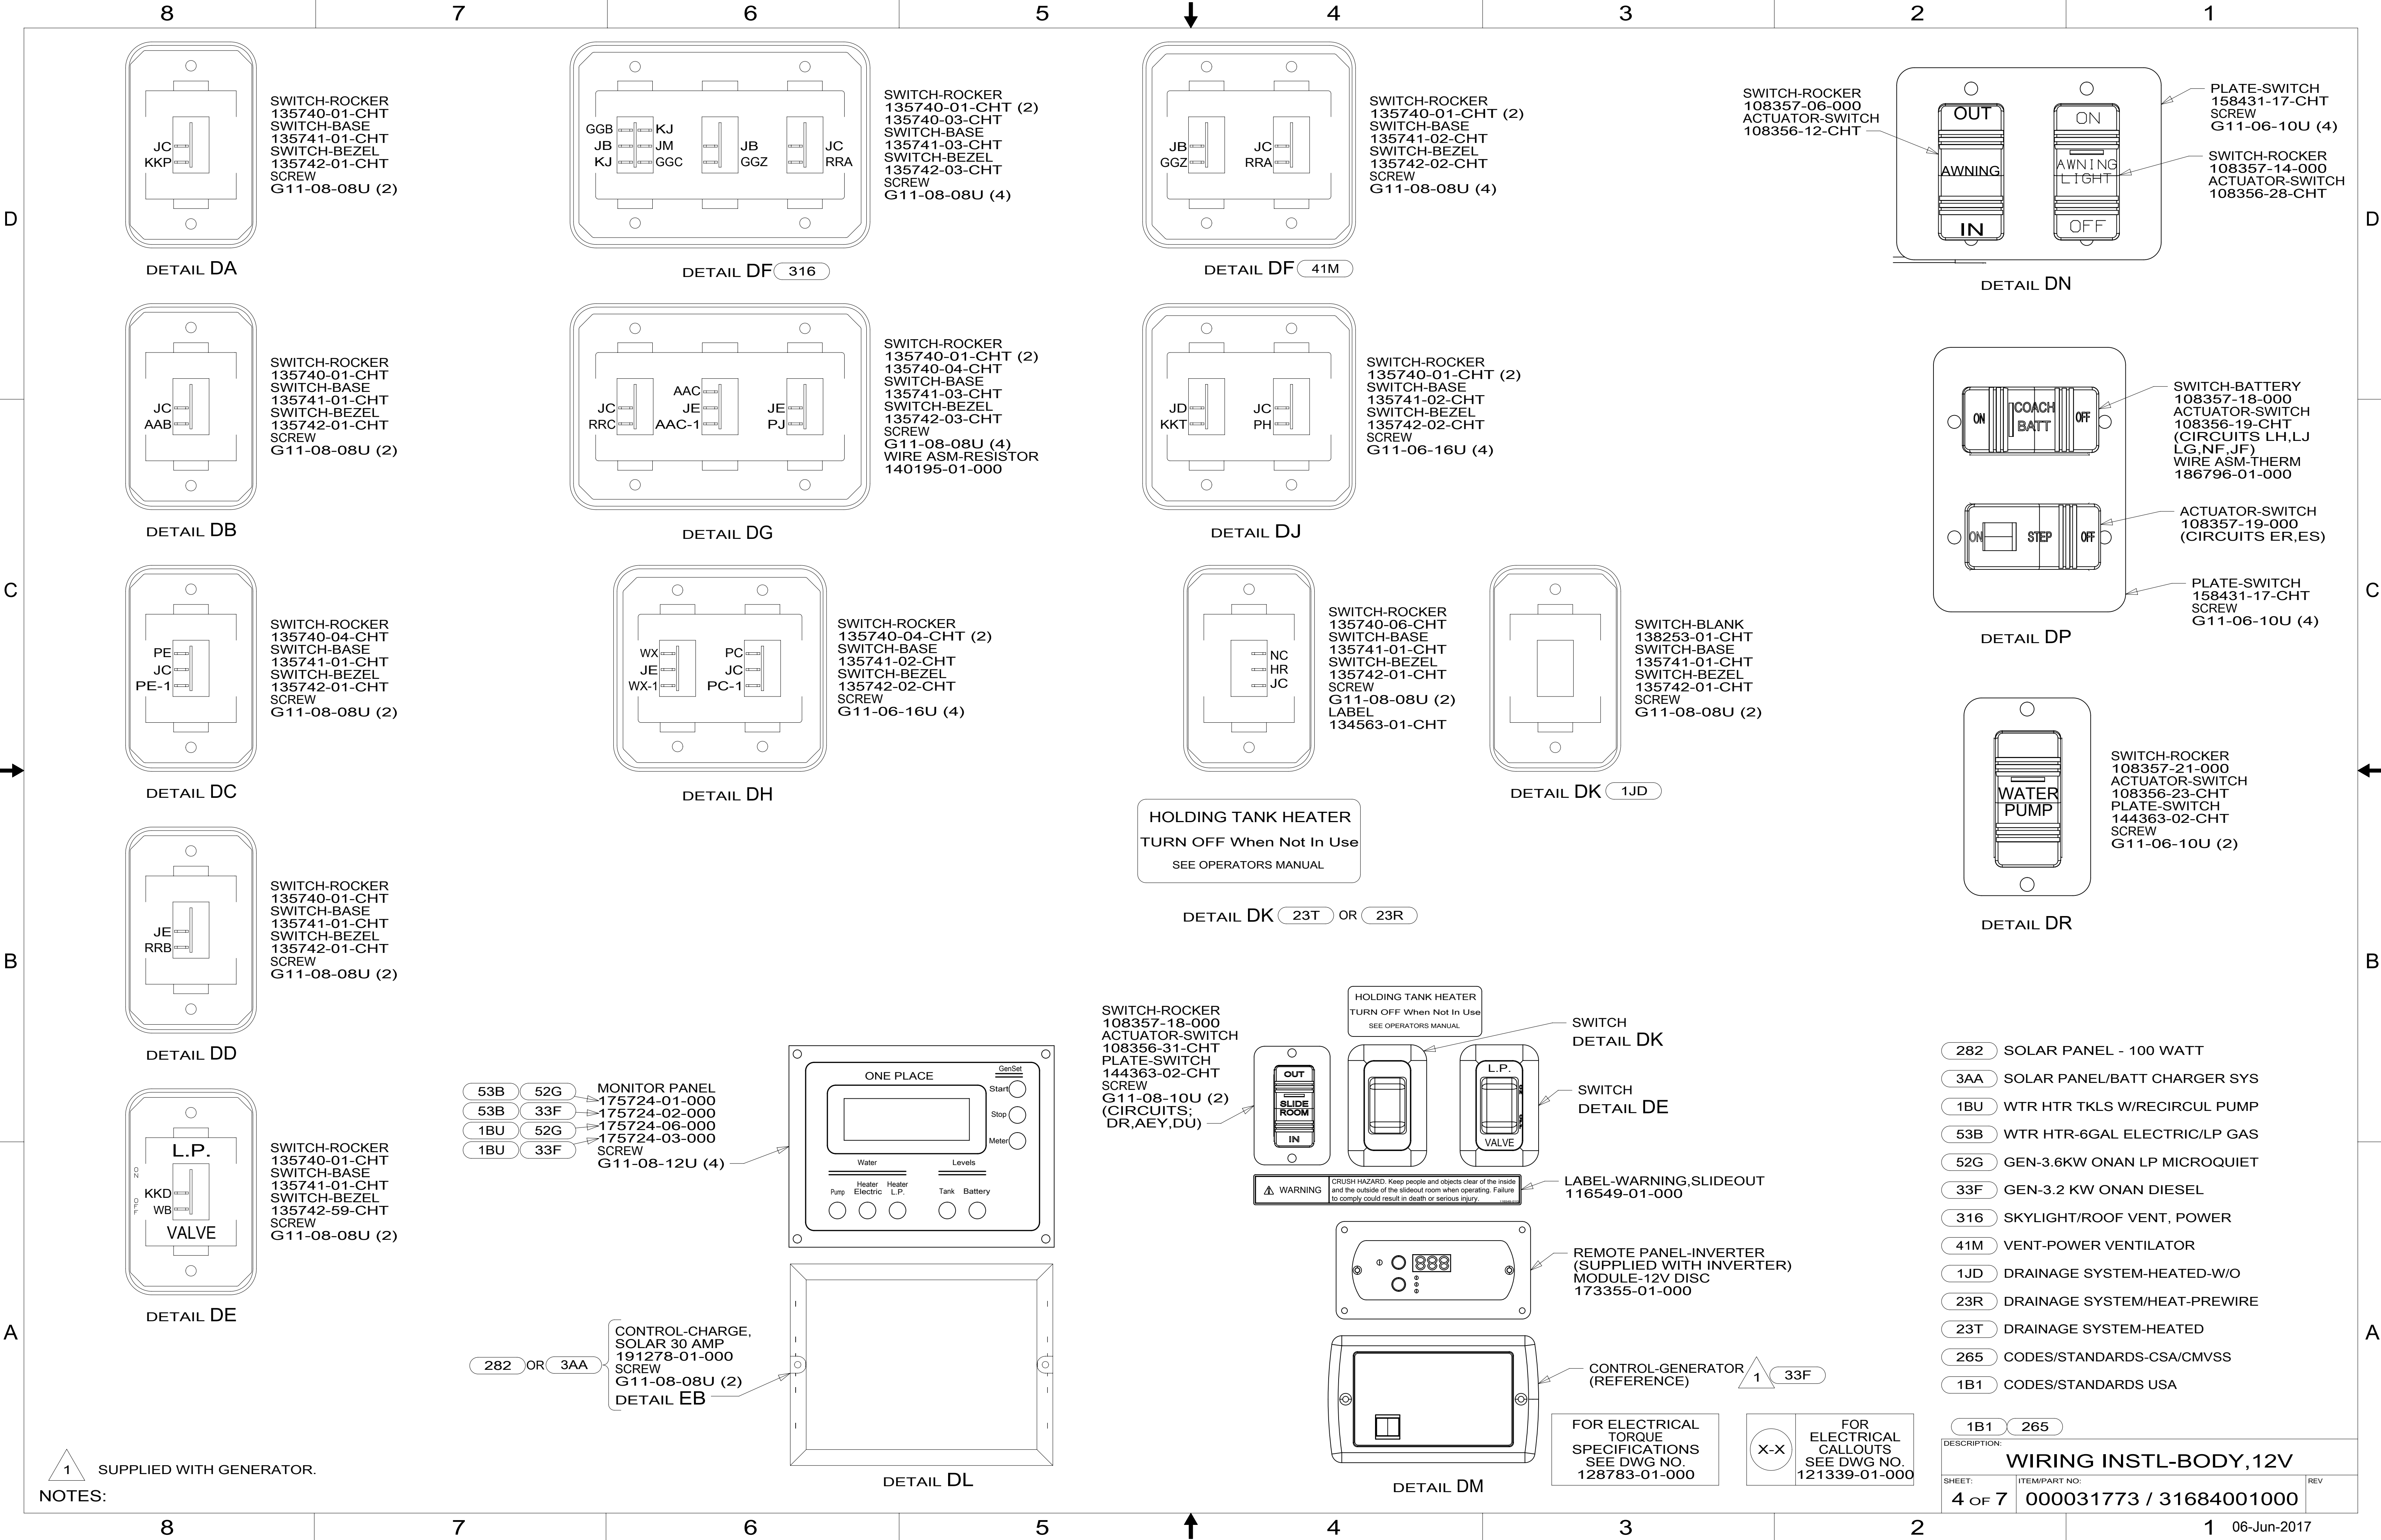

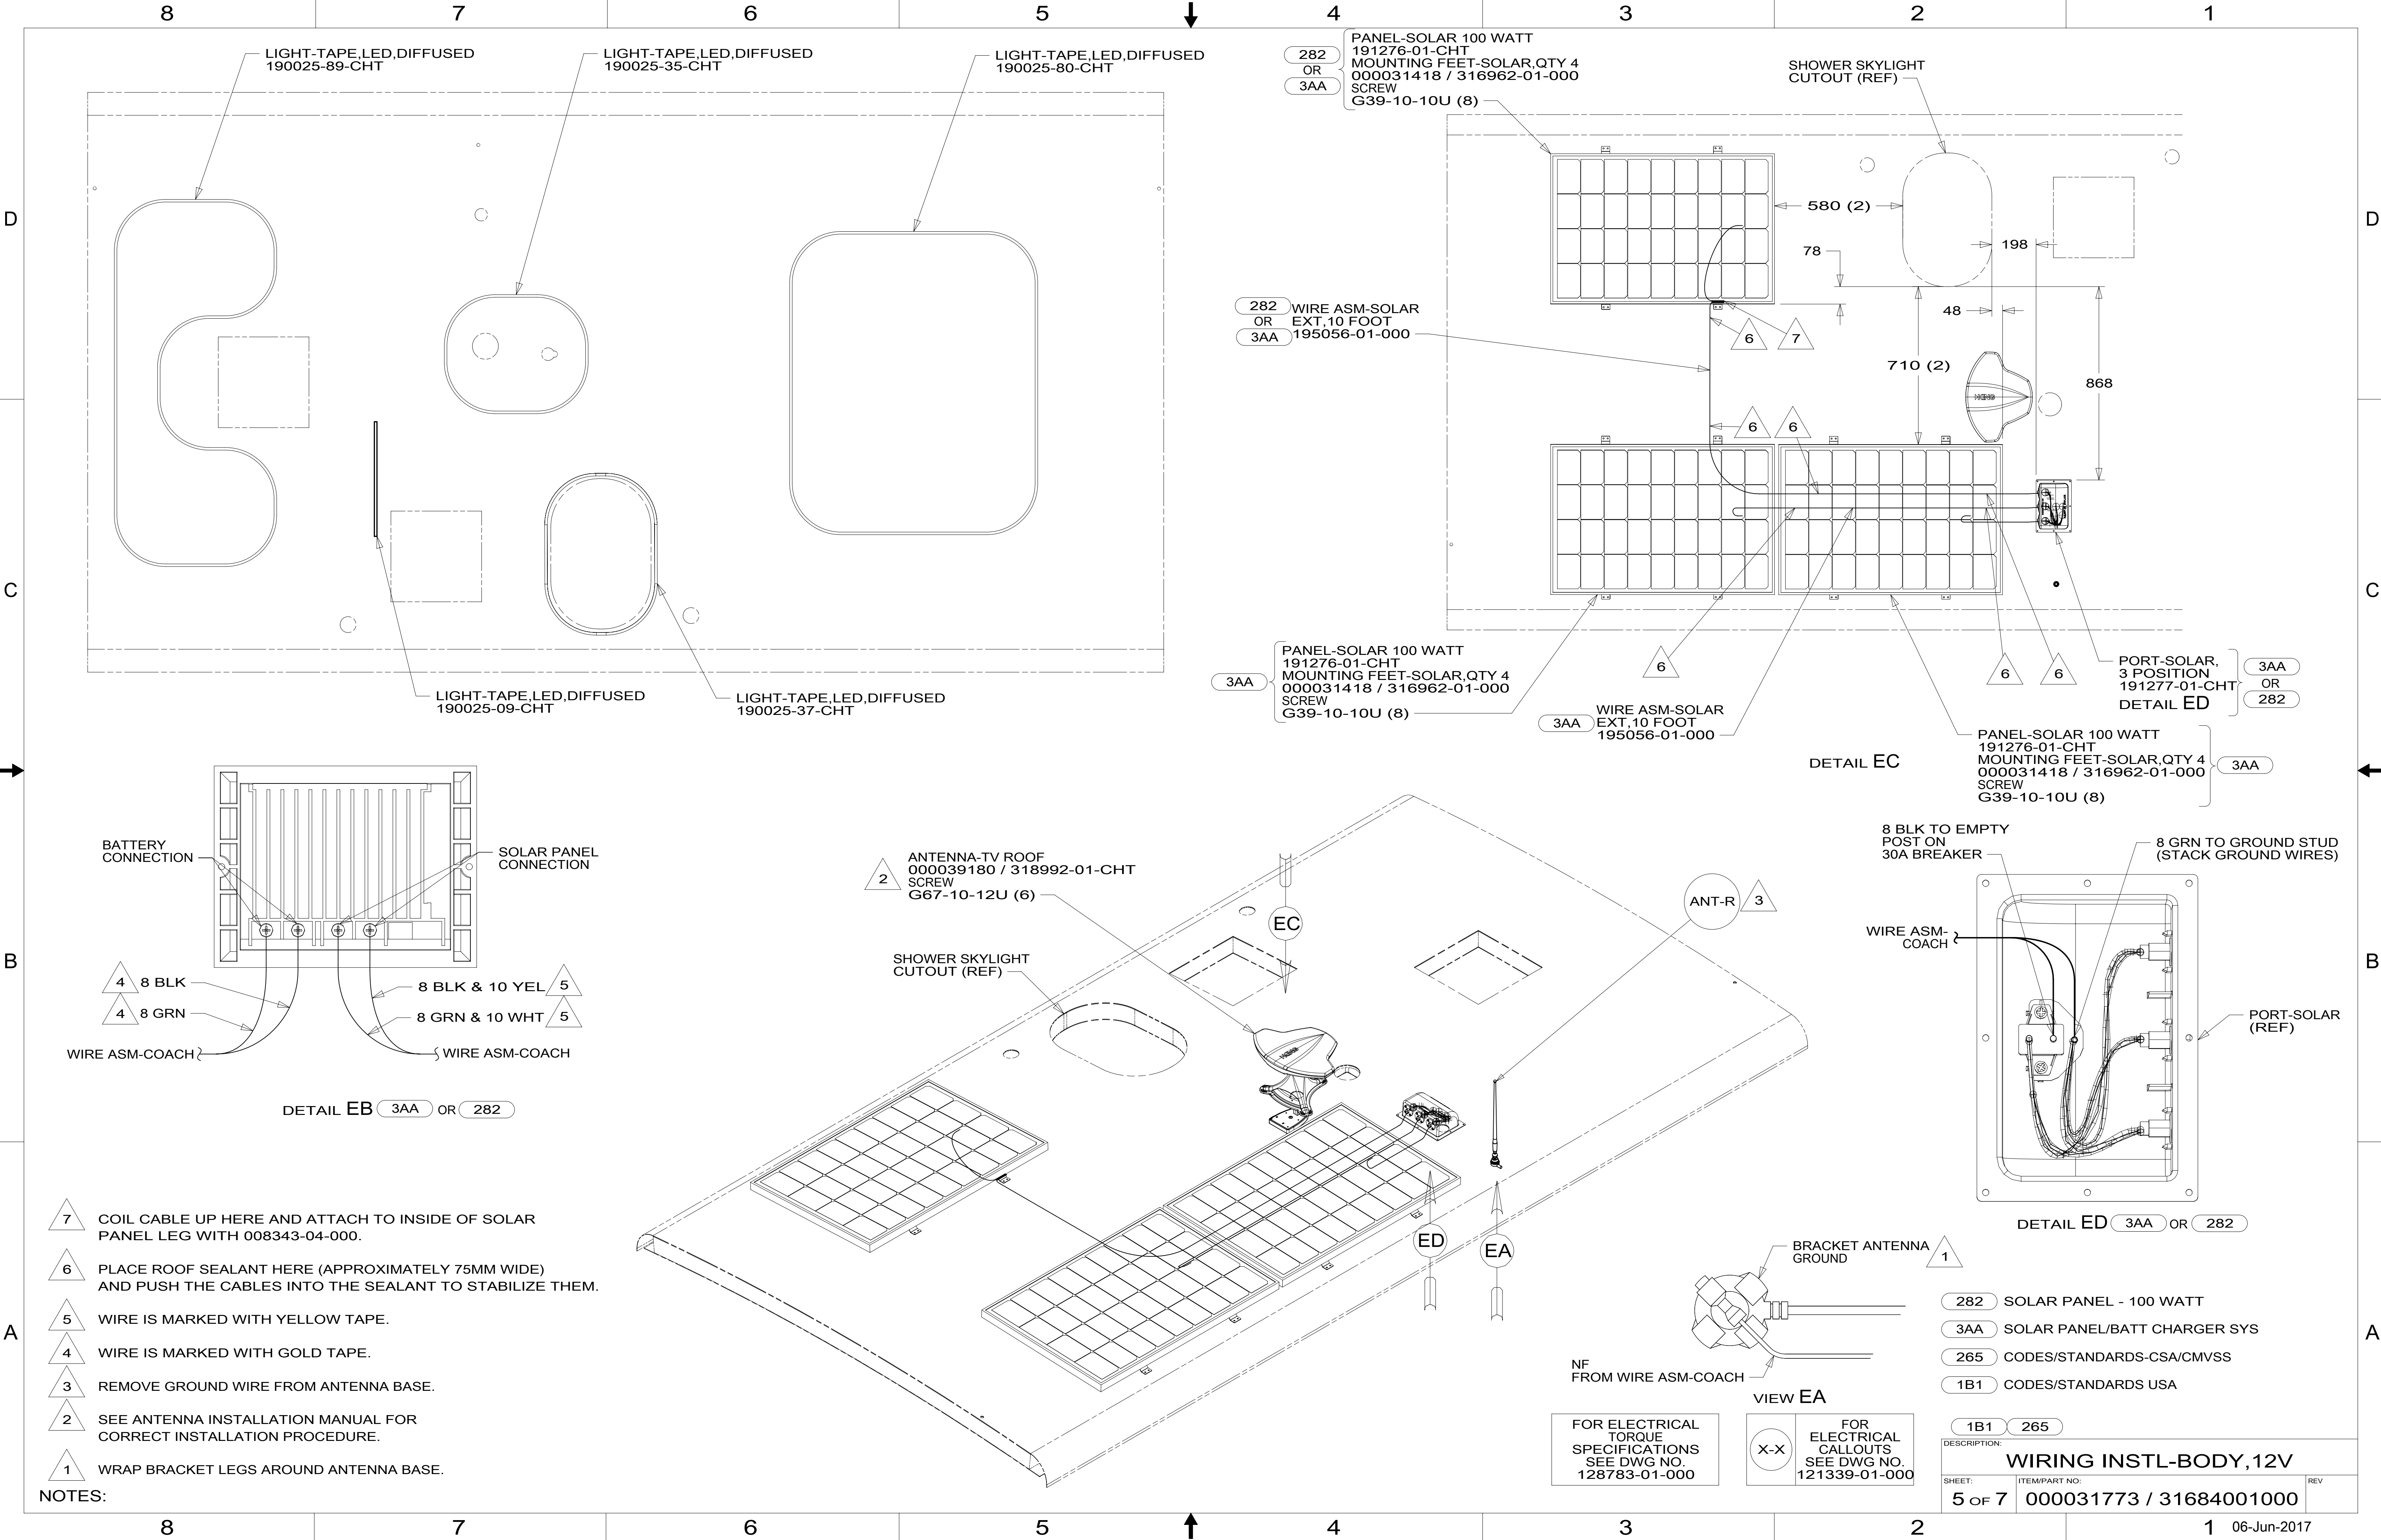

LIGHT-TAPE,LED,DIFFUSED
190025-89-CHT

LIGHT-TAPE,LED,DIFFUSED
190025-35-CHT

LIGHT-TAPE,LED,DIFFUSED
190025-80-CHT

LIGHT-TAPE,LED,DIFFUSED
190025-09-CHT

LIGHT-TAPE,LED,DIFFUSED
190025-37-CHT

PANEL-SOLAR 100 WATT
191276-01-CHT
MOUNTING FEET-SOLAR,QTY 4
000031418 / 316962-01-000
SCREW
G39-10-10U (8)

SHOWER SKYLIGHT
CUTOUT (REF)

282
OR
3AA
WIRE ASM-SOLAR
EXT.10 FOOT
195056-01-000

PANEL-SOLAR 100 WATT
191276-01-CHT
MOUNTING FEET-SOLAR,QTY 4
000031418 / 316962-01-000
SCREW
G39-10-10U (8)

3AA
WIRE ASM-SOLAR
EXT.10 FOOT
195056-01-000

PORT-SOLAR,
3 POSITION
191277-01-CHT
DETAIL ED

PANEL-SOLAR 100 WATT
191276-01-CHT
MOUNTING FEET-SOLAR,QTY 4
000031418 / 316962-01-000
SCREW
G39-10-10U (8)

BATTERY
CONNECTION

SOLAR PANEL
CONNECTION

2
ANTENNA-TV ROOF
000039180 / 318992-01-CHT
SCREW
G67-10-12U (6)

SHOWER SKYLIGHT
CUTOUT (REF)

8 BLK TO EMPTY
POST ON
30A BREAKER

8 GRN TO GROUND STUD
(STACK GROUND WIRES)

WIRE ASM-
COACH

PORT-SOLAR
(REF)

DETAIL EB 3AA OR 282

DETAIL ED 3AA OR 282

BRACKET ANTENNA
GROUND

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

VIEW EA


FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 282 SOLAR PANEL - 100 WATT
- 3AA SOLAR PANEL/BATT CHARGER SYS
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION:
WIRING INSTL-BODY,12V

SHEET: 5 OF 7 ITEM/PART NO: 000031773 / 31684001000 REV

06-Jun-2017

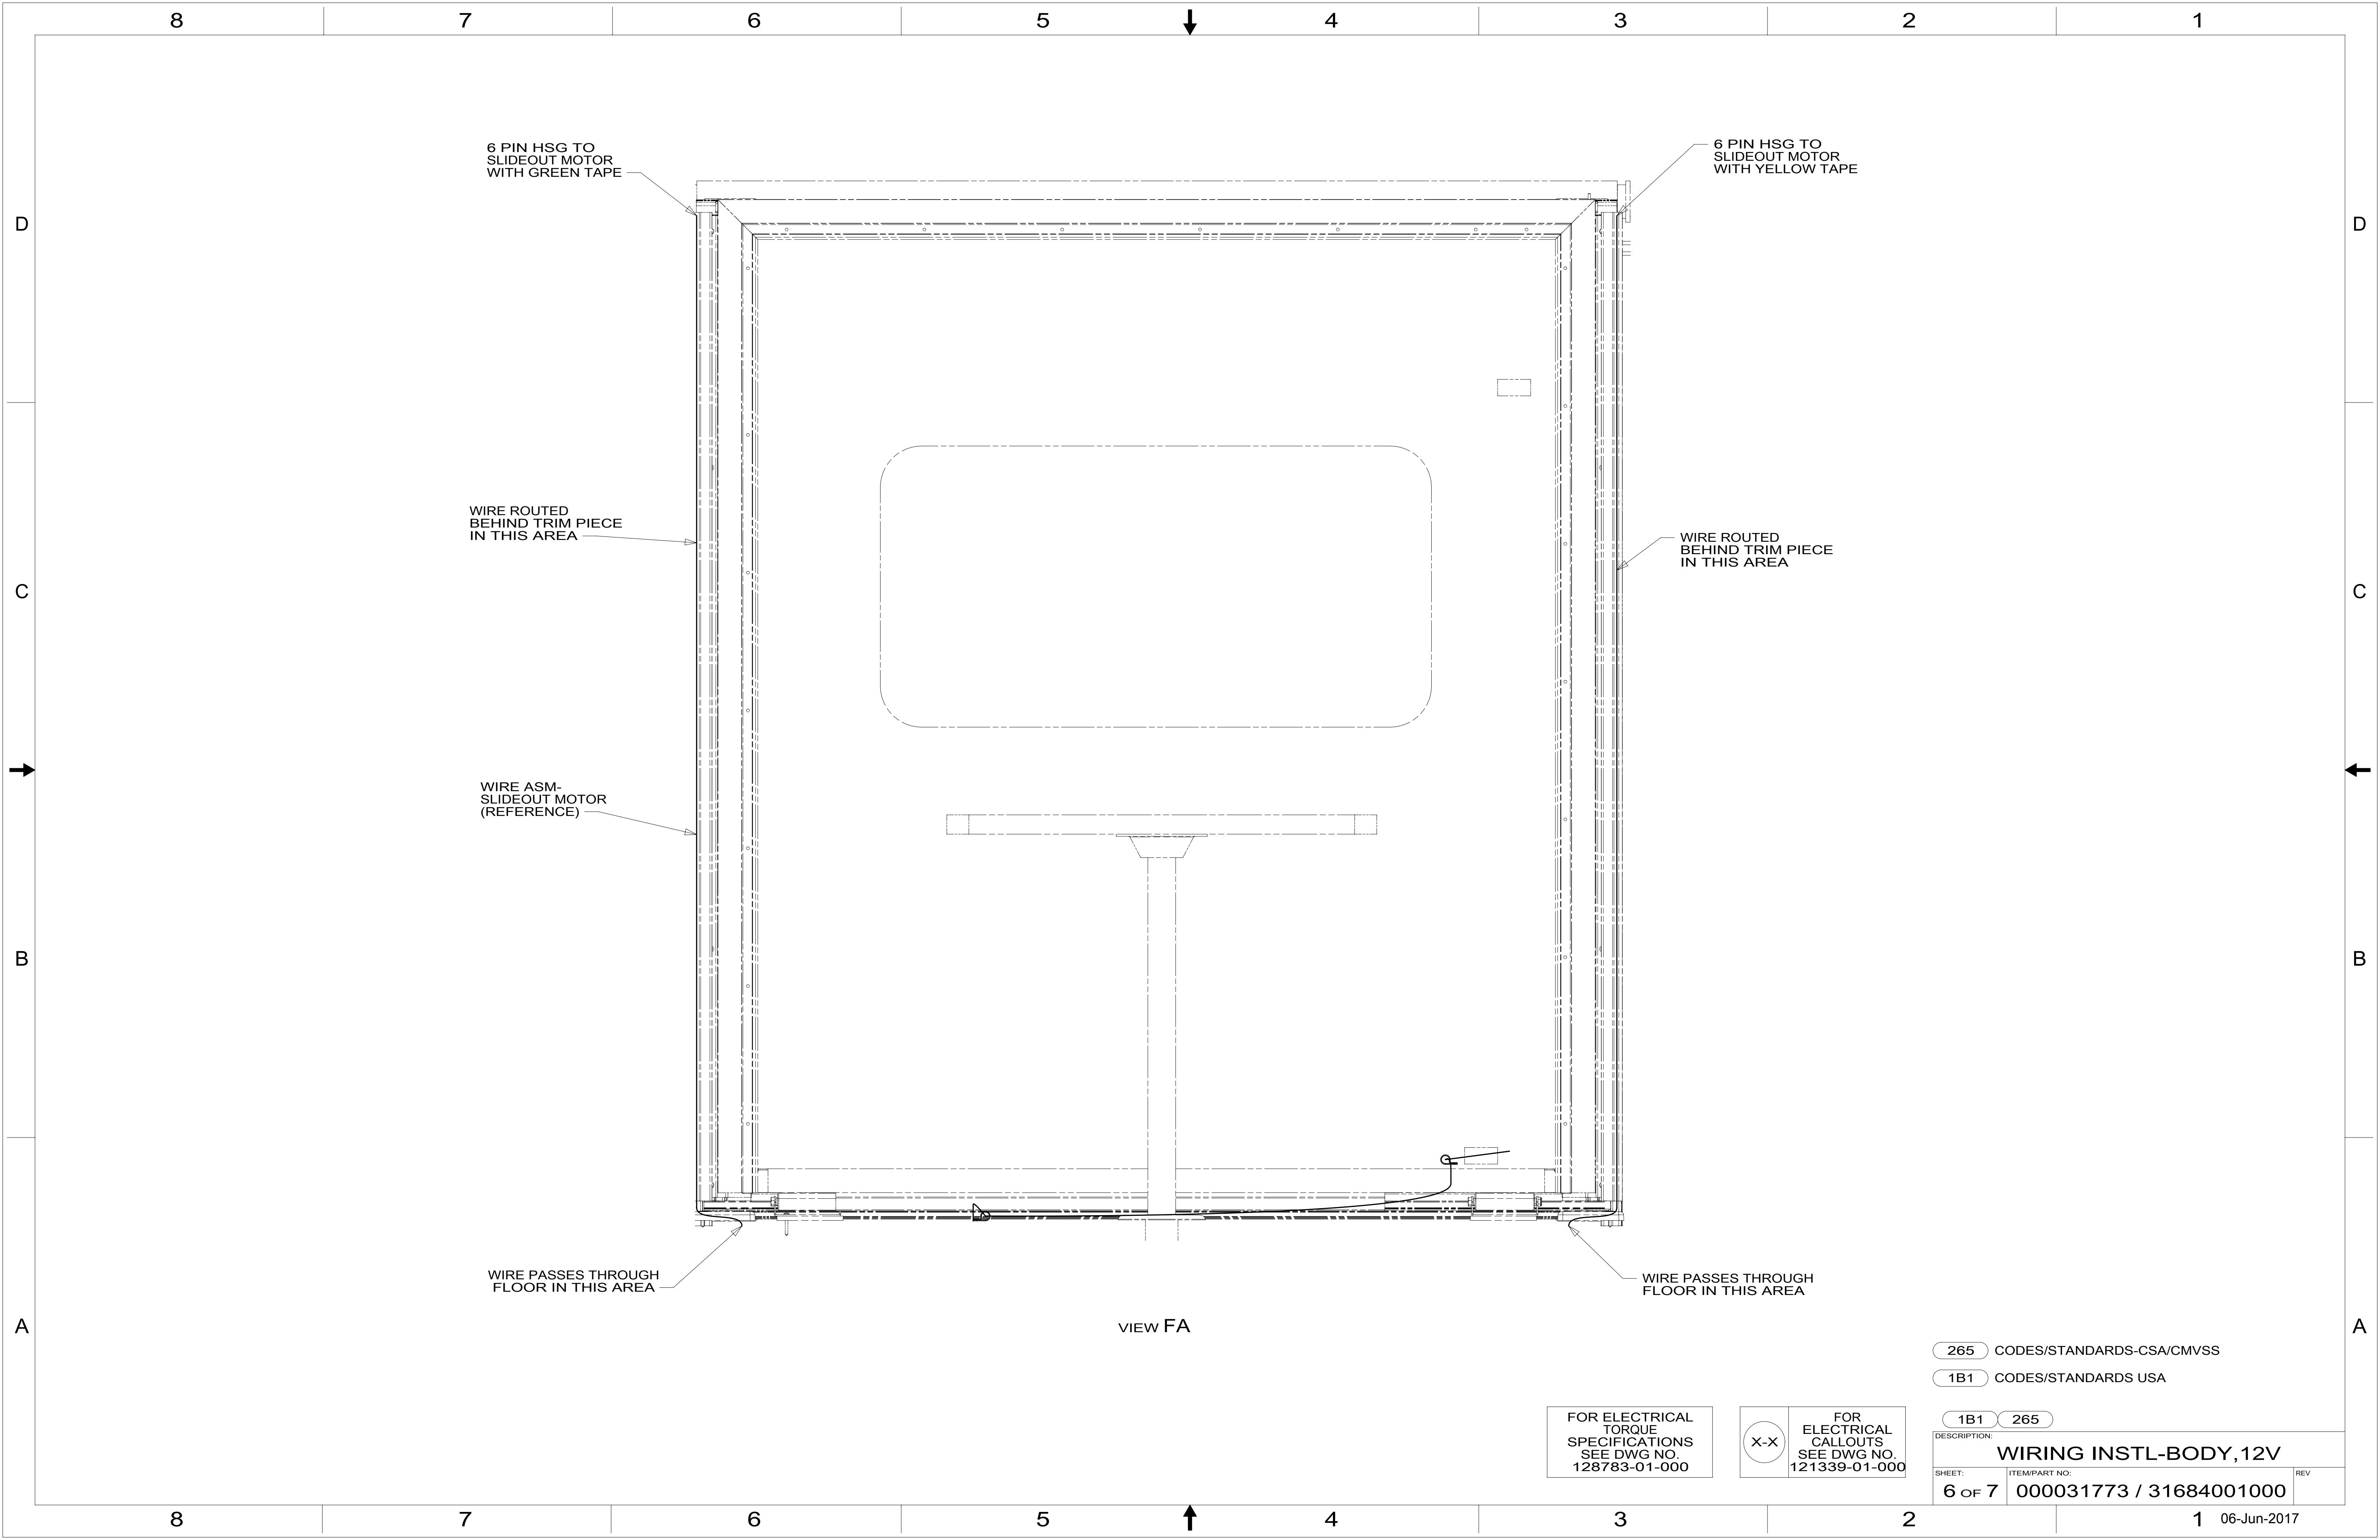

6 PIN HSG TO
SLIDEOUT MOTOR
WITH GREEN TAPE

6 PIN HSG TO
SLIDEOUT MOTOR
WITH YELLOW TAPE

WIRE ROUTED
BEHIND TRIM PIECE
IN THIS AREA

WIRE ROUTED
BEHIND TRIM PIECE
IN THIS AREA

WIRE ASM-
SLIDEOUT MOTOR
(REFERENCE)

WIRE PASSES THROUGH
FLOOR IN THIS AREA

WIRE PASSES THROUGH
FLOOR IN THIS AREA

VIEW FA

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

DESCRIPTION:
WIRING INSTL-BODY, 12V

SHEET: 6 OF 7	ITEM/PART NO: 000031773 / 31684001000	REV
-------------------------	---	-----

1 06-Jun-2017

