
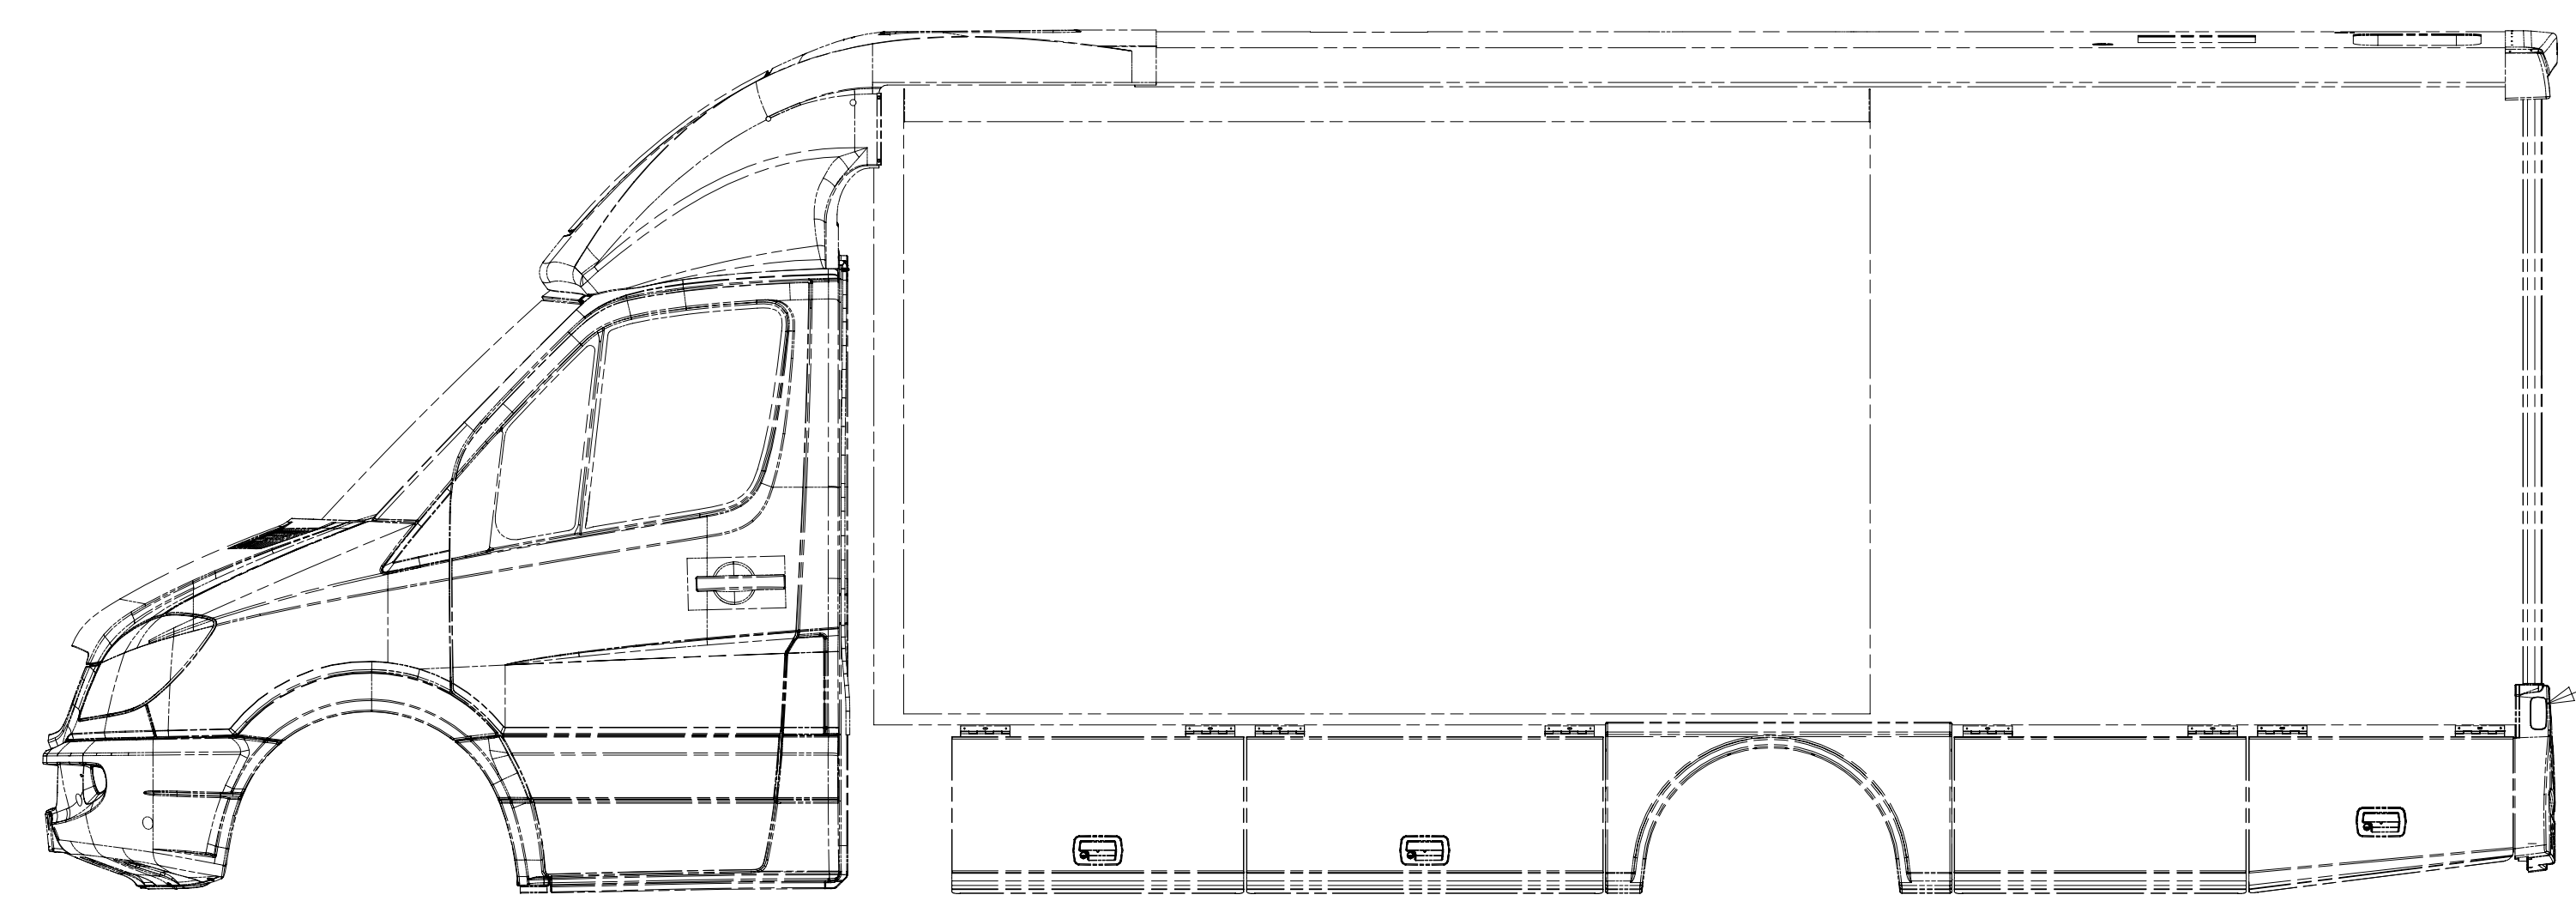


8 7 6 5 4 3 2 1

D  
C  
B  
A

LAMP-ASM-PORCH  
 184120-01-CHT  
 SCREW  
 G68-06-10E (2)  
 CONNECTOR  
 58028-01-000 (2)

LAMP-MARKER,  
 W RED LENS,BLK  
 193802-04-000  
 SCREW  
 G11-08-12U (EXT)(2)

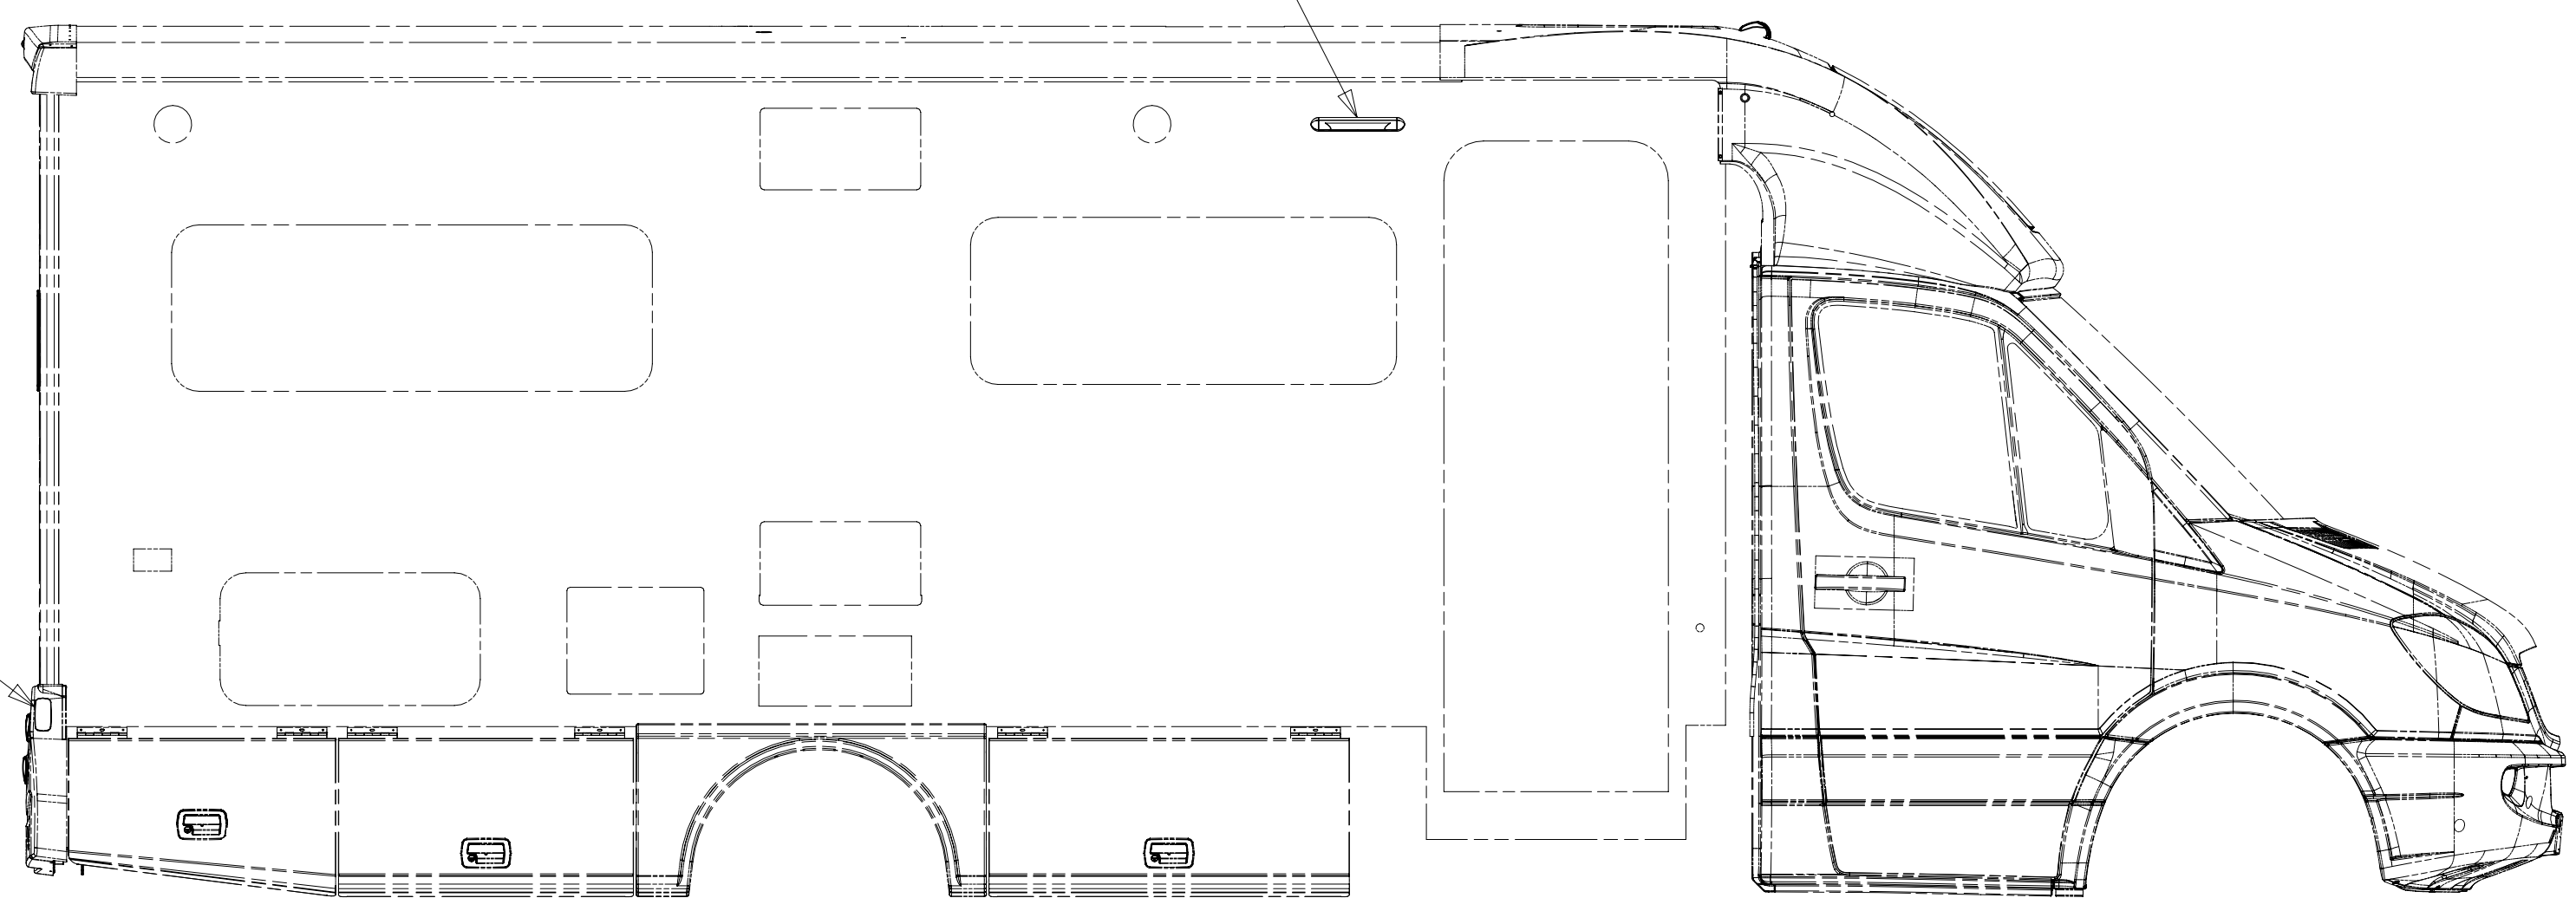

LAMP-MARKER,  
 W RED LENS,BLK  
 193802-04-000  
 SCREW  
 G11-08-12U (EXT)(2)

265 CODES/STANDARDS-CSA/CMVSS  
 1B1 CODES/STANDARDS USA  
 1B1 265



DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS	
DIFFR:	MATERIAL:	
UNSPECIFIED TOLERANCES:		
WHOLE DIM (X) :		
ONE-PLACE (X.X) :		
TWO-PLACE (X.XX) :		
ANGLE :		

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES

WEIGHT: (LBS) FIRST USED: 16 500-SE

DESCRIPTION: WIRING INSTL-EXTERIOR LAMPS

SHEET: 1 OF 3 ITEM/PART NO.: 000175374 / 30148801000 REV:

8 7 6 5 4 3 2 1

D  
C  
B  
A

8

7

6

5



4

3

2

1


D

WIRE ASM-CLEARANCE LAMPS  
181140-01-000

2 PIN HOUSING  
TO WIRE ASM-ROOF

LAMP-CLEARANCE.AMBER  
170776-01-000 (3)  
SCREW  
G39-06-16U (6)

LAMP ASM-CLEARANCE  
179596-01-CHT (2)

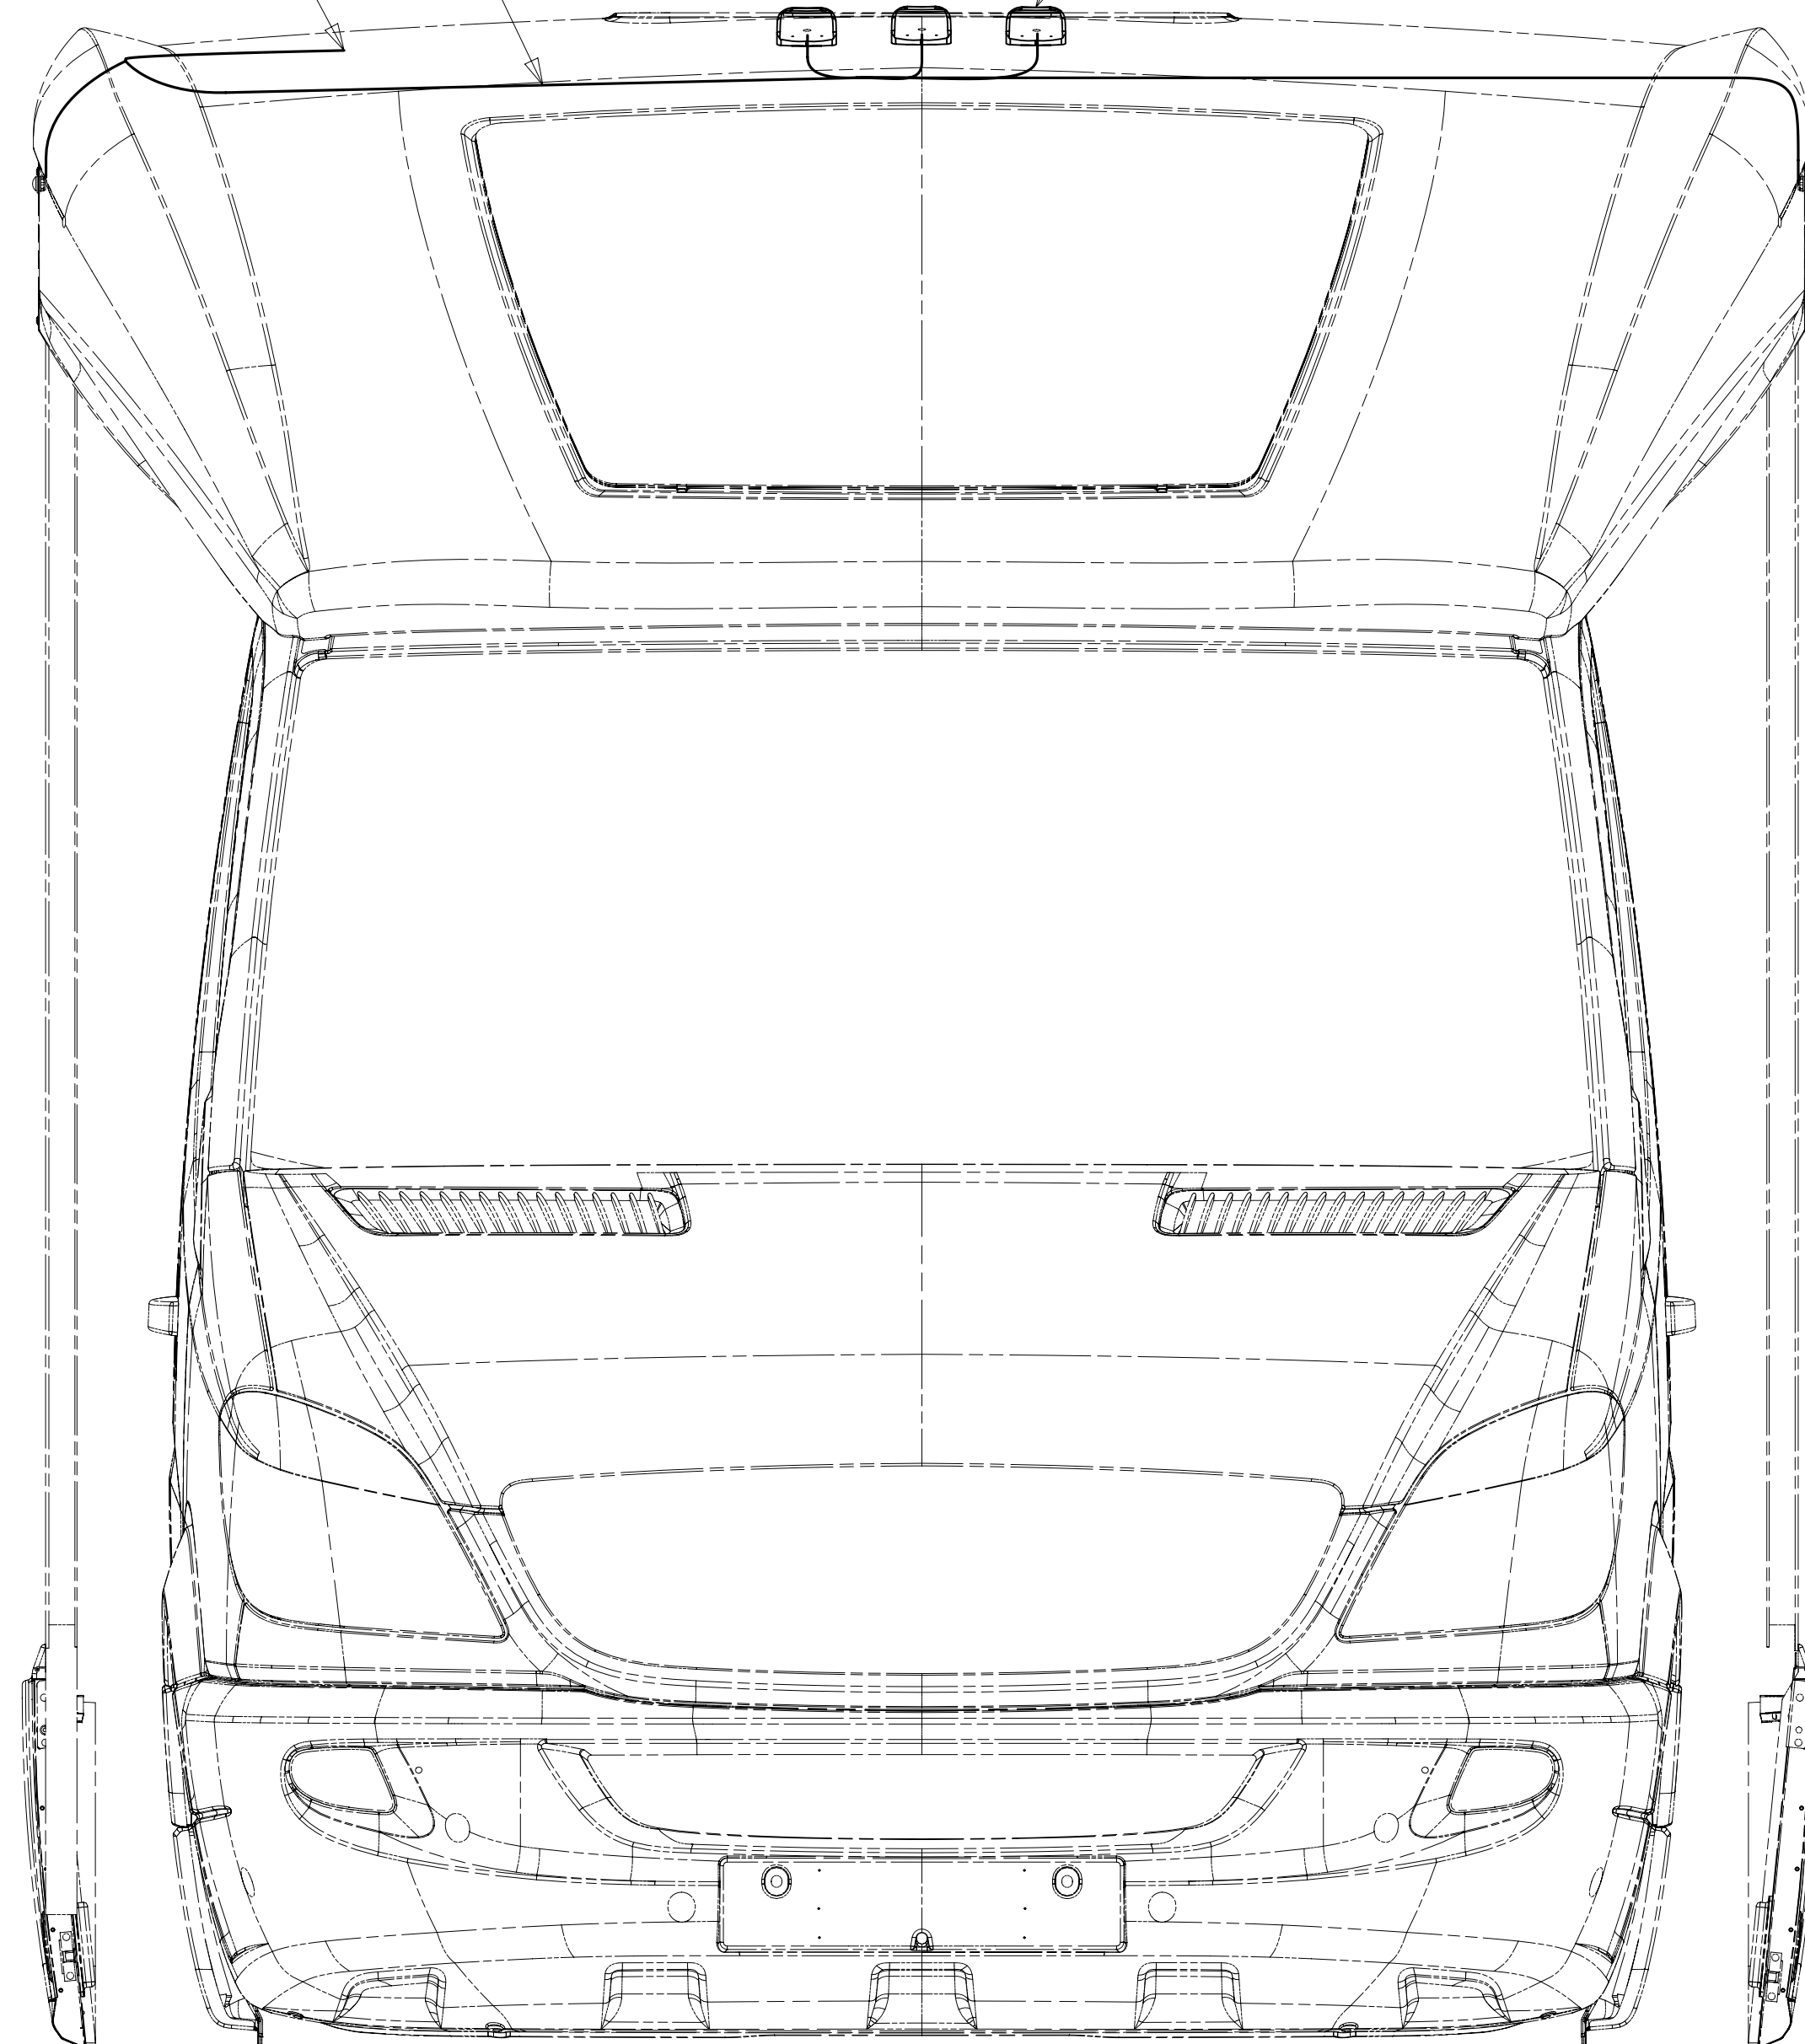

D

C

B

A

C

B

A

8

7

6

5



4

3

2


1

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FOR ELECTRICAL  
TORQUE  
SPECIFICATIONS  
SEE DWG NO.  
128783-01-000




FOR  
ELECTRICAL  
CALLOUTS  
SEE DWG NO.  
121339-01-000

DESCRIPTION:  
**WIRING INSTL-EXTERIOR LAMPS**

SHEET: 2 OF 3 ITEM/PART NO: 000175374 / 30148801000 REV

1 25-Jan-2018

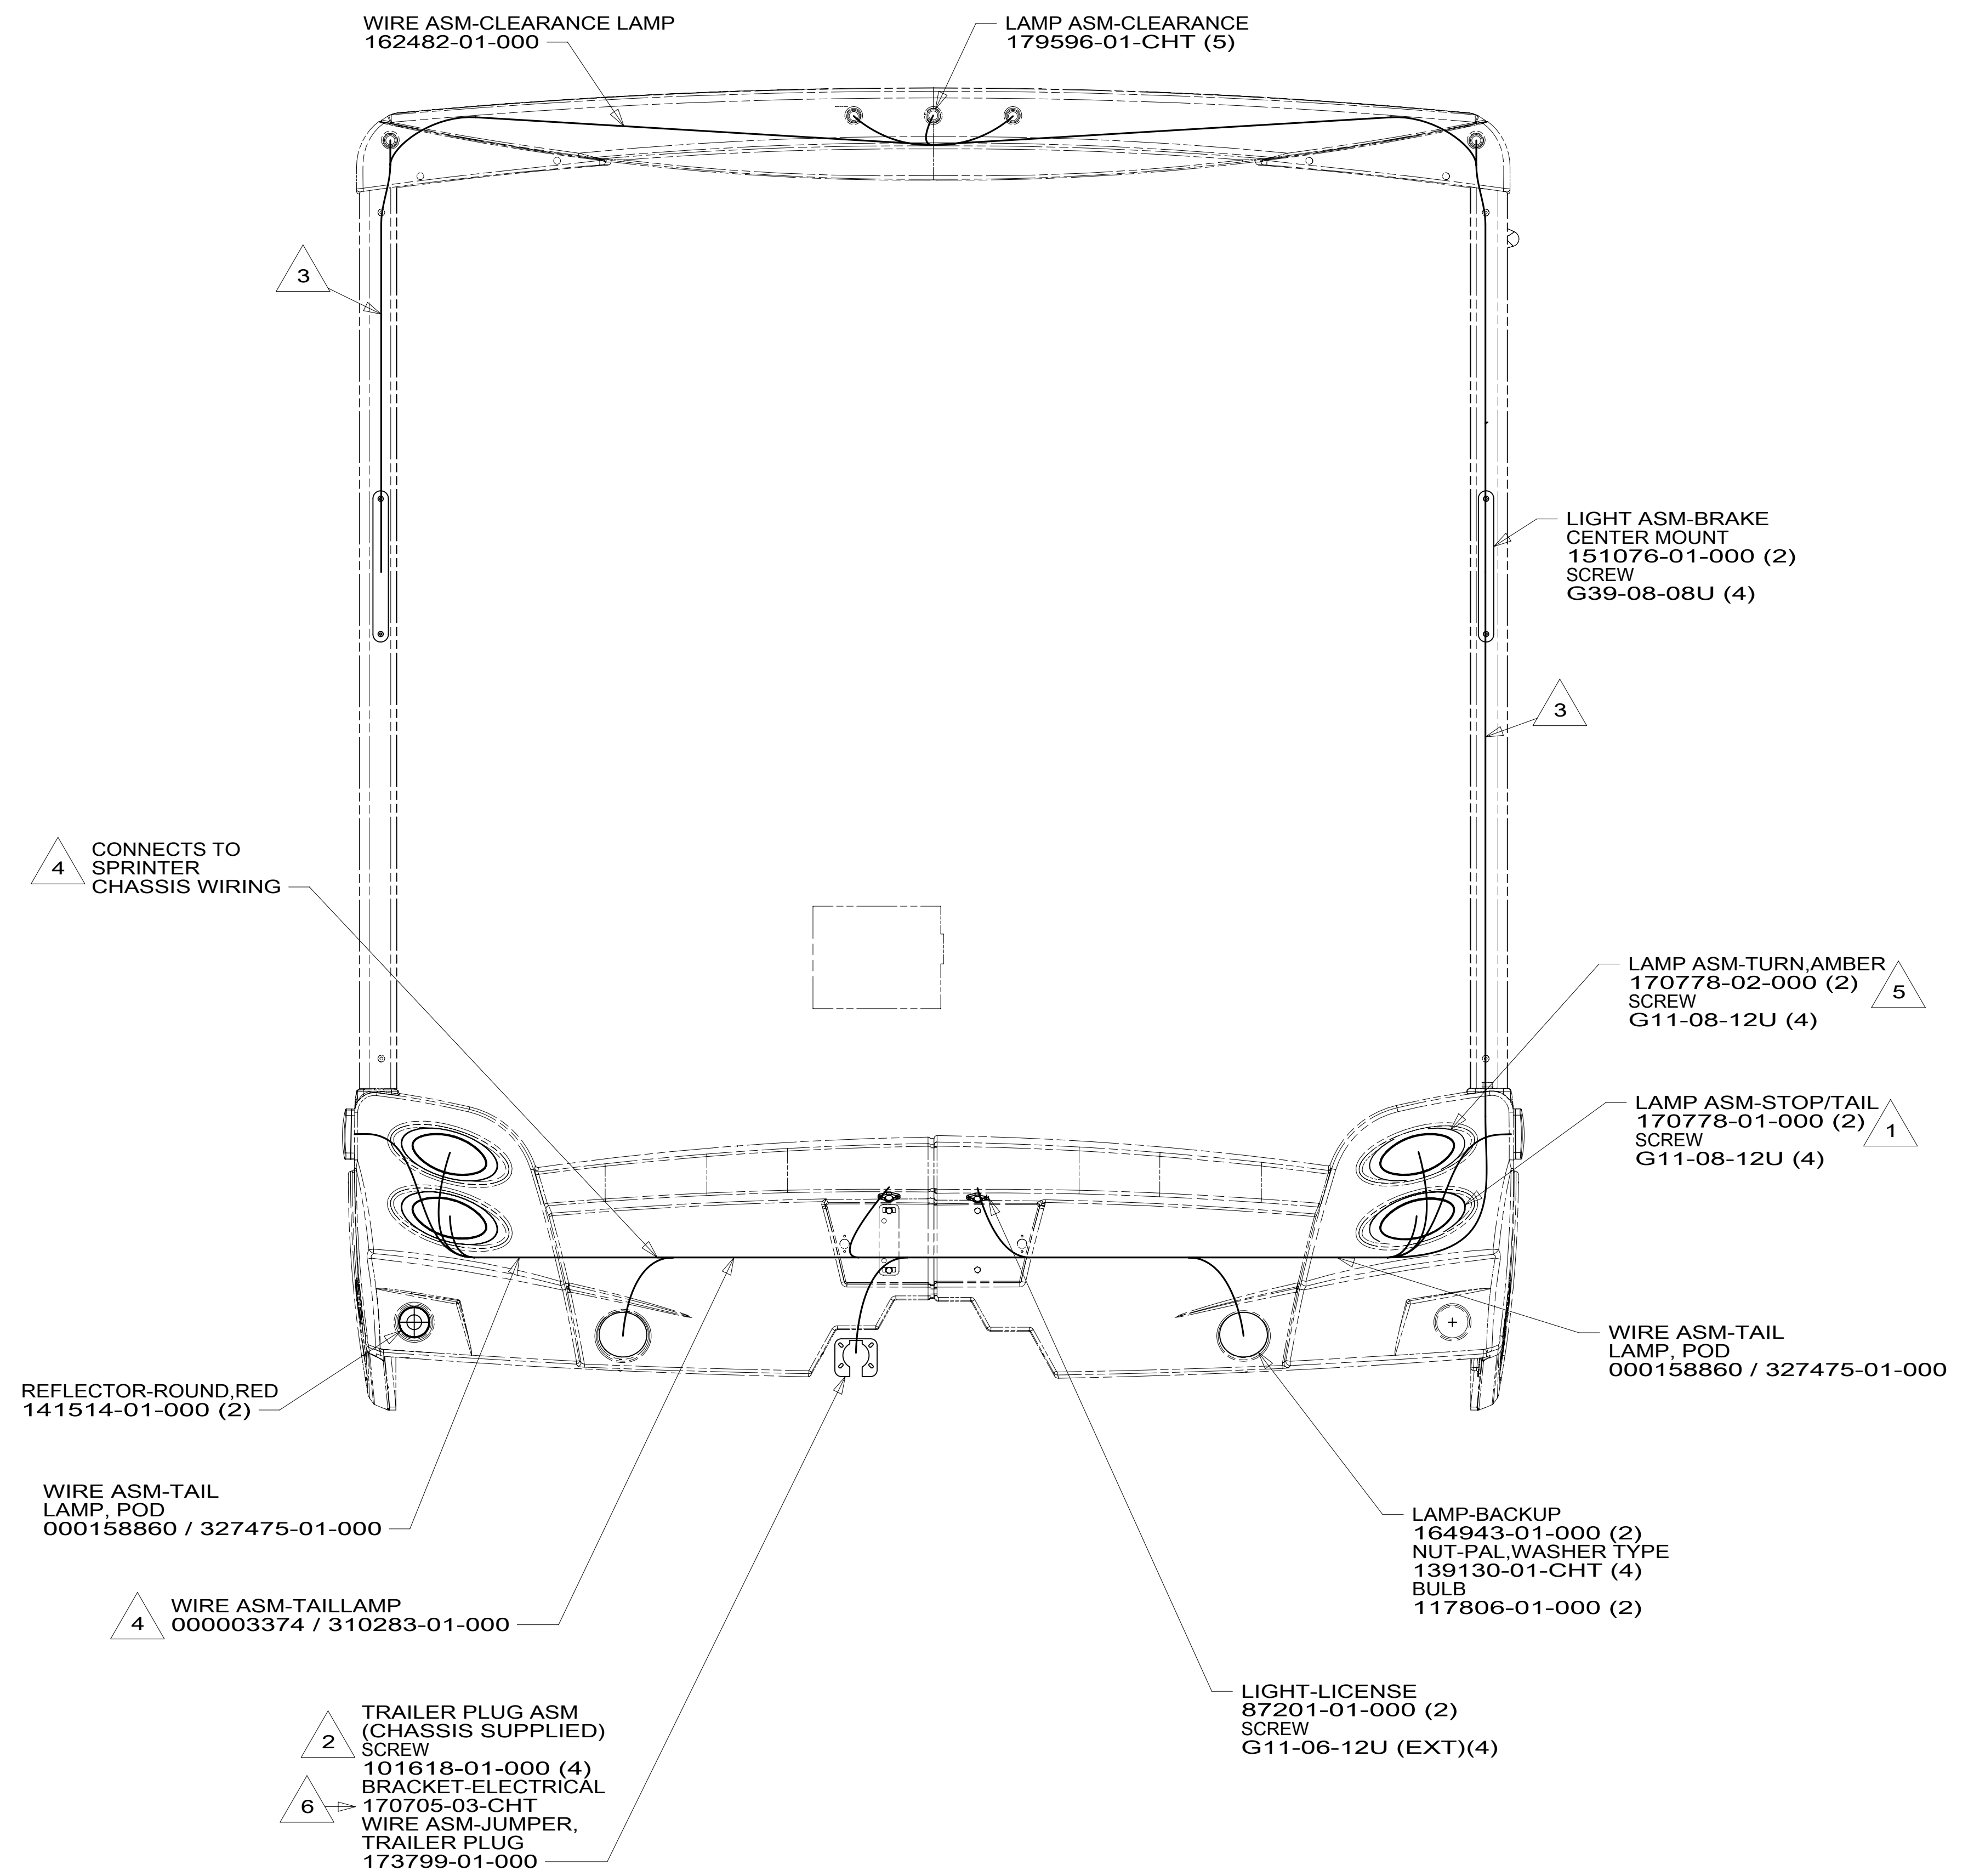

- 6 NOT USED FOR 524J & 524G.
- 5 CONNECT CIRCUIT 'TURN' TO RED WIRE. CONNECT CIRCUIT 'MS' TO WHT WIRE. TAPE BACK UNUSED BLK WIRE TO HARNESS.
- 4 REMOVE EXTENSION LOOMS THAT ARE SUPPLIED WITH CHASSIS. THE CHASSIS IS SUPPLIED WITH TWO 7-PIN CONNECTORS ALONG THE LEFT SIDE FRAME RAIL. THE CHASSIS WIRING WITH THE TWO 7-PIN CONNECTORS HAS A LONGER DROP AND A SHORTER DROP. ATTACH THE LONGER DROP TO THE WIRE ASM-TAILLAMP CONNECTOR WITH ONLY 4 PINS IN IT. ATTACH THE SHORTER DROP TO THE WIRE ASM-TAILLAMP CONNECTOR WITH 6 PINS.
- 3 RUN WIRE THROUGH THE INSIDE OF ALUMINUM EXTRUSION.
- 2 SECURE WIRE BELOW COACH WITH CLAMP 10495-01-000 AND SCREW G67-10-12B.
- 1 CONNECT CIRCUIT 'X' TO RED WIRE. CONNECT CIRCUIT 'MS' TO WHT WIRE. CONNECT CIRCUIT 'MM' TO BLK WIRE.

NOTES:

FOR ELECTRICAL  
TORQUE  
SPECIFICATIONS  
SEE DWG NO.  
128783-01-000

FOR  
ELECTRICAL  
CALLOUTS  
SEE DWG NO.  
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS  
1B1 CODES/STANDARDS USA

DESCRIPTION:	1B1 265	
<b>WIRING INSTL-EXTERIOR LAMPS</b>		
SHEET:	ITEM/PART NO.:	REV
3 OF 3	000175374 / 30148801000	