

3 45B WIRE ASM-BED LIFT
195046-01-000

45D 3 PIN HOUSING
TO SIDEWALL

45B 3 PIN HSG
TO WIRE ASM-
BED LIFT

3 WIRING TO
LOFT BED

45D READ-4

EA

WIRE ASM-IP.MAIN
000024288 / 314955-01-000

RING TERMINAL (4)
TO GROUND BOLT

TO RELAYS

CLIP-WIRE, NYLON
080734-02-000
TIE-WIRE
008343-01-000

6 PIN HOUSING
TO LEFT MIRROR

12 AND 4 PIN
HOUSINGS TO SIDEWALL

GROMMET
023942-02-000

TO GROUND STUD

45B 9 PIN HOUSING
TO ROOF

12 PIN HOUSING
TO ROOF

2 PIN HSG
TO SIDEWALL 45D

2 PIN HSG
TO WIRE ASM-
IP.MAIN 45B

TO SUNVISOR SHADE
3 BUTT SPLICES
HHM-BLK
HHN-RED
KE-BRN

4

SPEAKER
94097-01-000 (2)
SCREW
G11-08-20U (6)

TAPE (2)
(400MM) 2

6 PIN HOUSING
TO RIGHT MIRROR

PANEL-SWITCH
MOUNTING SINGLE
174834-01-CHT
SWITCH-MAP LIGHT
174757-20-CHT 45B
OR
SWITCH-BLANK
145754-01-CHT 45D

USB-CHARGER DUAL,DC
188312-01-000

4 PIN HSG TO PASS
MAP LAMP SWITCH

RECEPTACLE-12V
111414-01-000

- 45D LOFT BED - WITHOUT
- 45B LOFT BED
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265



DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS	
DFFR:		
UNSPECIFIED TOLERANCES:	MATERIAL:	
WHOLE DIM (X) ± 3		
ONE-PLACE (X.X) ± 1.5		
TWO-PLACE (X.XX) ± 0.50		
ANGLE ± 1°		
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS)	FIRST USED: 17 E-SER

DESCRIPTION: WIRING INSTL-FRONT END		
SHEET: 1 OF 9	ITEM/PART NO.: 000178093 / 30244001000	REV:
REF:		1 05-May-2017

4 CUT VISOR WIRING TO 300 MM BEFORE CONNECTING.

3 SEE SHEET 9 FOR ADDITIONAL INFORMATION ON LOFT BED.

2 USE TAPE 8363-03-000 TO SECURE WIRES IN A-POST.

1. WINNEBAGO WIRE ASSEMBLIES ARE SHOWN FOR CLARITY.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

12 PIN HSG
TO WIRE
ASM-CHASSIS


BREAKER PANEL
DETAIL BA

SWITCHES
DETAIL CA


3,4, & 6 PIN HOUSINGS
TO LEVELING SYSTEM CONTROLS

FEMALE TERMINALS
TO JACKS DOWN LAMP


DETAIL CA

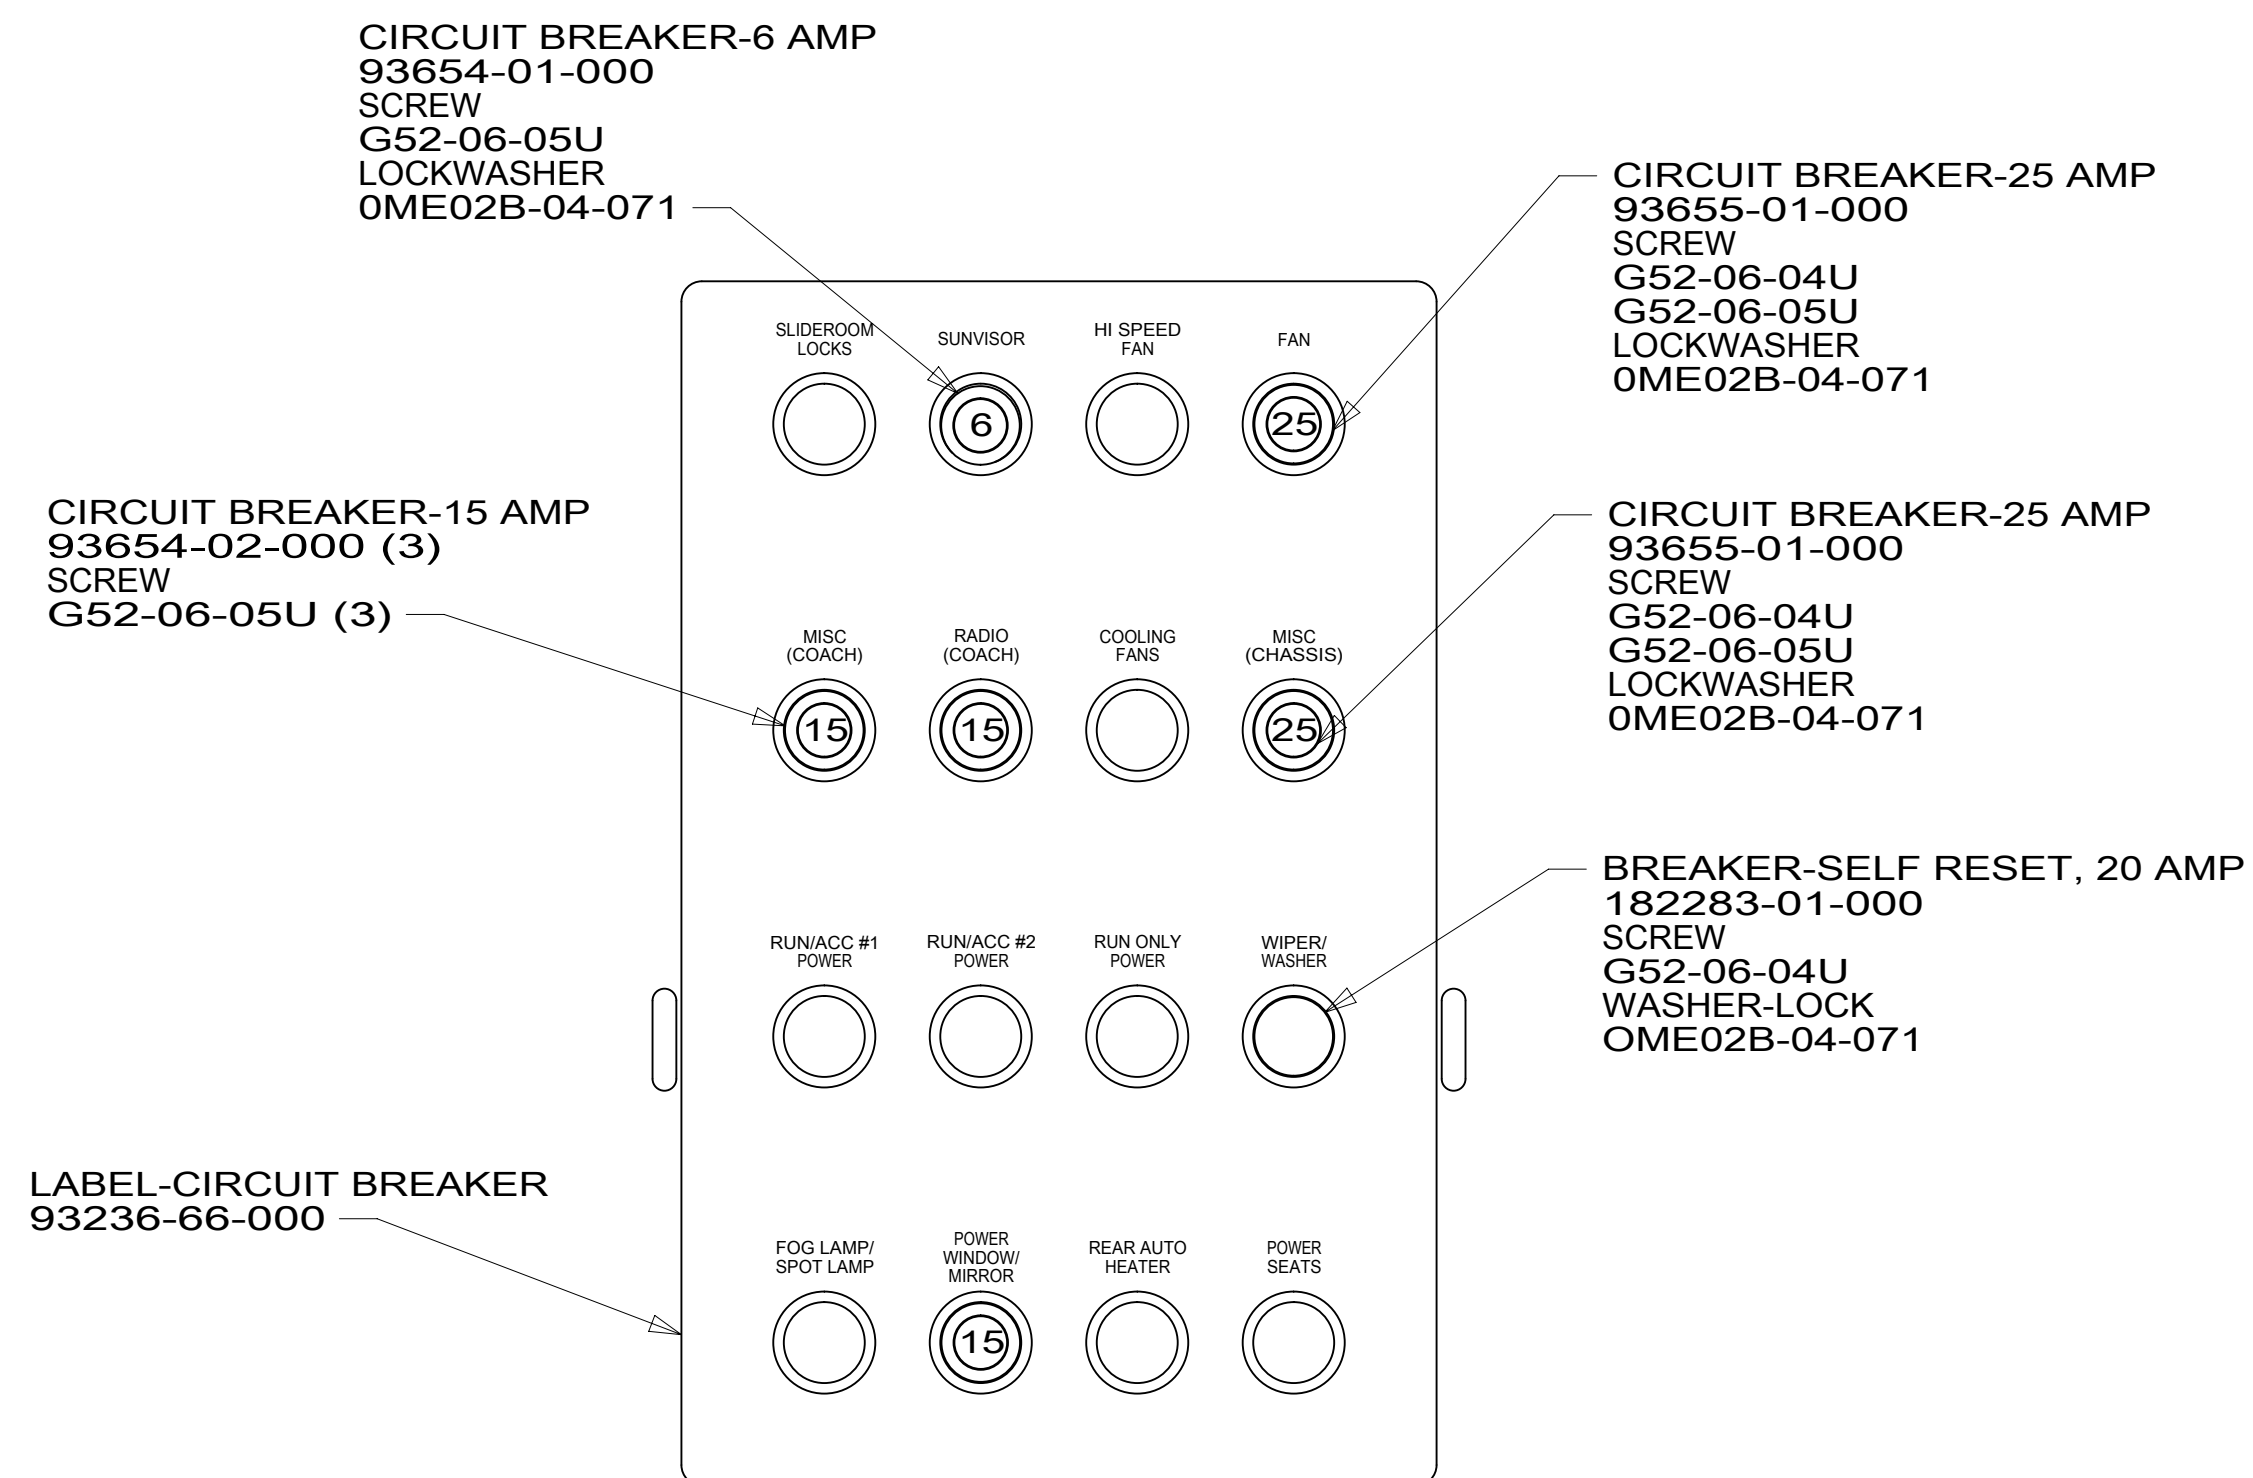

VIEW BB

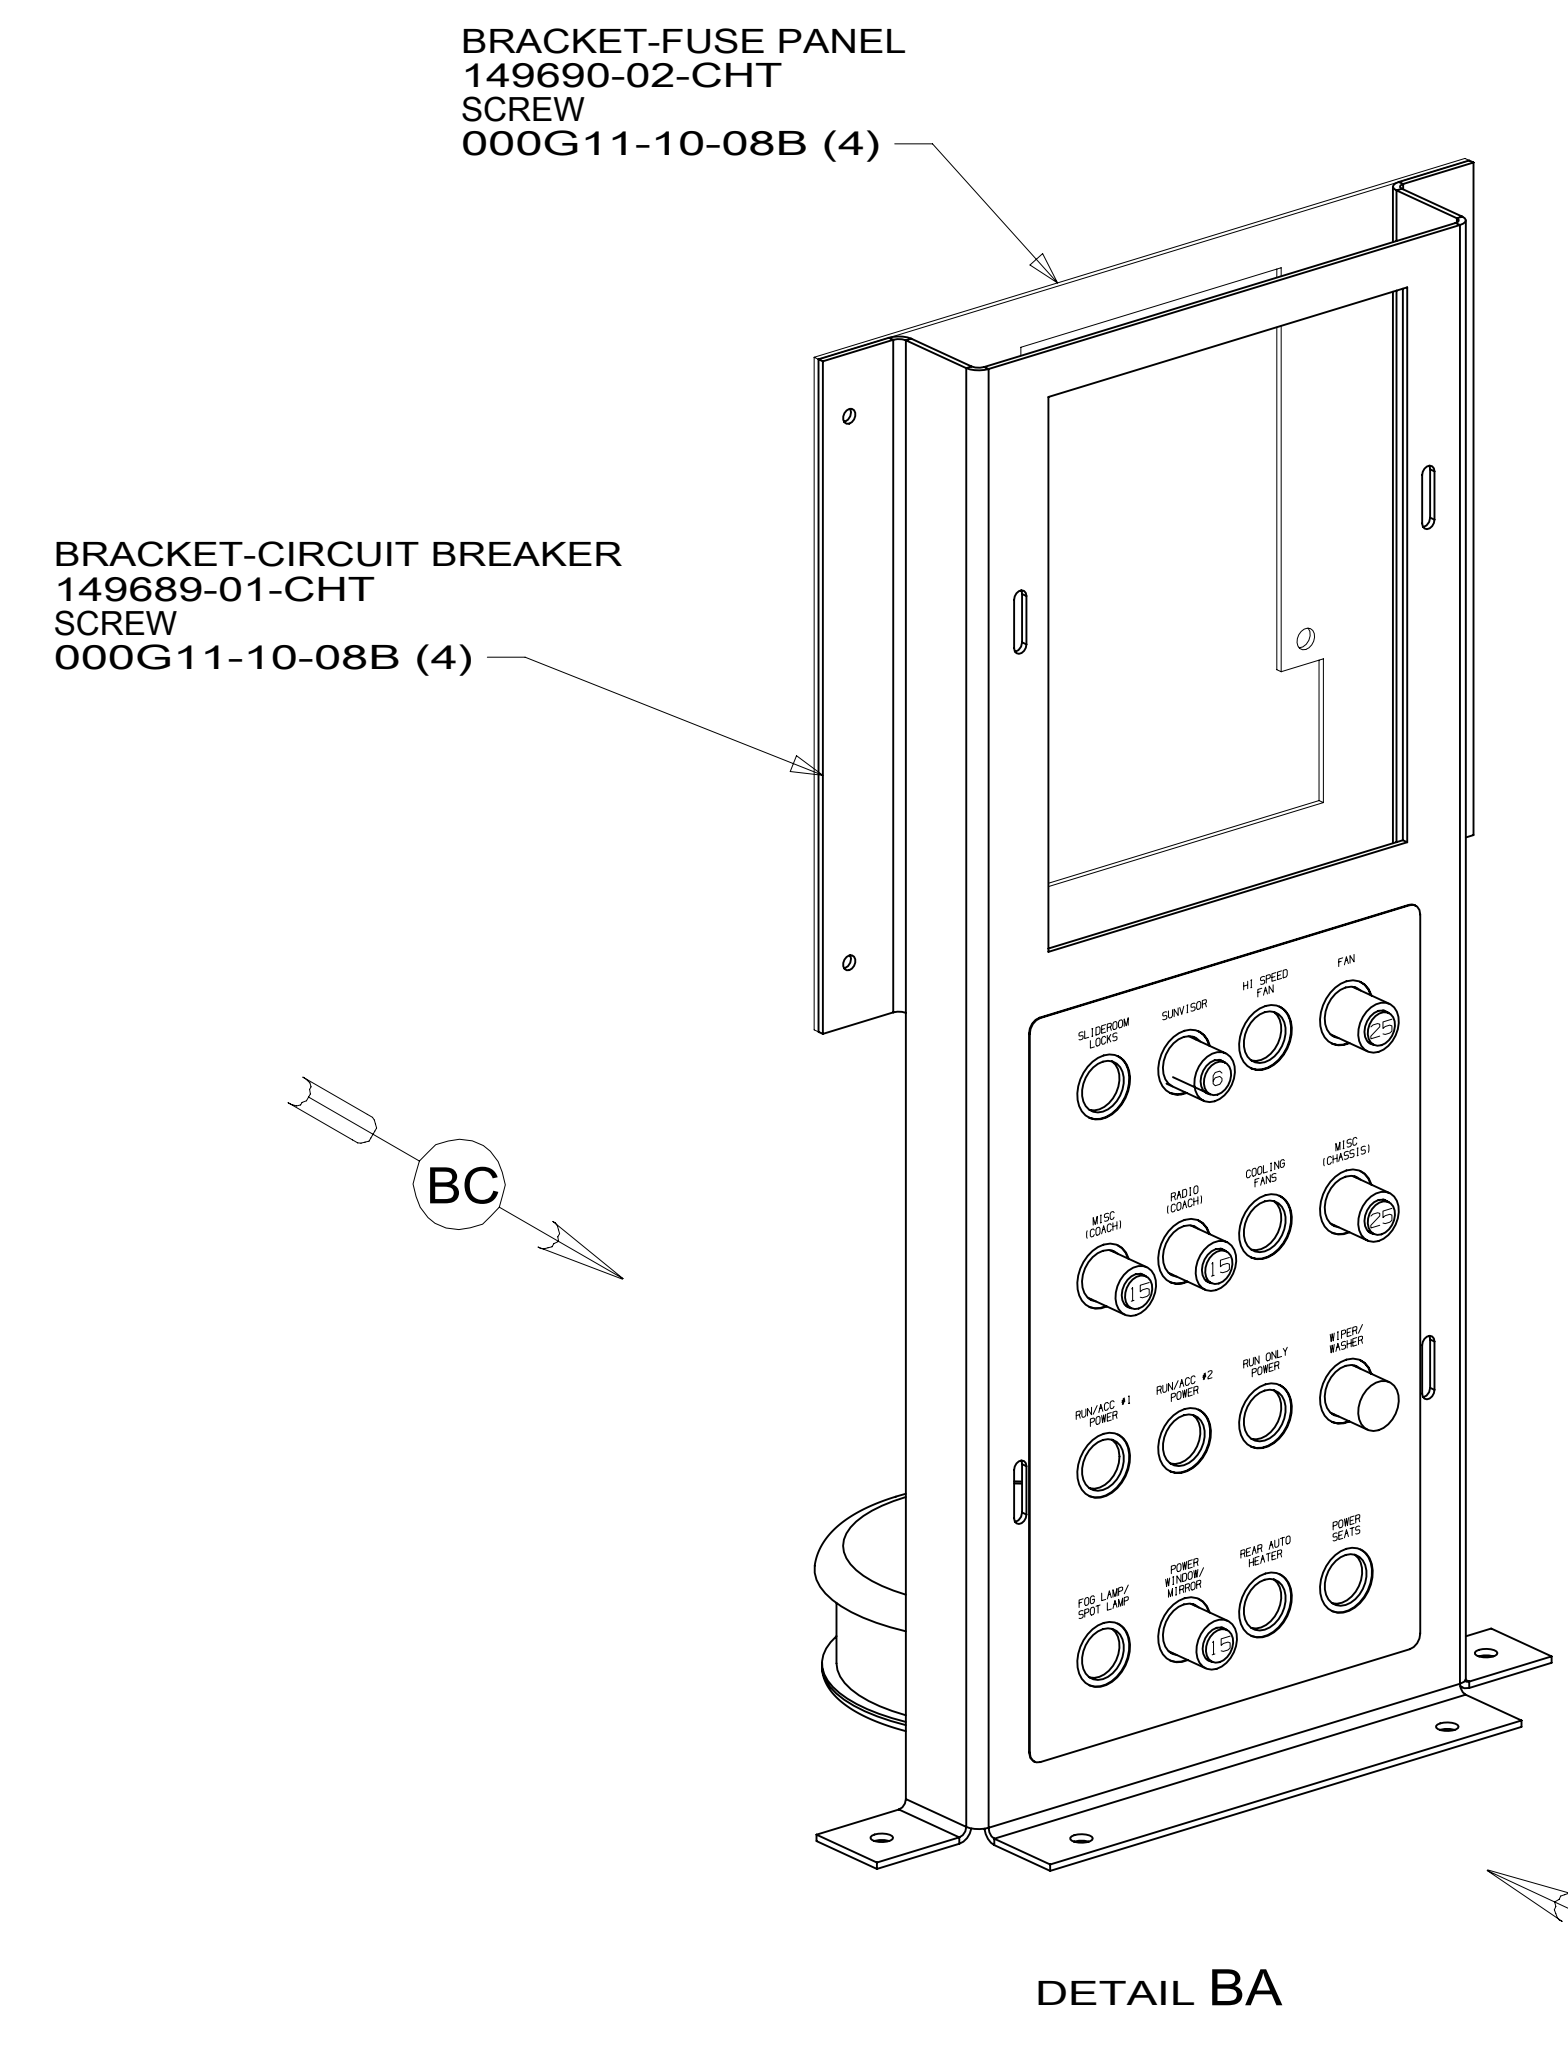

DETAIL BA

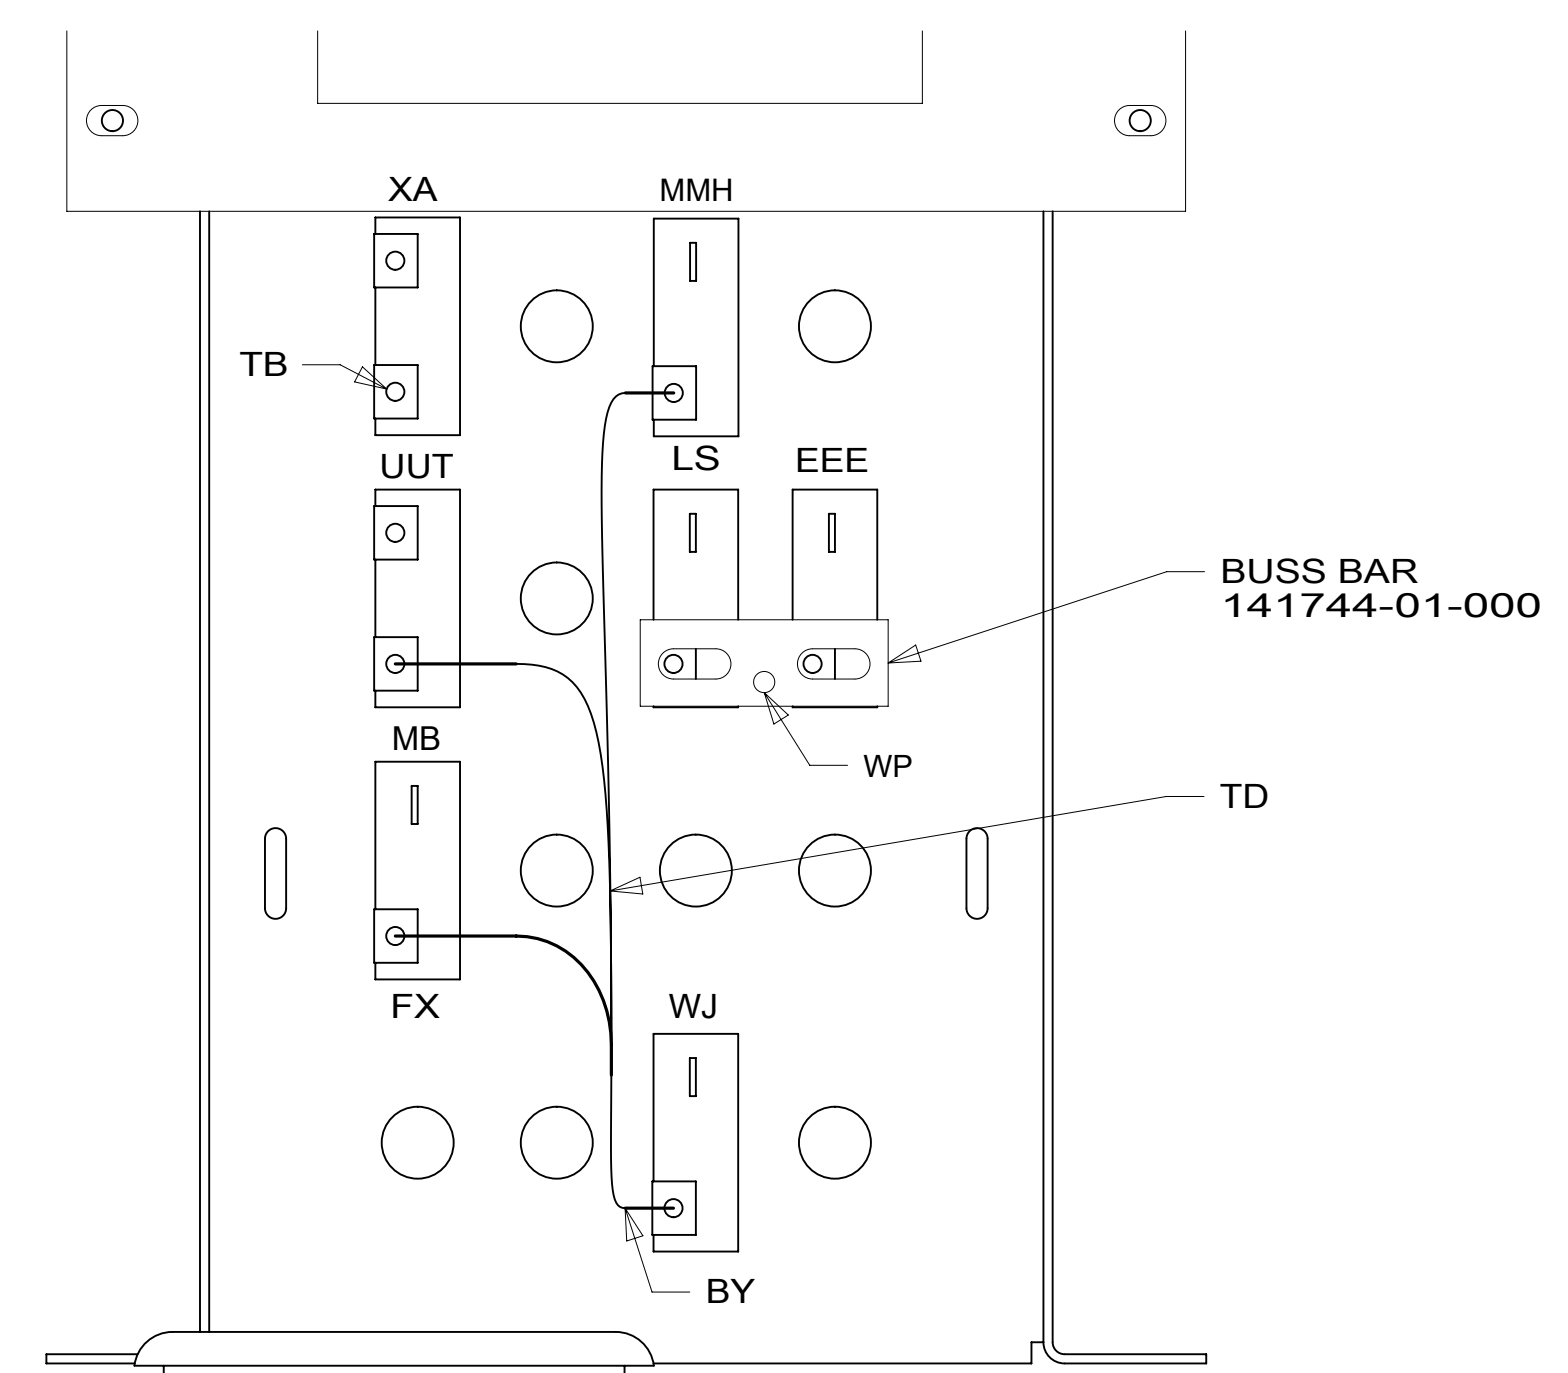

VIEW BC


1 ALL CIRCUITS ARE IN WIRE ASM-IP,MAIN.
NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

DESCRIPTION:	
1B1 265	
WIRING INSTL-FRONT END	
SHEET:	ITEM/PART NO:
2 OF 9	000178093 / 30244001000
REV	

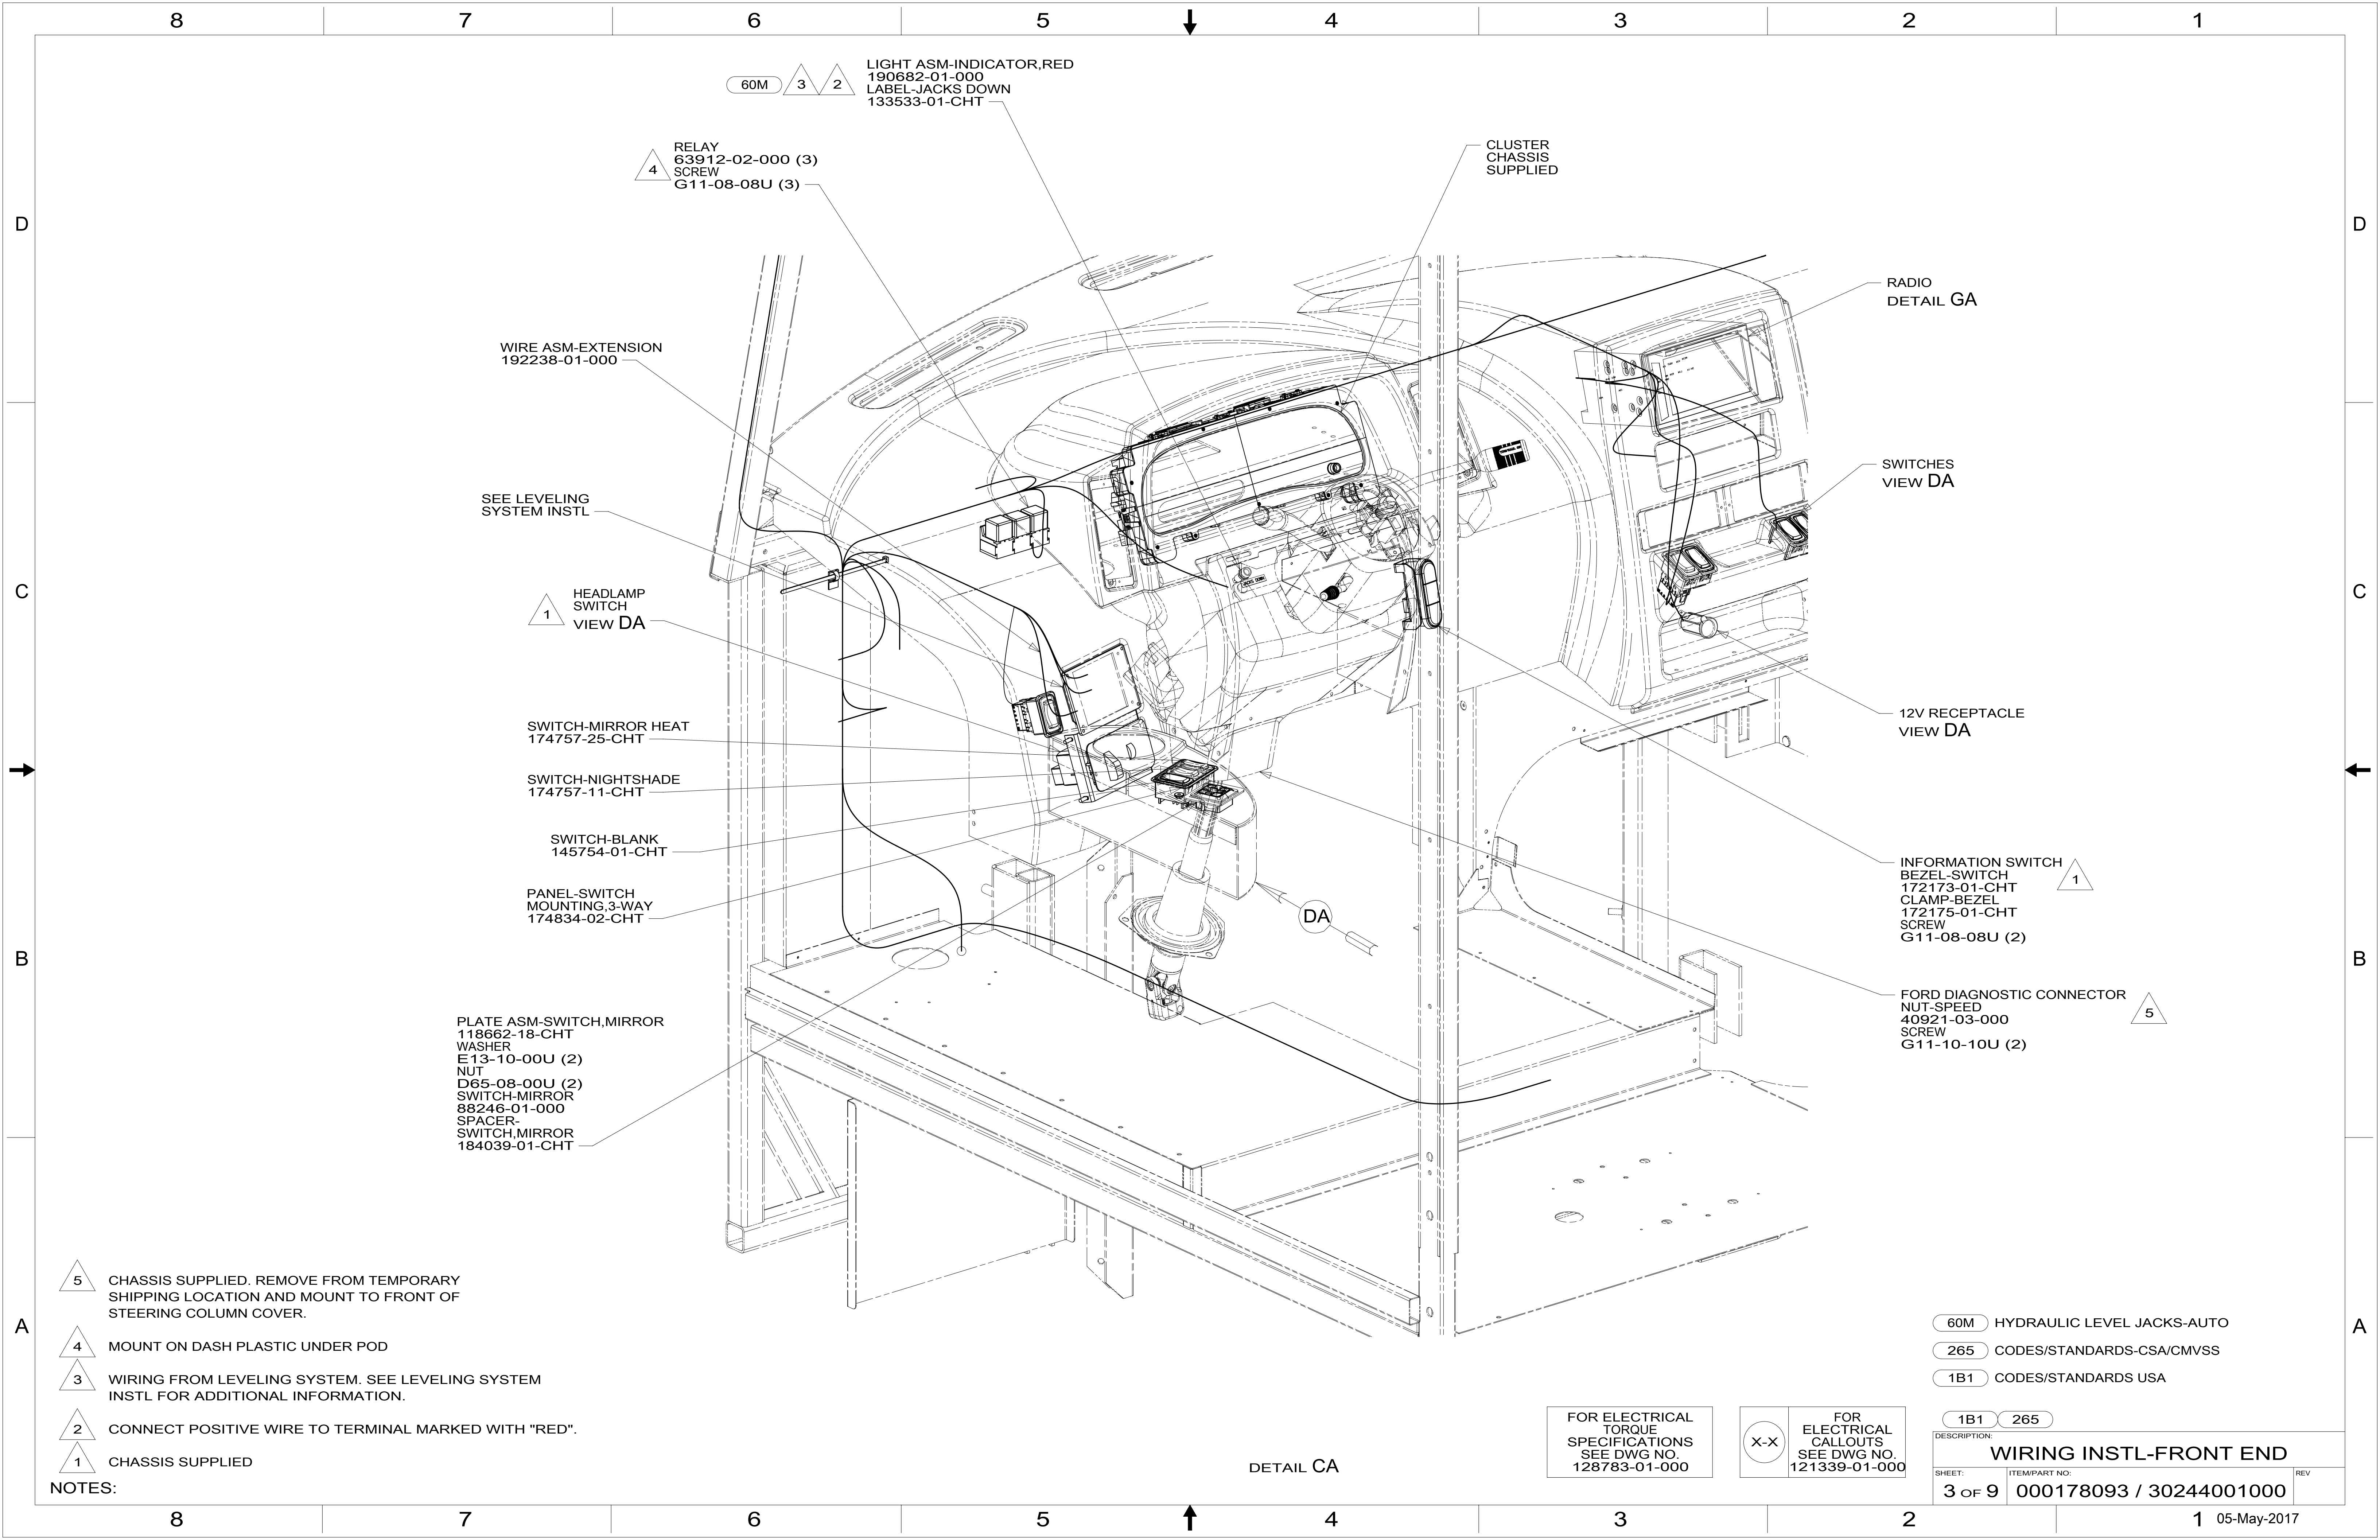

60M 3 2 LIGHT ASM-INDICATOR,RED
190682-01-000
LABEL-JACKS DOWN
133533-01-CHT

4 RELAY
63912-02-000 (3)
SCREW
G11-08-08U (3)

WIRE ASM-EXTENSION
192238-01-000

SEE LEVELING
SYSTEM INSTL

1 HEADLAMP
SWITCH
VIEW DA

SWITCH-MIRROR HEAT
174757-25-CHT

SWITCH-NIGHTSHADE
174757-11-CHT

SWITCH-BLANK
145754-01-CHT

PANEL-SWITCH
MOUNTING,3-WAY
174834-02-CHT

PLATE ASM-SWITCH,MIRROR
118662-18-CHT
WASHER
E13-10-00U (2)
NUT
D65-08-00U (2)
SWITCH-MIRROR
88246-01-000
SPACER-
SWITCH,MIRROR
184039-01-CHT

CLUSTER
CHASSIS
SUPPLIED

RADIO
DETAIL GA

SWITCHES
VIEW DA

12V RECEPTACLE
VIEW DA

1 INFORMATION SWITCH
BEZEL-SWITCH
172173-01-CHT
CLAMP-BEZEL
172175-01-CHT
SCREW
G11-08-08U (2)

5 FORD DIAGNOSTIC CONNECTOR
NUT-SPEED
40921-03-000
SCREW
G11-10-10U (2)

5 CHASSIS SUPPLIED. REMOVE FROM TEMPORARY SHIPPING LOCATION AND MOUNT TO FRONT OF STEERING COLUMN COVER.

4 MOUNT ON DASH PLASTIC UNDER POD

3 WIRING FROM LEVELING SYSTEM. SEE LEVELING SYSTEM INSTL FOR ADDITIONAL INFORMATION.

2 CONNECT POSITIVE WIRE TO TERMINAL MARKED WITH "RED".

1 CHASSIS SUPPLIED

NOTES:

- 60M HYDRAULIC LEVEL JACKS-AUTO
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:	
WIRING INSTL-FRONT END	
SHEET:	ITEM/PART NO. REV
3 OF 9	000178093 / 30244001000

DETAIL CA

8 7 6 5 4 3 2 1

D

D

C


C

B

B

A

A

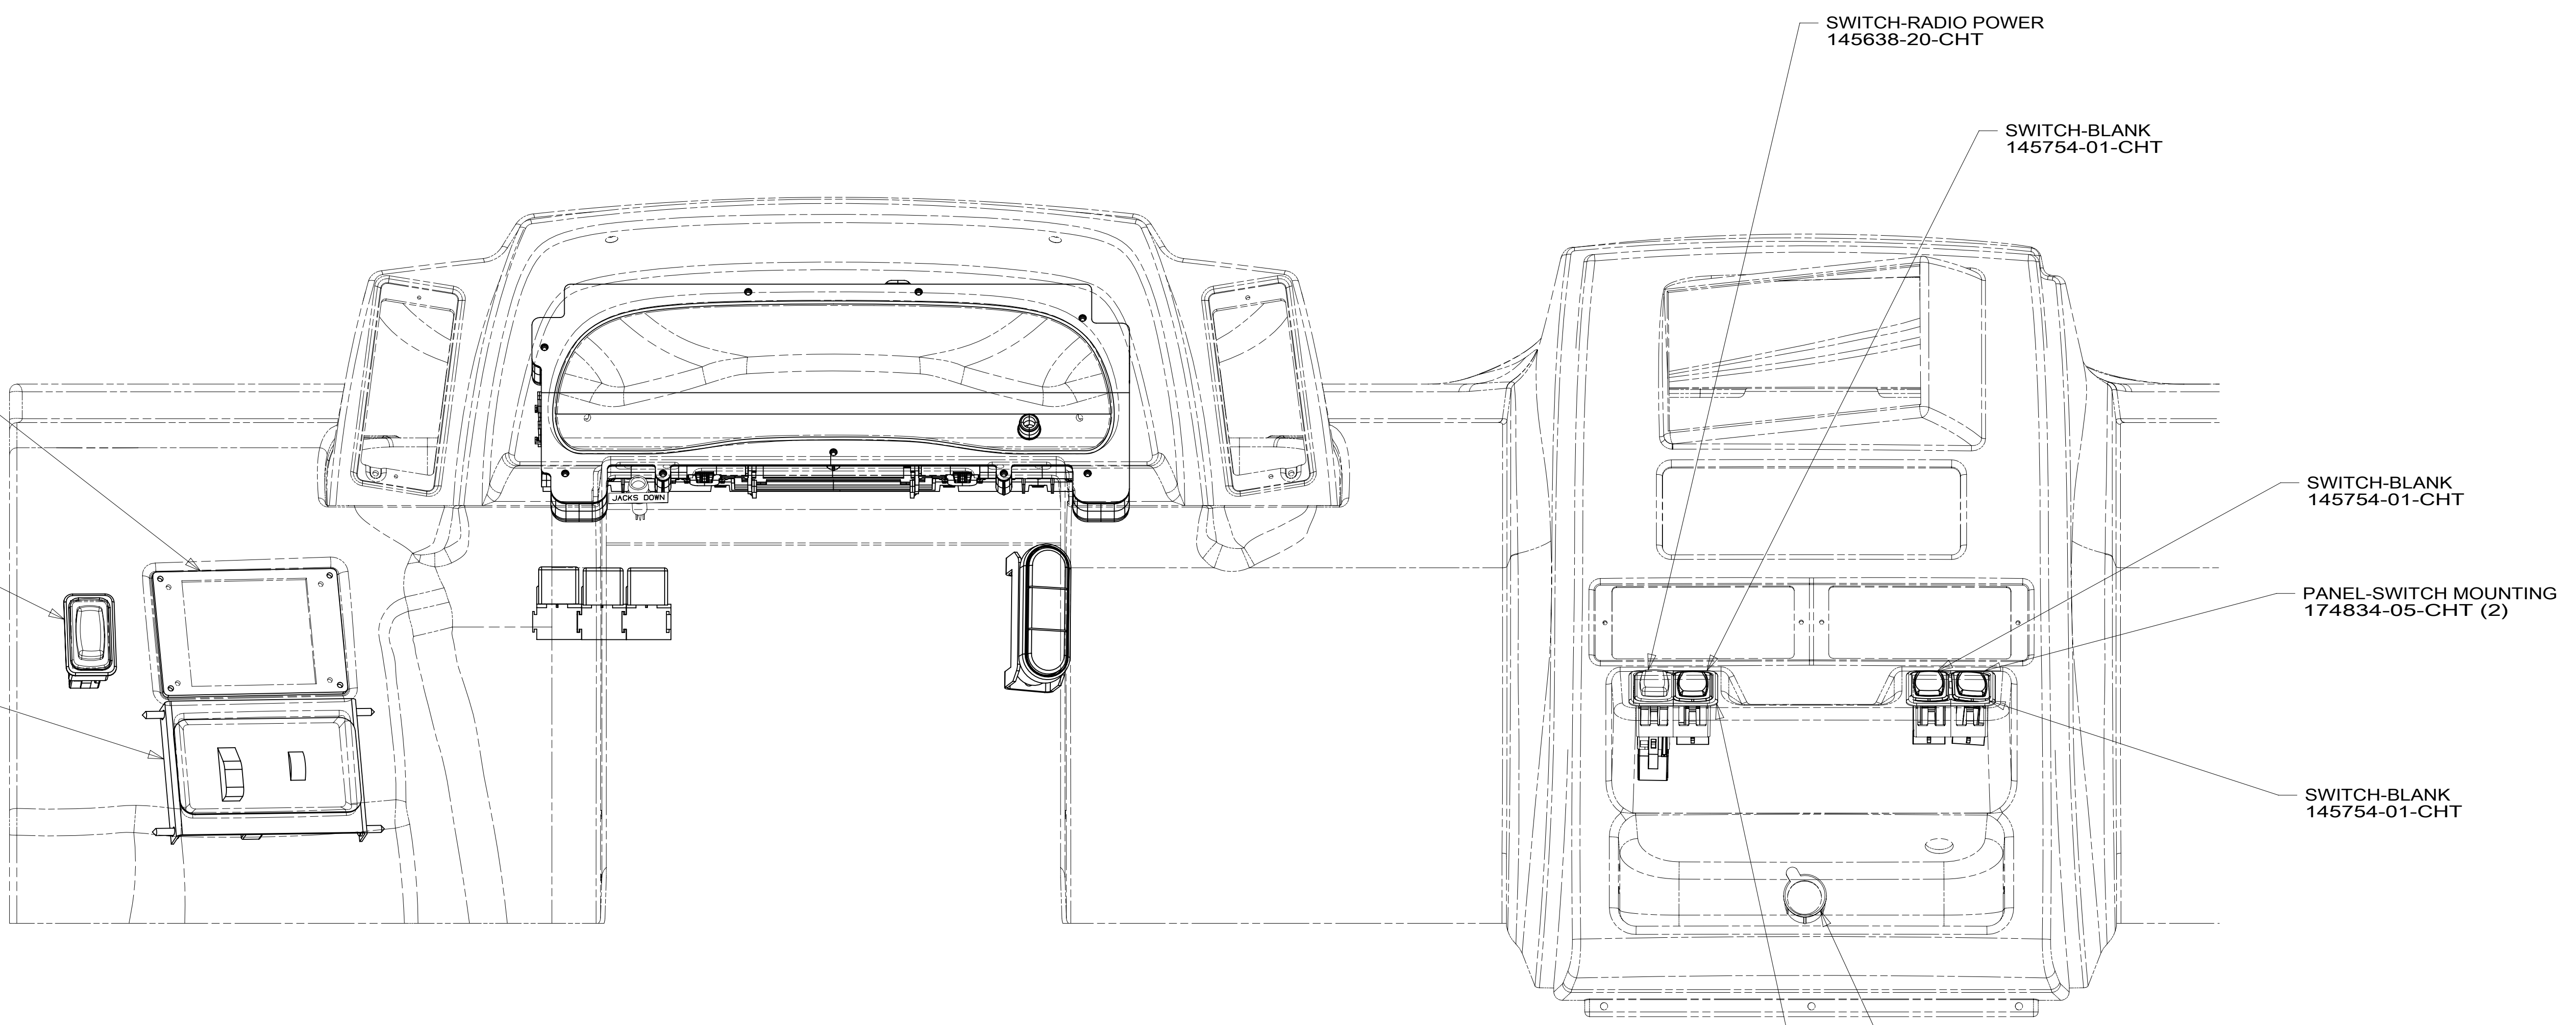

VIEW DA

2 SWITCH-BATTERY BOOST
145638-18-CHT
PANEL-SWITCH MOUNT
174834-01-CHT

MOUNT-HEADLAMP SWITCH
155516-03-CHT

SWITCH-RADIO POWER
145638-20-CHT

SWITCH-BLANK
145754-01-CHT


SWITCH-BLANK
145754-01-CHT

PANEL-SWITCH MOUNTING
174834-05-CHT (2)


SWITCH-BLANK
145754-01-CHT

RECEPTACLE-12V
111414-01-000

PANEL-SWITCH MOUNTING
174834-05-CHT (2)

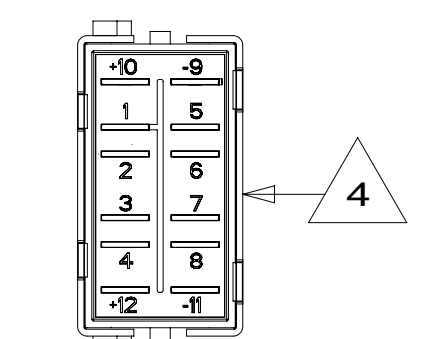

DETAIL DB
(MOUNTED VERTICALLY)

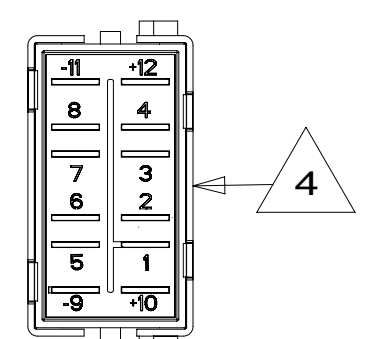

DETAIL DC
(MOUNTED VERTICALLY)

- NOTES:
- 4 WITH SWITCH INSTALLED THIS SIDE OF SWITCH WILL FACE LEFT SIDEWALL.
 - 3 DETAIL IS LOOKING AT SWITCH FROM THE BACK SIDE OF SWITCH AS ITS INSTALLED.
 - 2 SEE DETAIL DC FOR ORIENTATION.
 - 1 SEE DETAIL DB FOR ORIENTATION.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA



DESCRIPTION:	
WIRING INSTL-FRONT END	
SHEET:	ITEM/PART NO. REV
4 OF 9	000178093 / 30244001000

8 7 6 5 4 3 2 1 05-May-2017

8 7 6 5 4 3 2 1

D
C
B
A

D
C
B
A

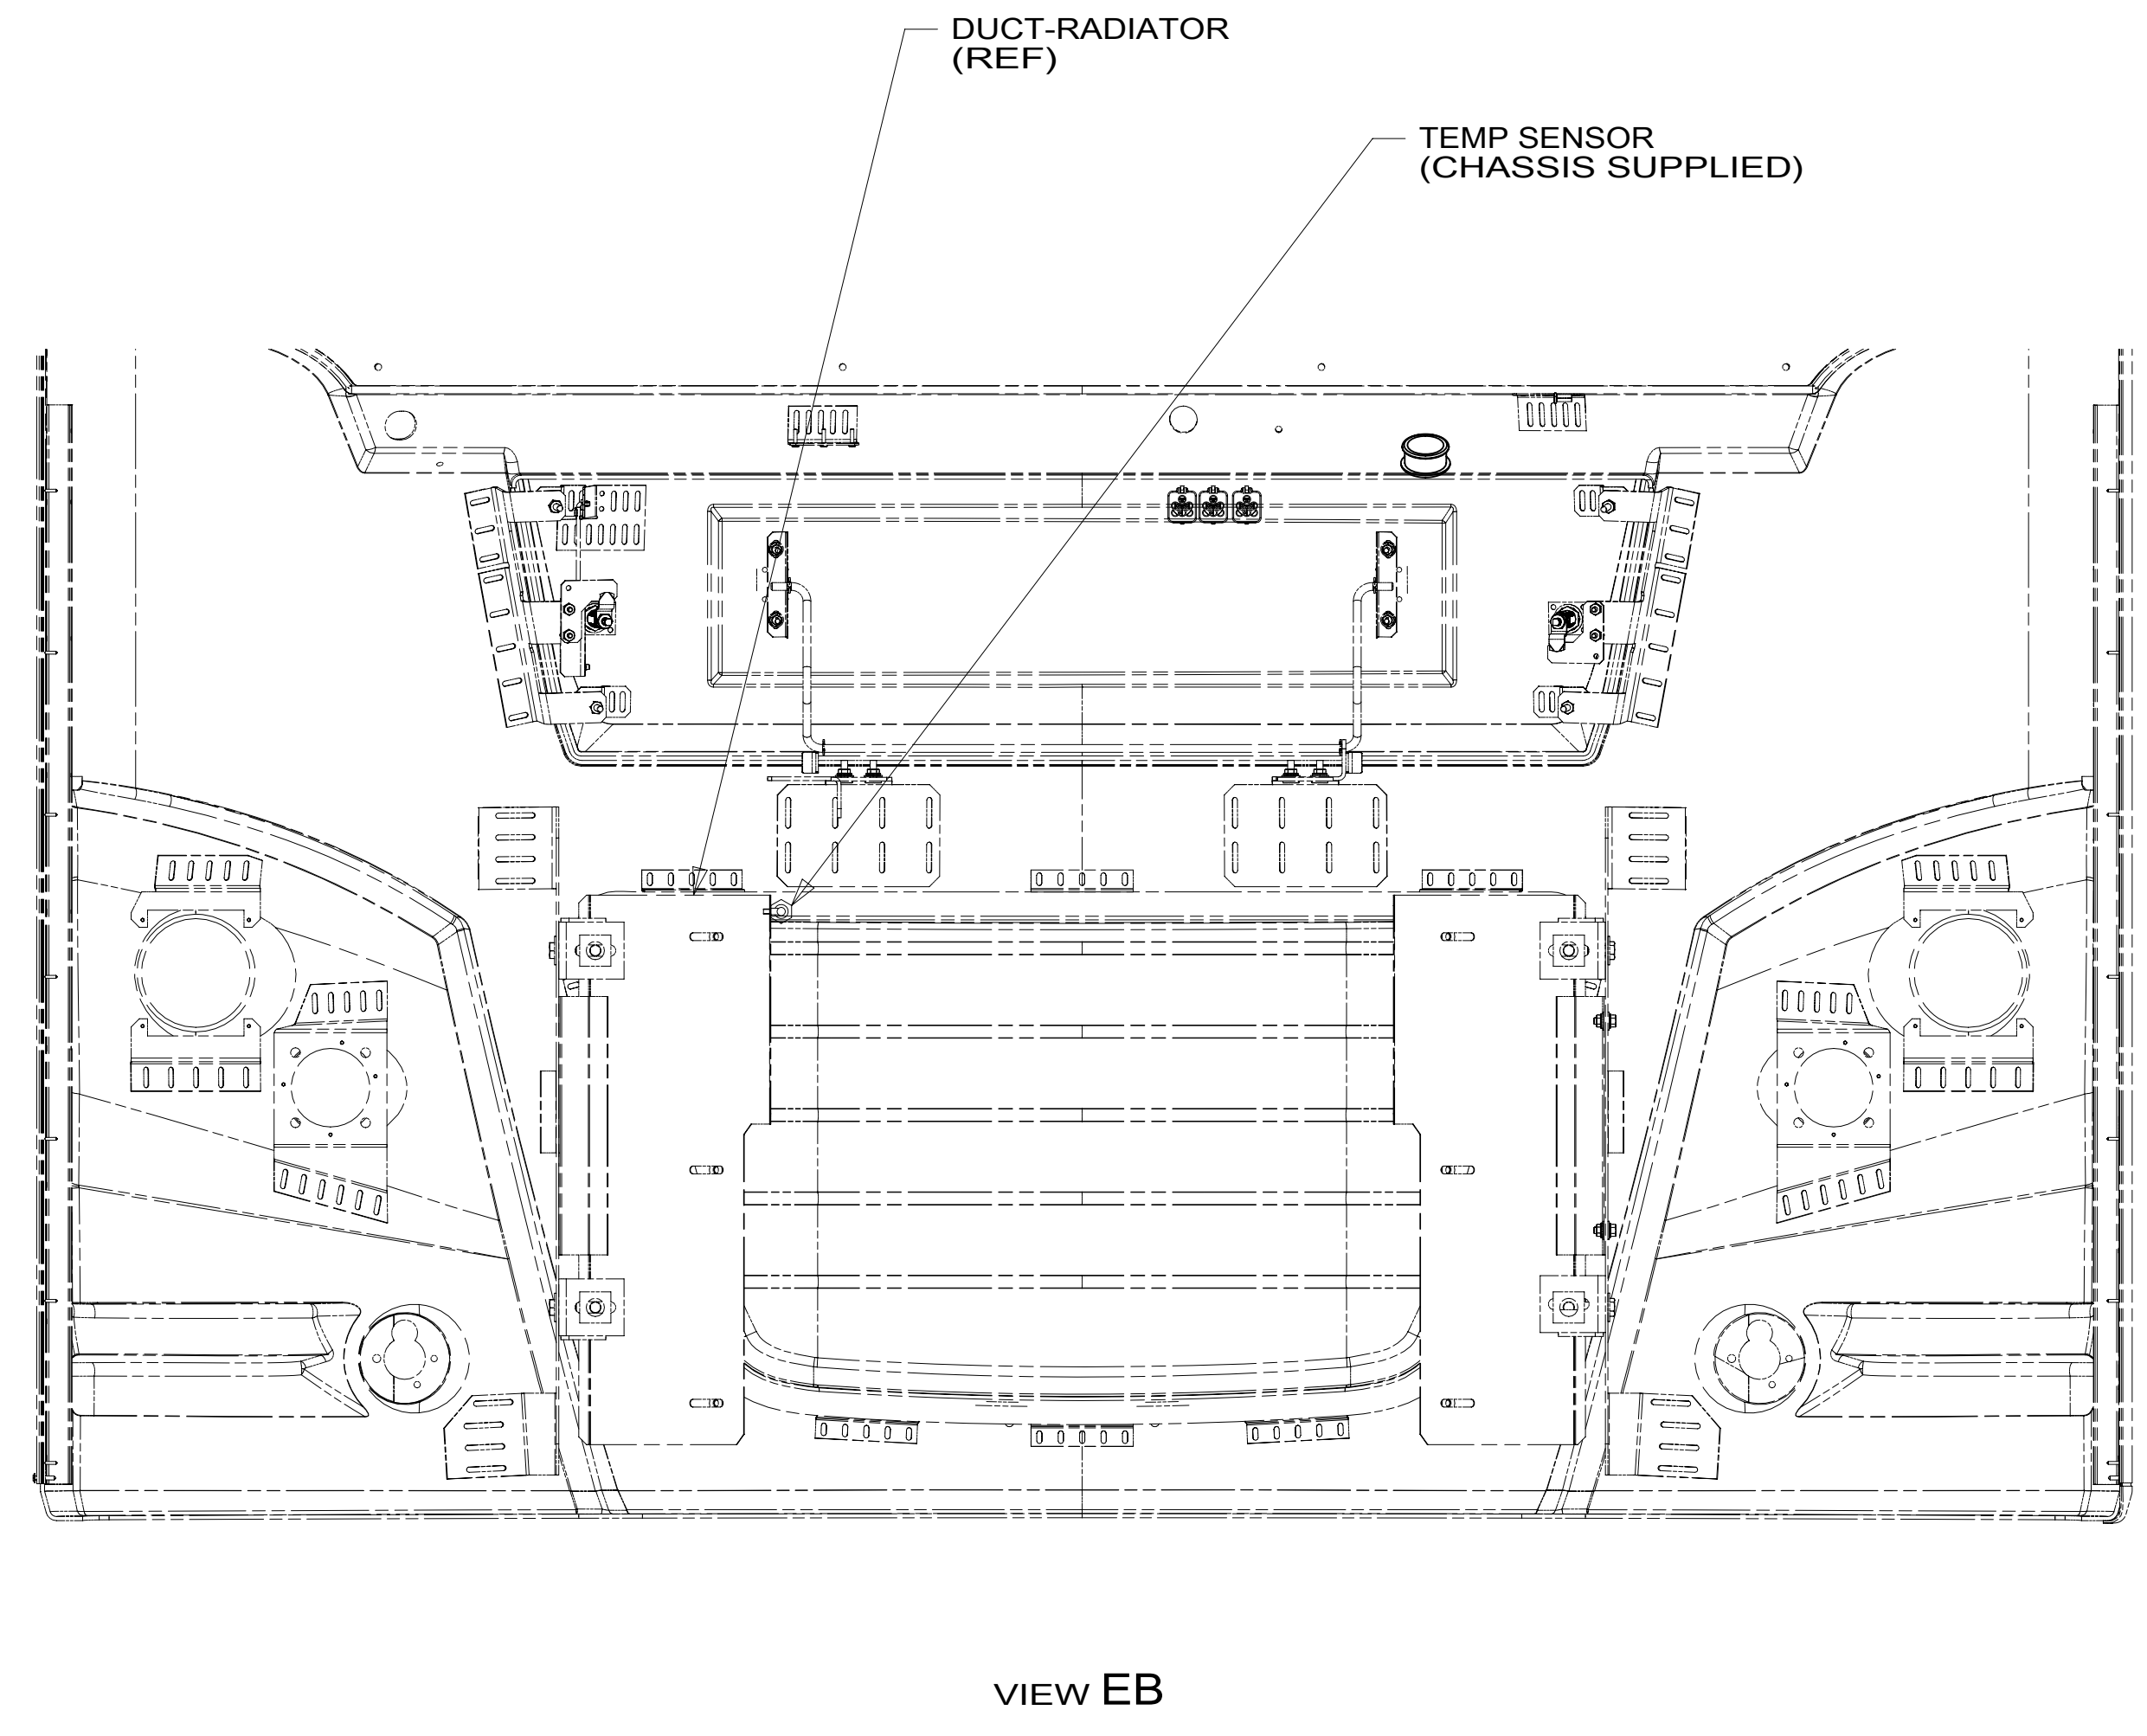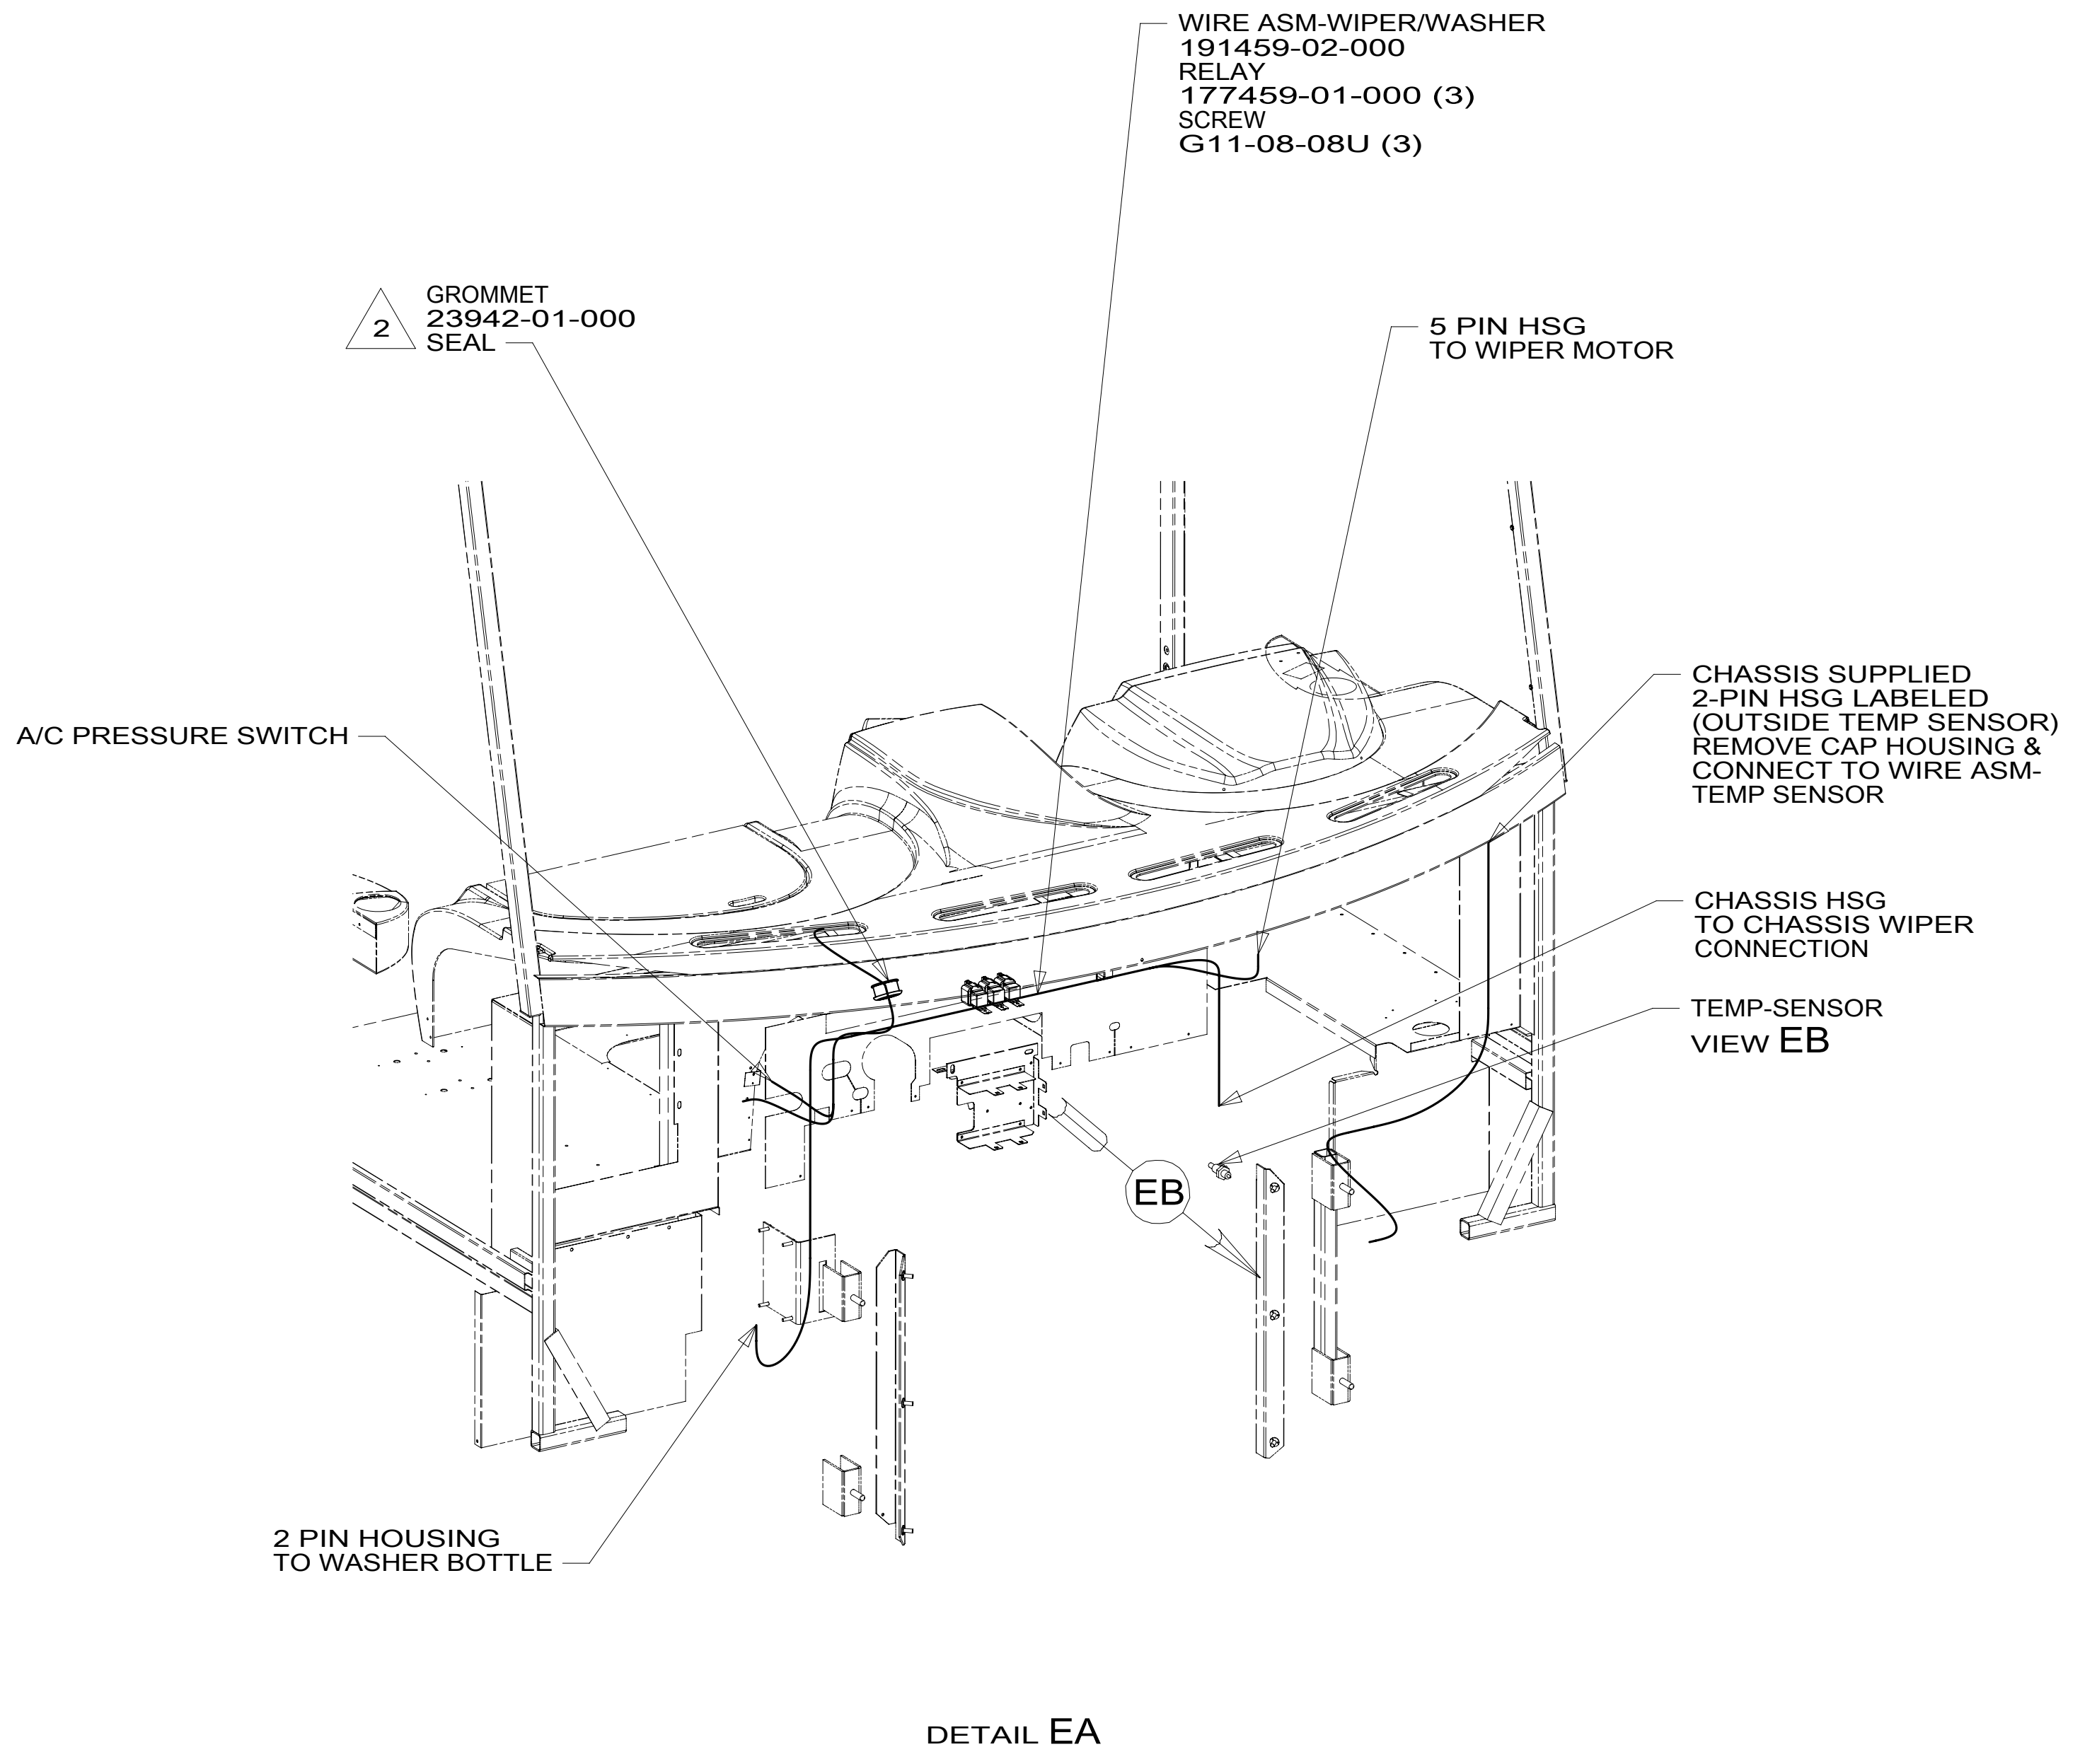

- 2 ROUTE WIRES THROUGH HOLE IN STEEL.
- GATHER ALL EXCESS WIRE AFTER MAKING ALL CONNECTIONS.
BUNDLE AND SECURE WITH WIRE TIE 8343-01-000 OR 93147-01-000.
- NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

1B1 265		DESCRIPTION: WIRING INSTL-FRONT END	
SHEET: 5 OF 9	ITEM/PART NO: 000178093 / 30244001000	REV	

8 7 6 5 4 3 2 1 05-May-2017

8

7

6

5





4





3

2

1

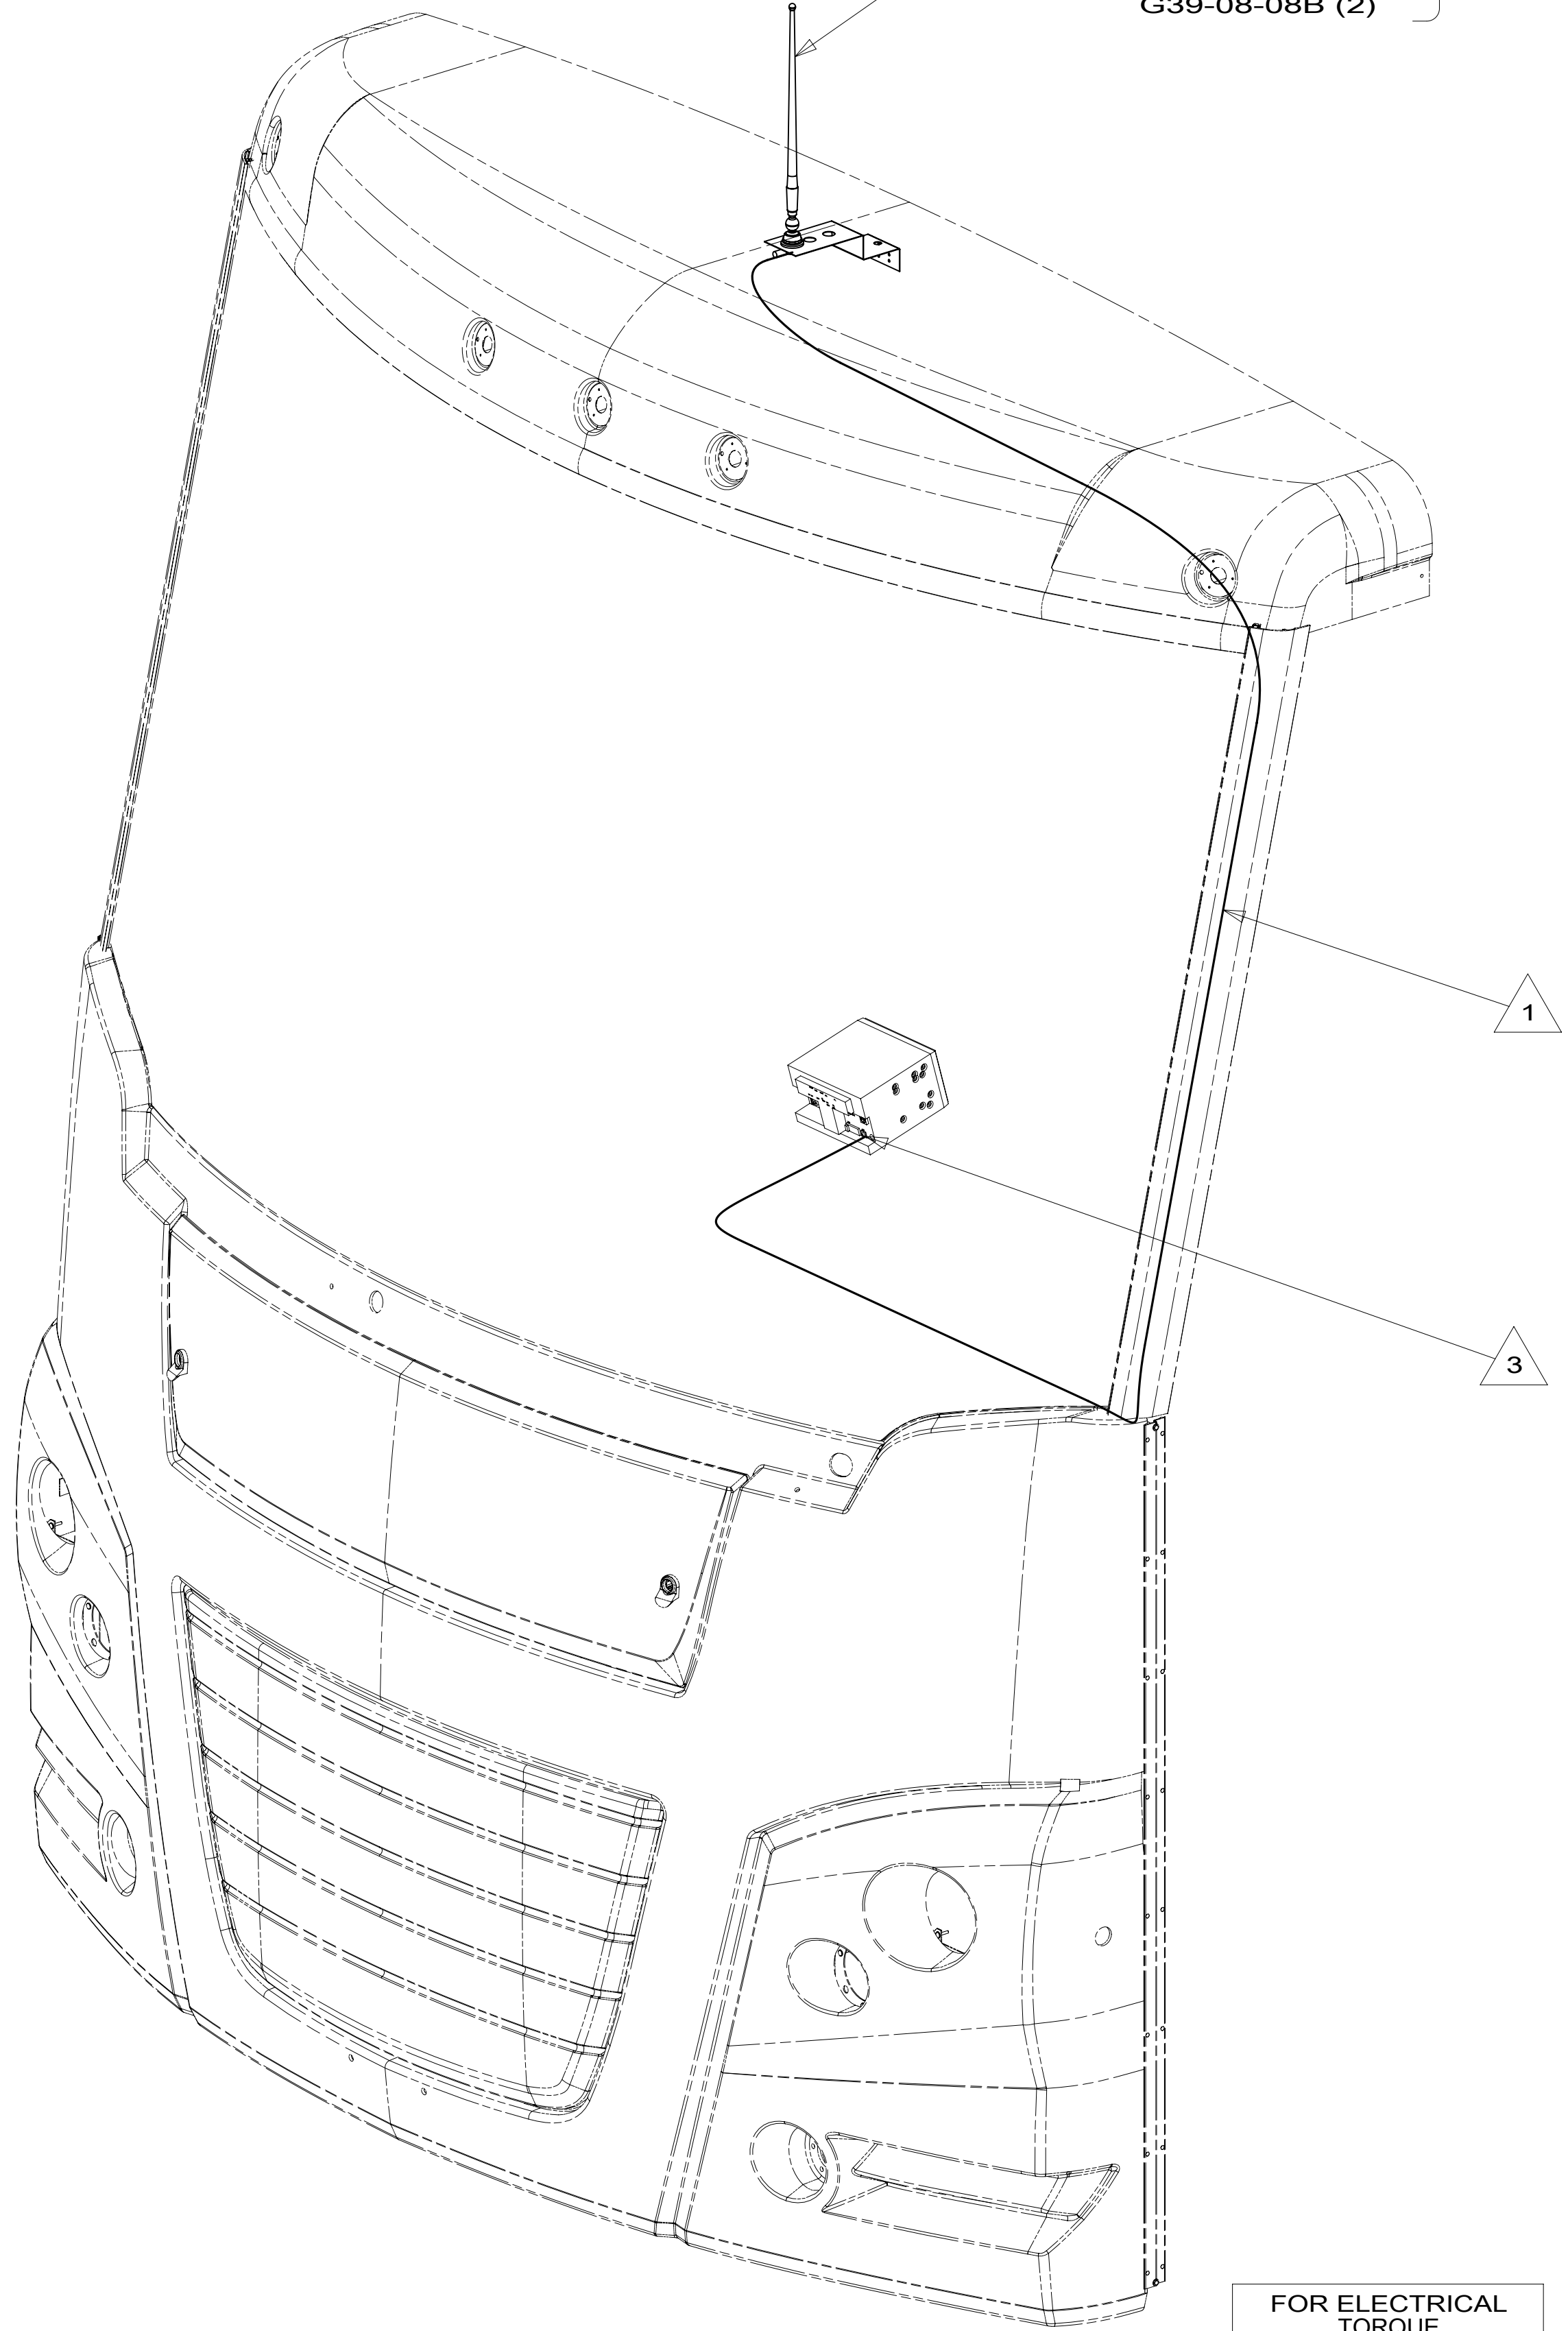ANTENNA-RADIO
 90944-02-000
 CABLE ASM-ANTENNA
 90944-03-000
 BRACKET-ANTENNA
 115916-01-CHT
 SCREW
 G39-08-08B (2)



-  USE HOLE IN BRACKET AS GUIDE TO DRILL 13 MM DIAMETER HOLE IN FIBERGLASS.
-  TO RADIO.
-  SEAL AROUND ANTENNA BASE.
-  ROUTE CABLES ALONG A-POST, UNDER TRIM COVER.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

DESCRIPTION: WIRING INSTL-FRONT END

SHEET:	ITEM/PART NO.:	REV
6 OF 9	000178093 / 30244001000	

8

7

6

5




4

3

2

1 05-May-2017

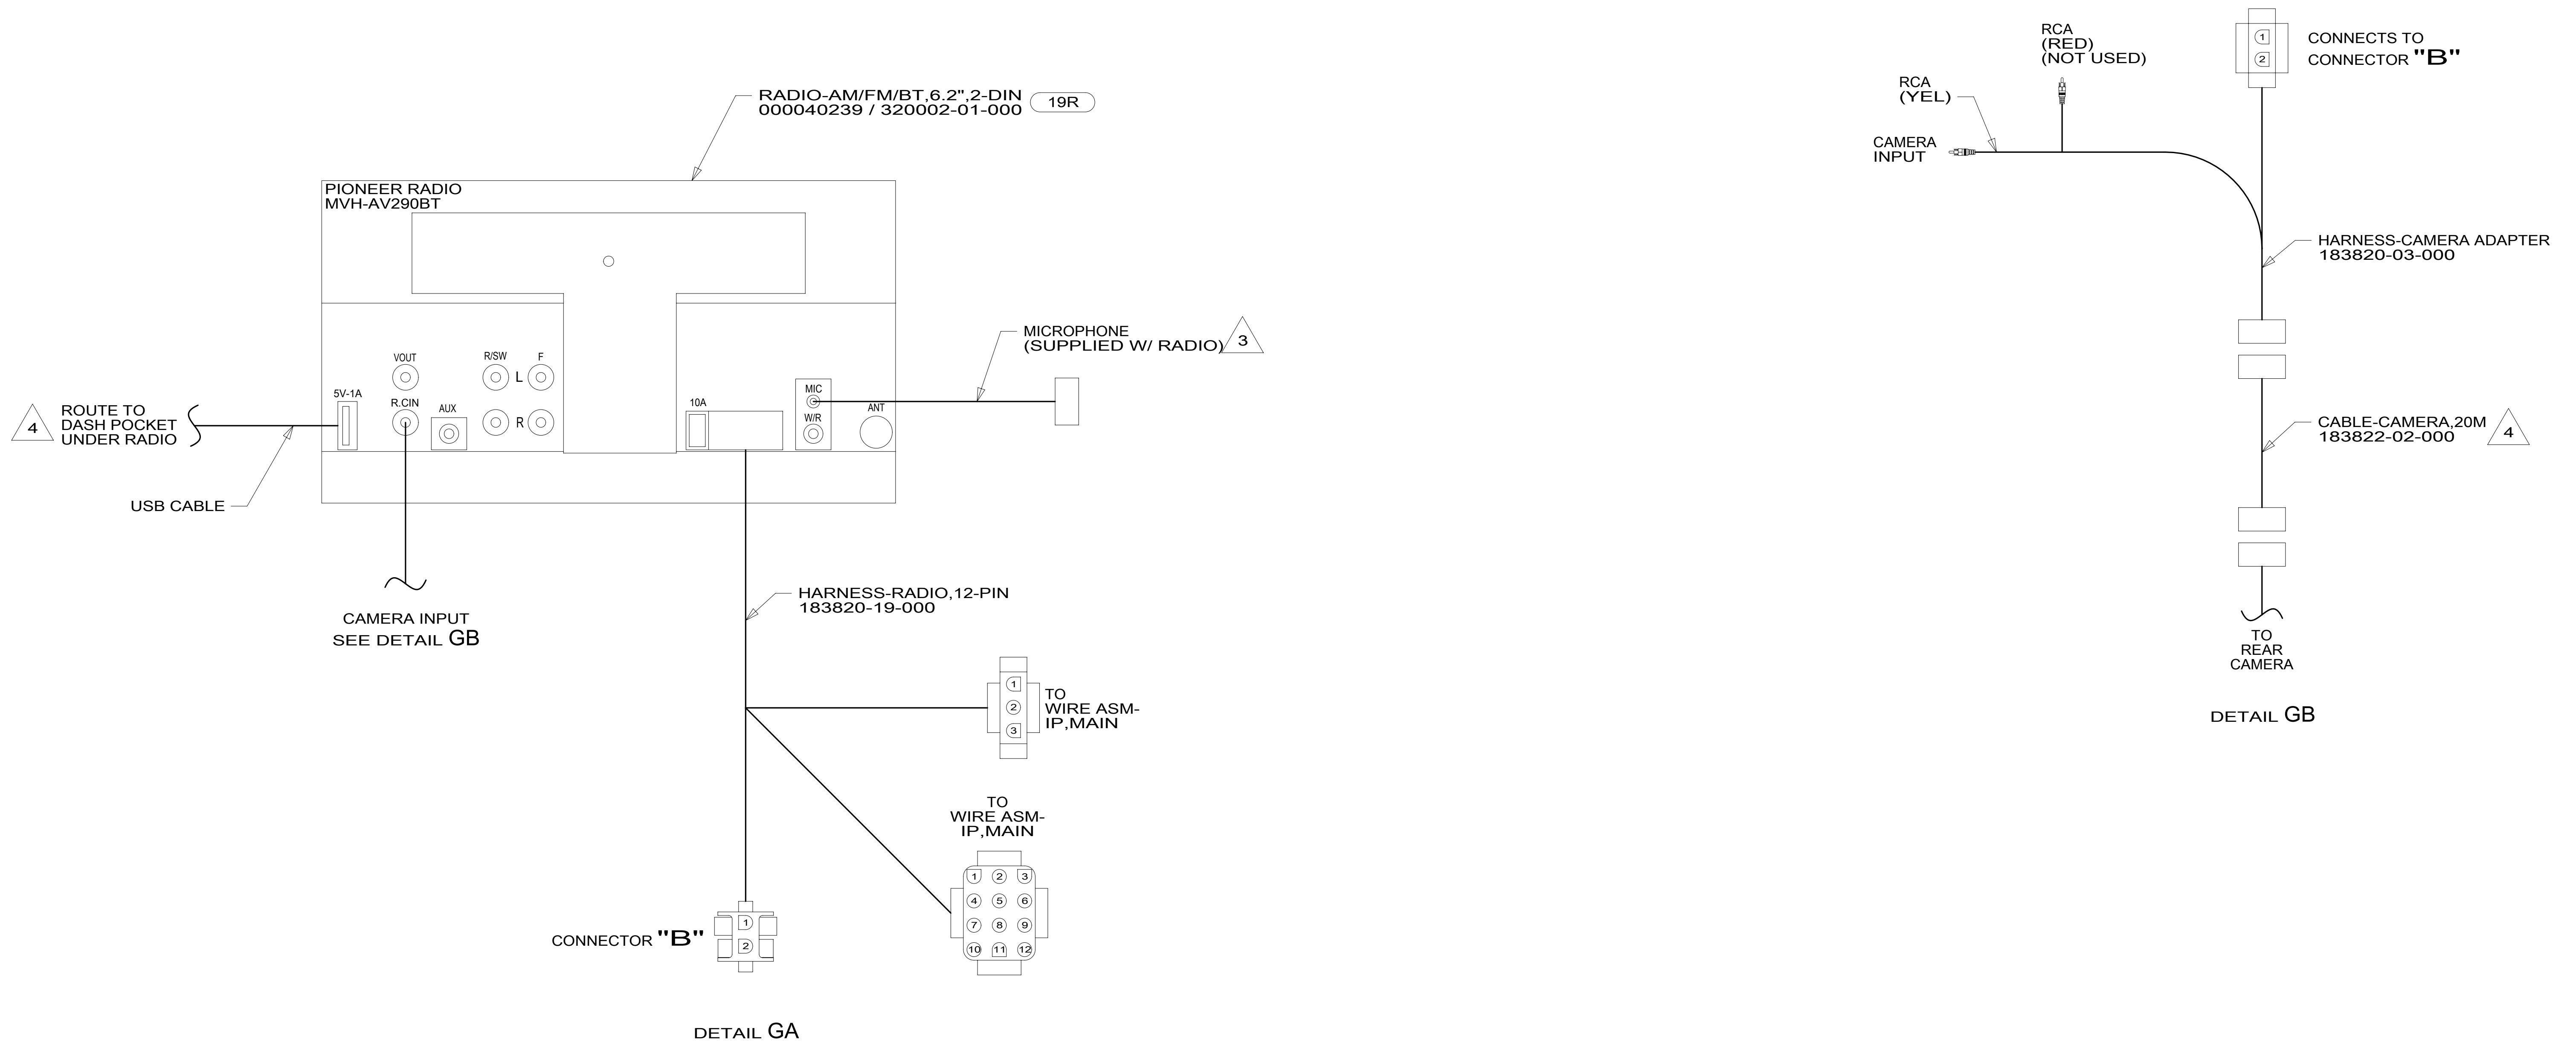

- NOTES:
- 4 CABLE ROUTED FROM RADIO UP LEFT "A" PILLAR , THEN THROUGH LEFT HAND COVE TO REAR OF UNIT. SEE SHEET 8.
 - 3 WIRE TIE EXCESS CABLE UNDER DASH LEAVING 200 MM EXTENDING INTO POCKET IN DASH.
 - 2 SEE WIRING INSTL-TV/DVD FOR ADDITIONAL INFORMATION.
 - 1 ATTACH RCA CABLES TO RADIO AND THEN ROUTE UP RIGHT "A" PILLAR, LEAVE IN OVERHEAD AREA FOR LATER ATTACHMENT TO ROOF LOOM.

- 19R VIDEO CAMERA SYSTEM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA




FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:		1B1 265	
WIRING INSTL-FRONT END			
SHEET:	ITEM/PART NO.:	REV	
7 OF 9	000178093 / 30244001000		

8 7 6 5 4 3 2 1

D
C
B
A

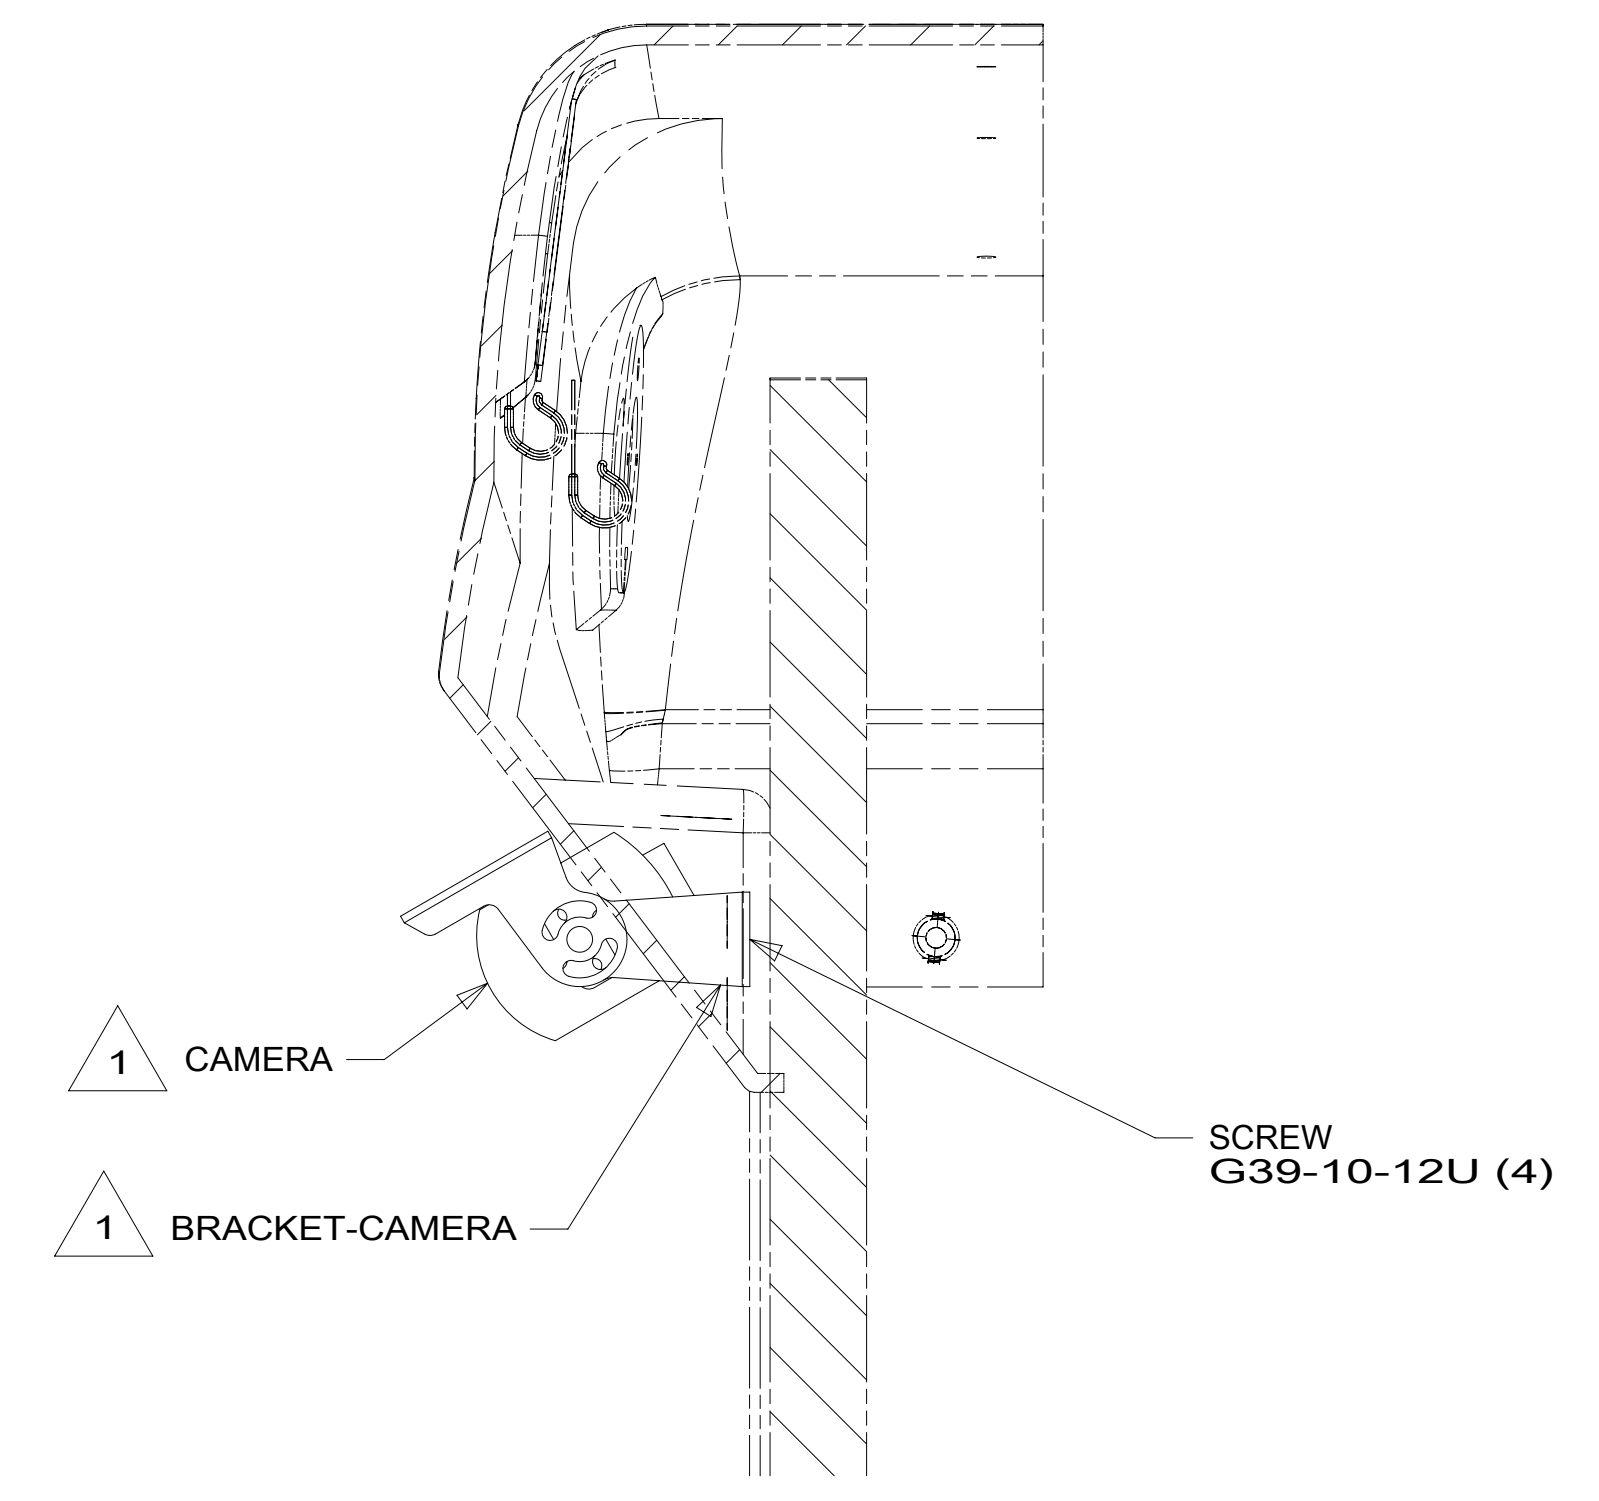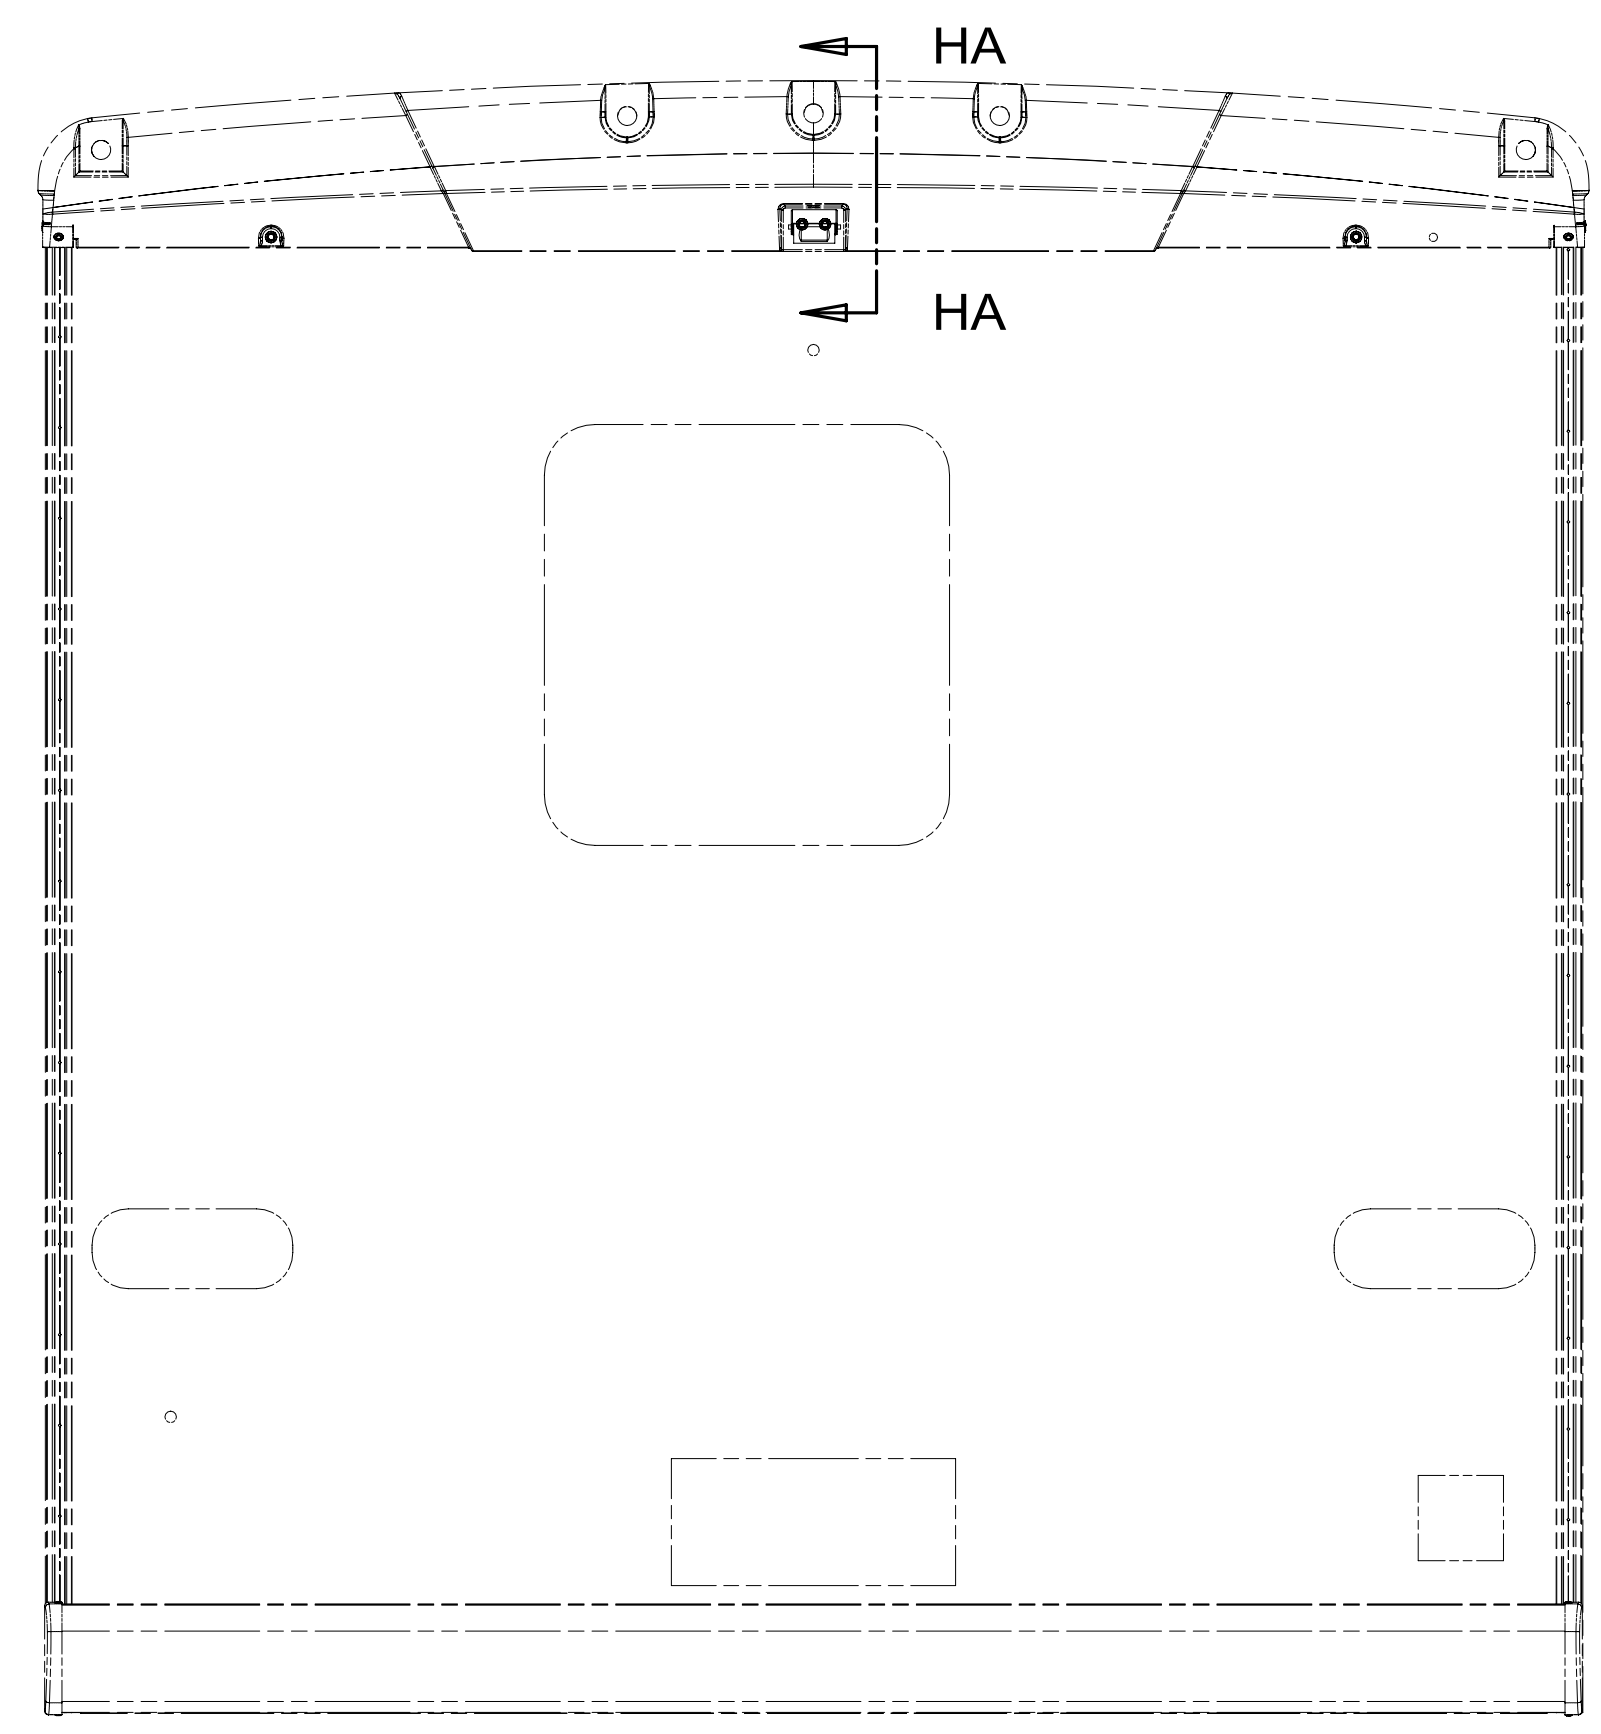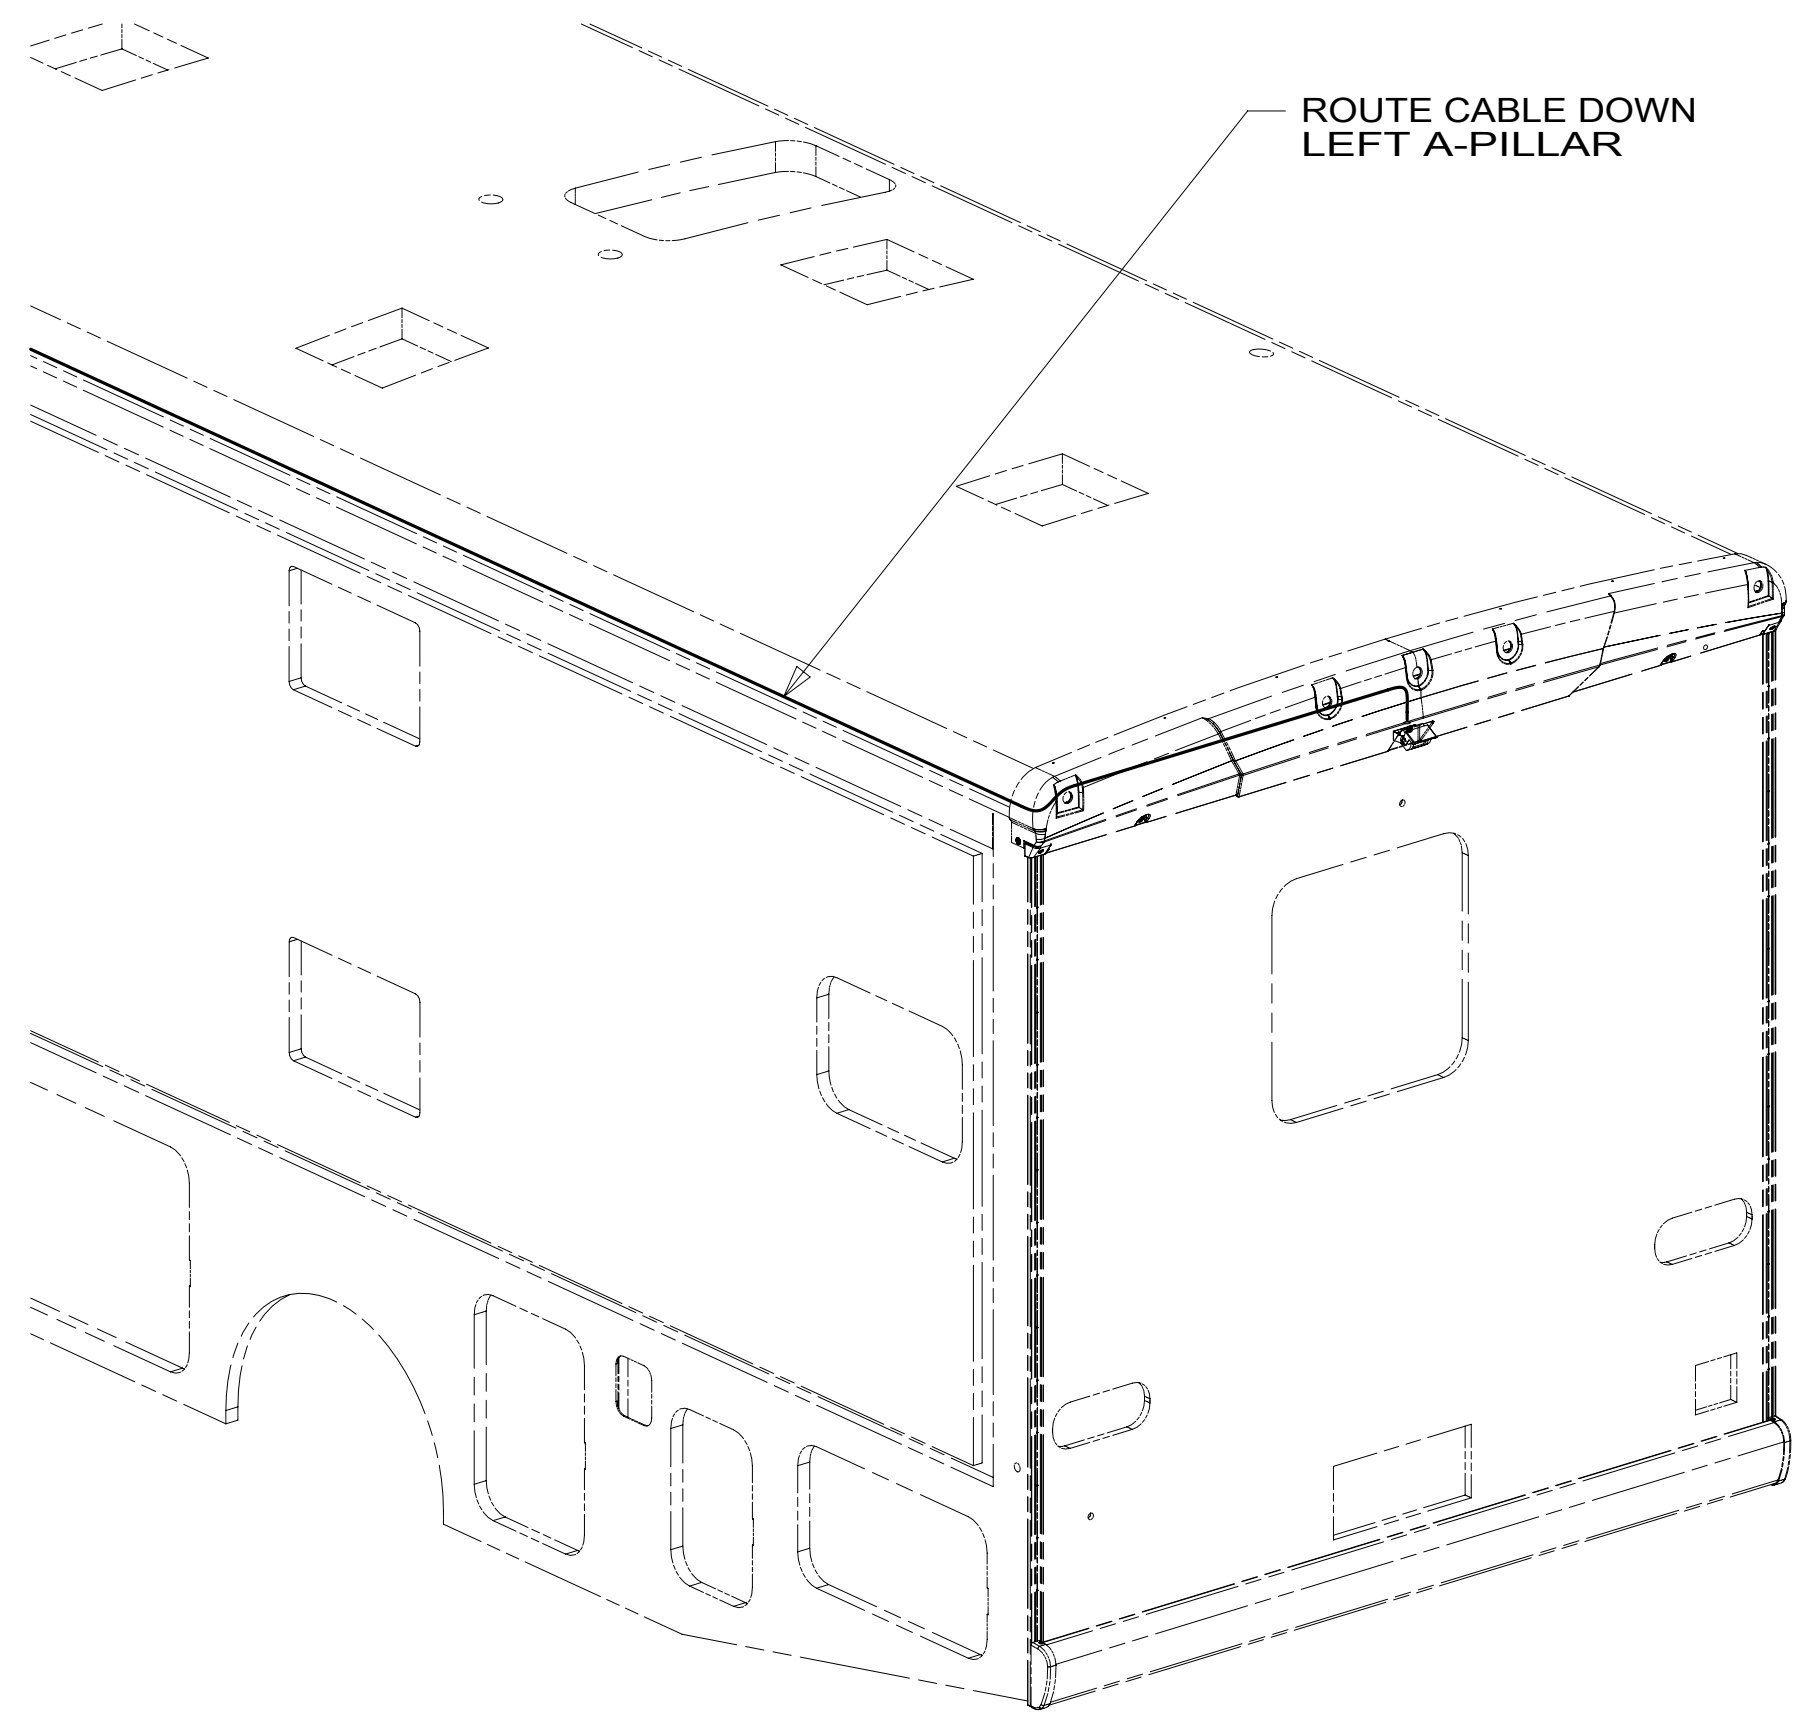

SECTION HA-HA

NOTES:
 1 PARTS SUPPLIED WITH CAMERA KIT P/N 183822-01-000.


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION: WIRING INSTL-FRONT END	
SHEET: 8 OF 9	ITEM/PART NO.: 000178093 / 30244001000
REV	1 05-May-2017

8 7 6 5 4 3 2 1

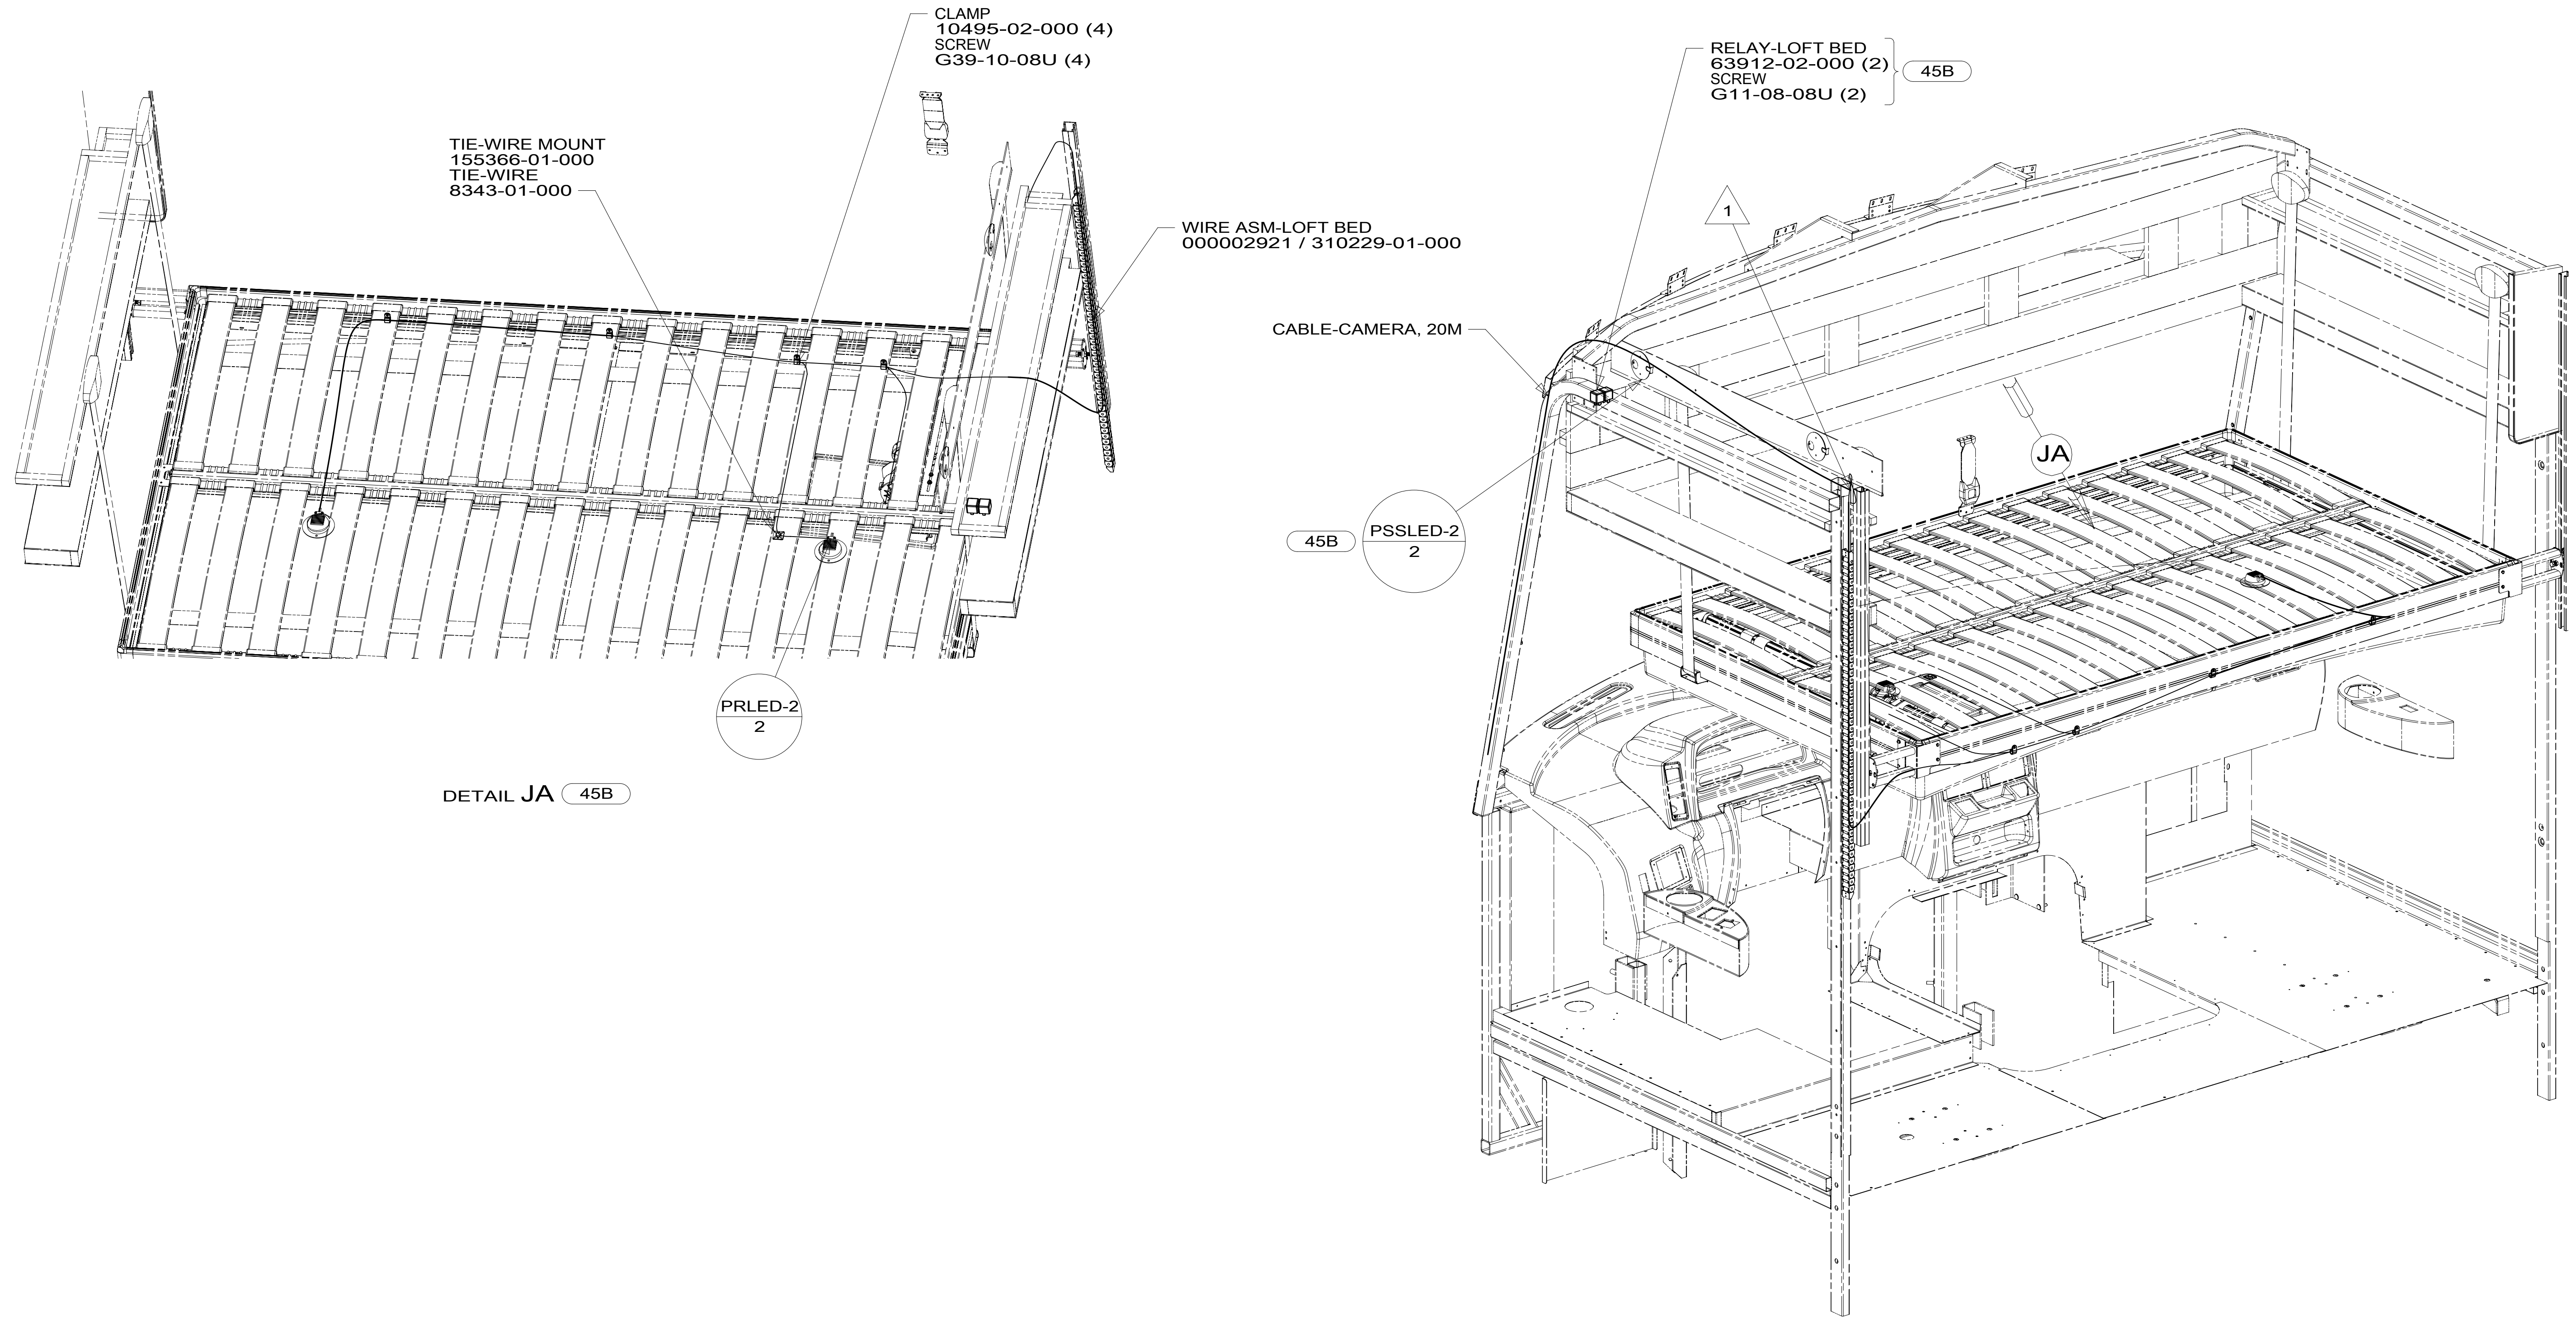

1 RUN CABLE THRU LEFT-HAND COVE TO REAR OF UNIT. SEE SHEET 8.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 45B LOFT BED
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265	
DESCRIPTION:	
WIRING INSTL-FRONT END	
SHEET:	ITEM/PART NO:
9 OF 9	000178093 / 30244001000
REV	