
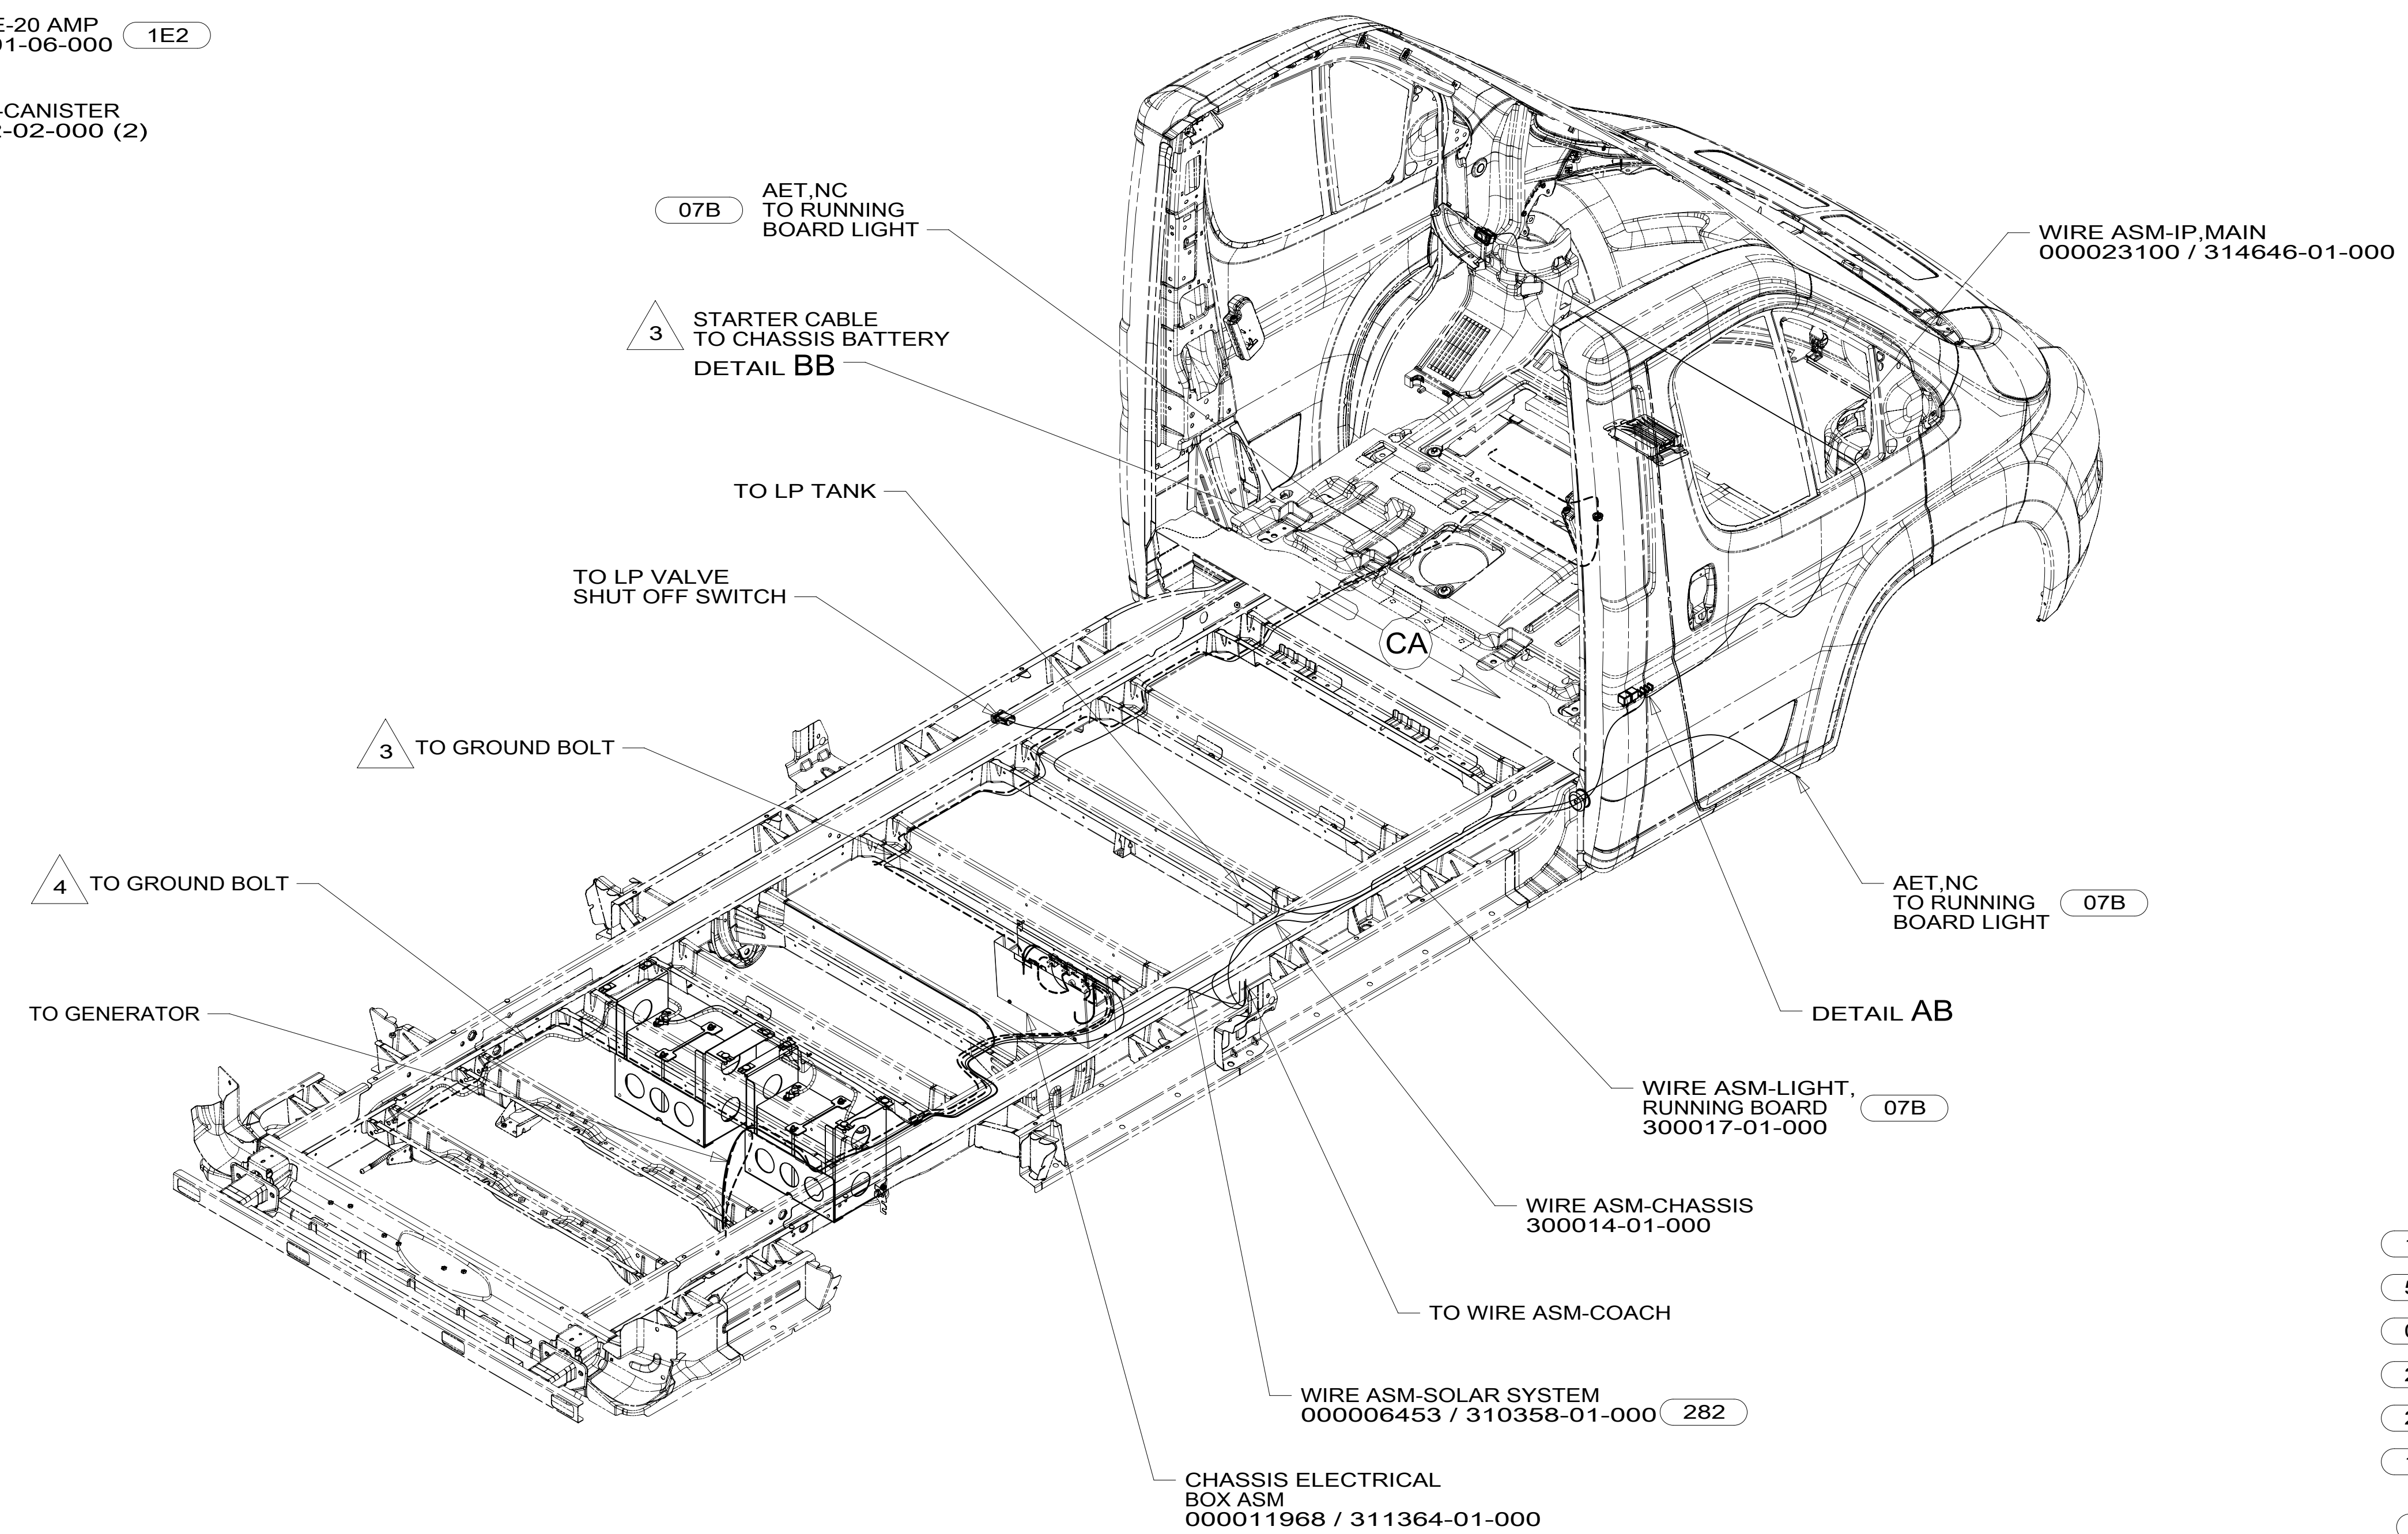


8 7 6 5 4 3 2 1

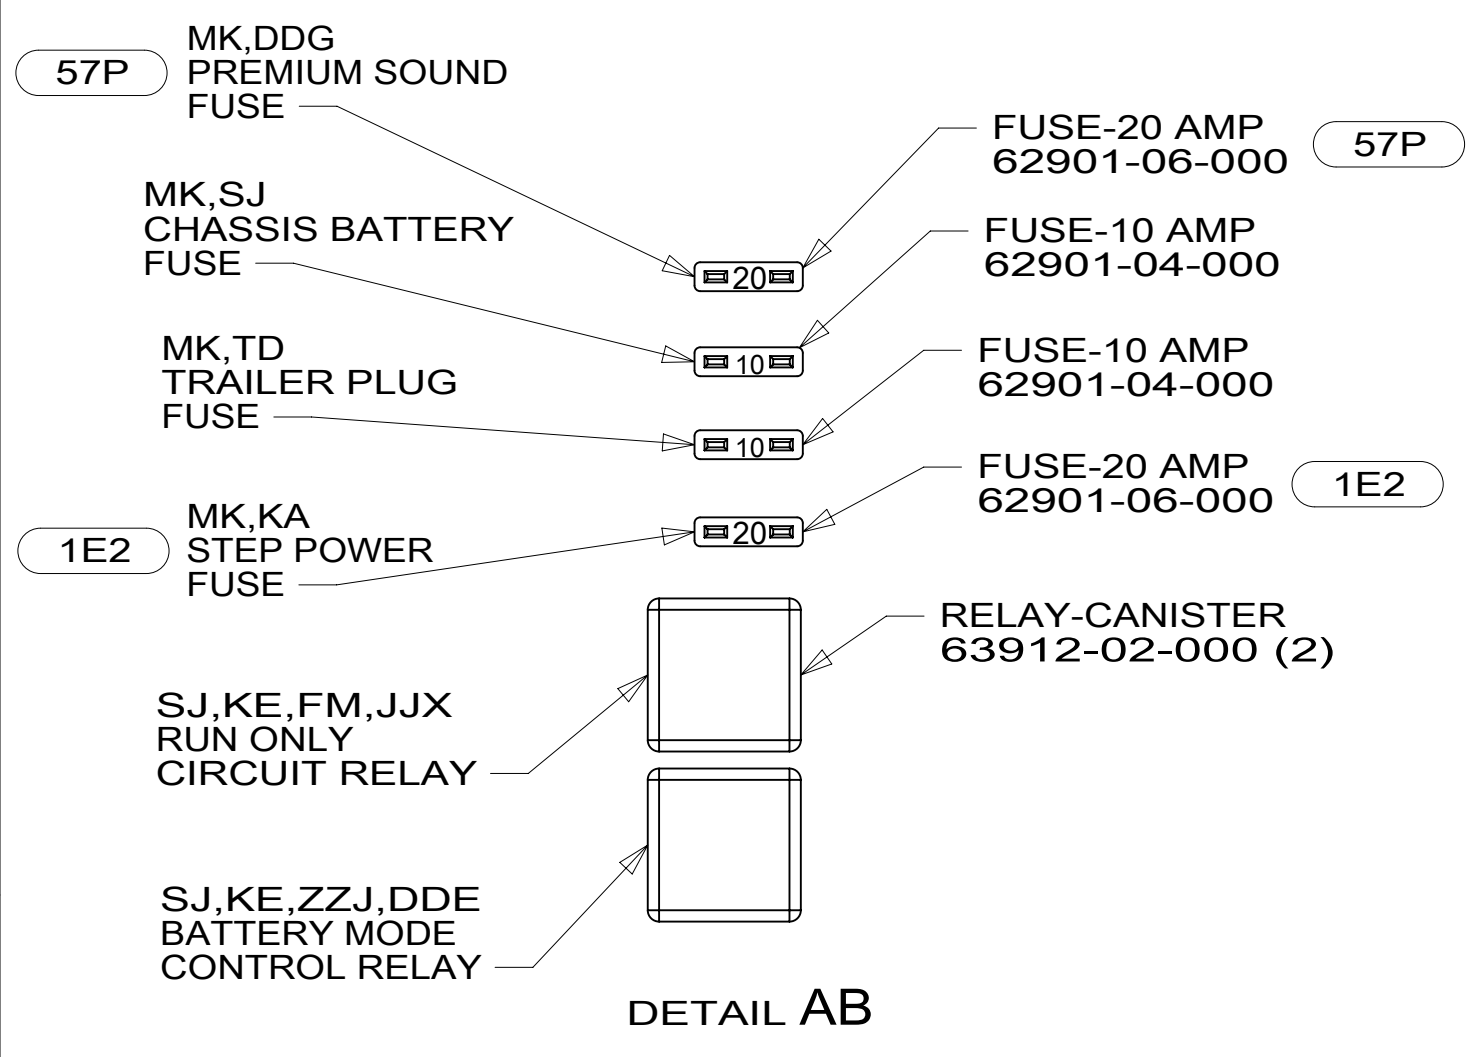

- 1E2 ENTRANCE STEP-ELEC.
- 57P RADIO SPEAKERS-PREMIUM SOUND
- 07B RUNNING BOARDS - ALUMINUM
- 282 SOLAR PANEL - 100 WATT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

WINNEBAGO
COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.

DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS	
DFFR:		
UNSPECIFIED TOLERANCES:	MATERIAL:	
WHOLE DIM (X) : 3		
ONE-PLACE (X.X) : 1.5		
TWO-PLACE (X.XX) : 0.50		
ANGLE : 1°		
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS)	FIRST USED:
		17 259K
DESCRIPTION: WIRING INSTL-CHASSIS		
SHEET: 1 OF 5	ITEM/PART NO: 000210567 / 30313901000	REV:
REF:		1 02-May-2017

- 4 REMOVE PAINT AND UNDER COATING FROM GROUND BOLT AND NUT TO INSURE PROPER CONTACT.
 3 SEE SHEET 5 FOR ADDITIONAL INFORMATION.
 2. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
 1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

8 7 6 5 4 3 2 1

D

C

B


A

D



C

B

A

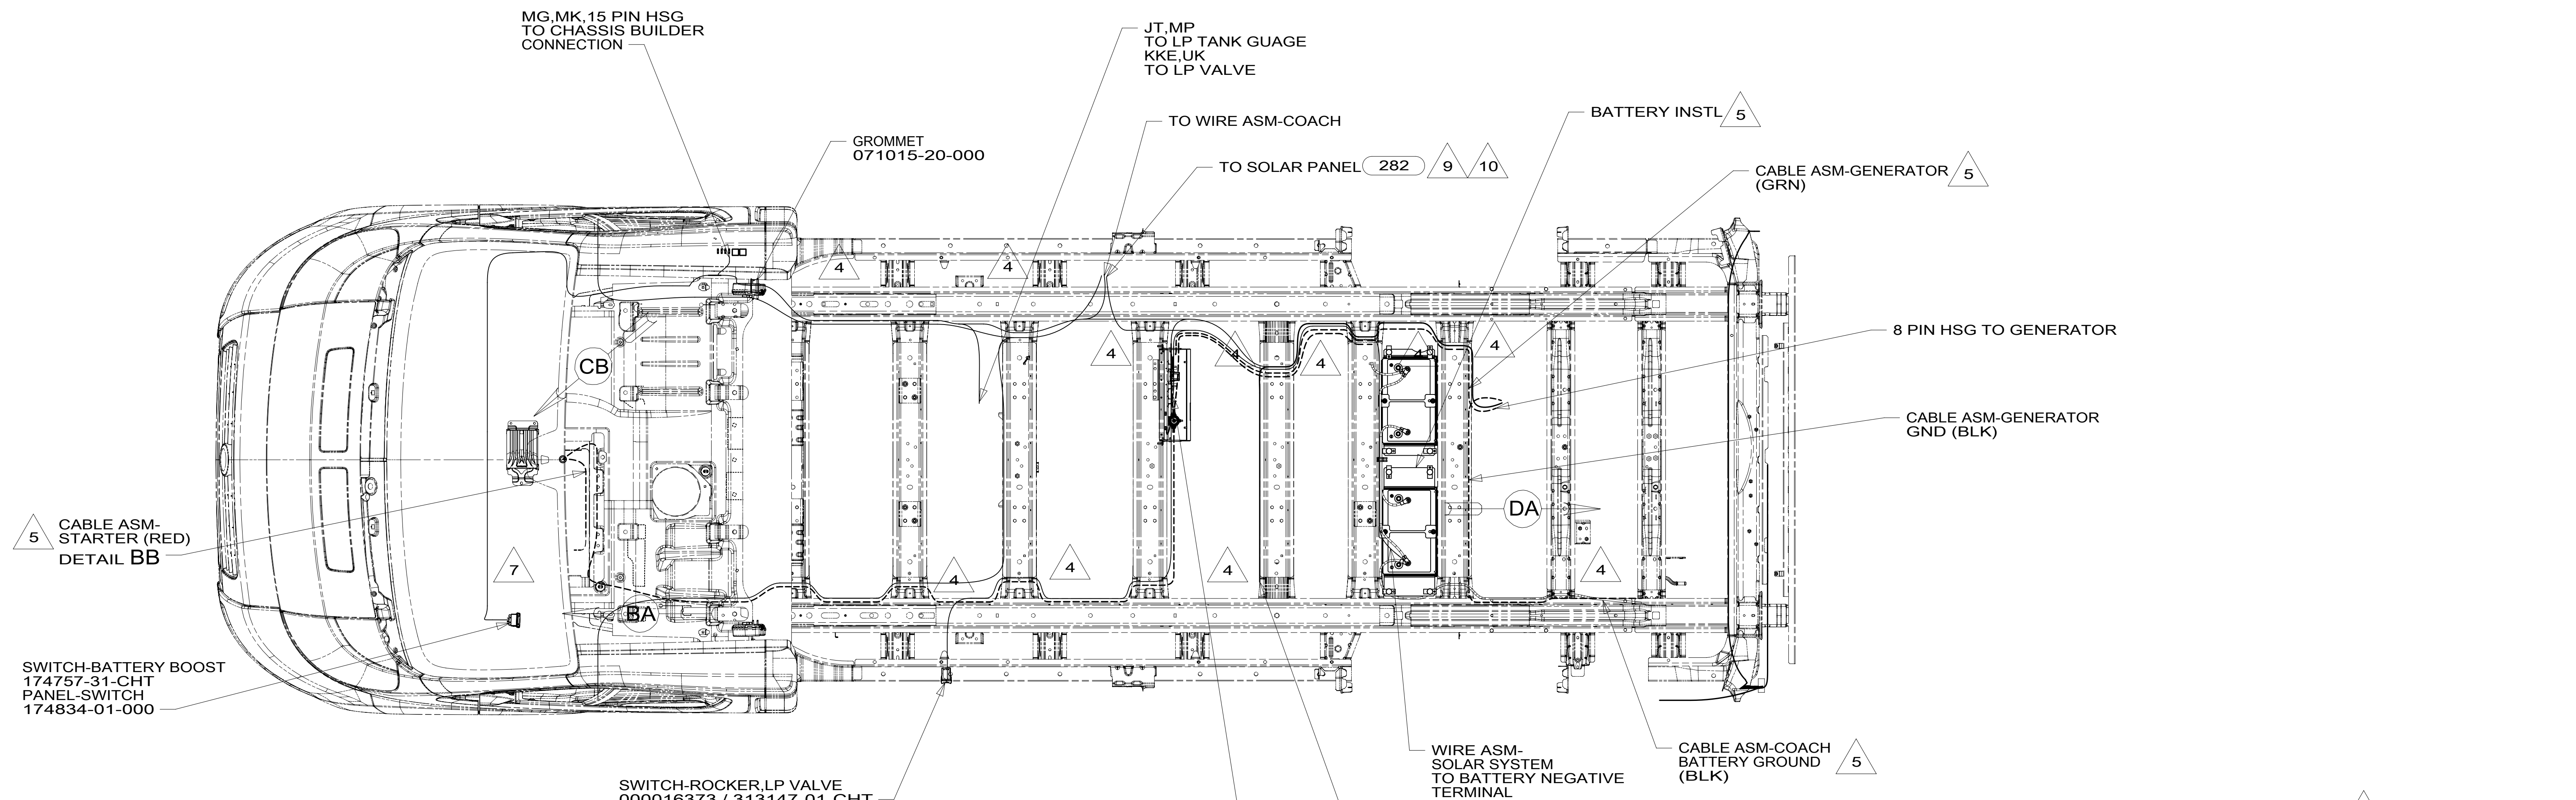

- 10 SEE CHASSIS ELECTRICAL BOX ASM FOR ADDITIONAL INFORMATION.
- 9 SEE WIRING INSTL-BODY, 12V FOR ADDITIONAL INFORMATION.
- 8. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.
- 7 SECURE WIRE HARNESS WITH CABLE TIE 008343-02-000.
- 6 LOCATED IN CAB FLOOR.
- 5 SEE SHEET 5 FOR ADDITIONAL INFORMATION.
- 4 CLAMP 83610-02-000, SCREW G39-08-12U.
- 3 DRILL HOLE IN BOTTOM OF PLASTIC BATTERY BOX.
- 2 CUTOUT BACKSIDE OF POCKET TO DIMENSION SHOWN.
- 1. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

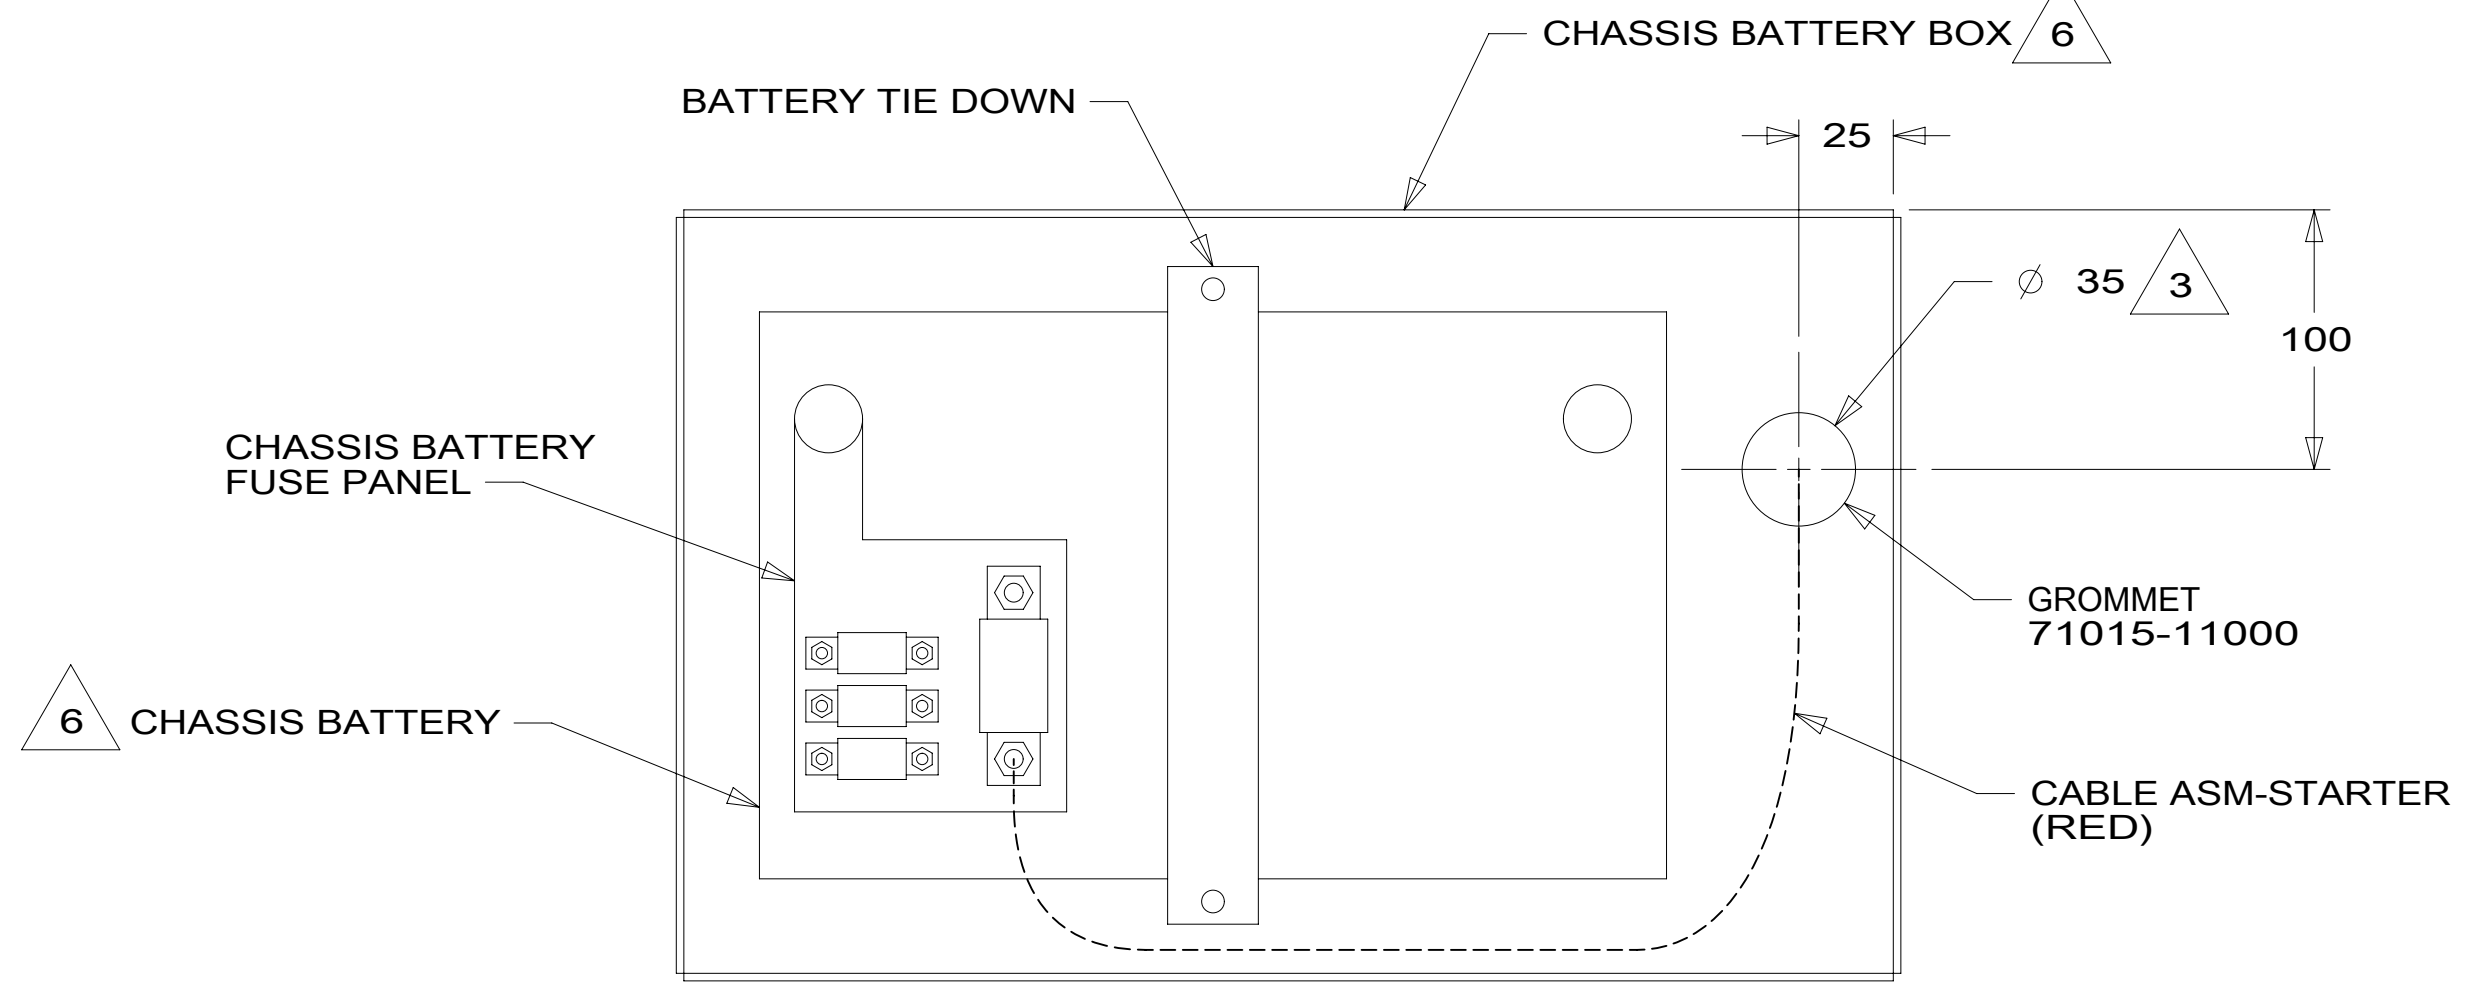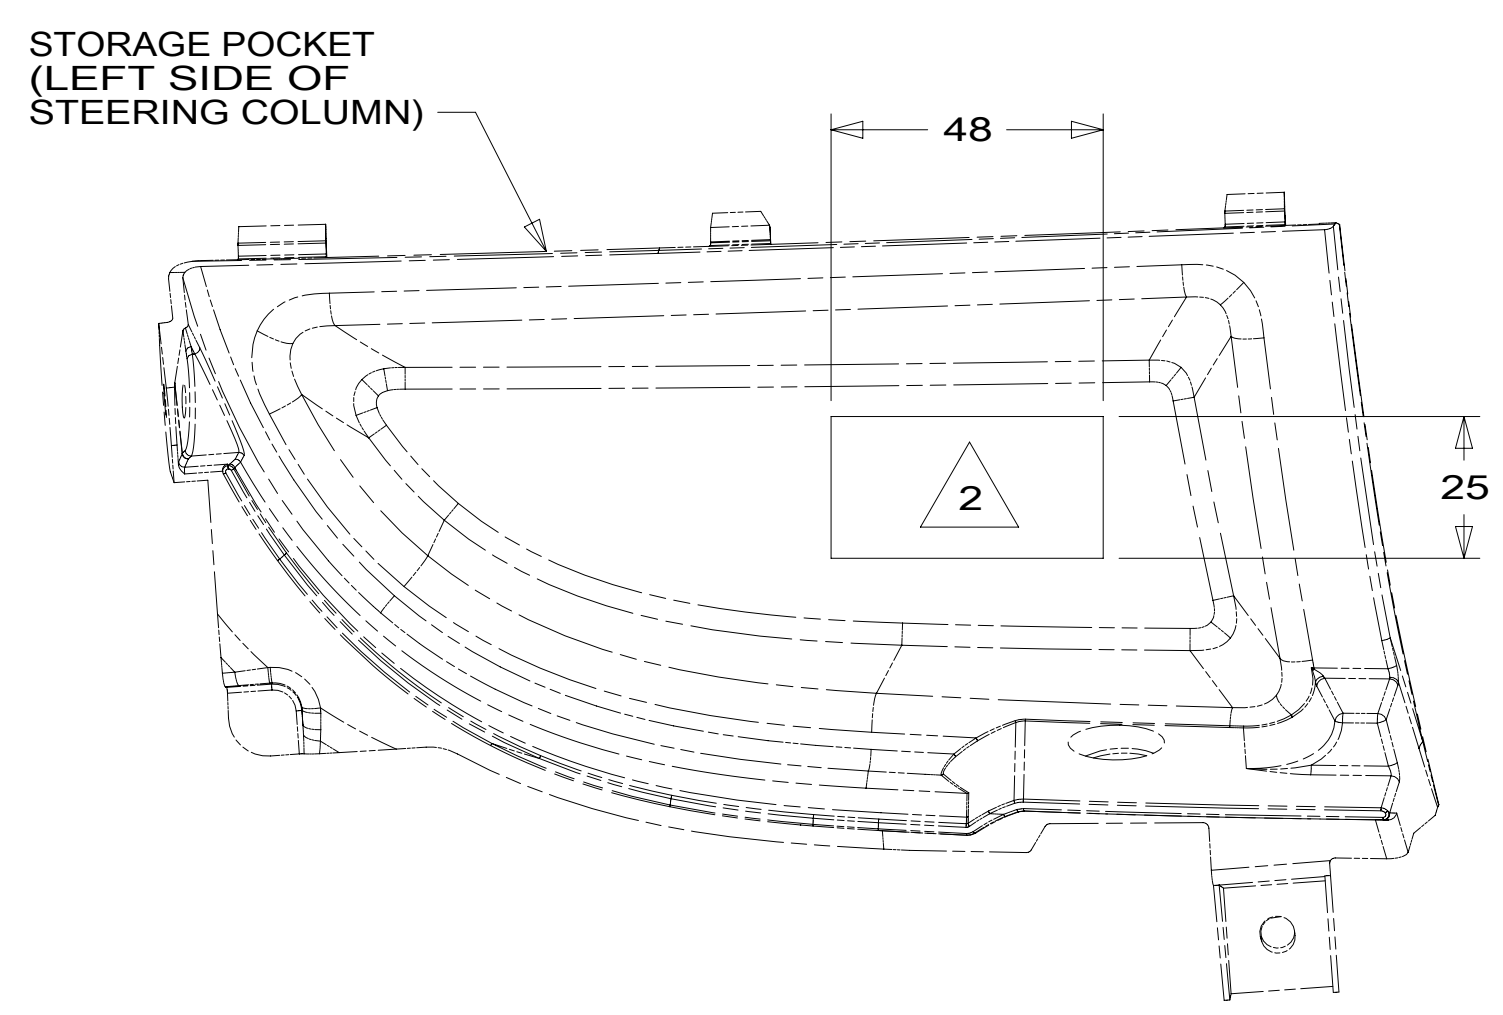

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


- 282 SOLAR PANEL - 100 WATT
- 1G8 GENERATOR-2800 WATT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION: 1B1 265	
WIRING INSTL-CHASSIS	
SHEET: 2 OF 5	ITEM/PART NO: 000210567 / 30313901000
REV: 02-May-2017	


8 7 6 5 4 3 2 1

D

D

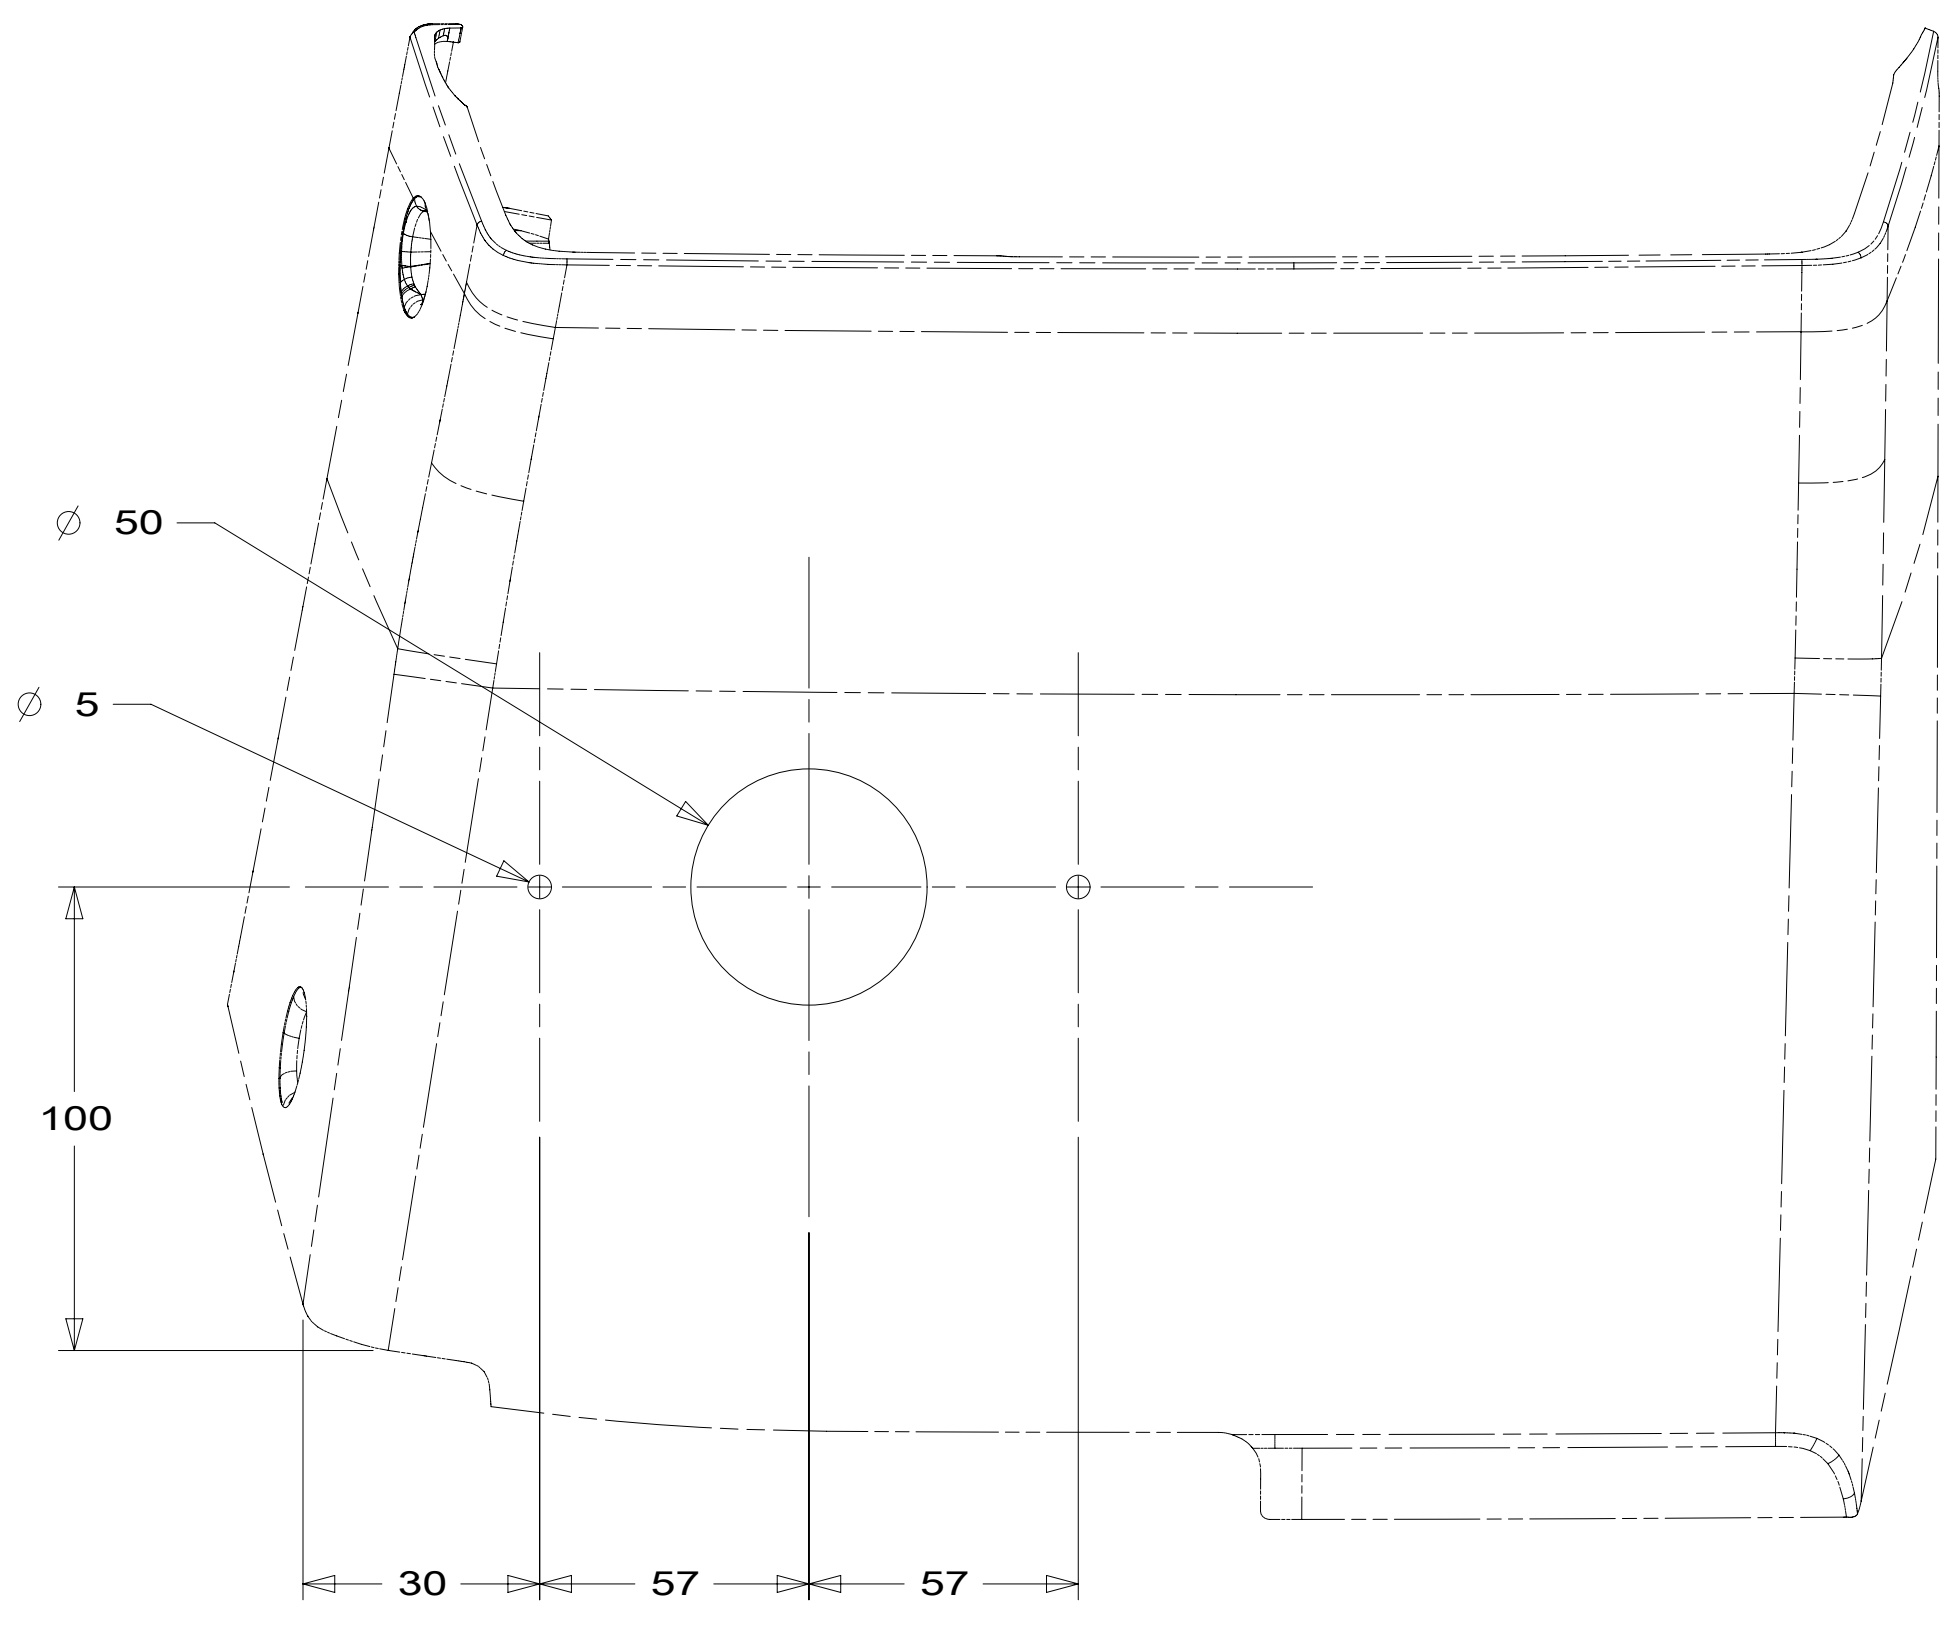

VIEW CA

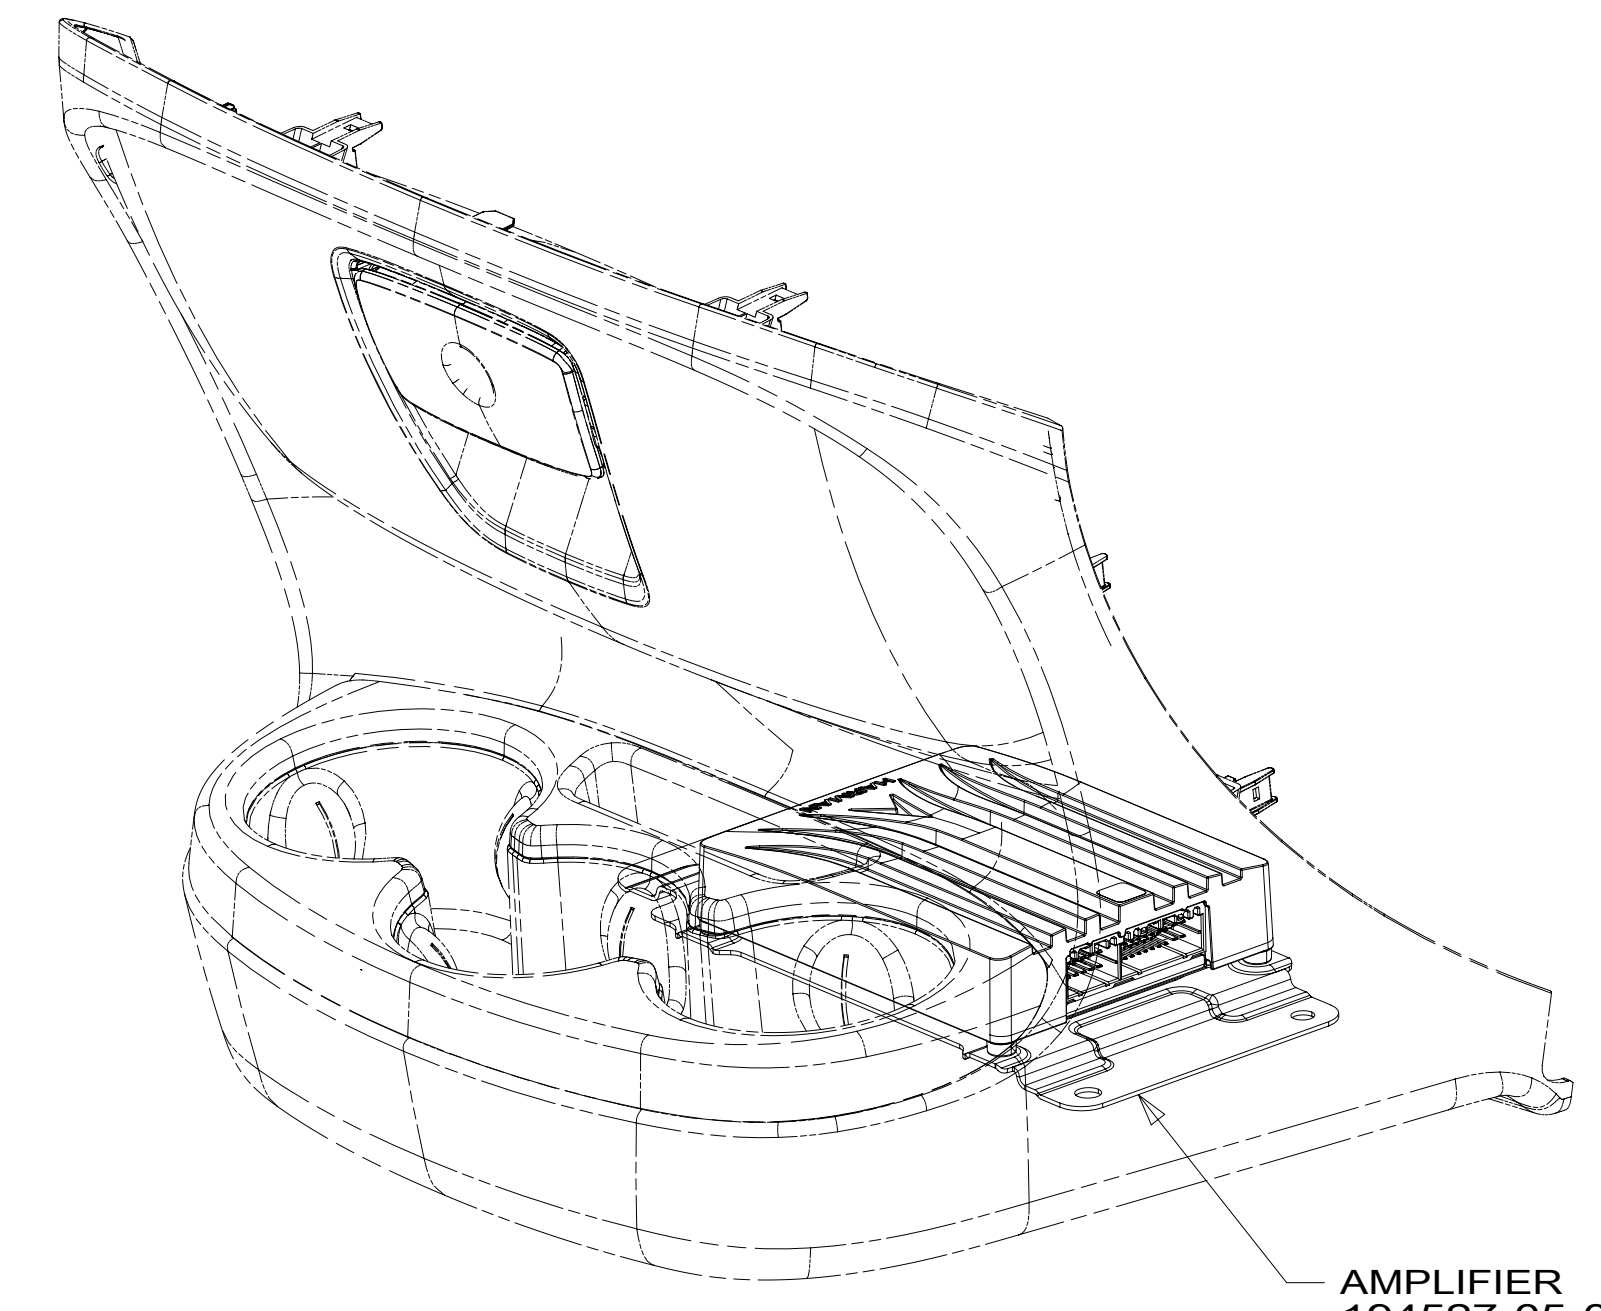

VIEW CB 57P

- AMPLIFIER
194527-05-000
- WIRE ASM-AMP
194532-01-000
- FASTENER-DUAL LOCK
085744-01-000 (100 MM)(2)
- FASTENER-DUAL LOCK
085744-02-000 (100 MM)(2)

→

←

B

B

A

A

NOTES:

1. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.



FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 57P RADIO SPEAKERS-PREMIUM SOUND
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION:		1B1 265	
WIRING INSTL-CHASSIS			
SHEET:	ITEM/PART NO.:	REV	
3 OF 5	000210567 / 30313901000		

8 7 6 5 4 3 2 1 02-May-2017

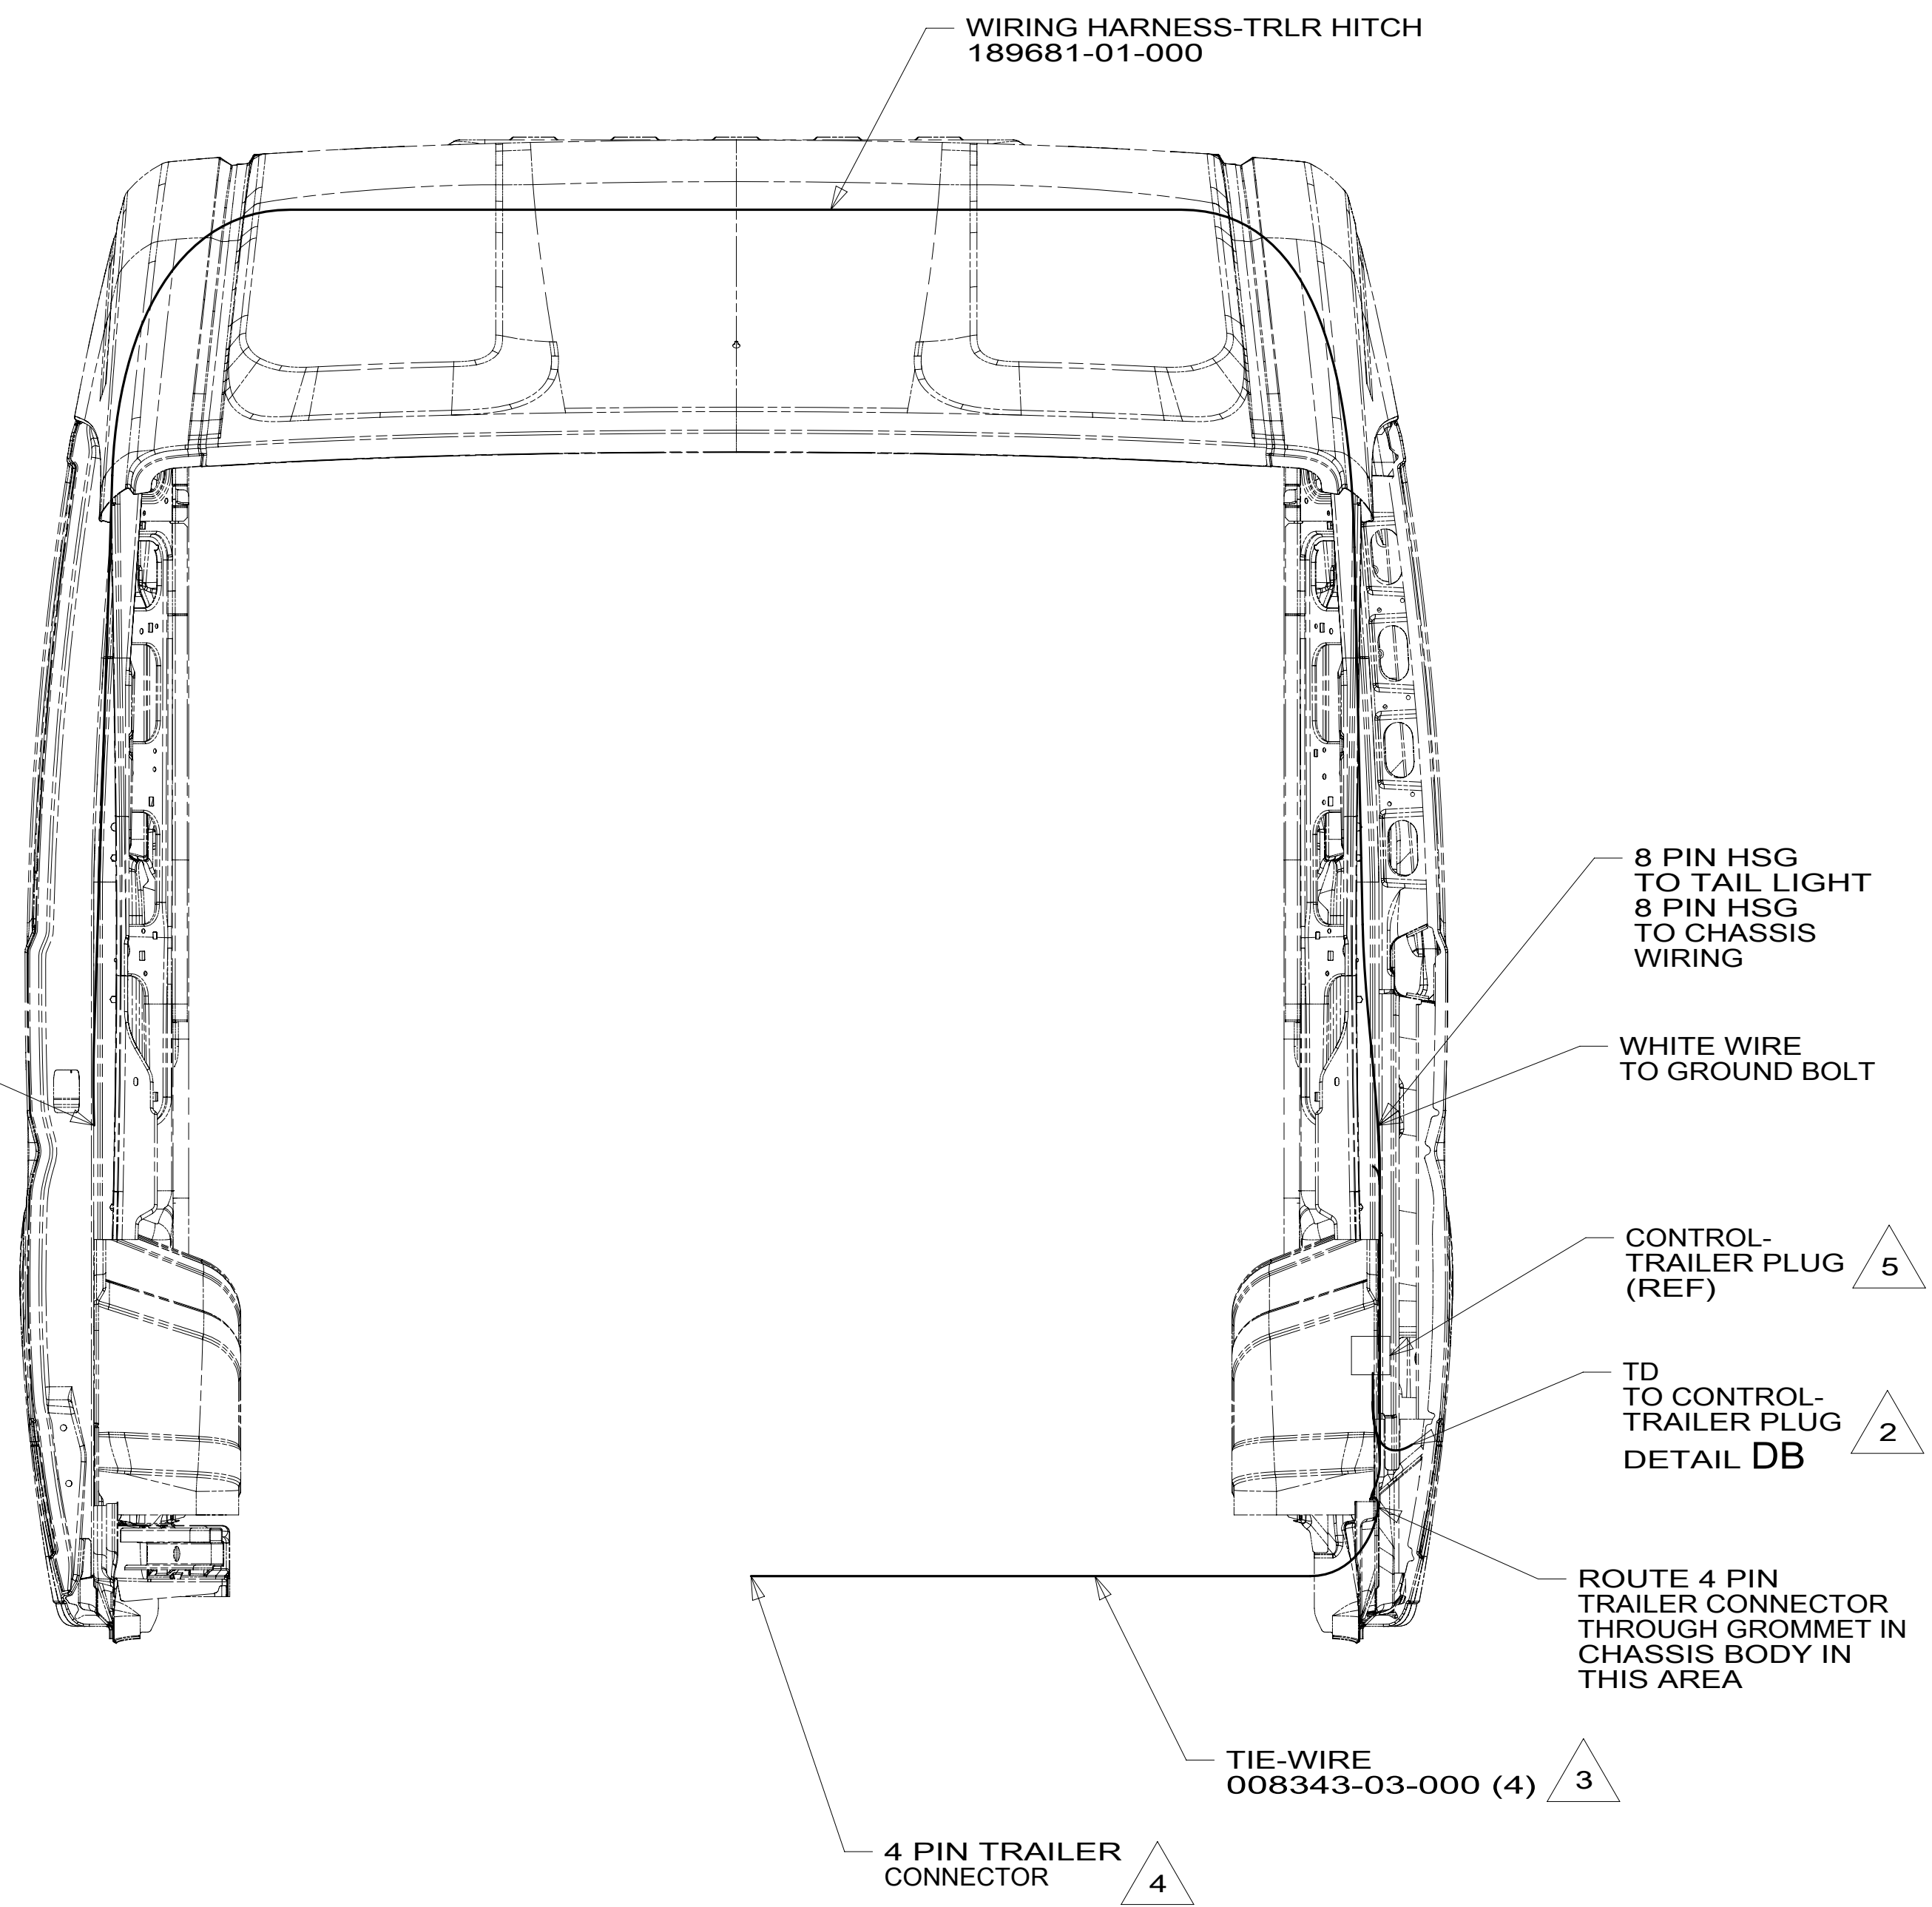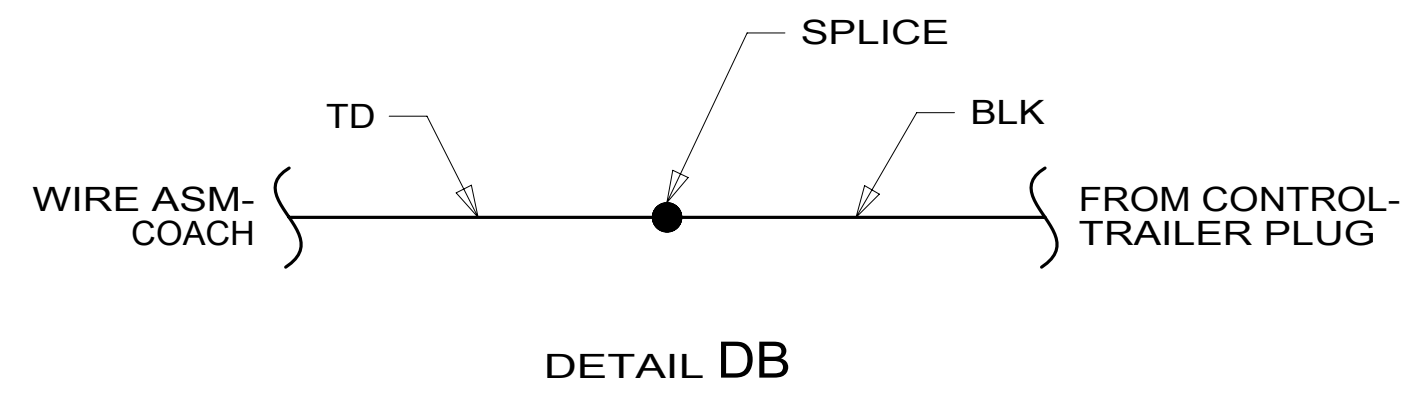

- 5 CONTROL SUPPLIED WITH WIRING HARNESS-TRLR HITCH. SECURE CONTROL IN PLACE WITH DOUBLE SIDED TAPE SUPPLIED WITH WIRING HARNESS-TRLR HITCH.
- 4 WIRE TIE 4-PIN TRAILER PLUG TO HITCH ASSEMBLY NEAR RECEIVER.
- 3 WIRE TIE TRAILER WIRING BEHIND BUMPER.
- 2 SEE WIRING INSTL-BODY, 12V FOR ADDITIONAL INFORMATION.

NOTES:
1. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

VIEW DA



FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

DESCRIPTION: WIRING INSTL-CHASSIS	
SHEET: 4 OF 5	ITEM/PART NO: 000210567 / 30313901000
REV	

8 7 6 5 4 3 2 1

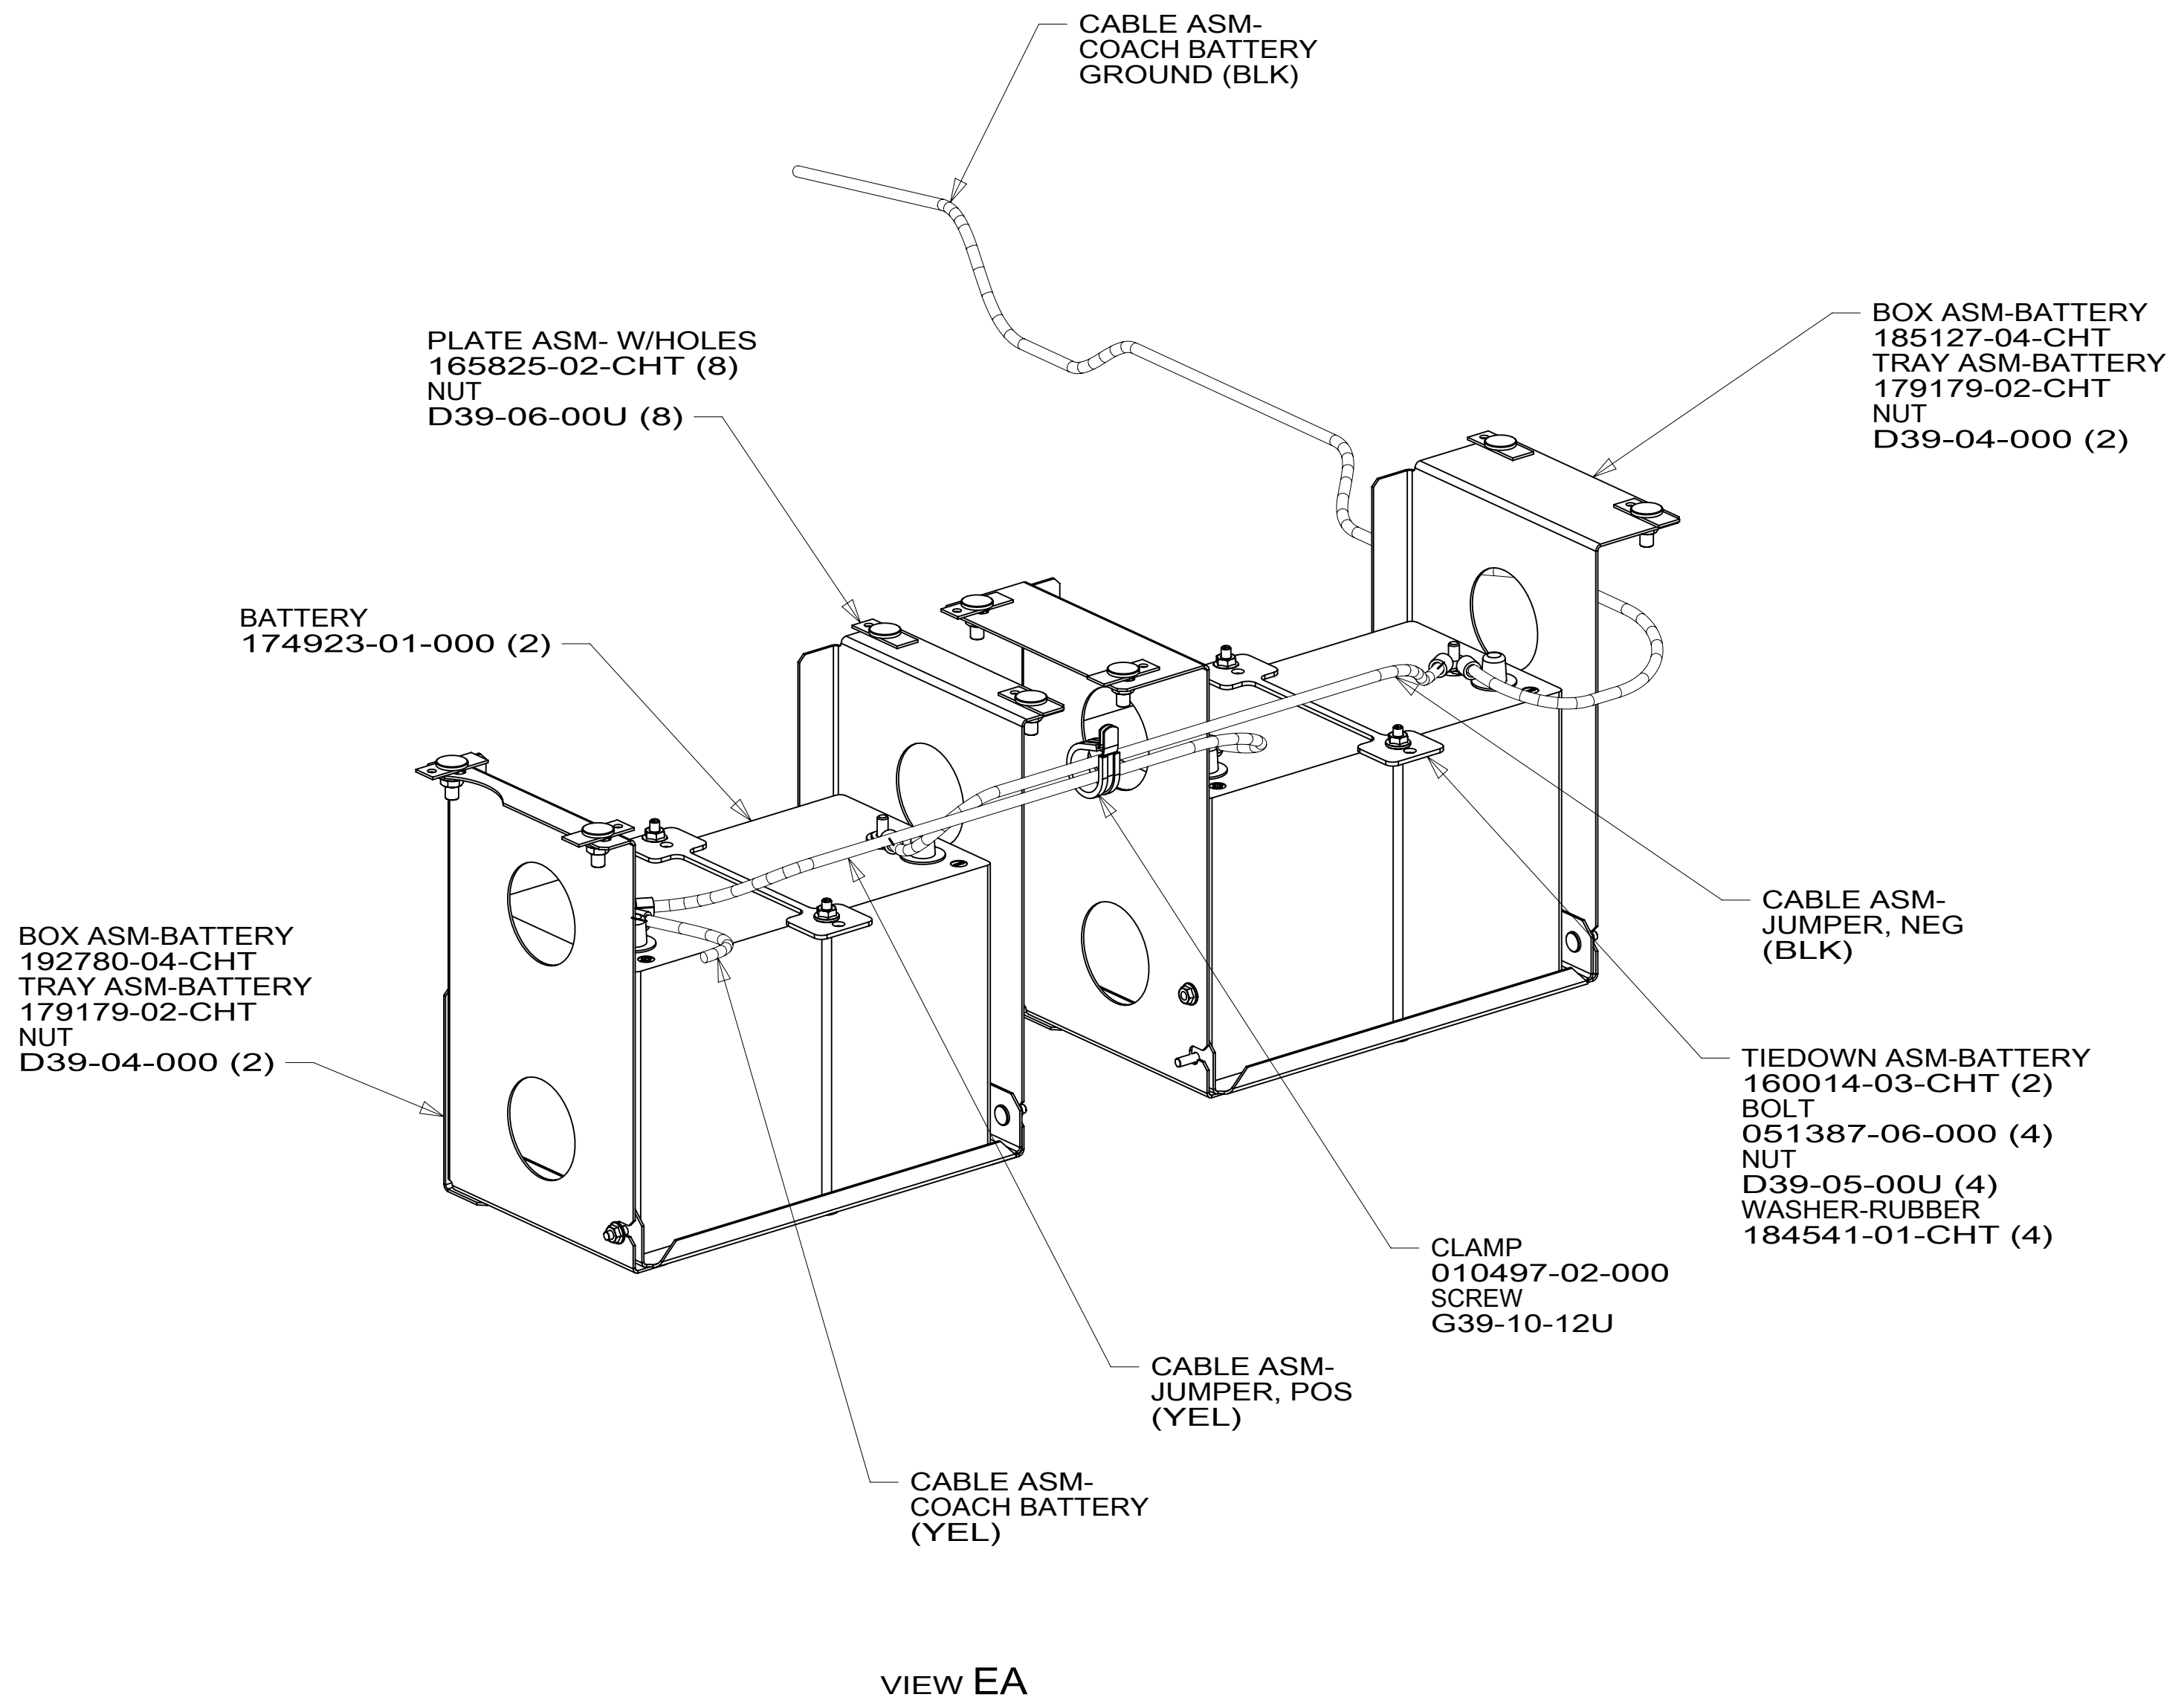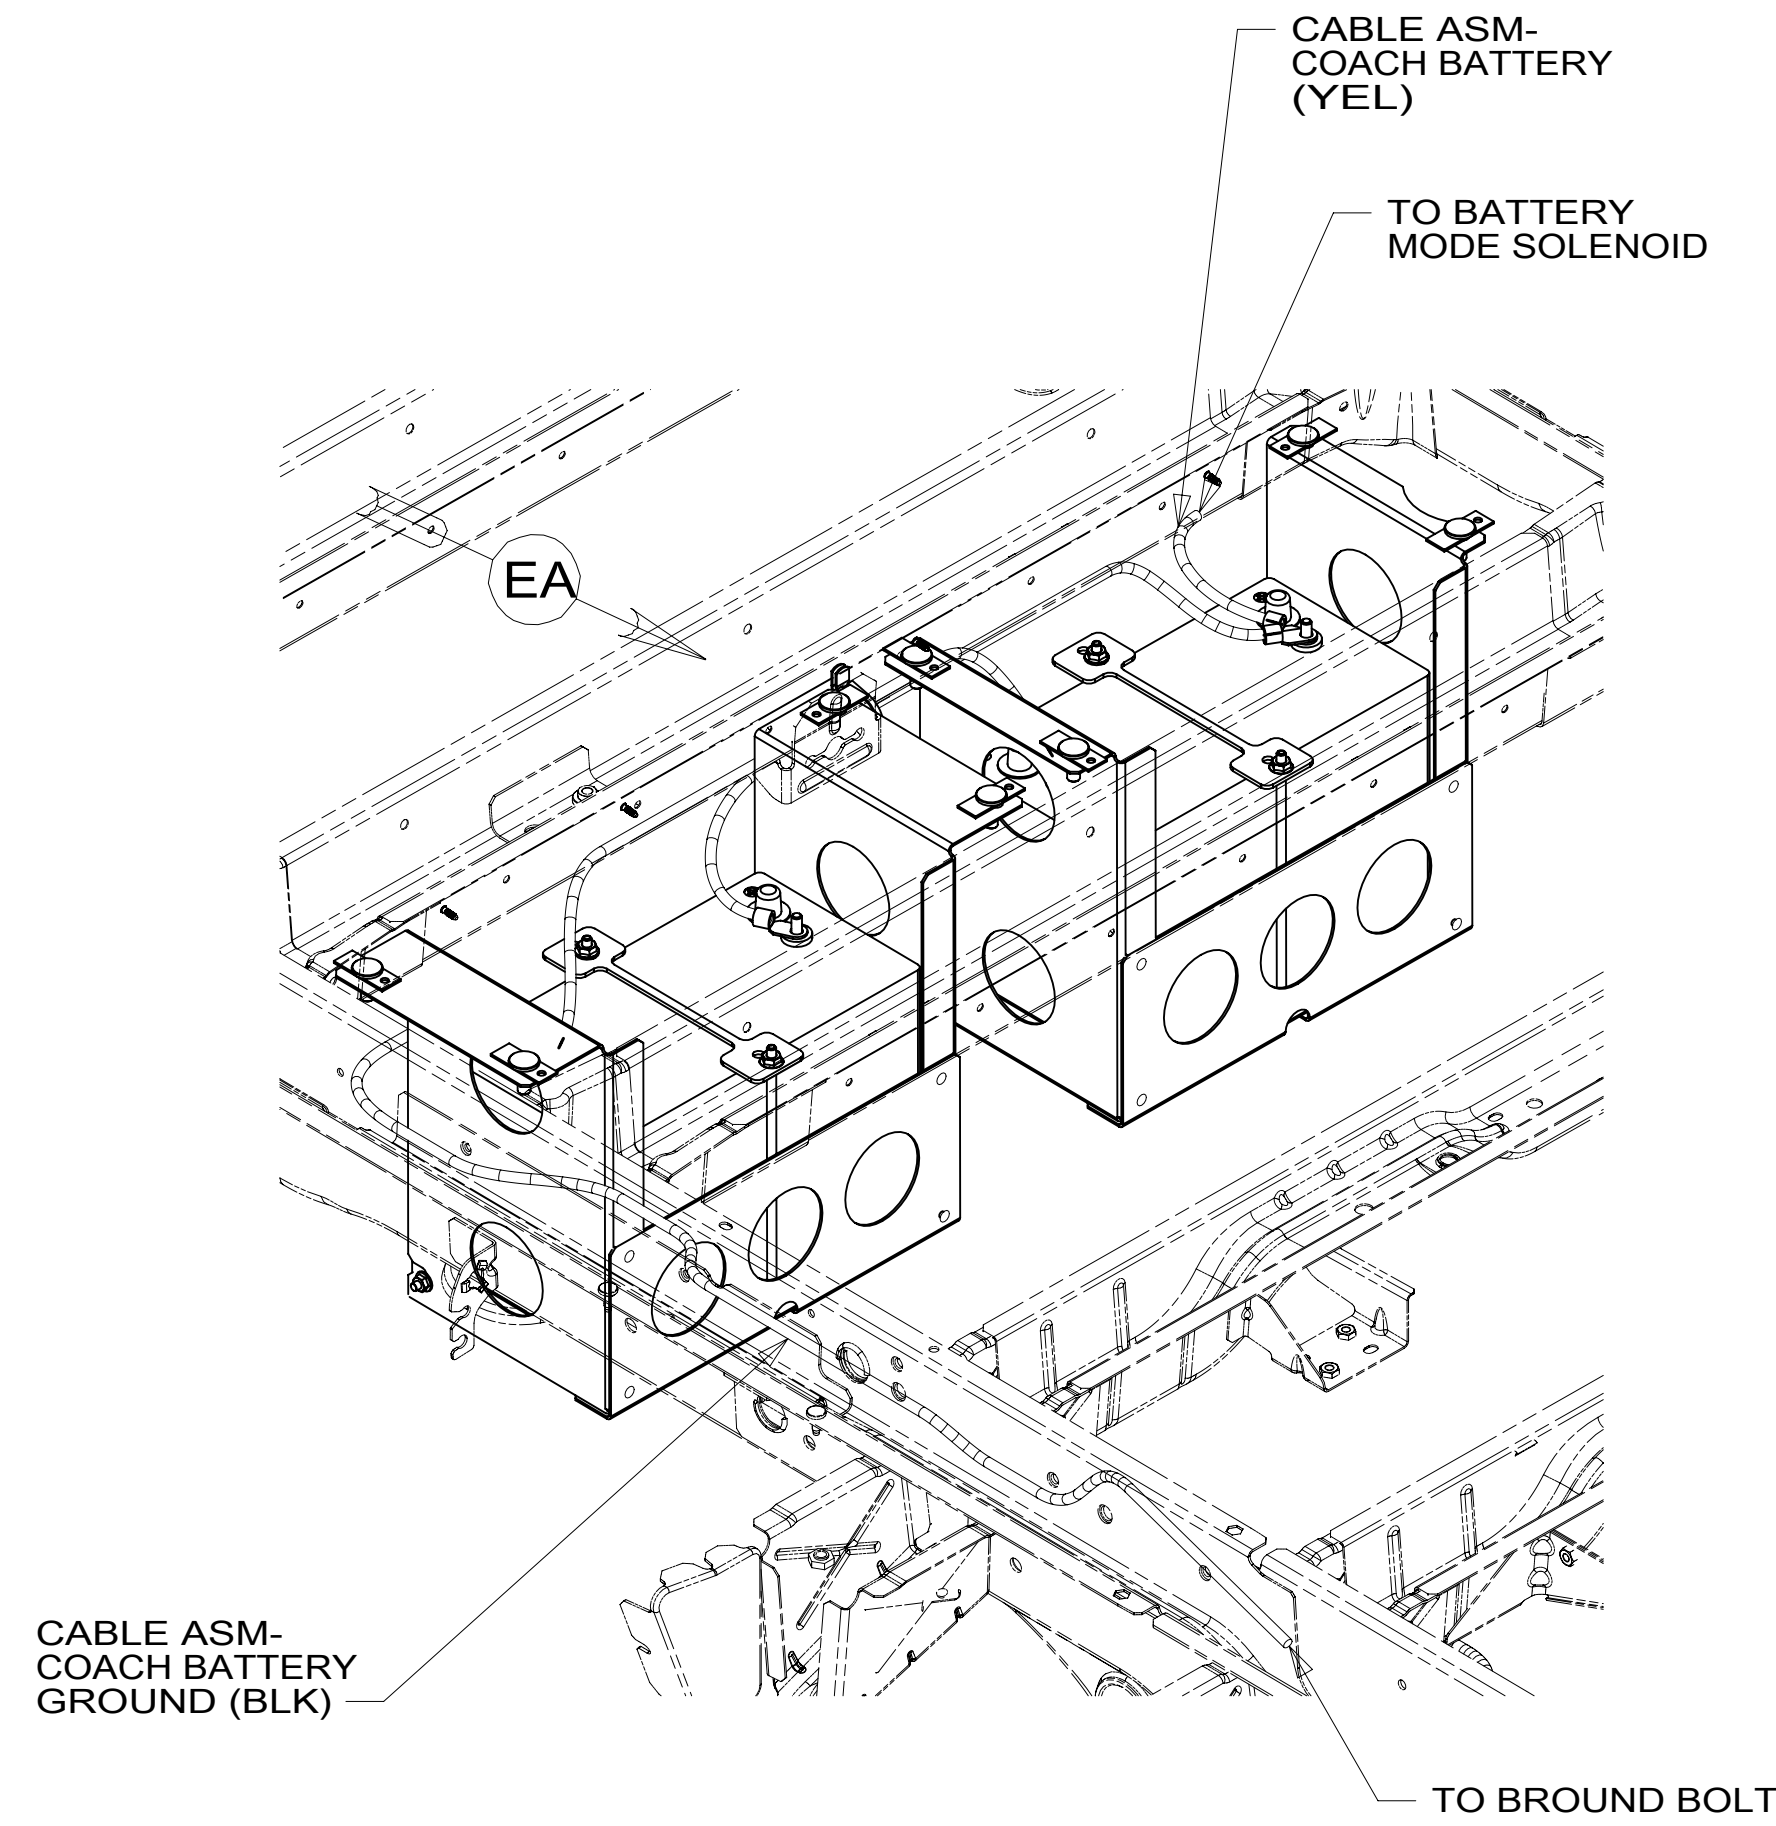

VIEW EA

CABLE ASM-STARTER (RED)	185087-01-039
CABLE ASM-COACH BATTERY (YEL)	141415-52-018
CABLE ASM-COACH BATTERY GND (BLK)	133566-17-009
CABLE ASM-GENERATOR (GRN)	141415-42-020
CABLE ASM-GENERATOR GND (BLK)	133566-17-018
CABLE ASM-JUMPER,POS	141415-52-009
CABLE ASM-JUMPER,NEG	133566-17-009

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

1B1 265

DESCRIPTION: **WIRING INSTL-CHASSIS**

SHEET: 5 OF 5 ITEM/PART NO: 000210567 / 30313901000 REV

8 7 6 5 4 3 2 1 02-May-2017