

- 3 PIN HOUSING 45D TO SIDEWALL
- 2 PIN HSG TO WIRE ASM-BED LIFT 45B
- 45D READ-4
- WIRE ASM-IP.MAIN 303081-01-000
- RING TERMINAL (4) TO GROUND BOLT
- TO RELAYS
- CLIP-WIRE, NYLON 080734-02-000
- TIE-WIRE 008343-01-000
- 6 PIN HOUSING TO LEFT MIRROR
- 12 PIN HOUSING TO SIDEWALL
- GROMMET 023942-02-000

- 9 PIN HOUSING TO ROOF 45B
- 2 PIN HOUSING CONNECTS TO WIRE ASM-CLEARANCE FRONT
- WIRING TO LOFT BED 3
- 2 PIN HSG TO SIDEWALL 45D
- 2 PIN HSG TO WIRE ASM-IP,MAIN 45B
- SPEAKER 94097-01-000 (2)
- SCREW G11-08-20U (6)
- WIRE ASM-BED LIFT 187662-03-000 3 45B
- TAPE (2) 2 (400MM)
- 6 PIN HOUSING TO RIGHT MIRROR
- PANEL-SWITCH MOUNTING,SINGLE 174834-01-CHT
- SWITCH-MAP LIGHT 174757-20-CHT 45B
- OR SWITCH-BLANK 145754-01-CHT 45D
- USB-CHARGER DUAL,DC 188312-01-000
- 4 PIN HSG TO PASS MAP LAMP SWITCH
- RECEPTACLE-12V 111414-01-000

3 SEE SHEET 9 FOR ADDITIONAL INFORMATION ON LOFT BED.

2 USE TAPE 8363-03-000 TO SECURE WIRES IN A-POST.

1. WINNEBAGO WIRE ASSEMBLIES ARE SHOWN FOR CLARITY.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 45D LOFT BED - WITHOUT
- 45B LOFT BED
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


1B1 265

WINNEBAGO
COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.


DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS	
DFFR:		
UNSPECIFIED TOLERANCES:	MATERIAL:	
WHOLE DIM (X) :	3	
ONE-PLACE (X.X) :	1.5	
TWO-PLACE (X.XX) :	0.50	
ANGLE :	1°	
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS)	FIRST USED:
		17 E31BE
DESCRIPTION:		
WIRING INSTL-FRONT END		
SHEET:	ITEM/PART NO.:	REV:
1 OF 9	000212731 / 30300401000	
REF:	1 05-May-2017	

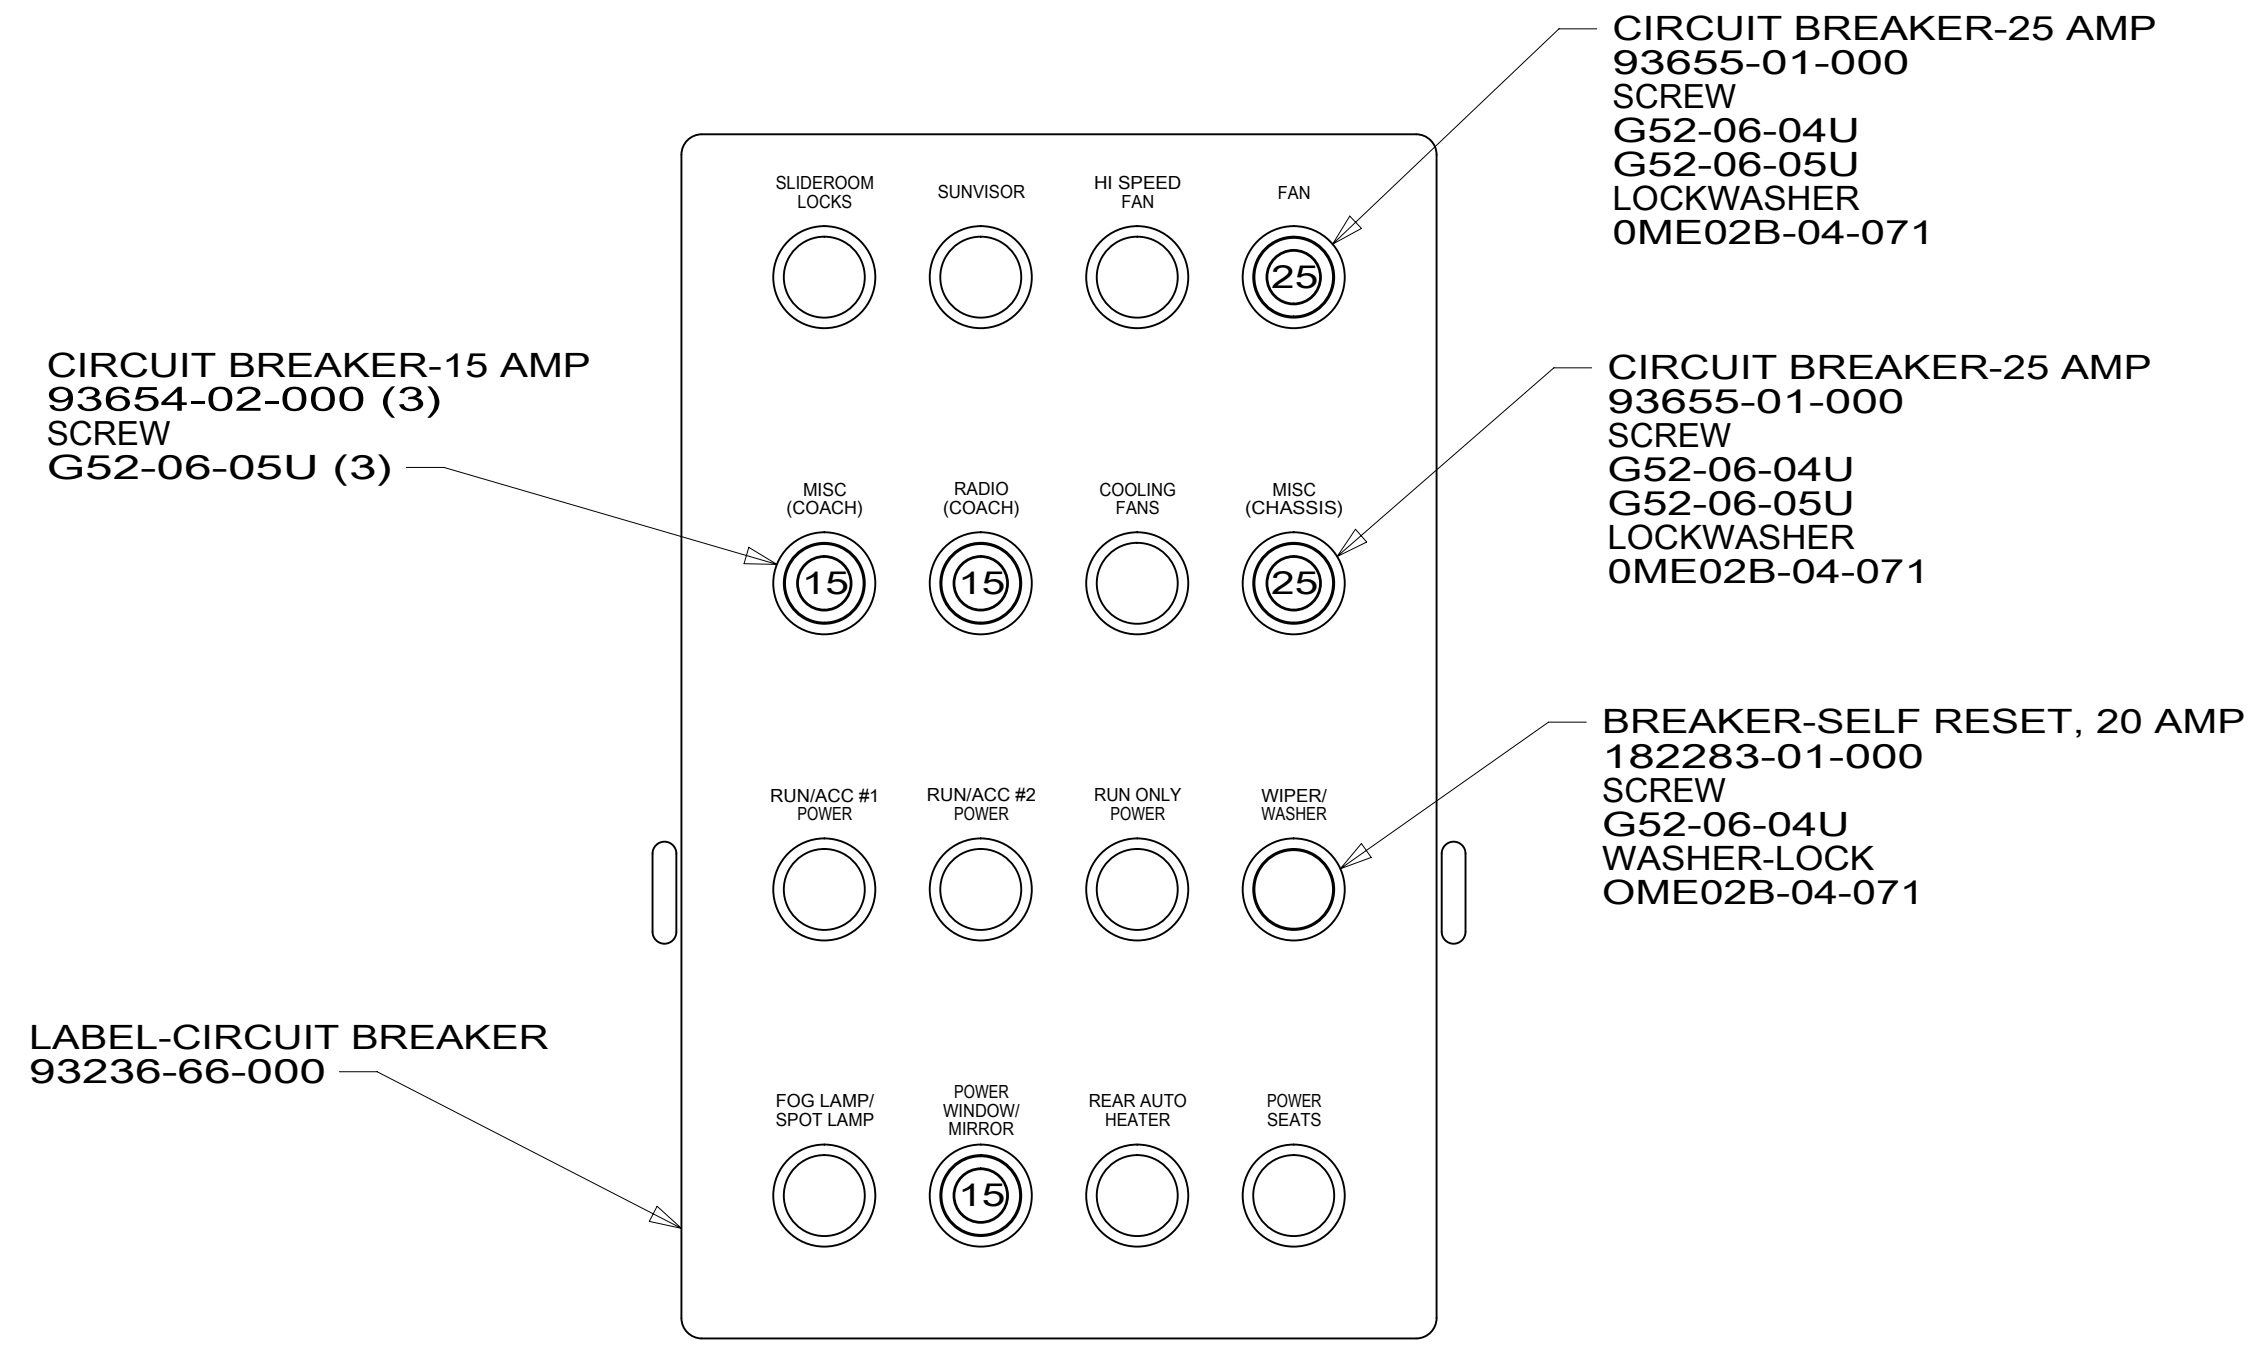

VIEW BB

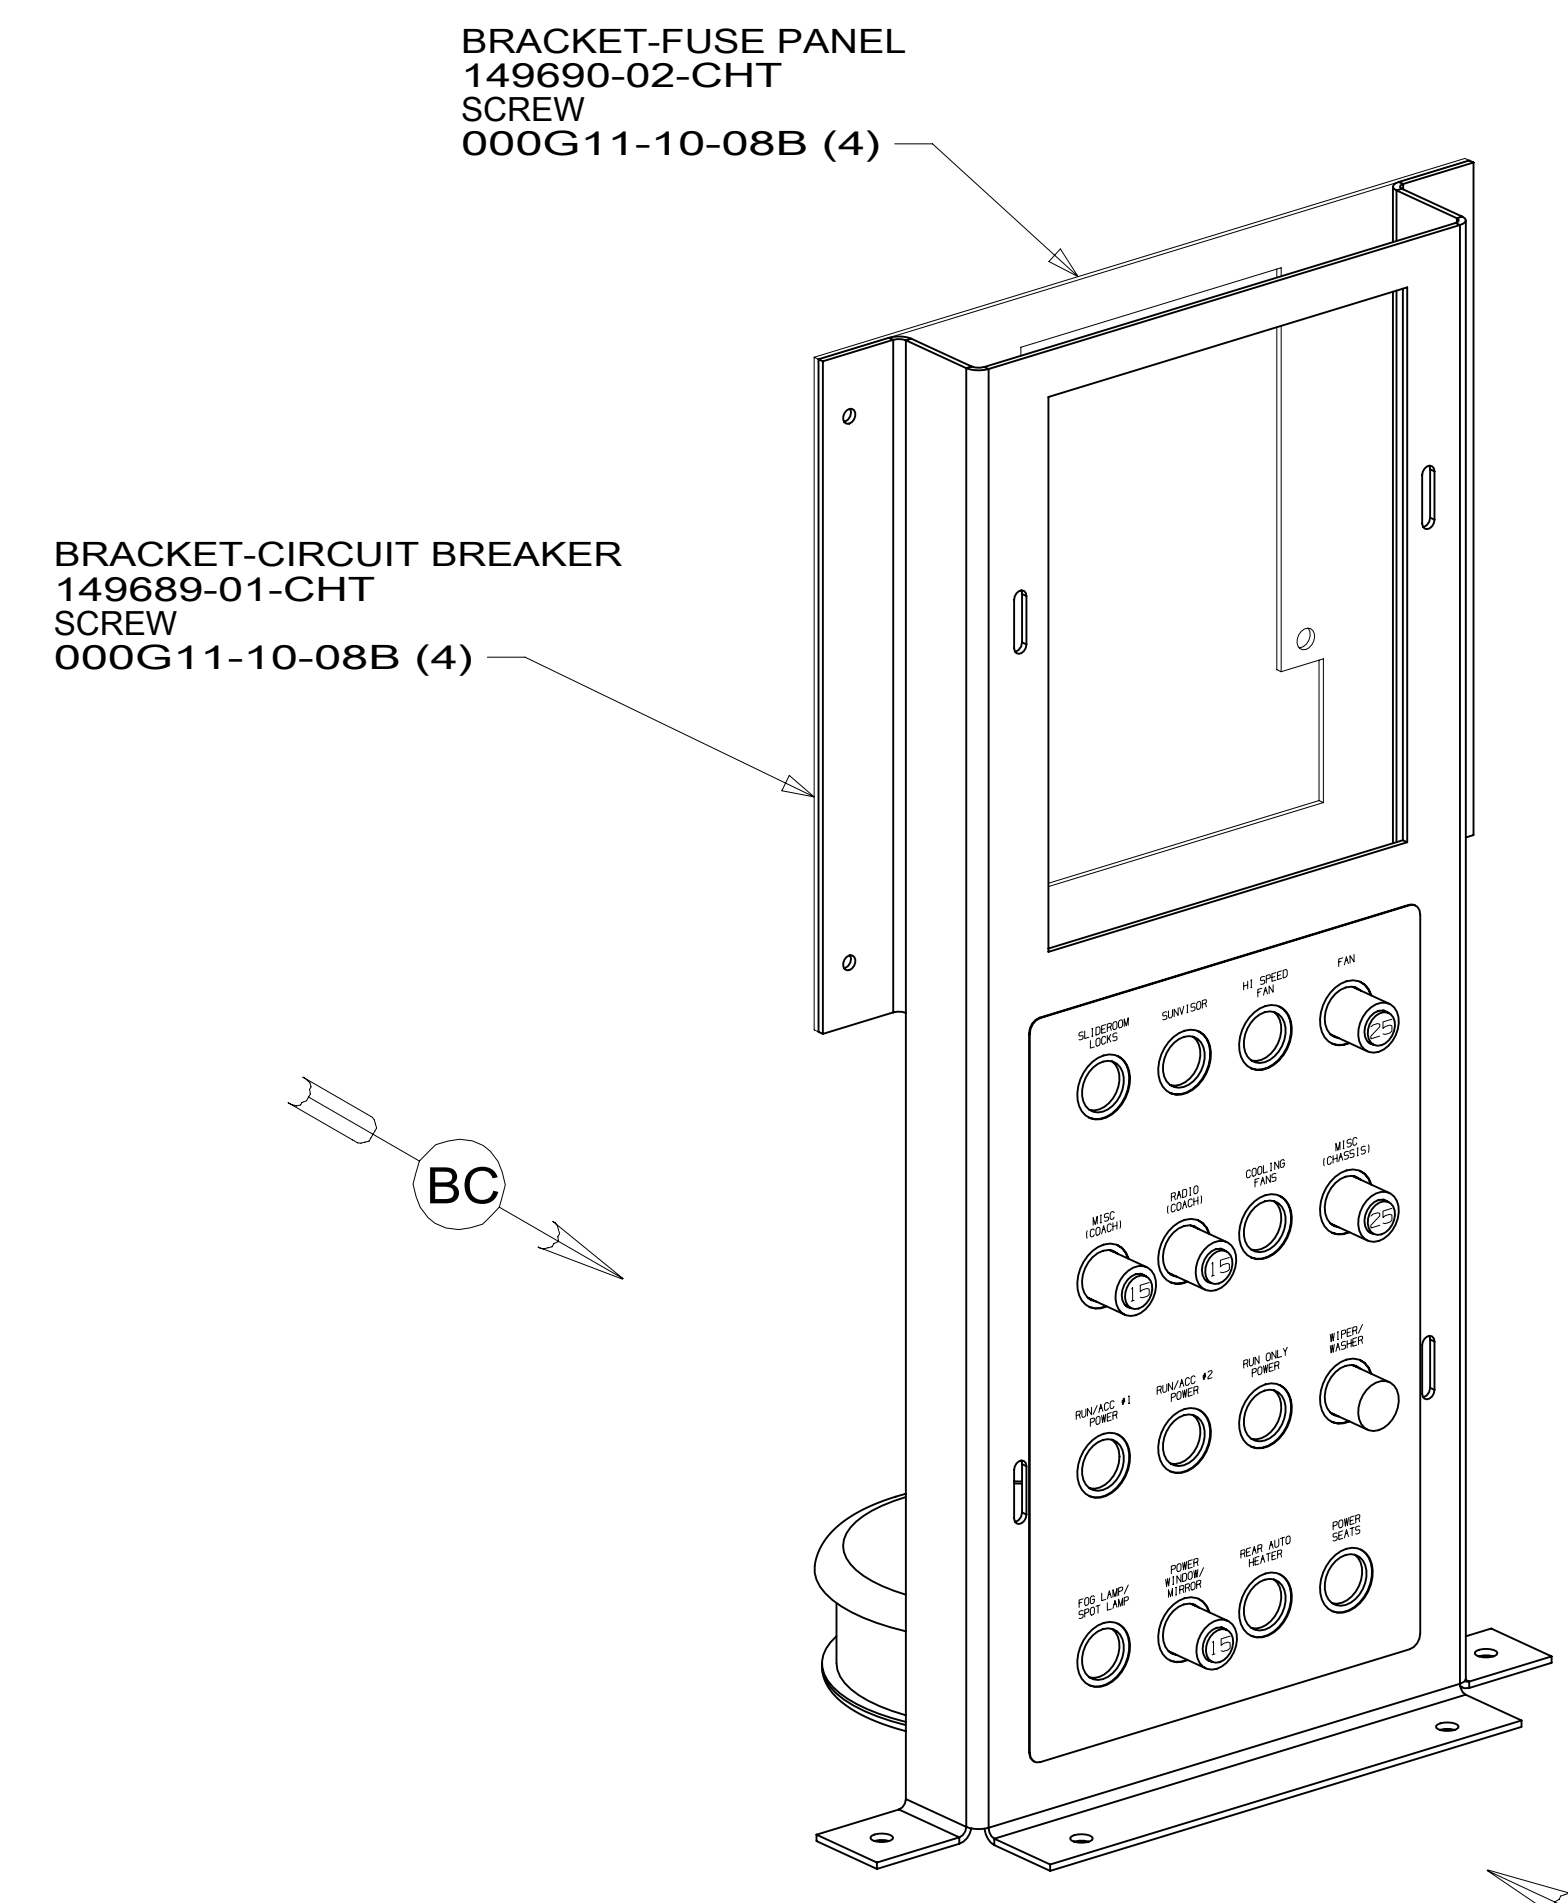

DETAIL BA

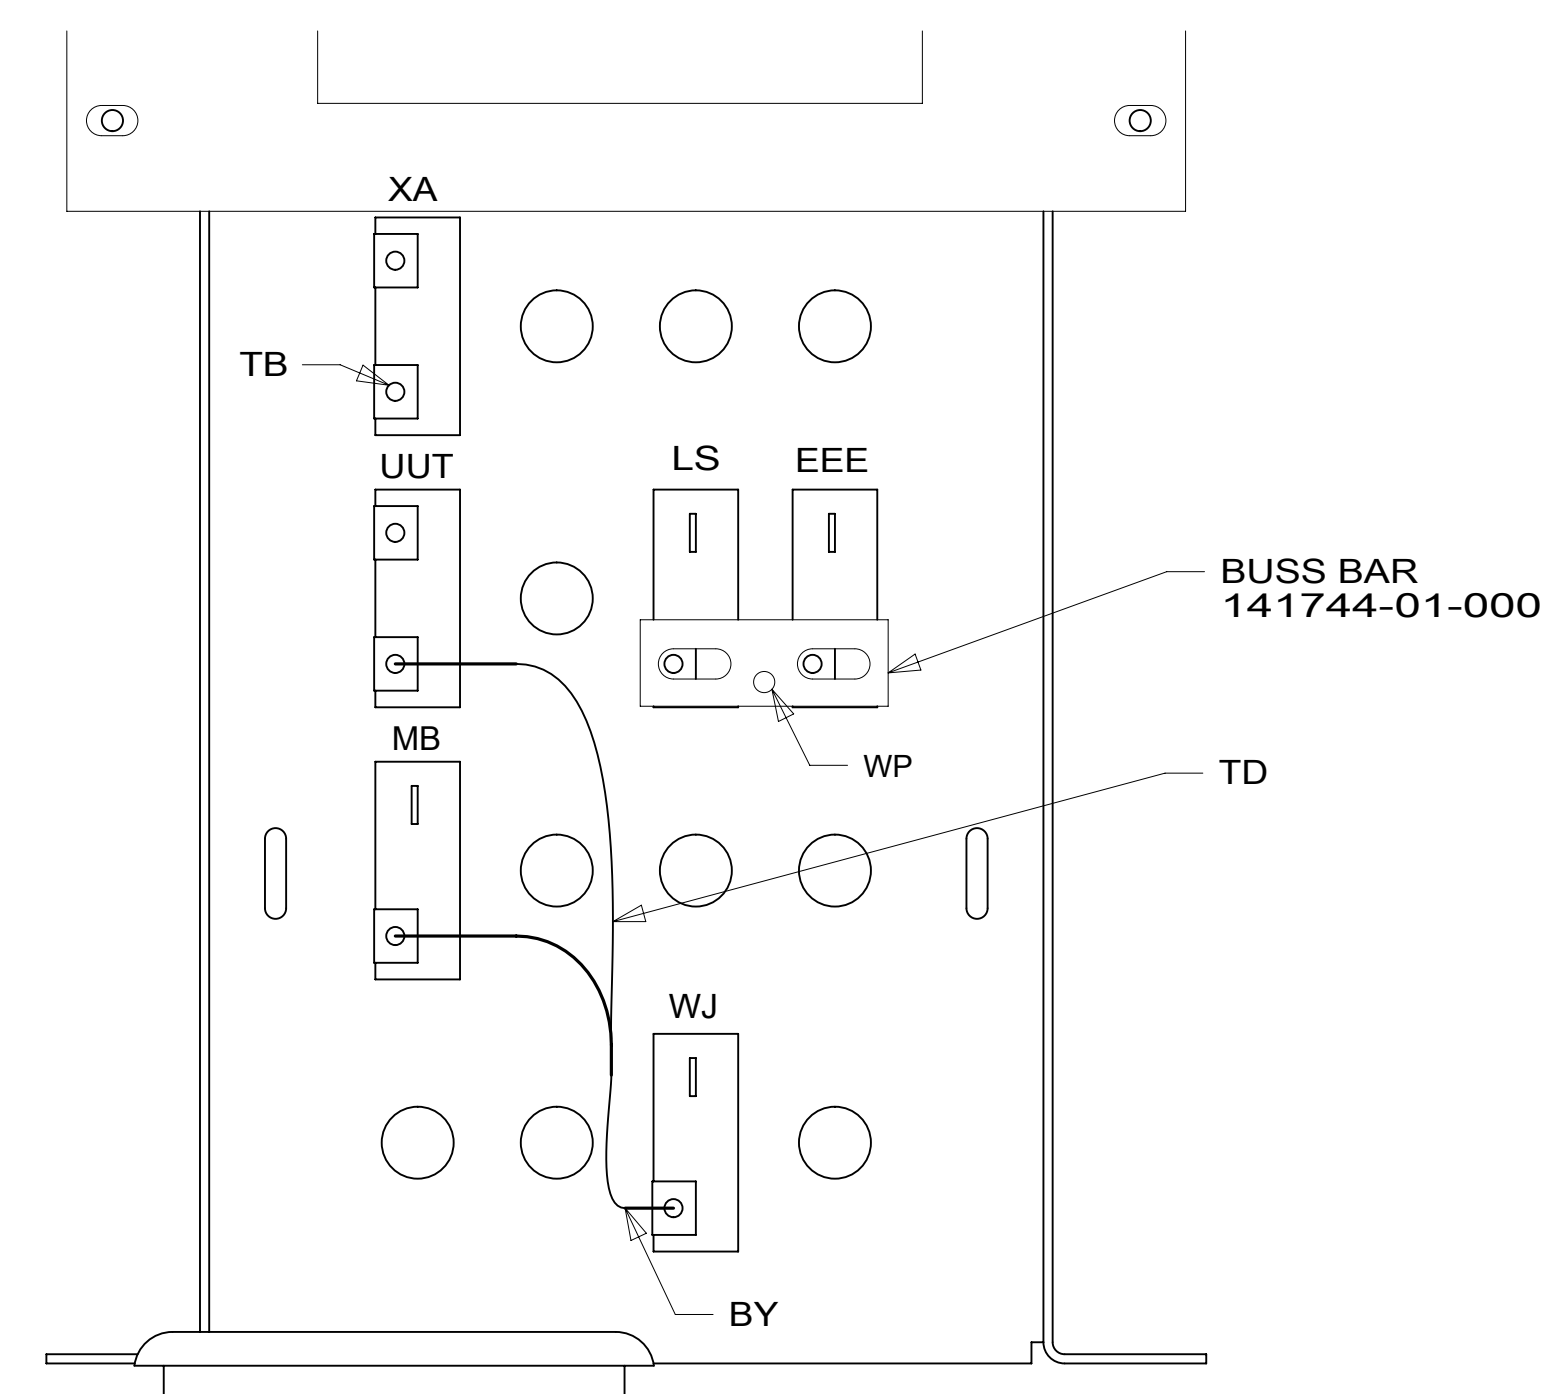

VIEW BC


1 ALL CIRCUITS ARE IN WIRE ASM-IP,MAIN.
 NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265	
DESCRIPTION: WIRING INSTL-FRONT END	
SHEET: 2 OF 9	ITEM/PART NO: 000212731 / 30300401000
REV	

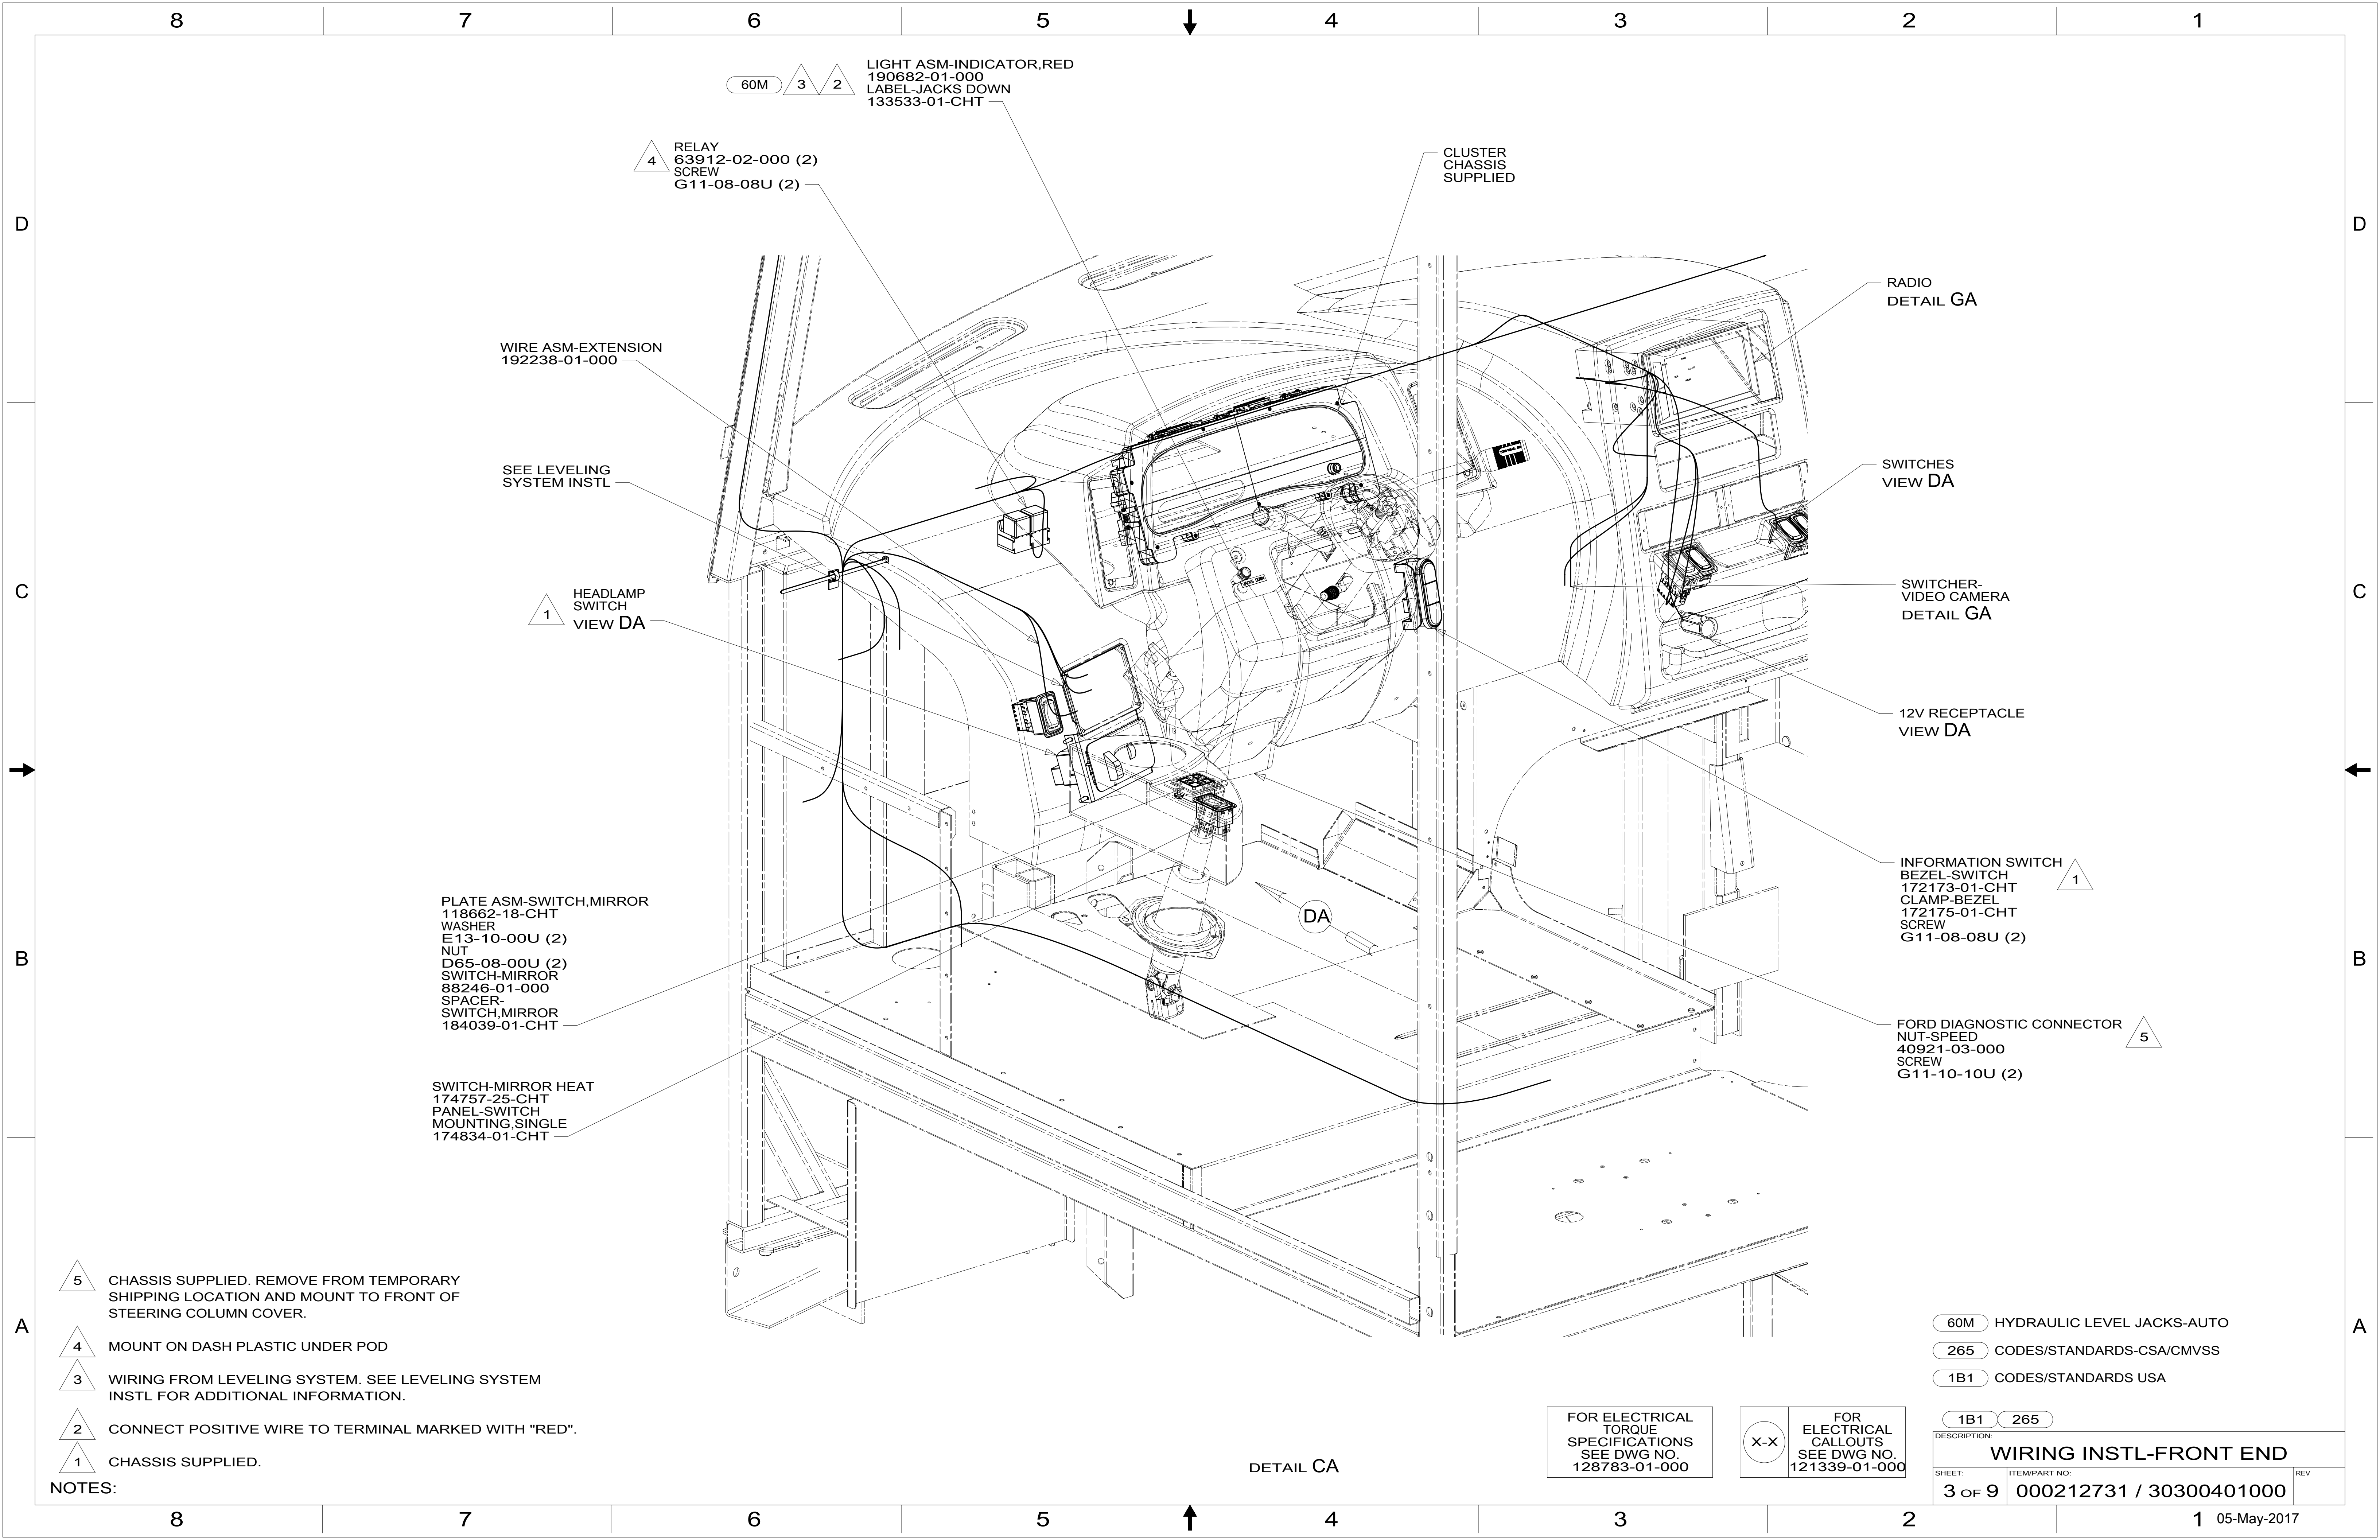

60M 3 2 LIGHT ASM-INDICATOR,RED
190682-01-000
LABEL-JACKS DOWN
133533-01-CHT

4 RELAY
63912-02-000 (2)
SCREW
G11-08-08U (2)

WIRE ASM-EXTENSION
192238-01-000

SEE LEVELING
SYSTEM INSTL

1 HEADLAMP
SWITCH
VIEW DA

PLATE ASM-SWITCH,MIRROR
118662-18-CHT
WASHER
E13-10-00U (2)
NUT
D65-08-00U (2)
SWITCH-MIRROR
88246-01-000
SPACER-
SWITCH,MIRROR
184039-01-CHT

SWITCH-MIRROR HEAT
174757-25-CHT
PANEL-SWITCH
MOUNTING,SINGLE
174834-01-CHT

CLUSTER
CHASSIS
SUPPLIED

RADIO
DETAIL GA

SWITCHES
VIEW DA

SWITCHER-
VIDEO CAMERA
DETAIL GA

12V RECEPTACLE
VIEW DA

1 INFORMATION SWITCH
BEZEL-SWITCH
172173-01-CHT
CLAMP-BEZEL
172175-01-CHT
SCREW
G11-08-08U (2)

5 FORD DIAGNOSTIC CONNECTOR
NUT-SPEED
40921-03-000
SCREW
G11-10-10U (2)

5 CHASSIS SUPPLIED. REMOVE FROM TEMPORARY SHIPPING LOCATION AND MOUNT TO FRONT OF STEERING COLUMN COVER.

4 MOUNT ON DASH PLASTIC UNDER POD

3 WIRING FROM LEVELING SYSTEM. SEE LEVELING SYSTEM INSTL FOR ADDITIONAL INFORMATION.

2 CONNECT POSITIVE WIRE TO TERMINAL MARKED WITH "RED".

1 CHASSIS SUPPLIED.

NOTES:

- 60M HYDRAULIC LEVEL JACKS-AUTO
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:		1B1 265	
WIRING INSTL-FRONT END			
SHEET:	ITEM/PART NO.:	REV	
3 OF 9	000212731 / 30300401000		

DETAIL CA

8 7 6 5 4 3 2 1

D

D

C


C

B



B

A

A

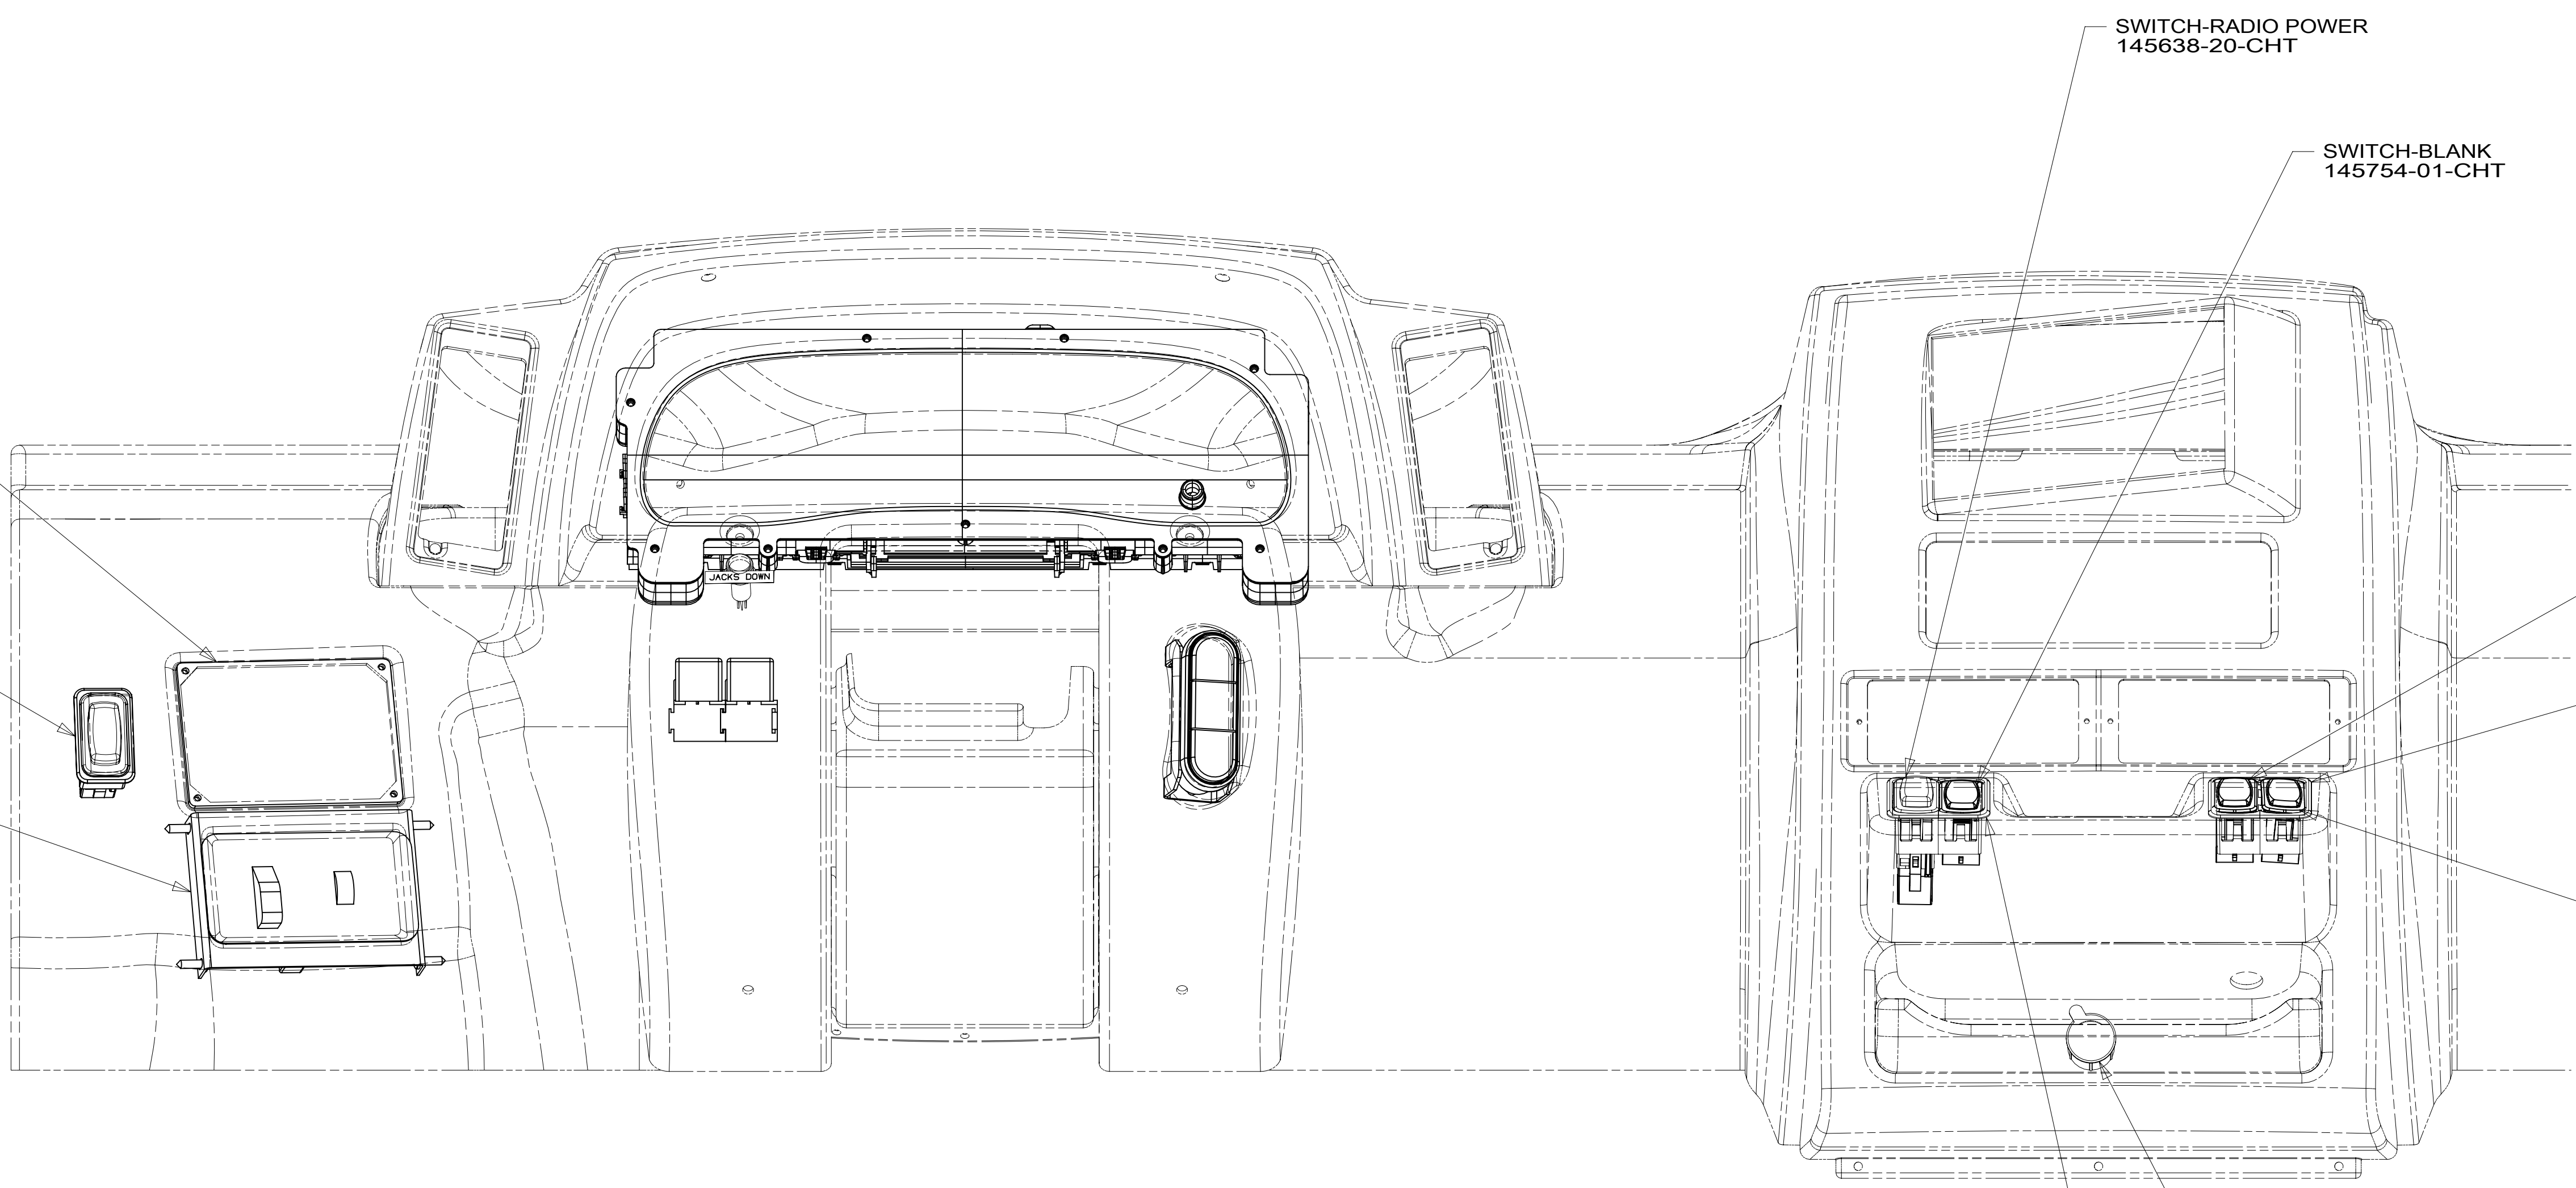

VIEW DA

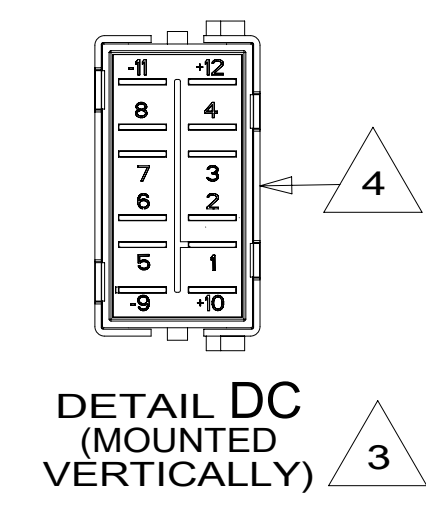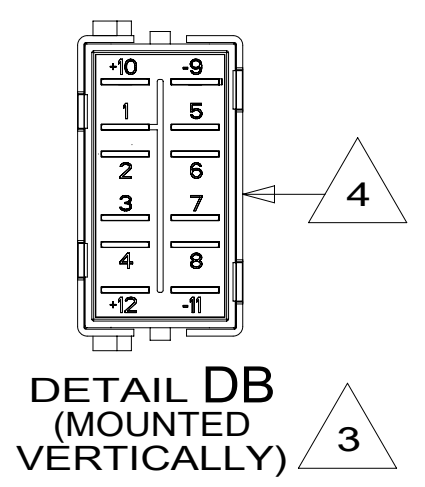

- NOTES:
- 4 WITH SWITCH INSTALLED THIS SIDE OF SWITCH WILL FACE LEFT SIDEWALL.
 - 3 DETAIL IS LOOKING AT SWITCH FROM THE BACK SIDE OF SWITCH AS ITS INSTALLED.
 - 2 SEE DETAIL DC FOR ORIENTATION.
 - 1 SEE DETAIL DB FOR ORIENTATION.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION: WIRING INSTL-FRONT END		
SHEET: 4 OF 9	ITEM/PART NO: 000212731 / 30300401000	REV



8 7 6 5 4 3 2 1 05-May-2017

8 7 6 5 4 3 2 1



D
C
B
A

D
C
B
A

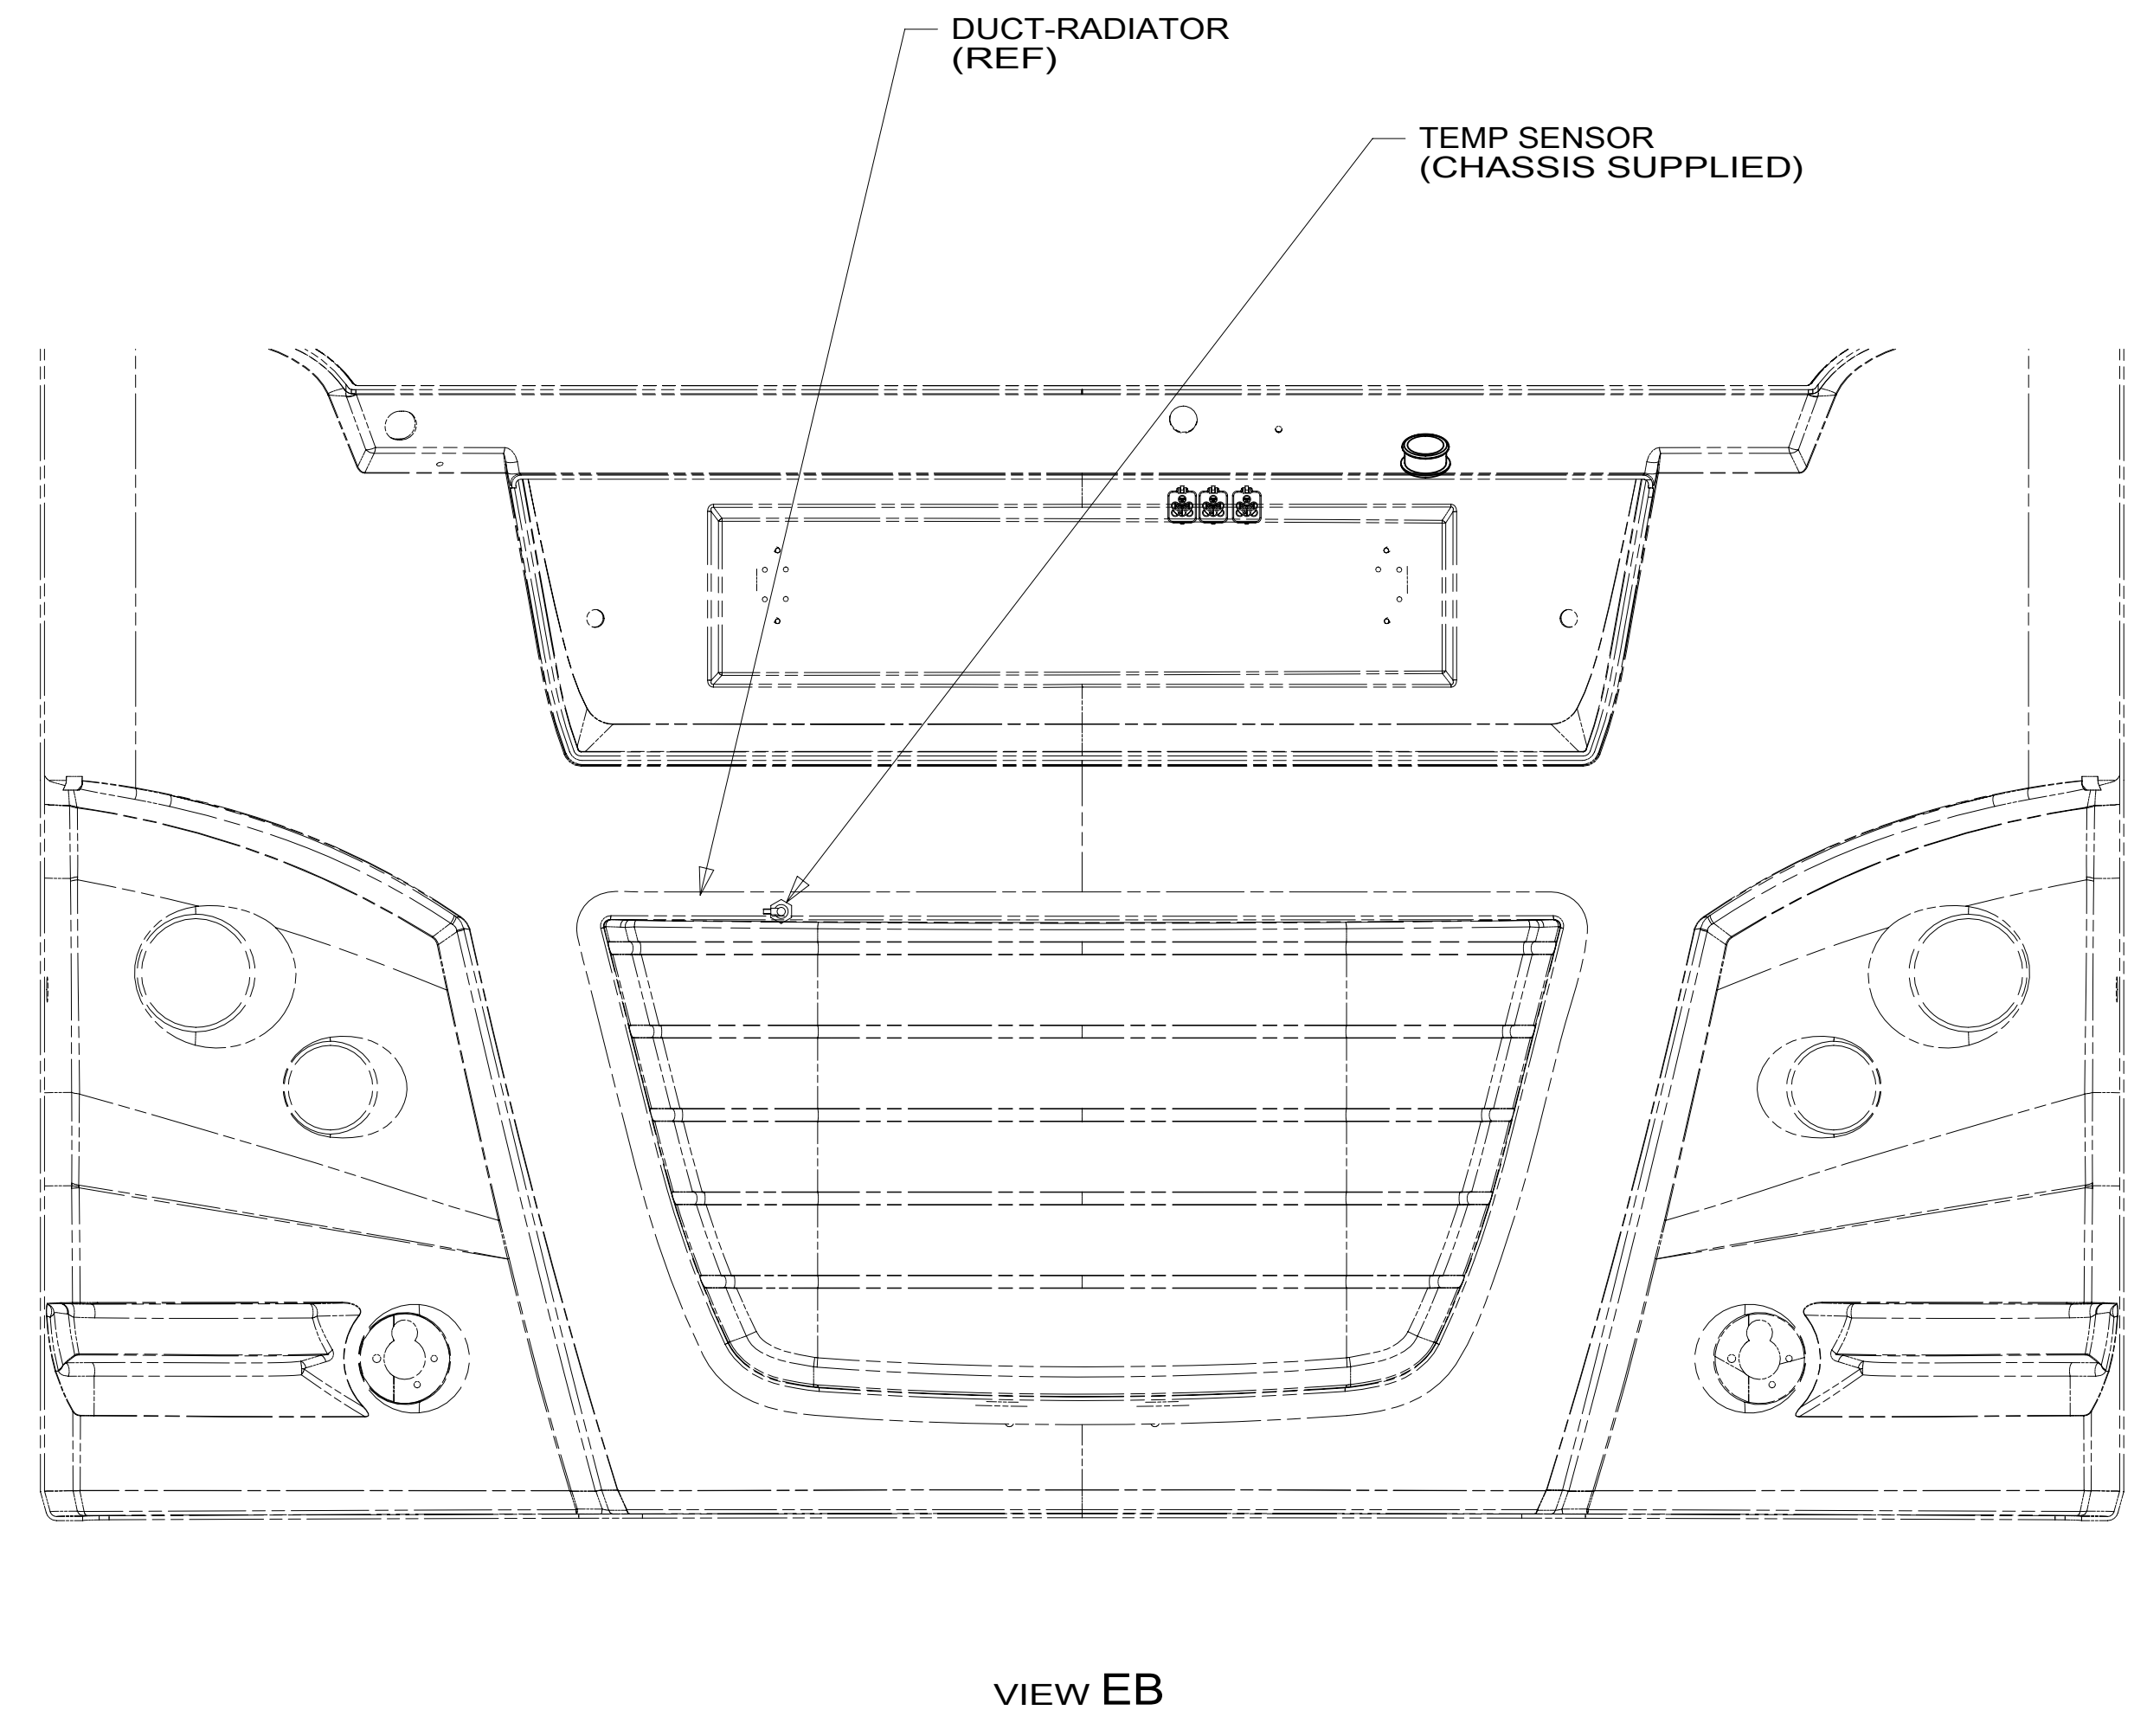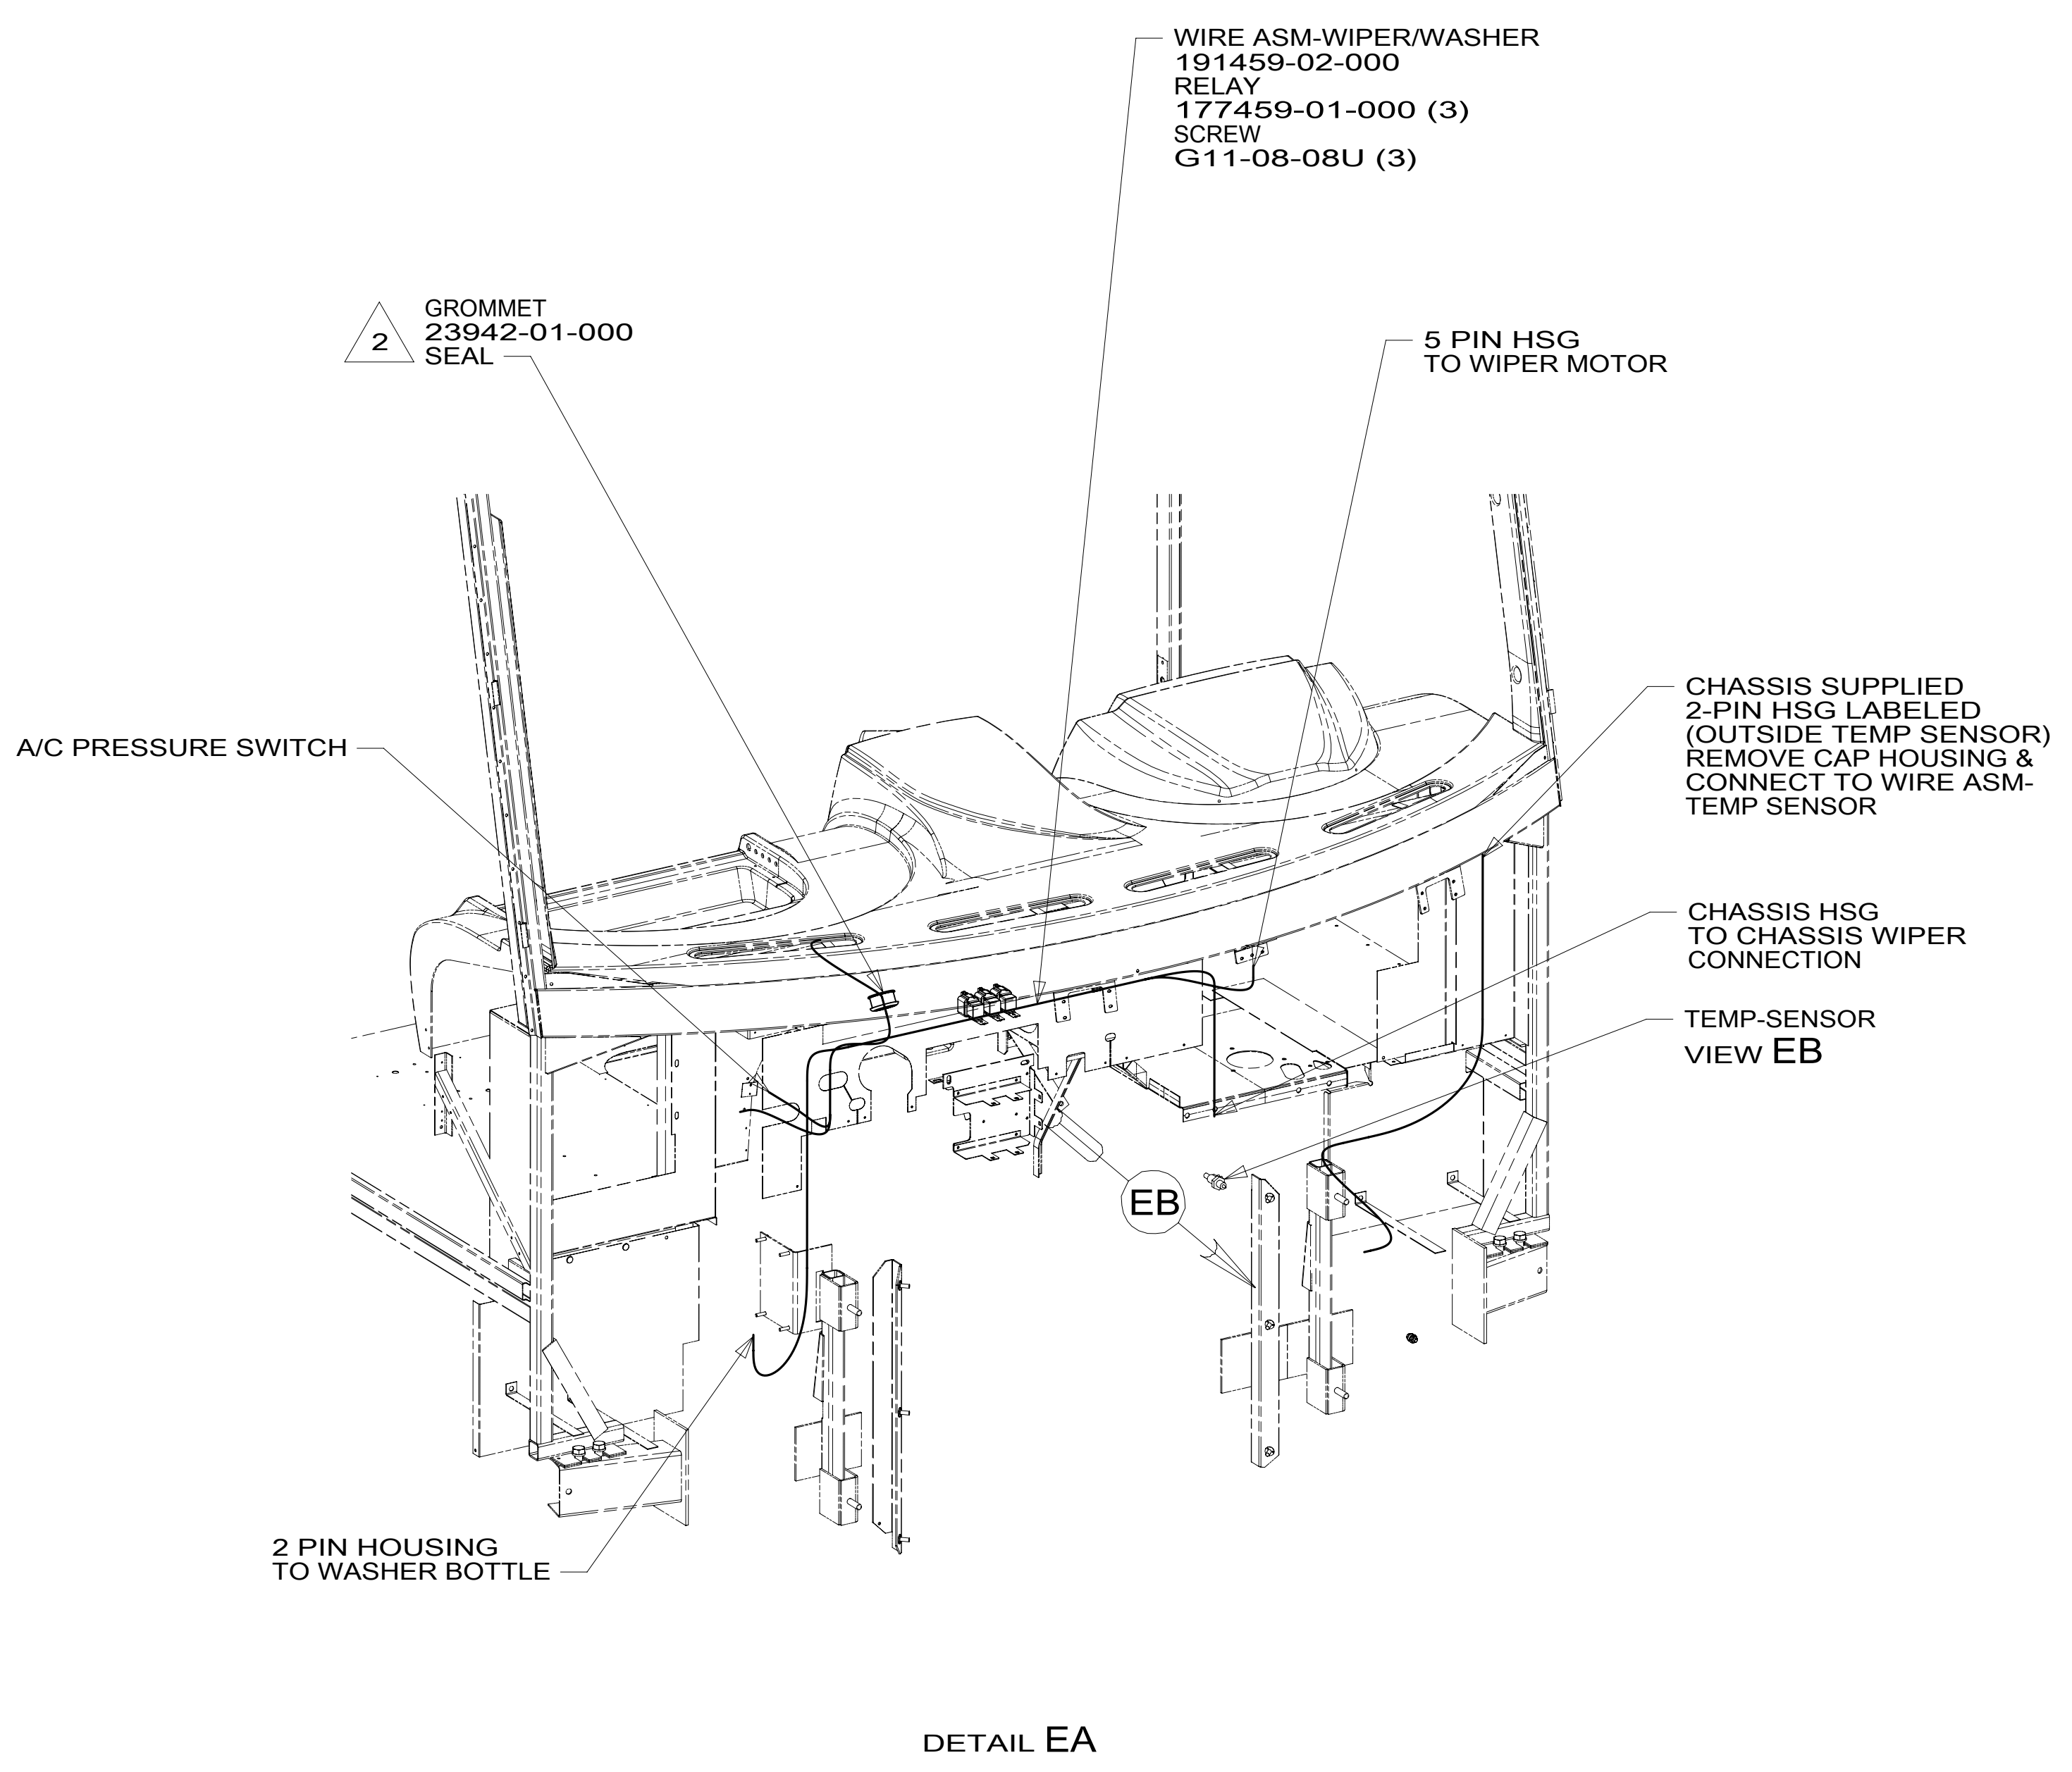

- 2 ROUTE WIRES THROUGH HOLE IN STEEL.
1. GATHER ALL EXCESS WIRE AFTER MAKING ALL CONNECTIONS.
BUNDLE AND SECURE WITH WIRE TIE 8343-01-000 OR 93147-01-000.
- NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000



FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000





265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

DESCRIPTION: WIRING INSTL-FRONT END		REV
SHEET: 5 OF 9	ITEM/PART NO: 000212731 / 30300401000	

8 7 6 5 4 3 2 1 05-May-2017

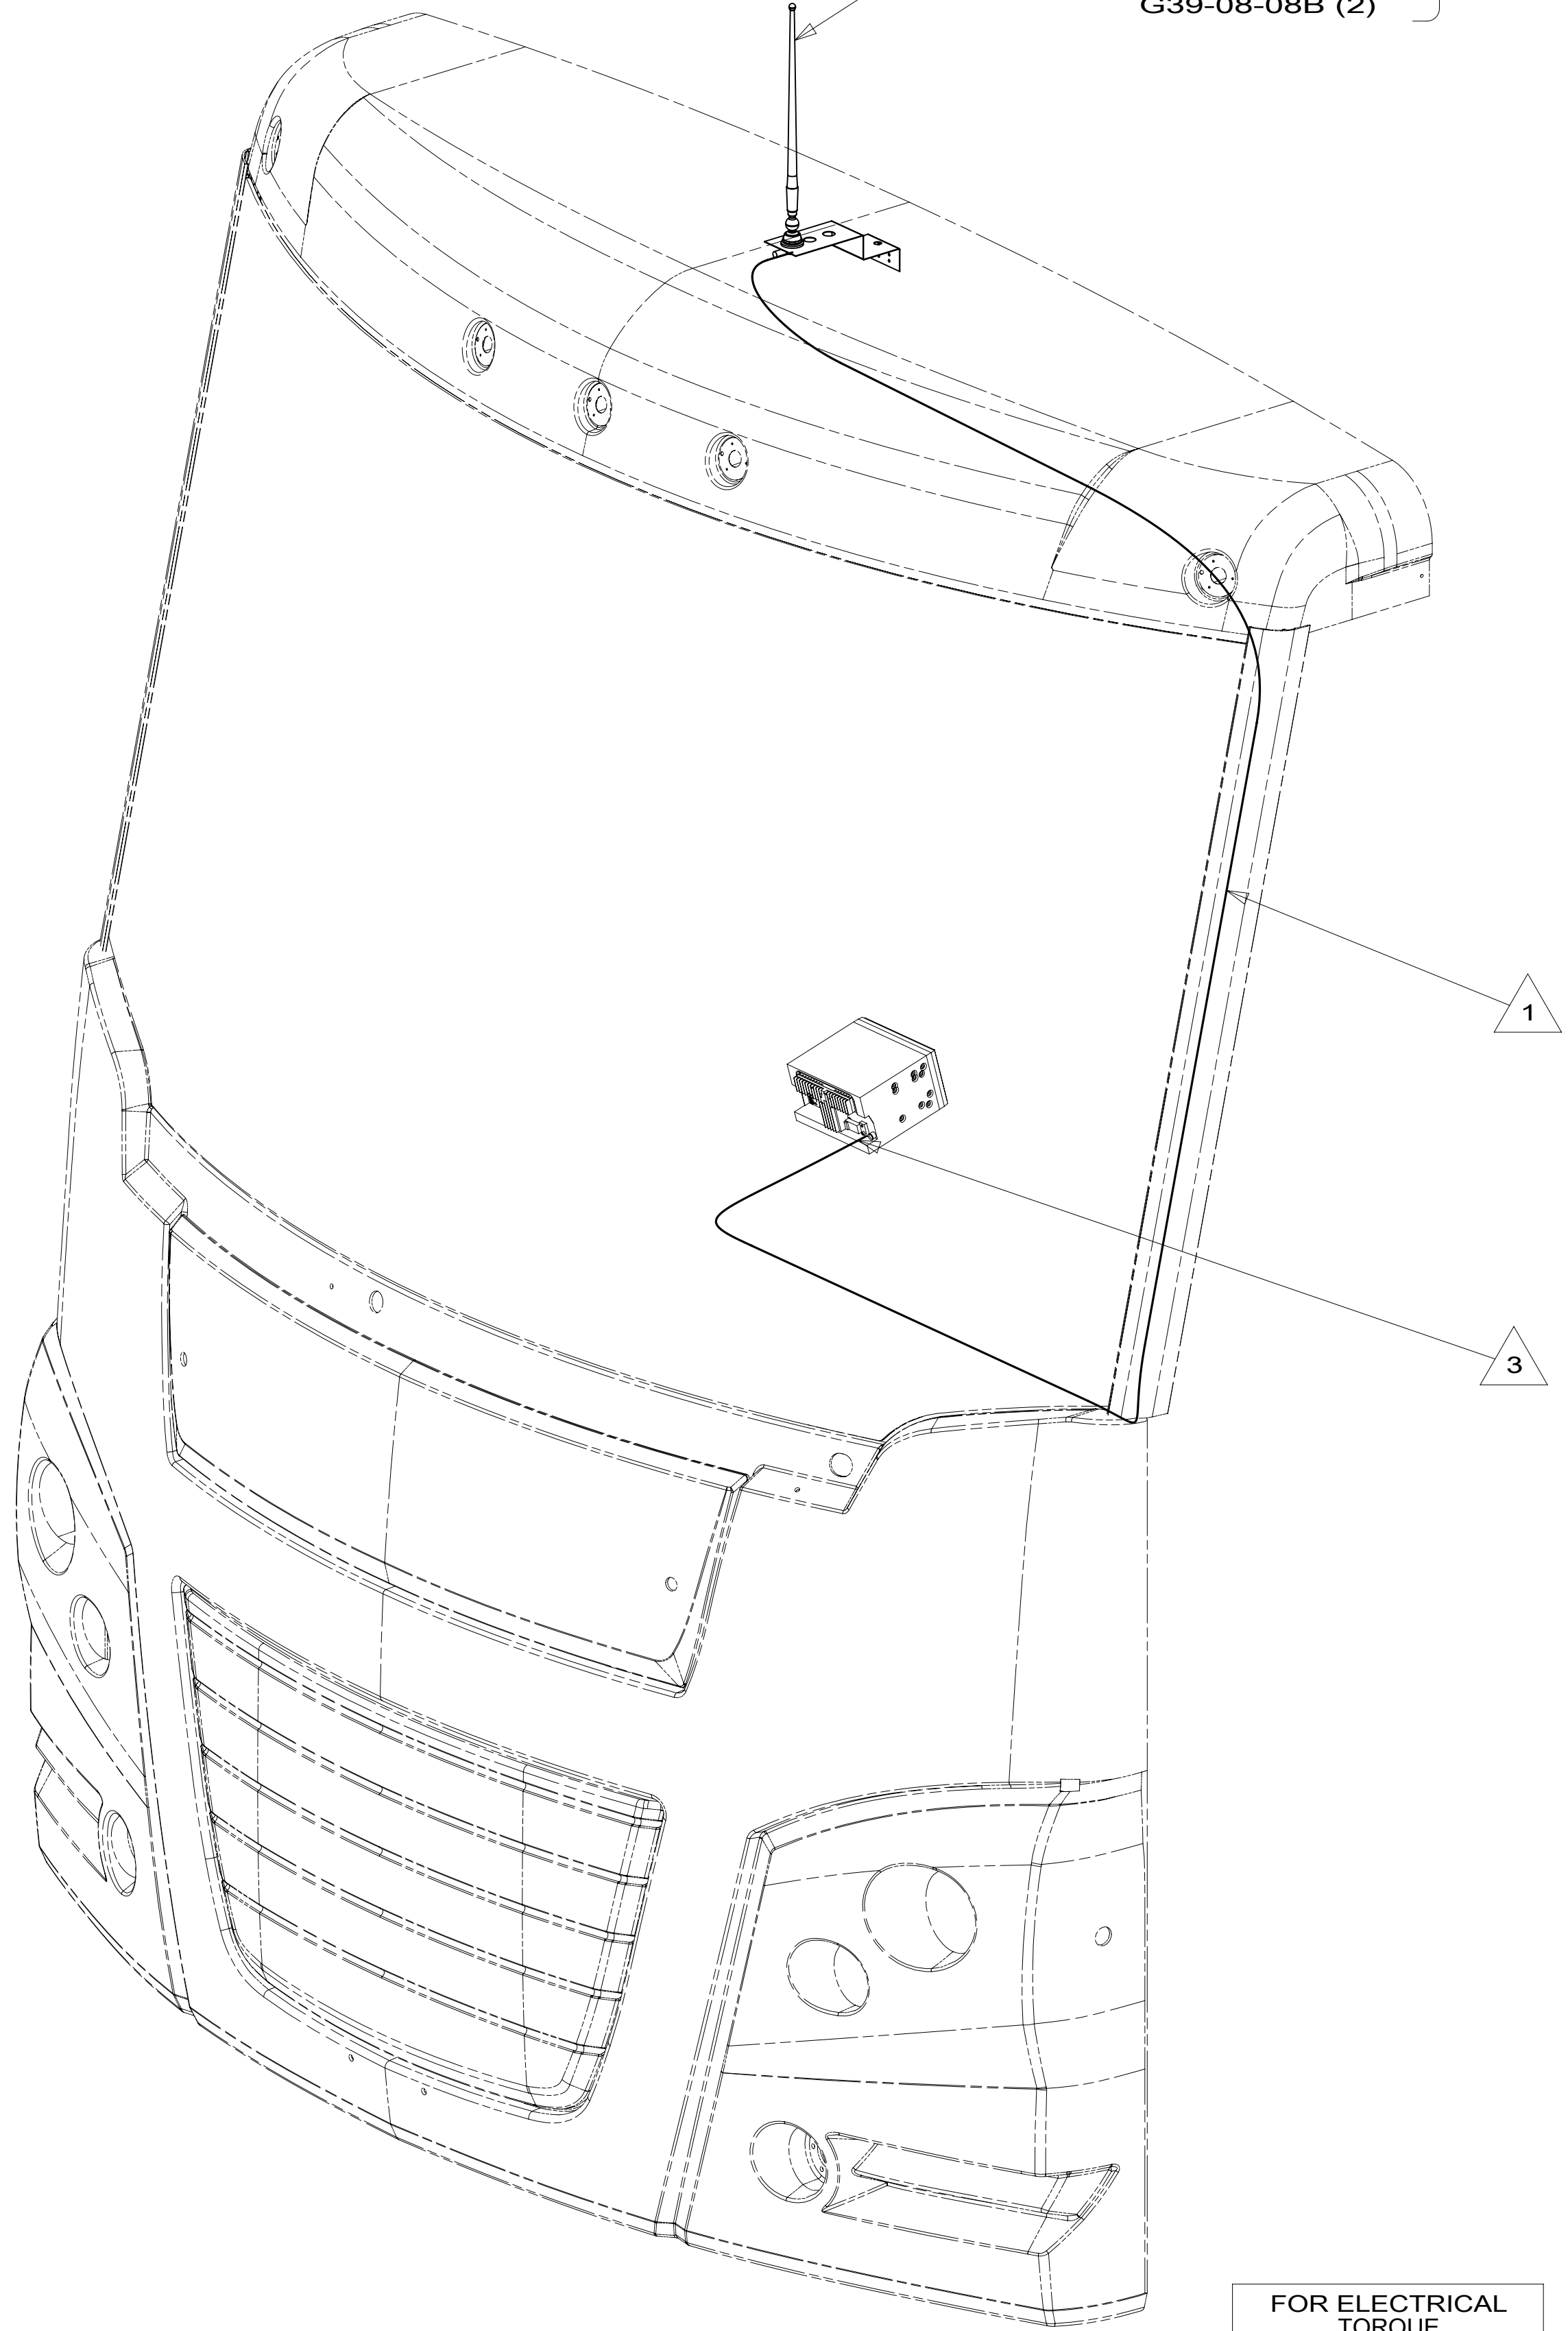ANTENNA-RADIO
 90944-02-000
 CABLE ASM-ANTENNA
 90944-03-000
 BRACKET-ANTENNA
 115916-01-CHT
 SCREW
 G39-08-08B (2)



-  USE HOLE IN BRACKET AS GUIDE TO DRILL 13 MM DIAMETER HOLE IN FIBERGLASS.
-  TO RADIO.
-  SEAL AROUND ANTENNA BASE.
-  ROUTE CABLES ALONG A-POST, UNDER TRIM COVER.

NOTES:


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS
 1B1 CODES/STANDARDS USA

1B1 265

DESCRIPTION: WIRING INSTL-FRONT END		
SHEET: 6 OF 9	ITEM/PART NO: 000212731 / 30300401000	REV

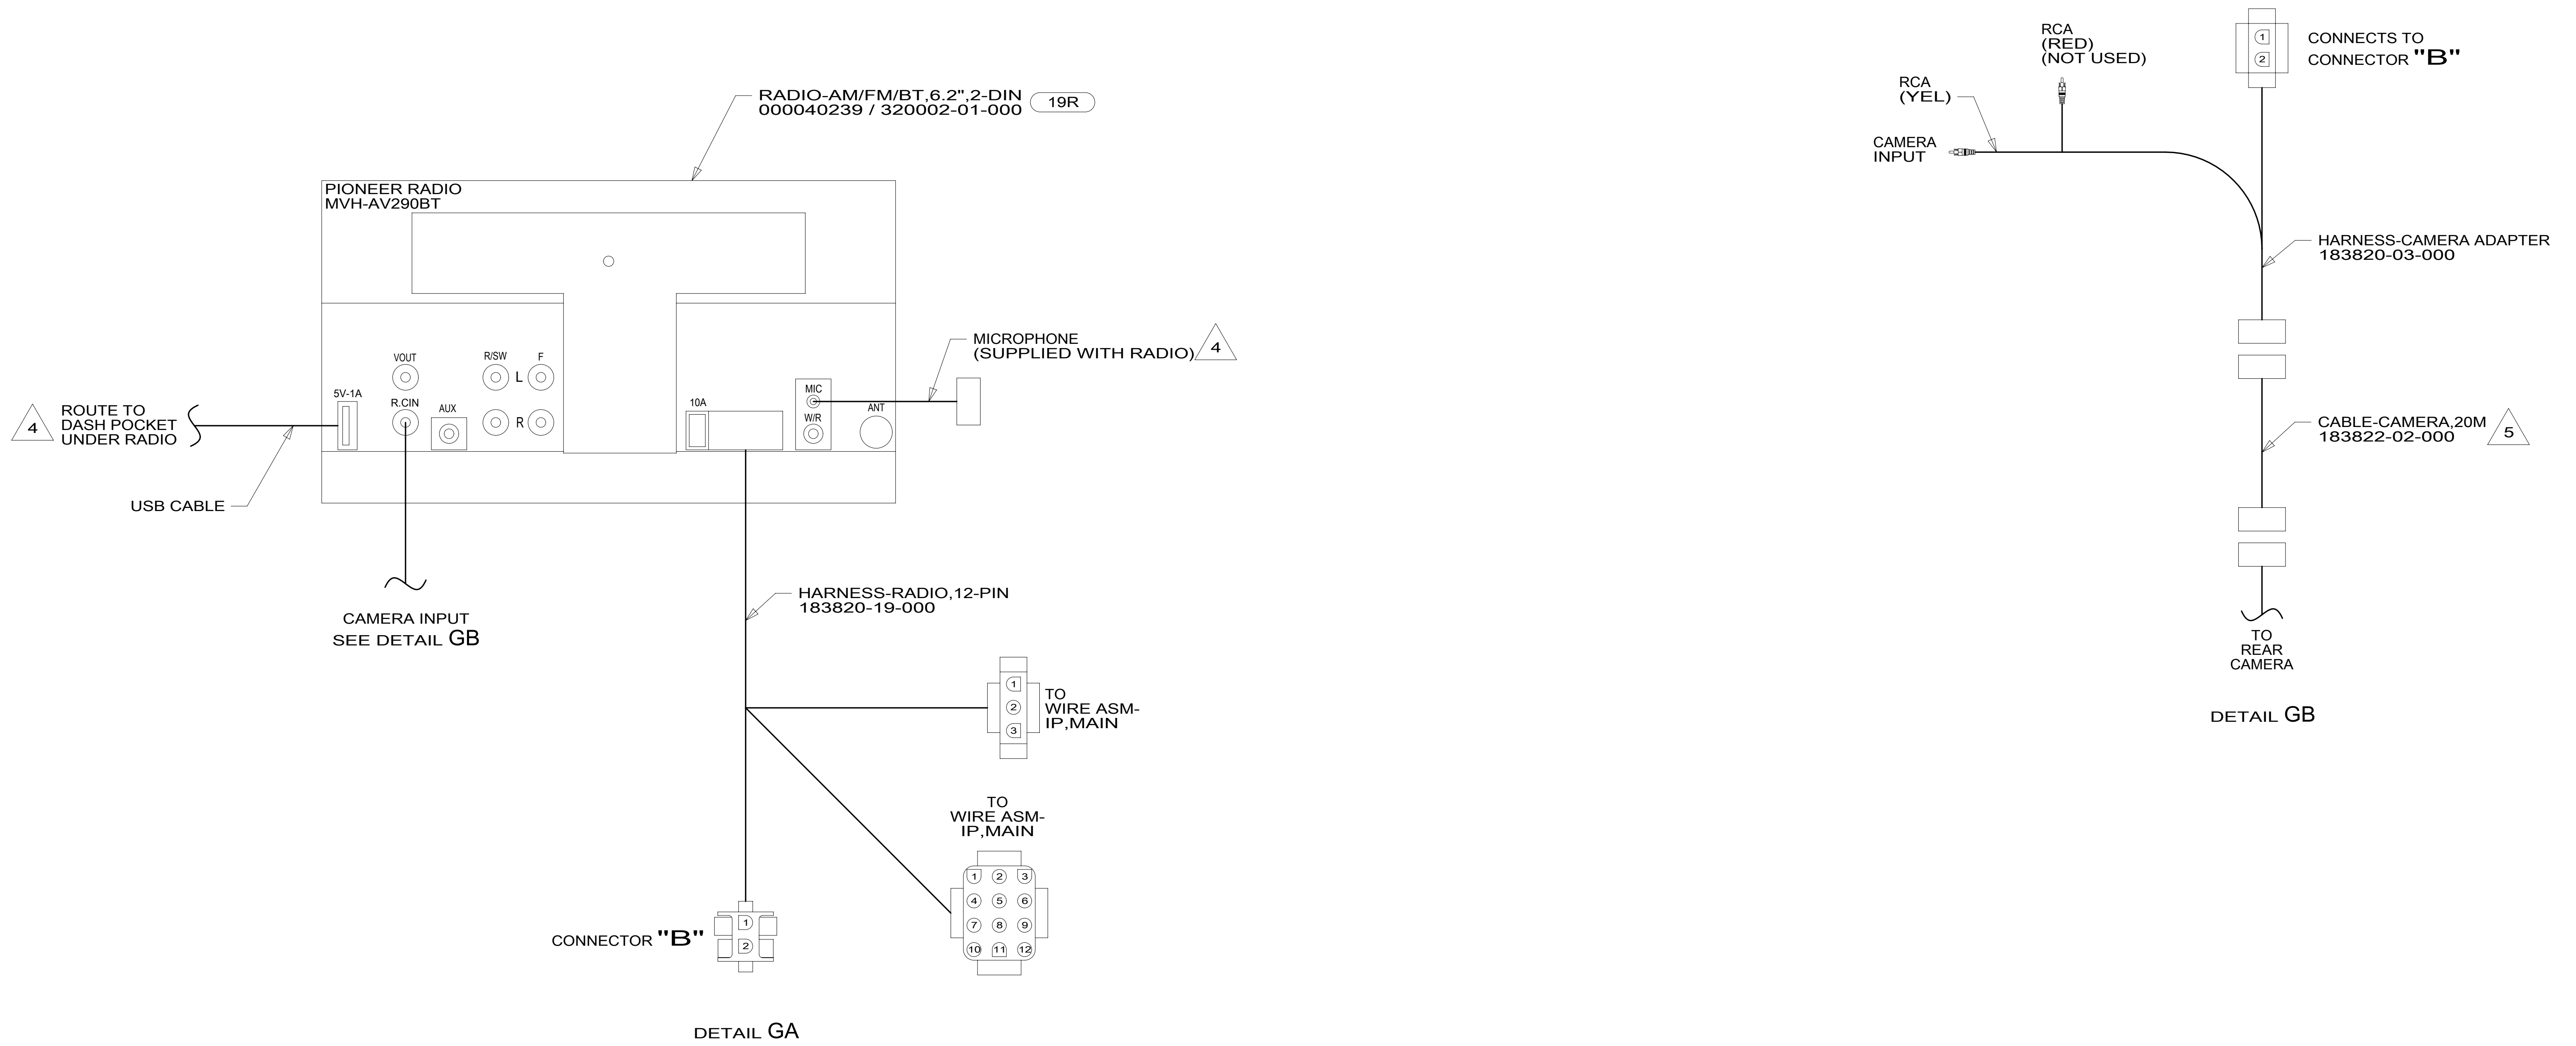

- NOTES:
- 5 CABLE ROUTED FROM RADIO UP LEFT "A" PILLAR , THEN THROUGH LEFT HAND COVE TO REAR OF UNIT. SEE SHEET 8.
 - 4 WIRE TIE EXCESS CABLE UNDER DASH LEAVING 200 MM EXTENDING INTO POCKET IN DASH.
 - 3 WIRE TIE TO RADIO WIRING.
 - 2 SEE WIRING INSTL-TV/DVD FOR ADDITIONAL INFORMATION.
 - 1 CABLE IS PART OF WIRE ASM-IP,MAIN.

- 19R VIDEO CAMERA SYSTEM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


DESCRIPTION:		1B1 265	
WIRING INSTL-FRONT END			
SHEET:	ITEM/PART NO.:	REV	
7 OF 9	000212731 / 30300401000		

8

7

6

5



4

3

2

1

D

D

C




C

B

B

A

A

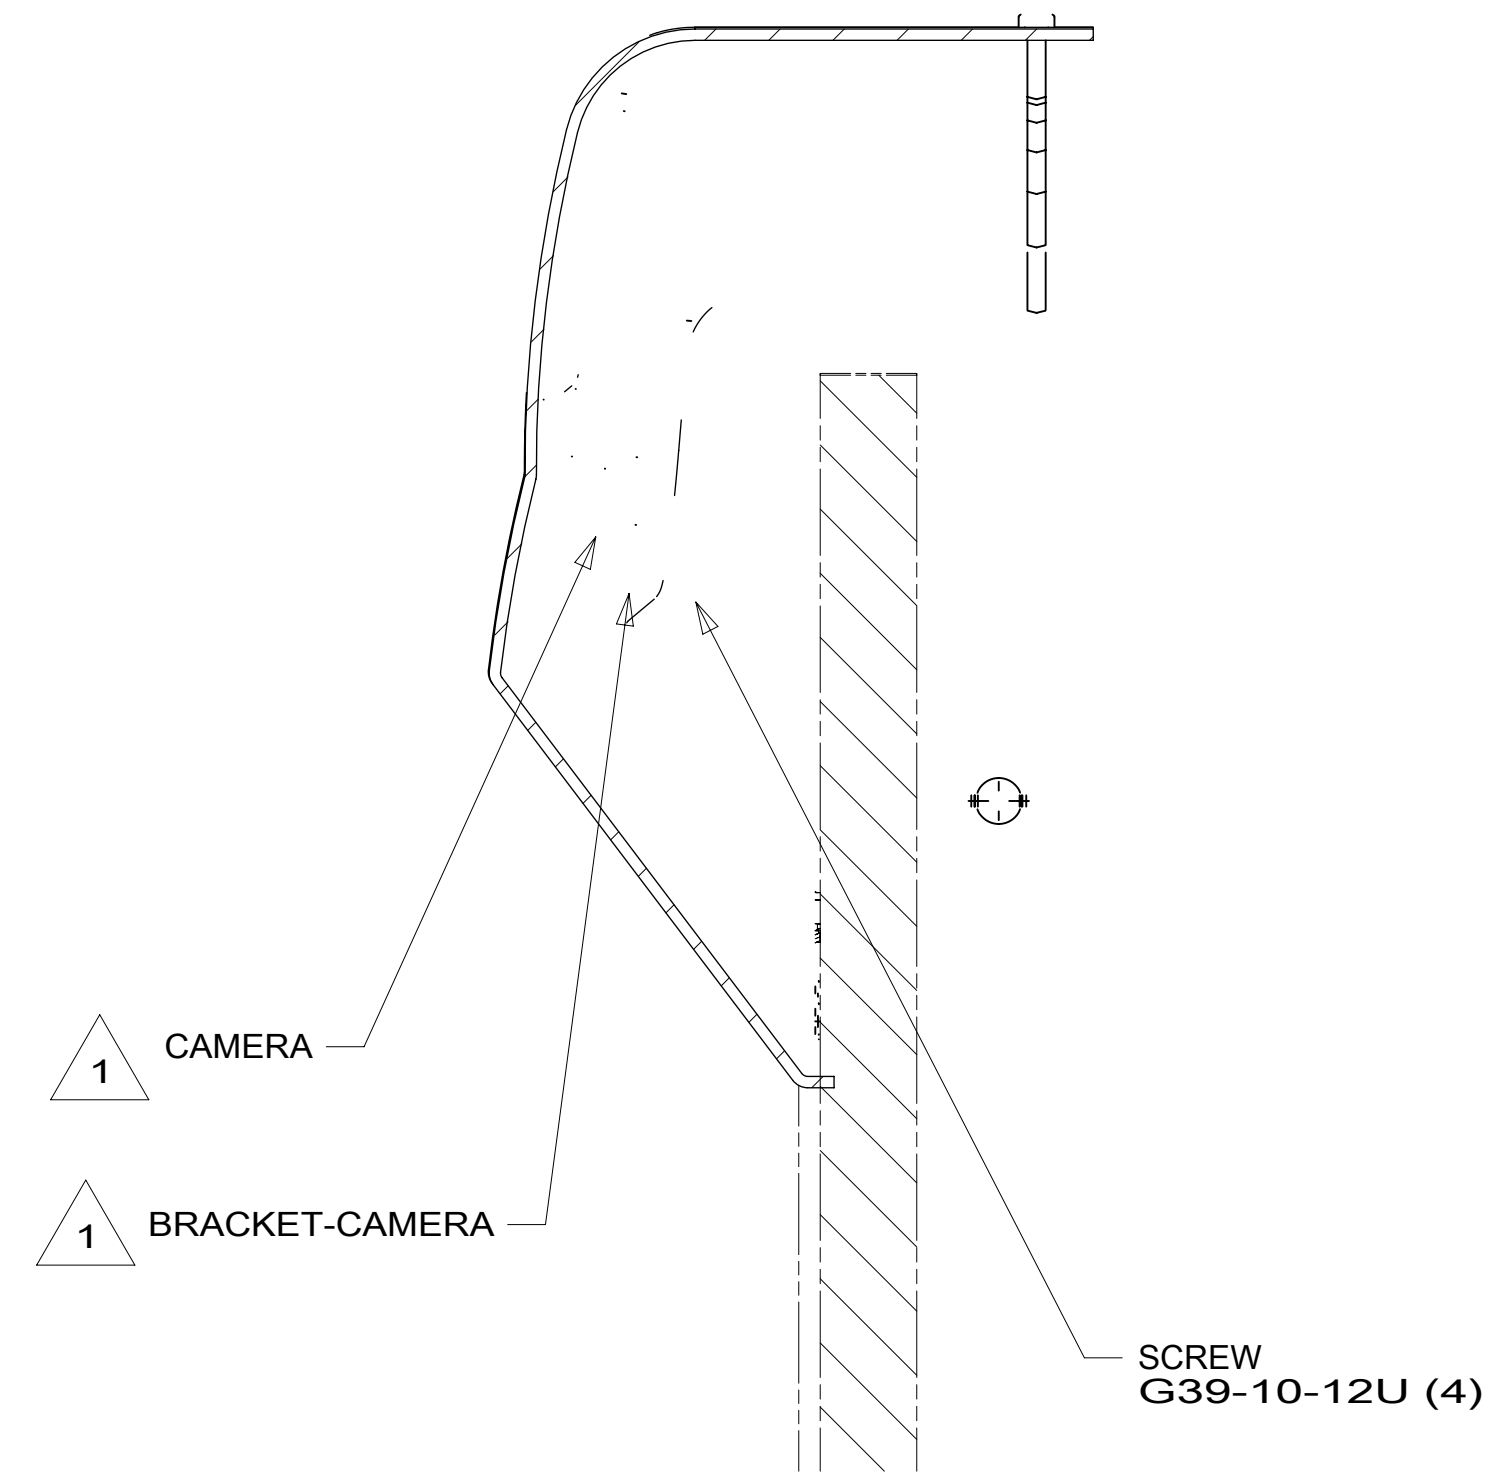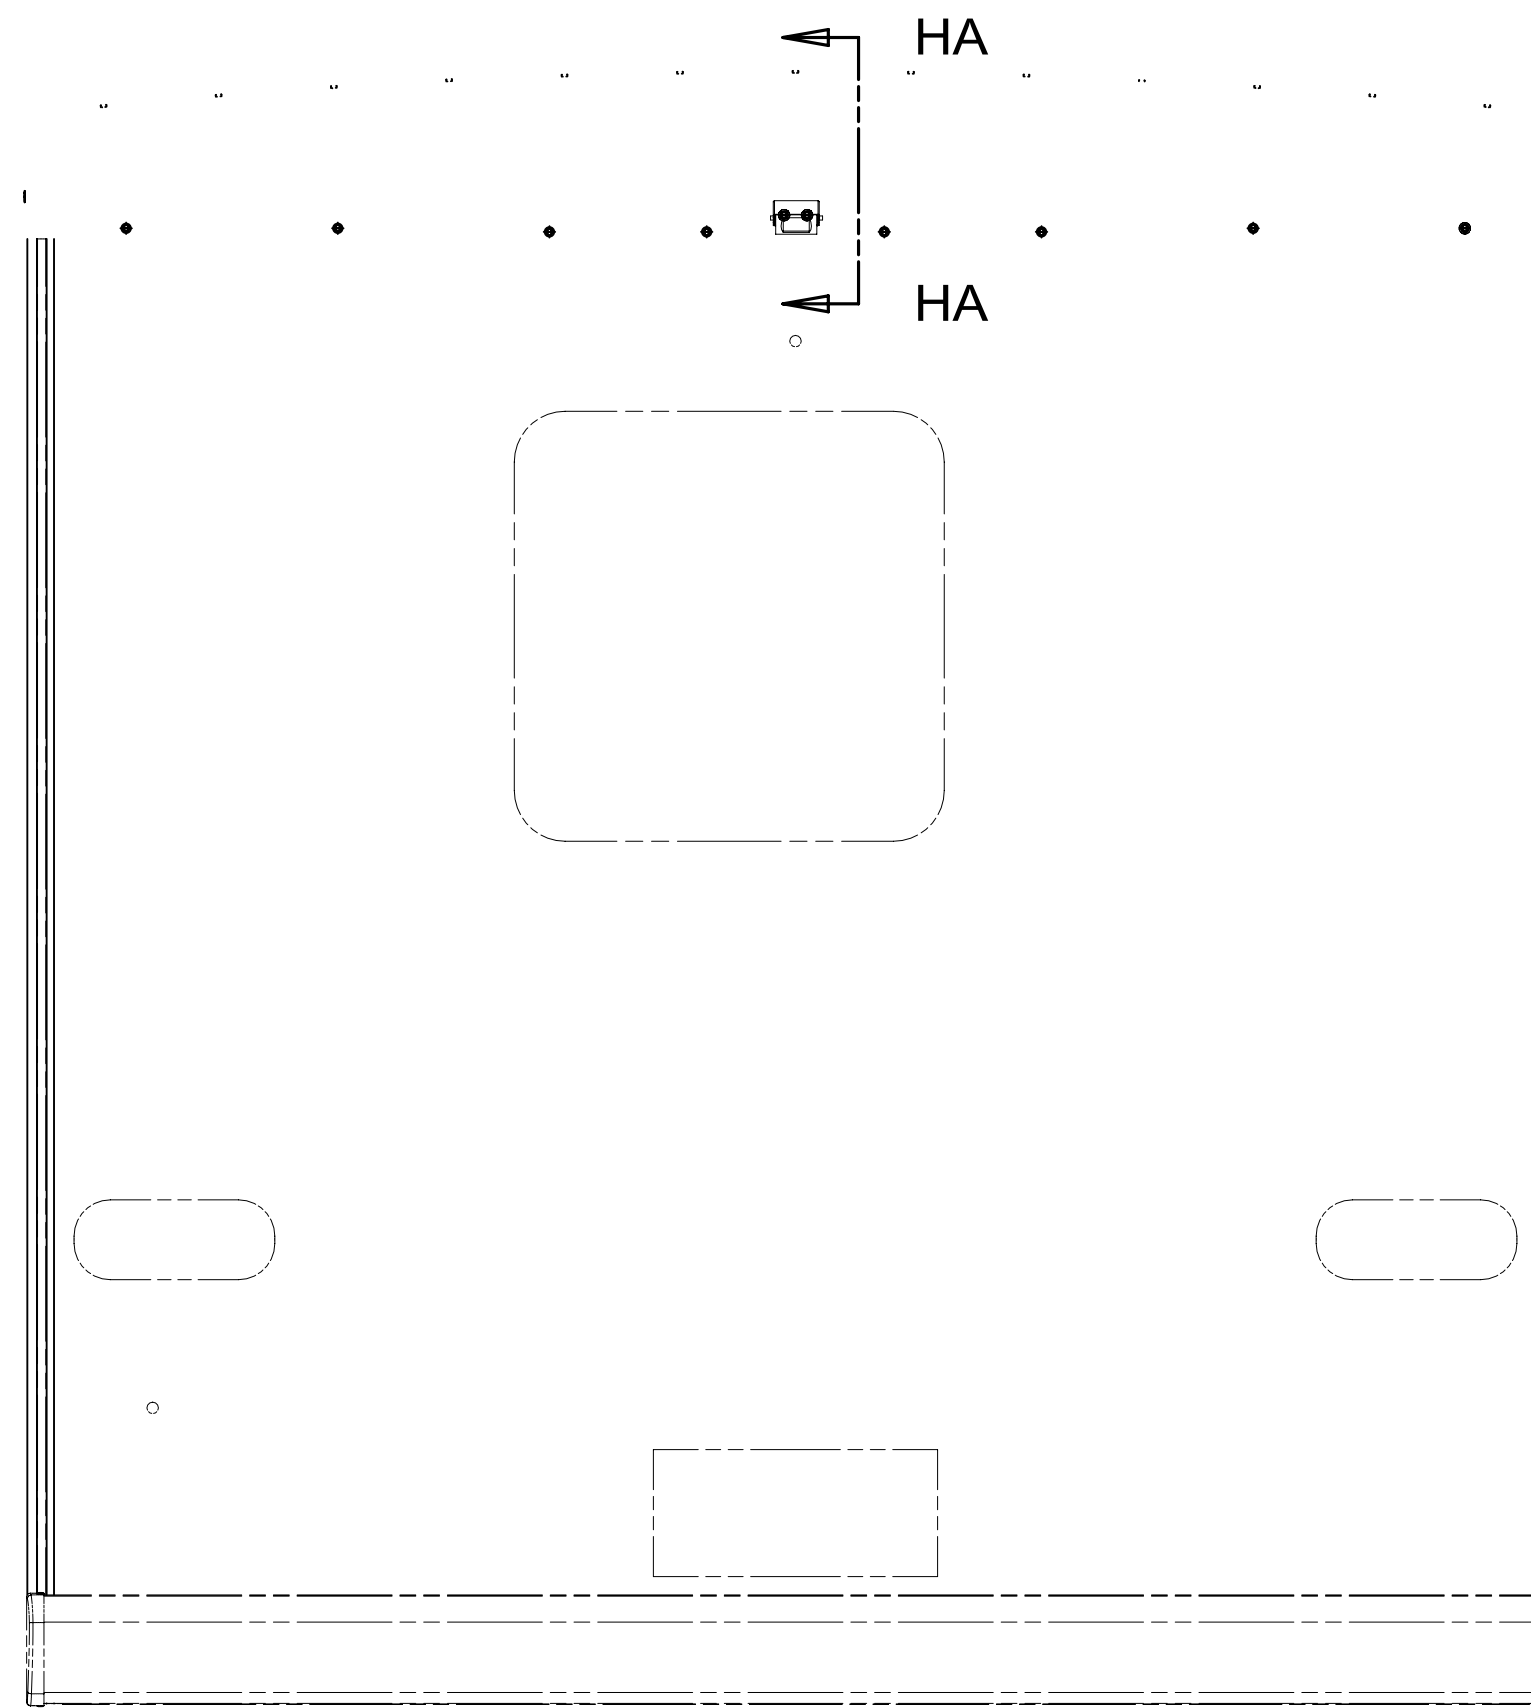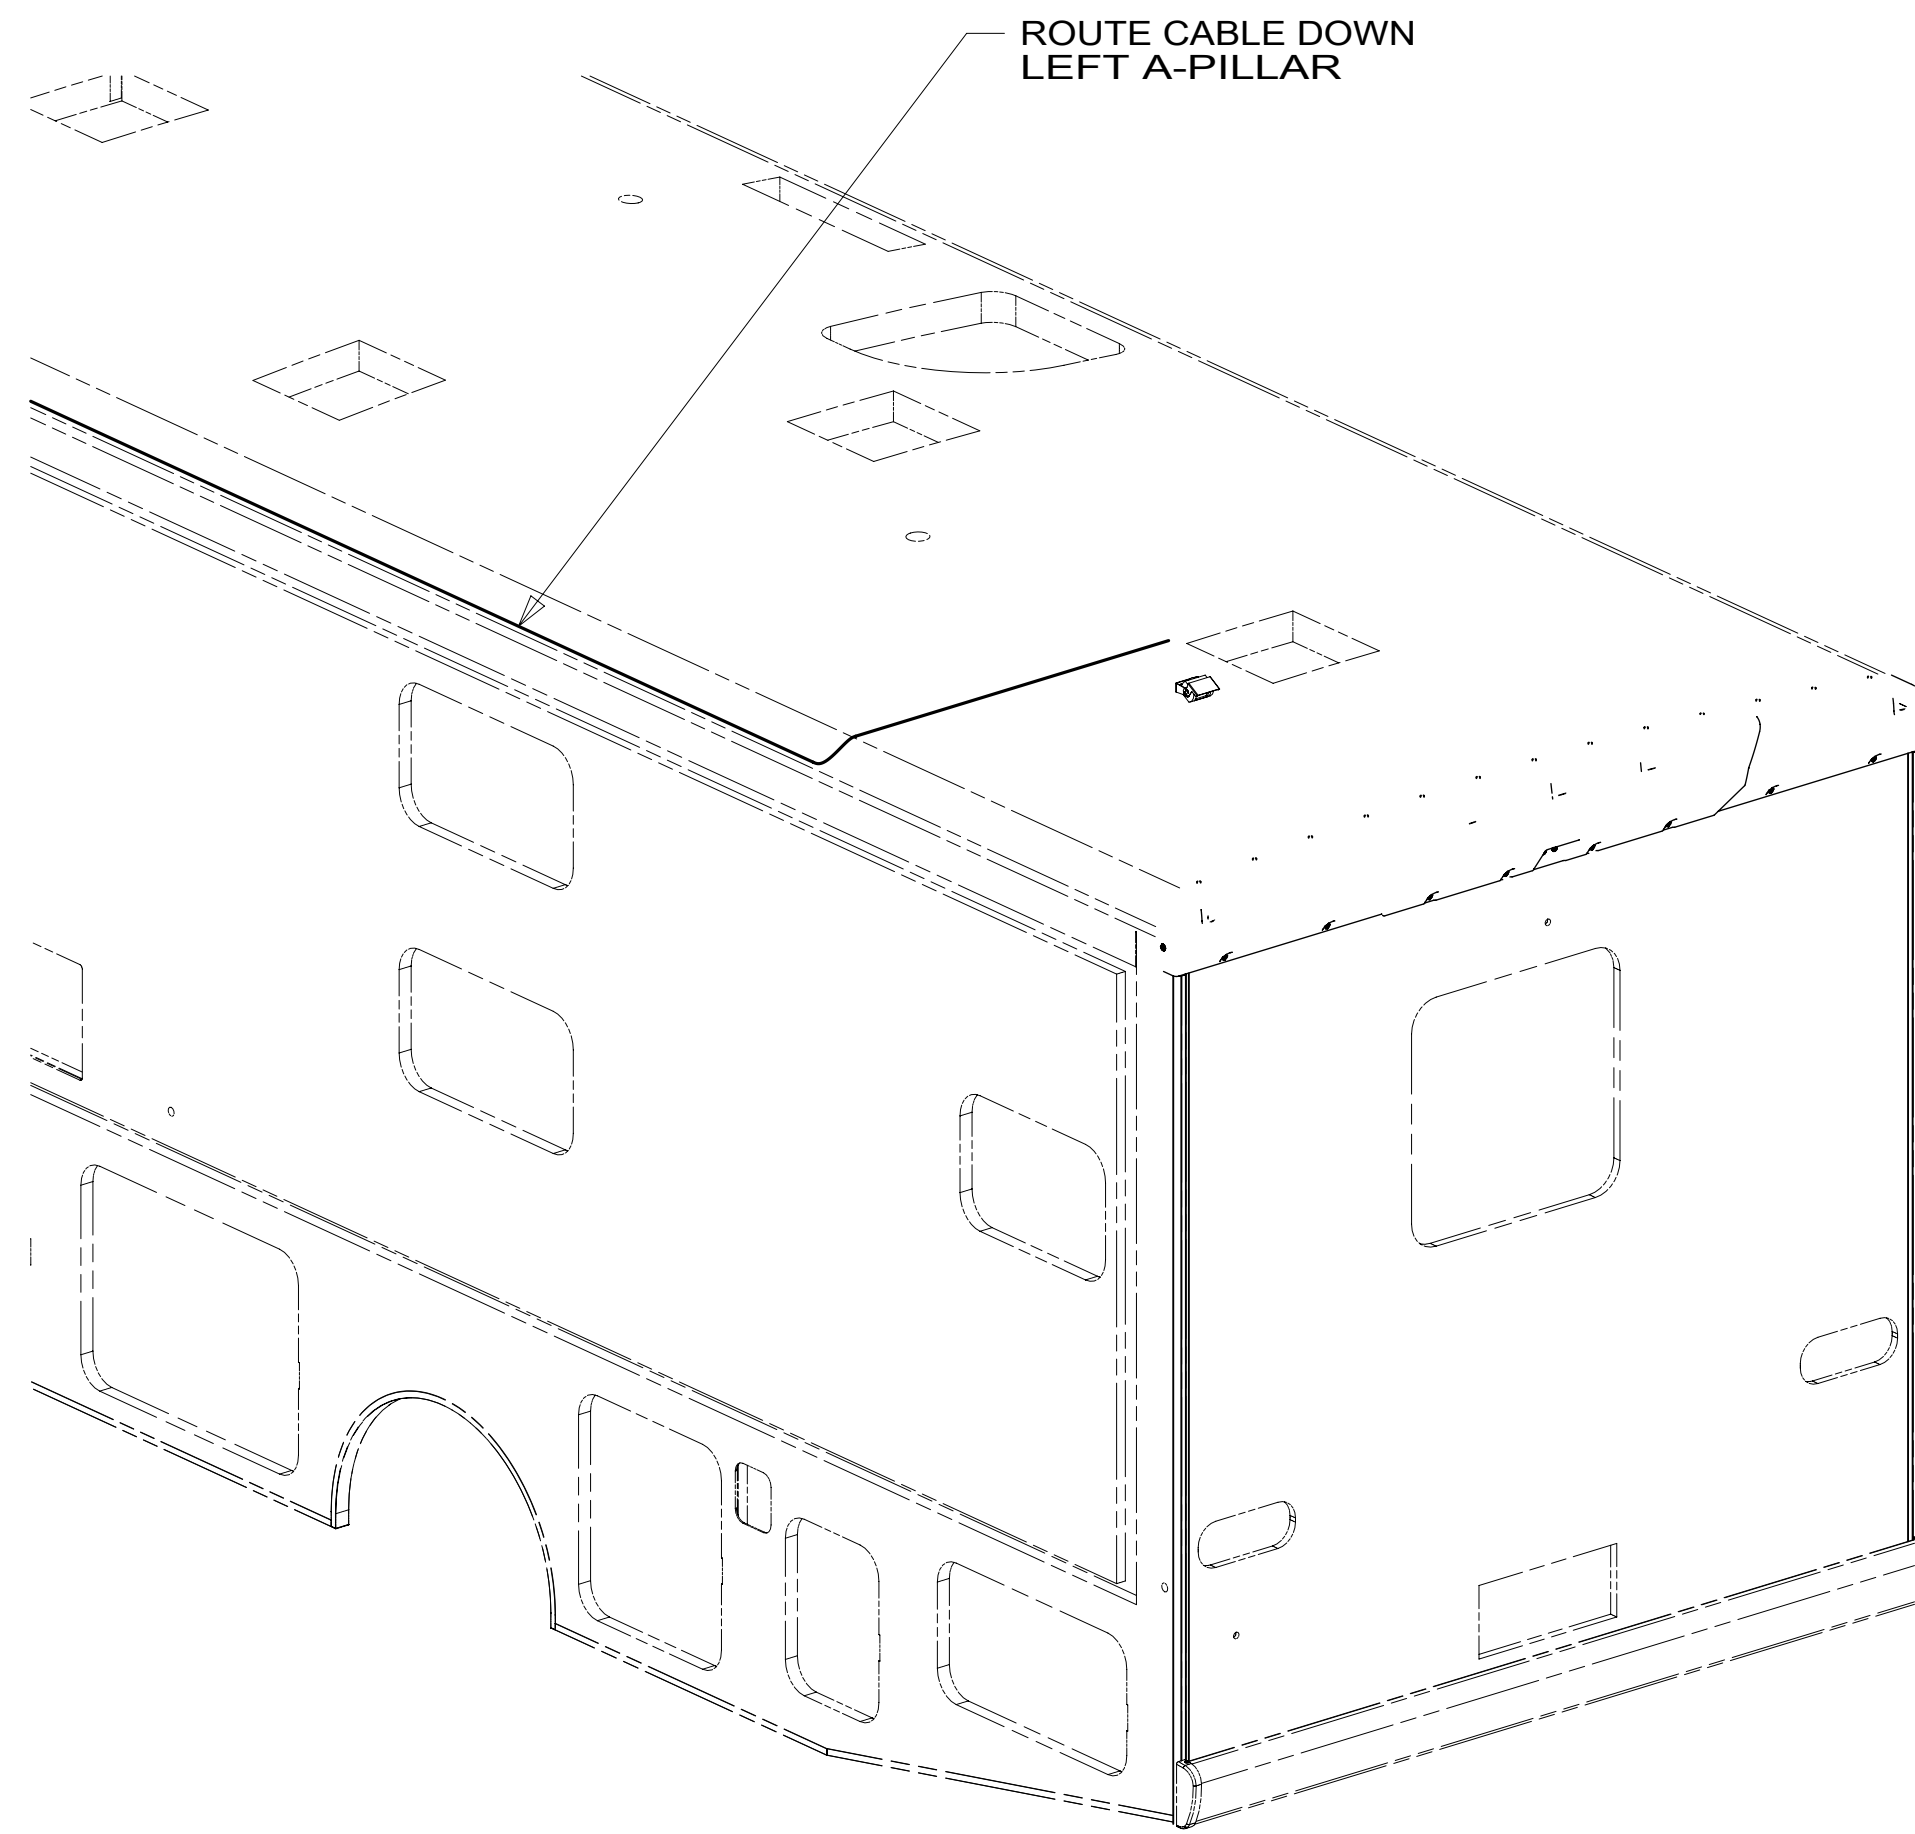

SECTION HA-HA

1 PARTS SUPPLIED WITH CAMERA KIT P/N 183822-01-000.


NOTES:

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000



FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

DESCRIPTION:
WIRING INSTL-FRONT END

SHEET: 8 OF 9 ITEM/PART NO: 000212731 / 30300401000 REV

8

7

6

5




4

3


2

1 05-May-2017

8 7 6 5 4 3 2 1


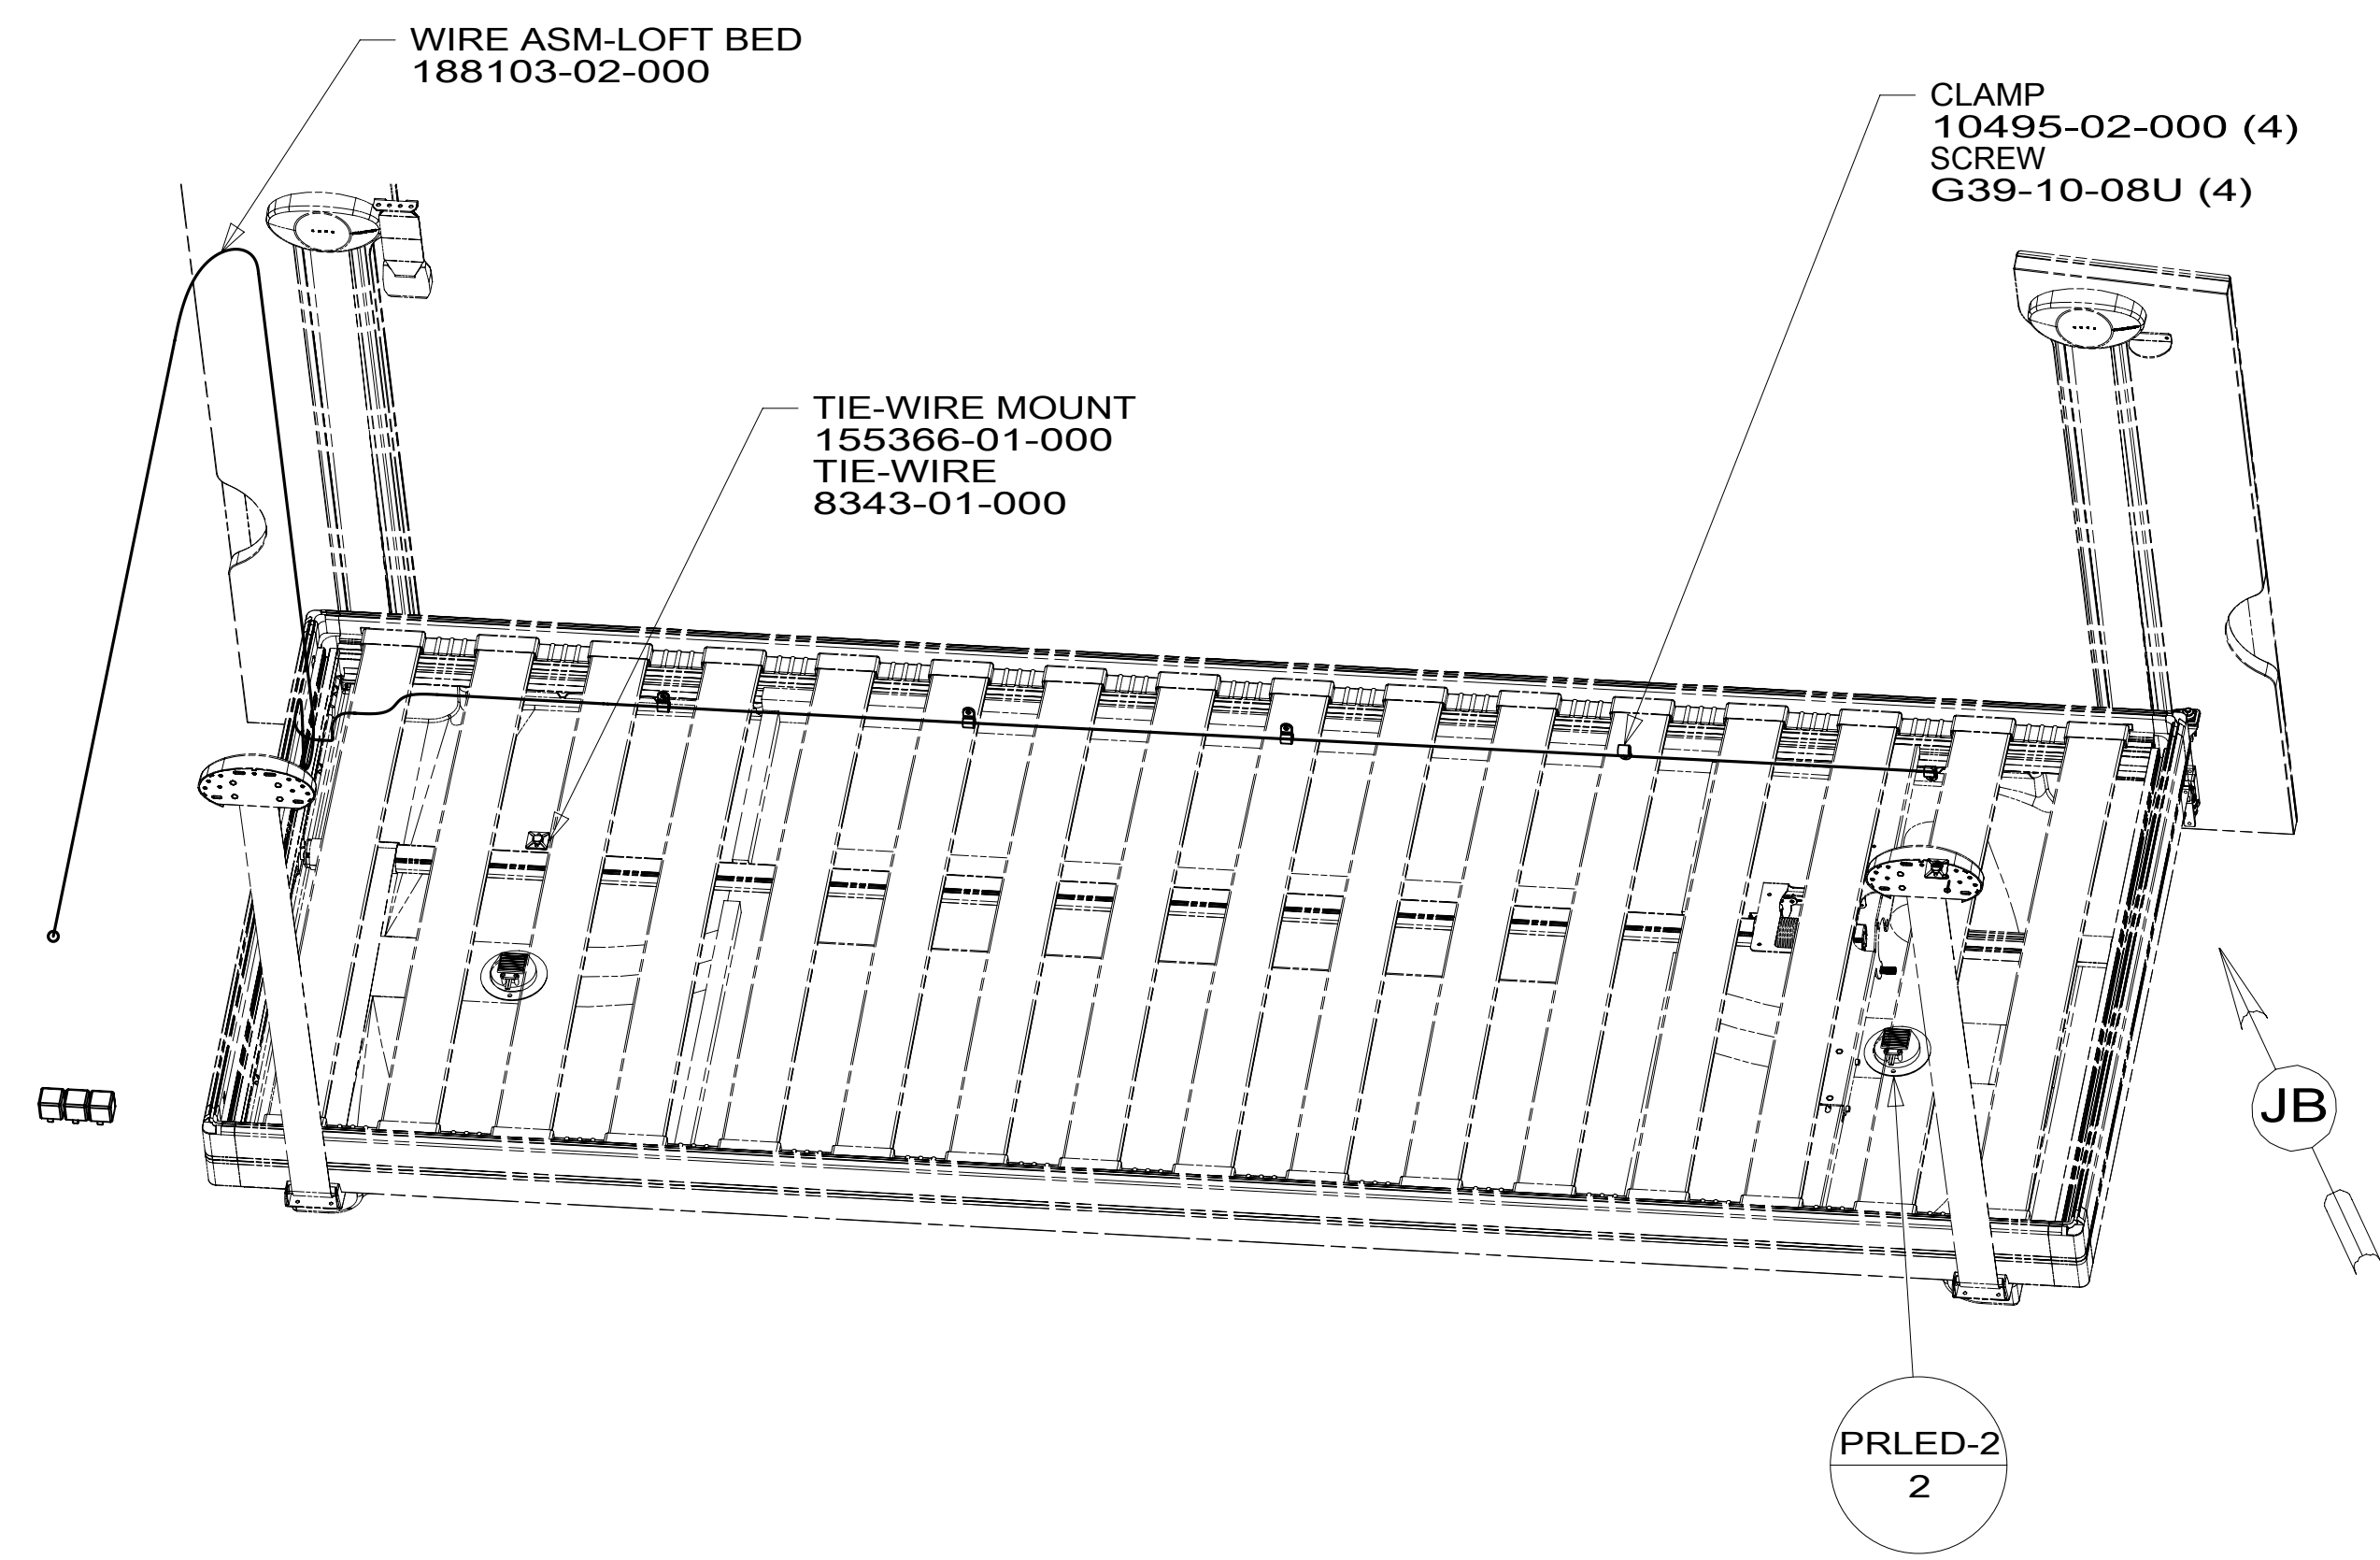


DETAIL JA 45B

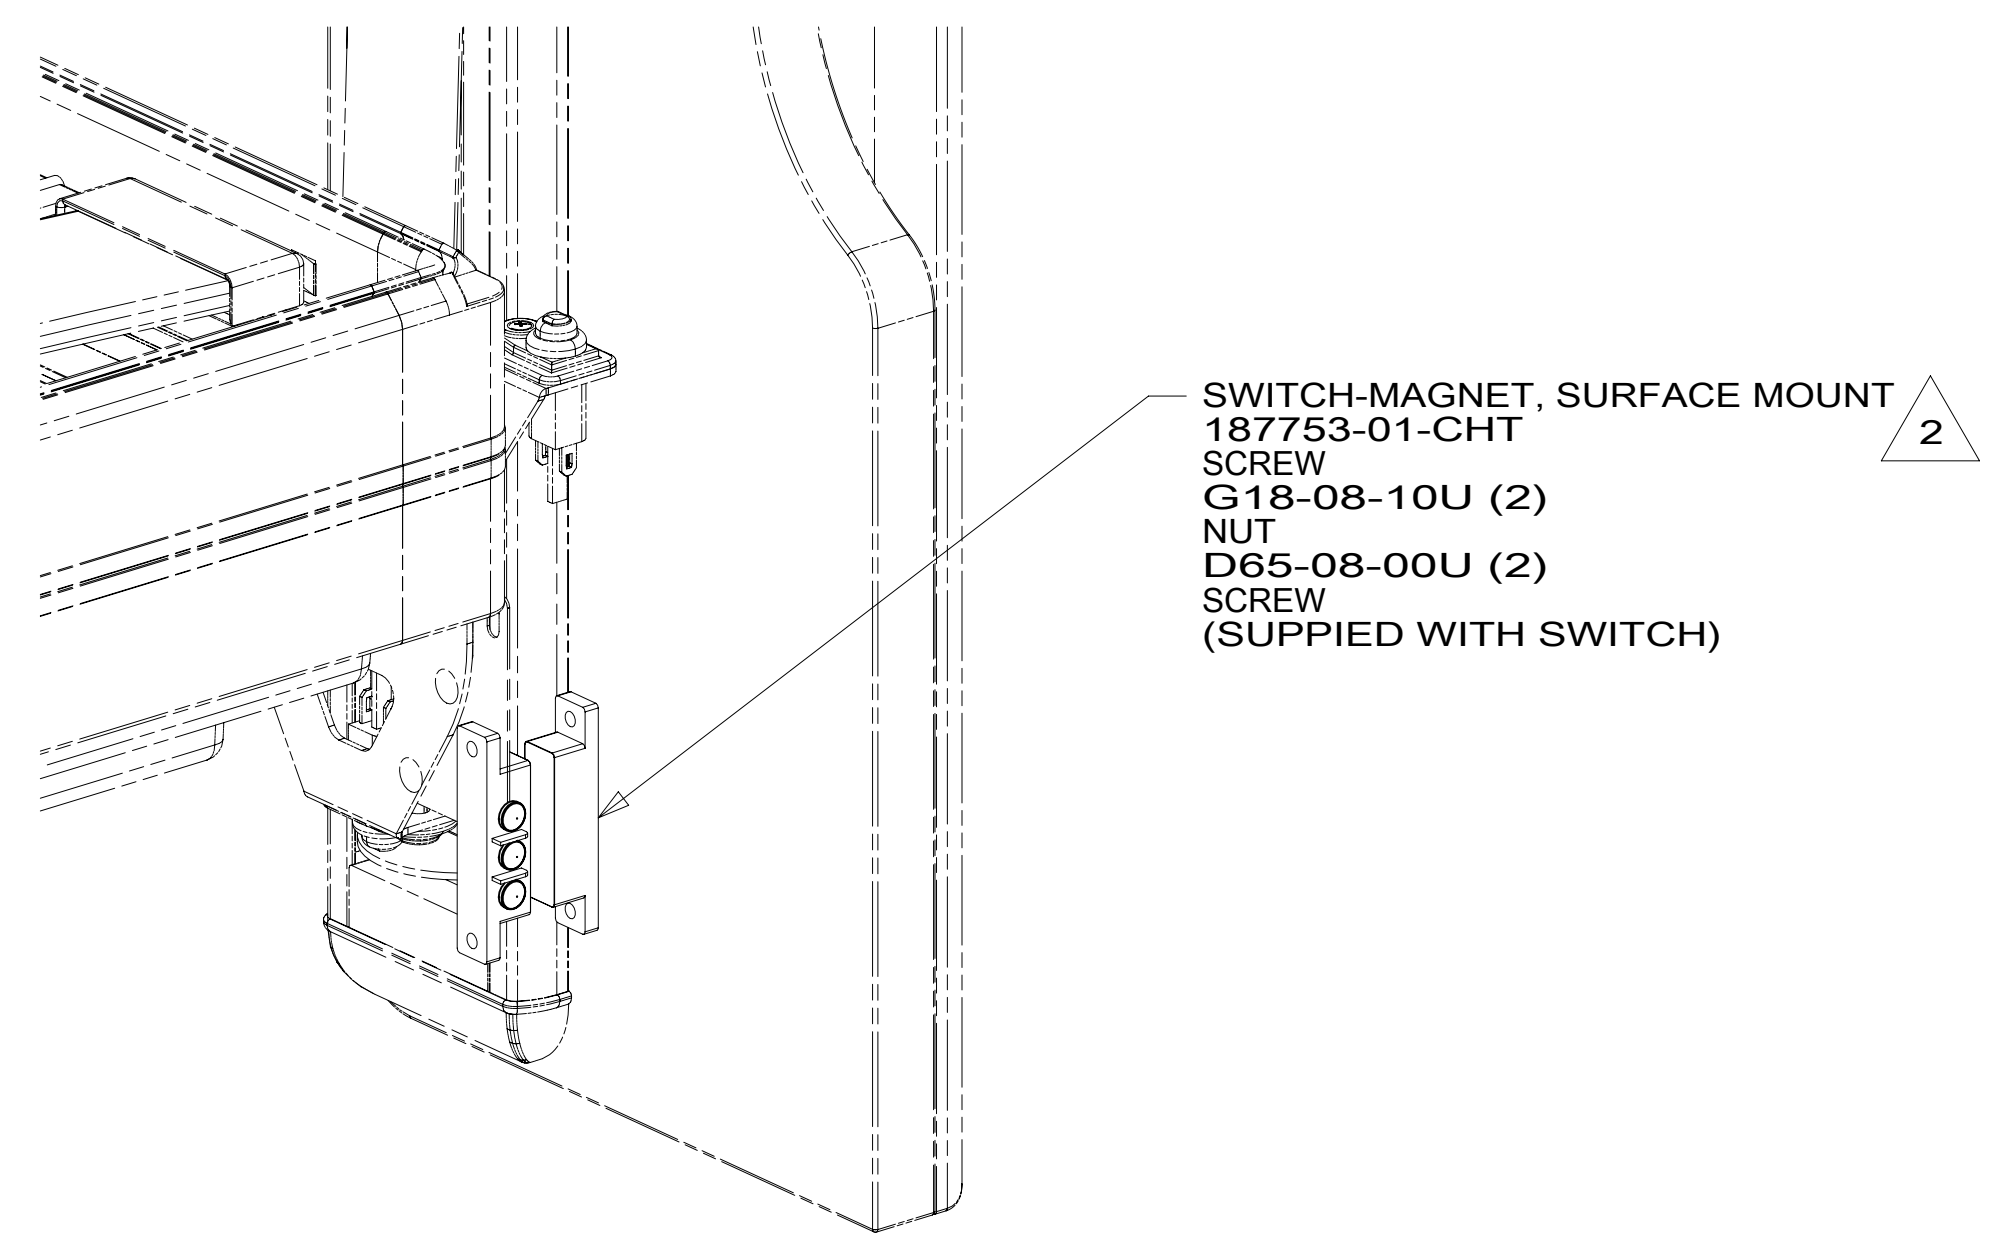

DETAIL JB 45B
(SWITCH COVER NOT SHOWN)

CABLE-CAMERA, 20M

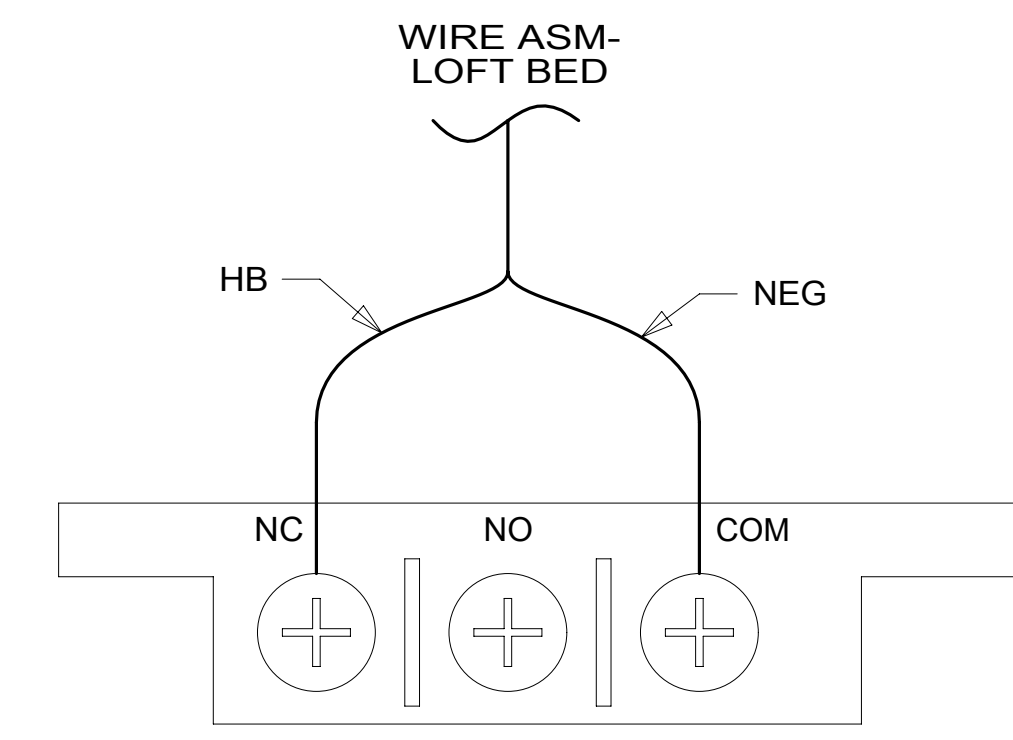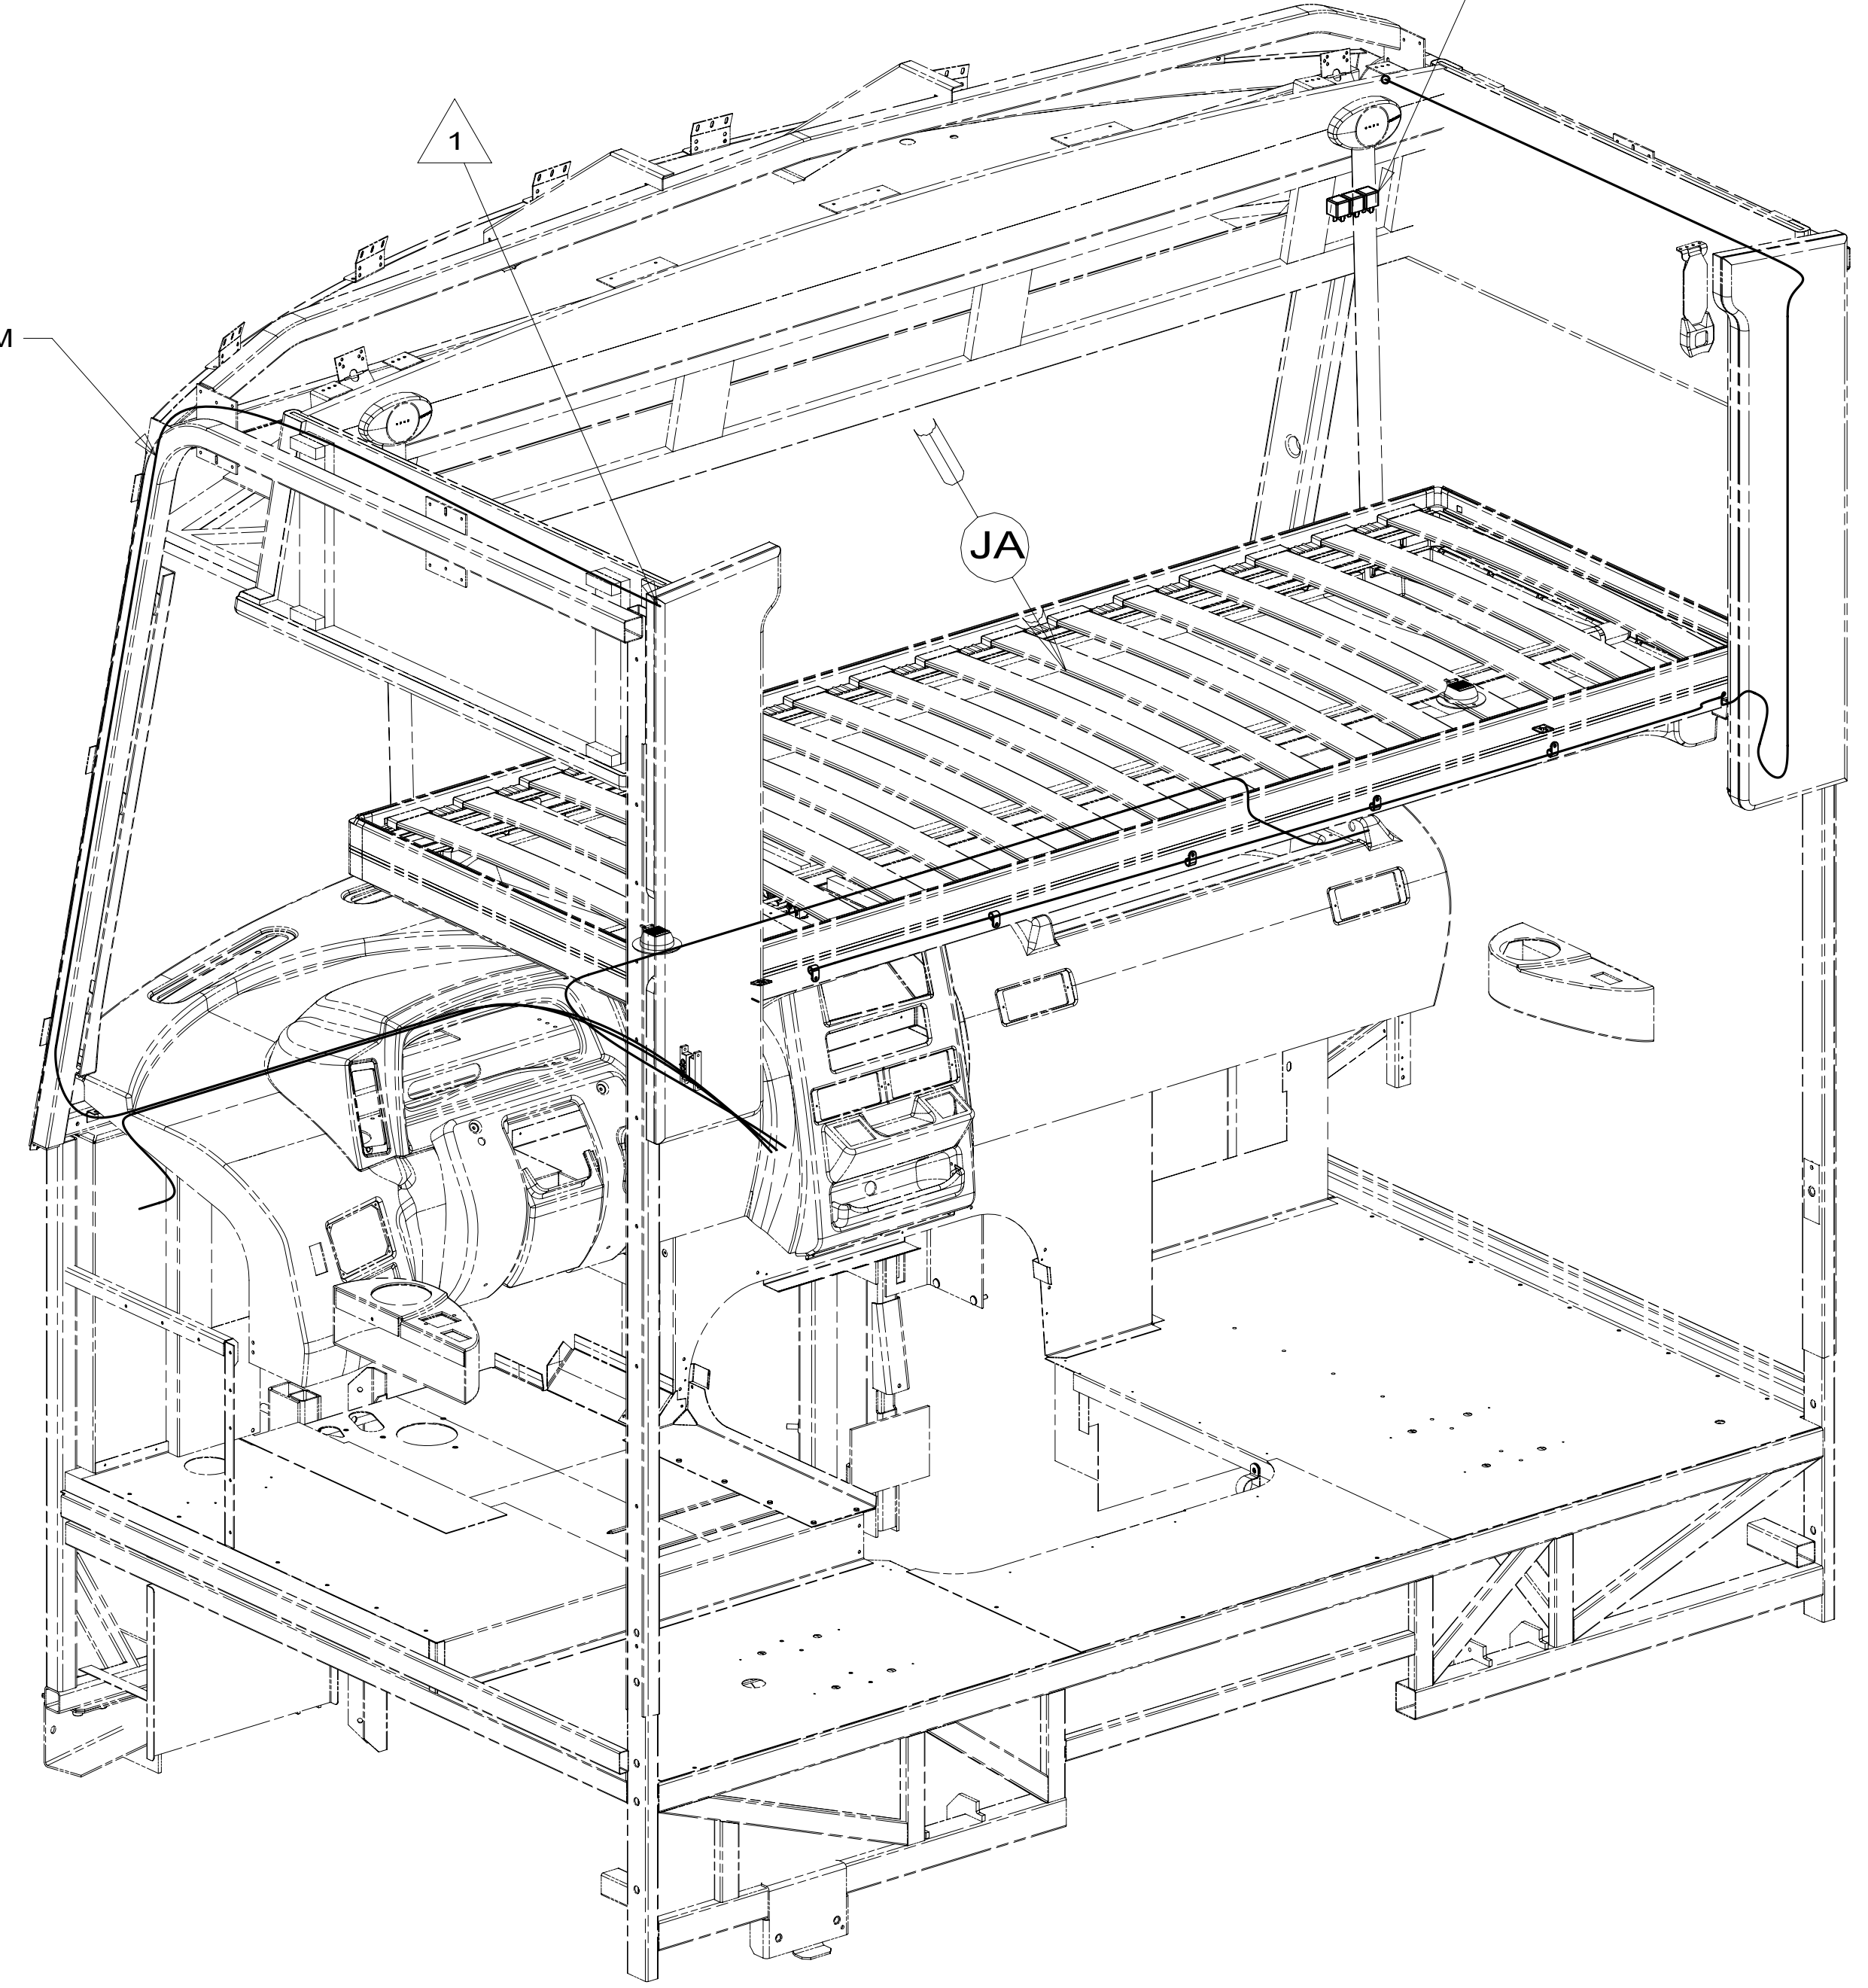

DETAIL JC

2 SEE DETAIL JC FOR WIRING CONNECTIONS.
1 RUN CABLE THRU LEFT-HAND COVE TO REAR OF UNIT. SEE SHEET 8.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 45B LOFT BED
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION:		1B1 265	
WIRING INSTL-FRONT END			
SHEET:	ITEM/PART NO.:	REV	
9 OF 9	000212731 / 30300401000		

8 7 6 5 4 3 2 1 05-May-2017

303004