

- △ 6 SEE WIRING INSTL-FRONT END FOR ADDITIONAL INFORMATION.
 △ 5 CLAMP 83610-01-000, SCREW G39-10-12U.
 4. WIRE TIE 8343-04-000. FASTEN EVERY 600MM MINIMUM.
 3. ALL DIMENSIONS ARE FROM DATUM UNLESS OTHERWISE SPECIFIED.
 △ 2 COVER SHARP EDGES WHERE WIRE CROSSES FRAME RAILS.
 △ 1 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265




| | | | |
|--|-------------------------|-----------------------------------|-------------|
| DSNR: | | ALL DIMENSIONS ARE IN MILLIMETERS | |
| DIFFR: | | MATERIAL: | |
| UNSPECIFIED TOLERANCES: | | | |
| WHOLE DIM (X) | : 3 | | |
| ONE-PLACE (X.X) | : 1.5 | | |
| TWO-PLACE (X.XX) | : 0.50 | | |
| ANGLE | : 1° | | |
| REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES | | WEIGHT: (LBS) | FIRST USED: |
| | | | 18 V26M |
| DESCRIPTION: | | | |
| WIRING INSTL-CHASSIS | | | |
| SHEET: | ITEM/PART NO.: | REV: | |
| 1 OF 2 | 000043012 / 32026001000 | | |
| REF: | | 1 13-Jun-2018 | |

8 7 6 5 4 3 2 1

D
C
B
A

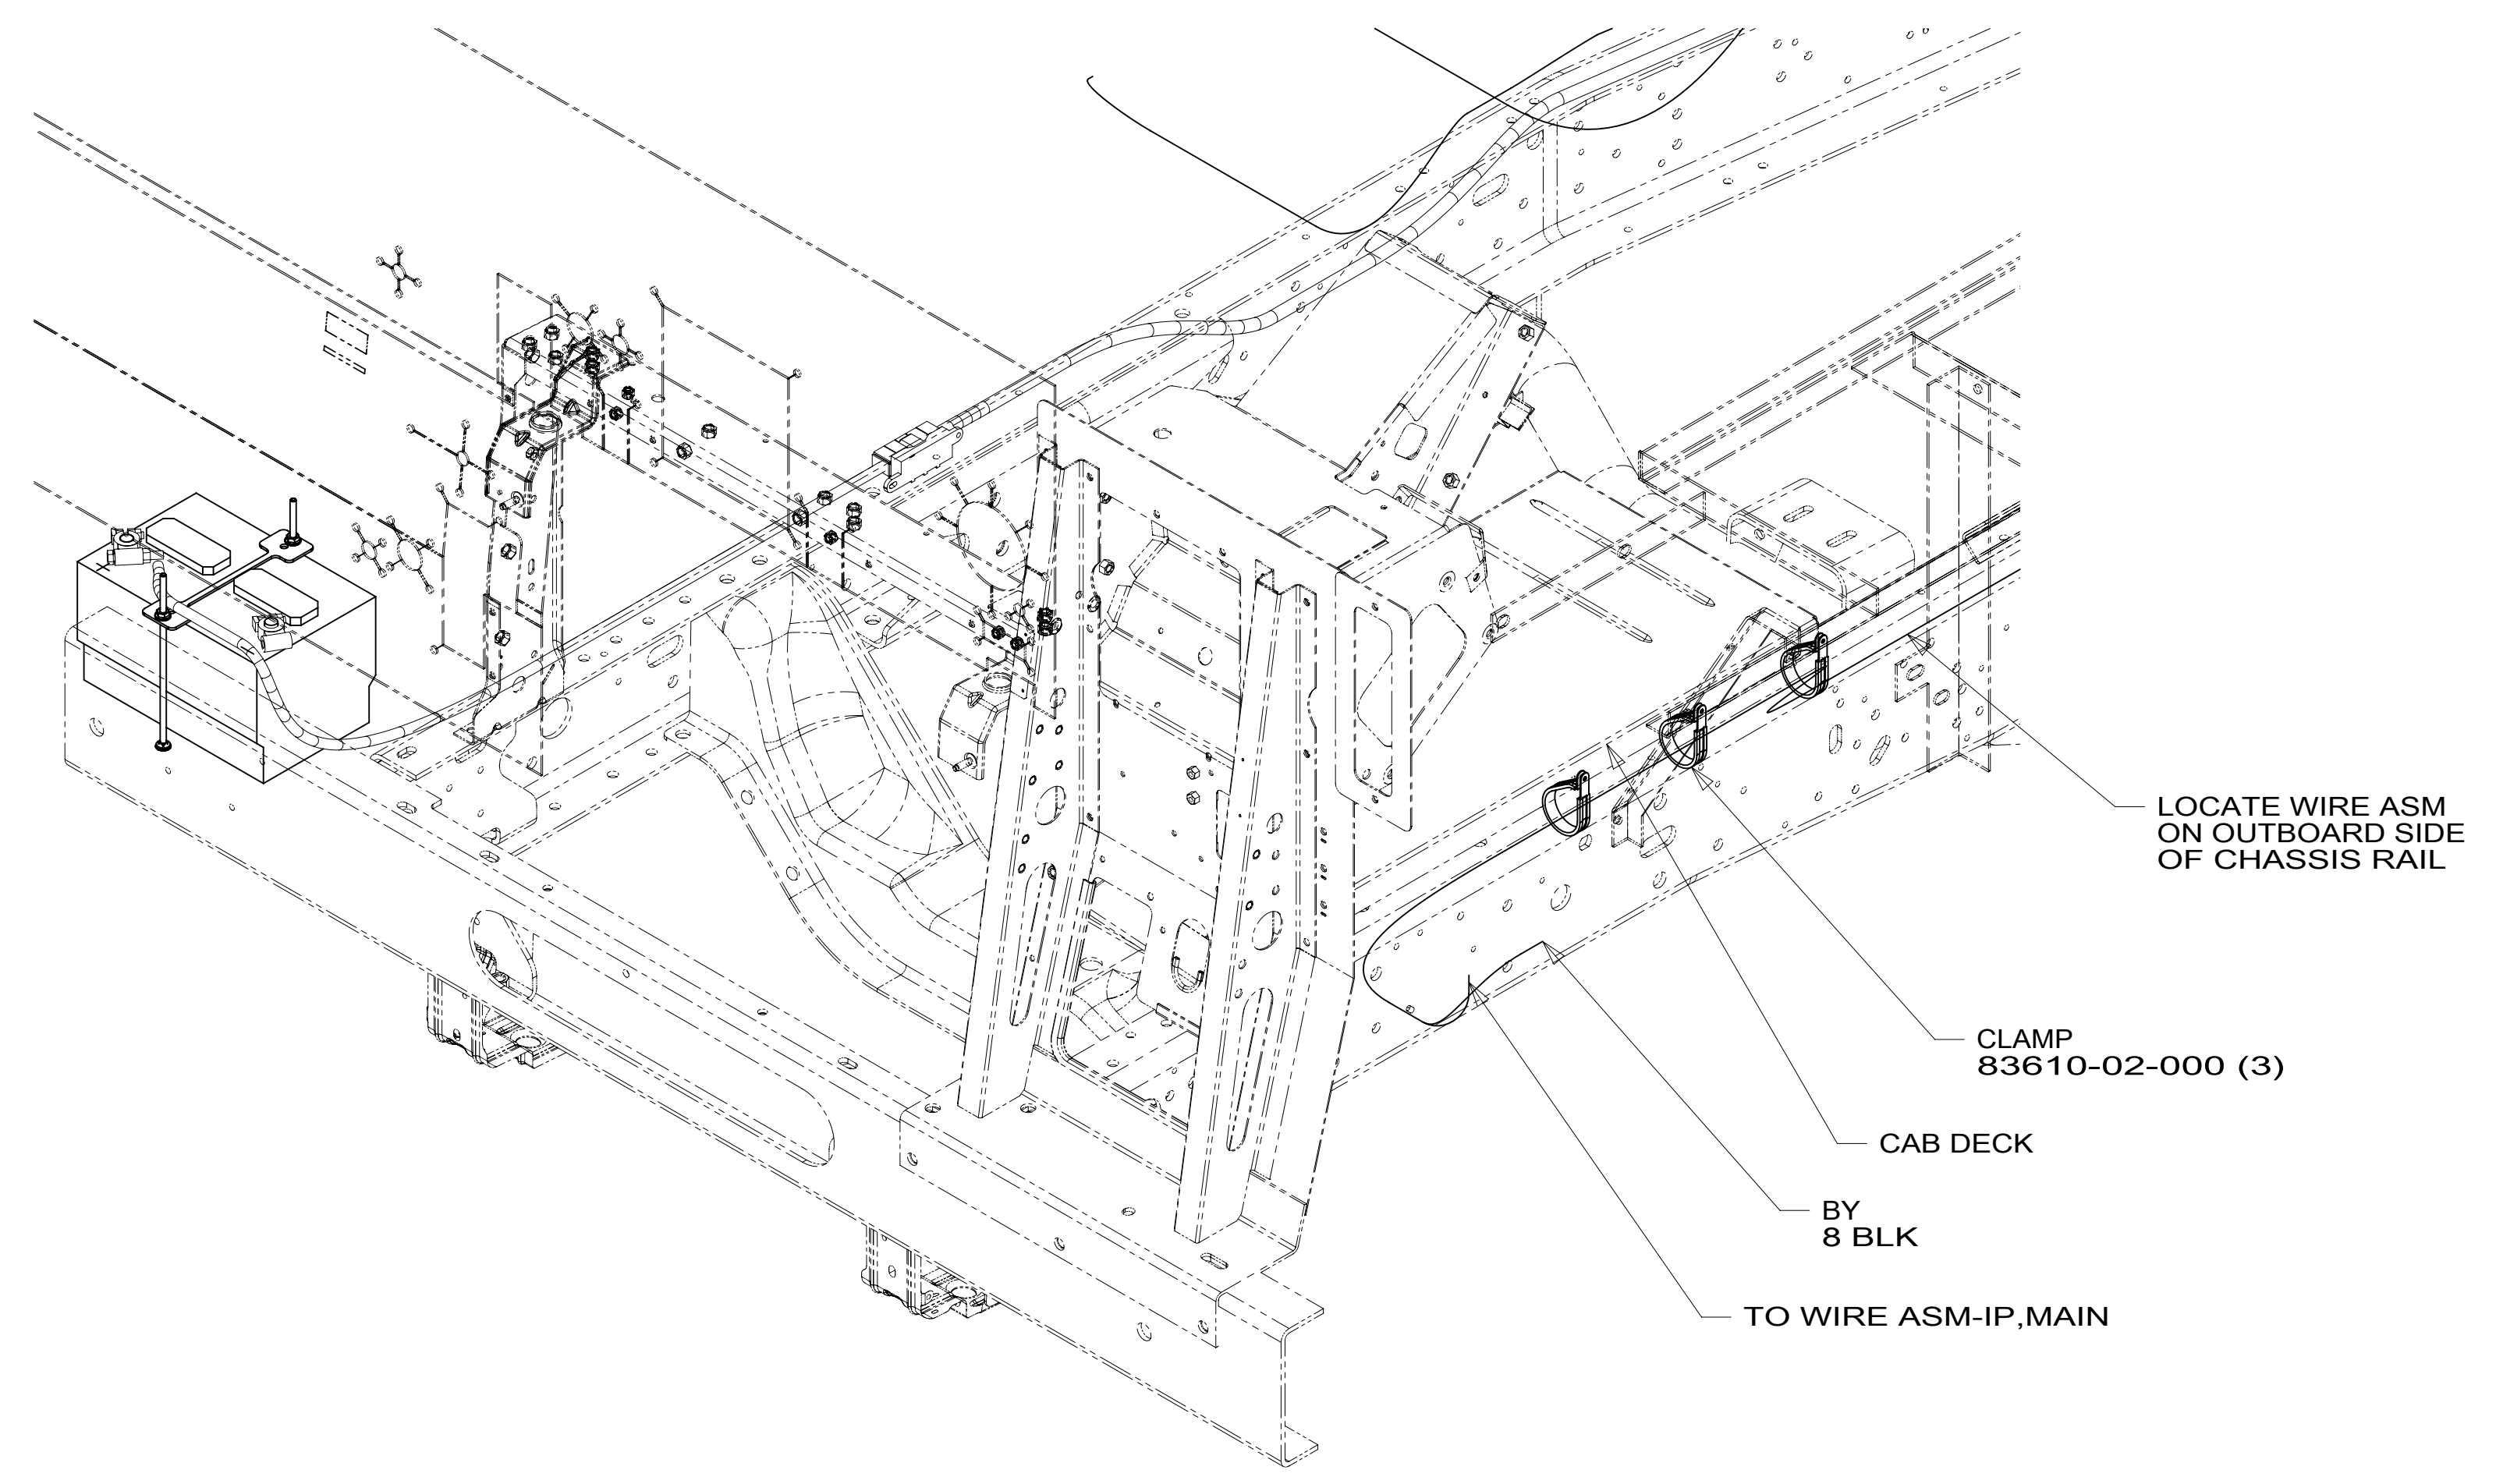

VIEW BA

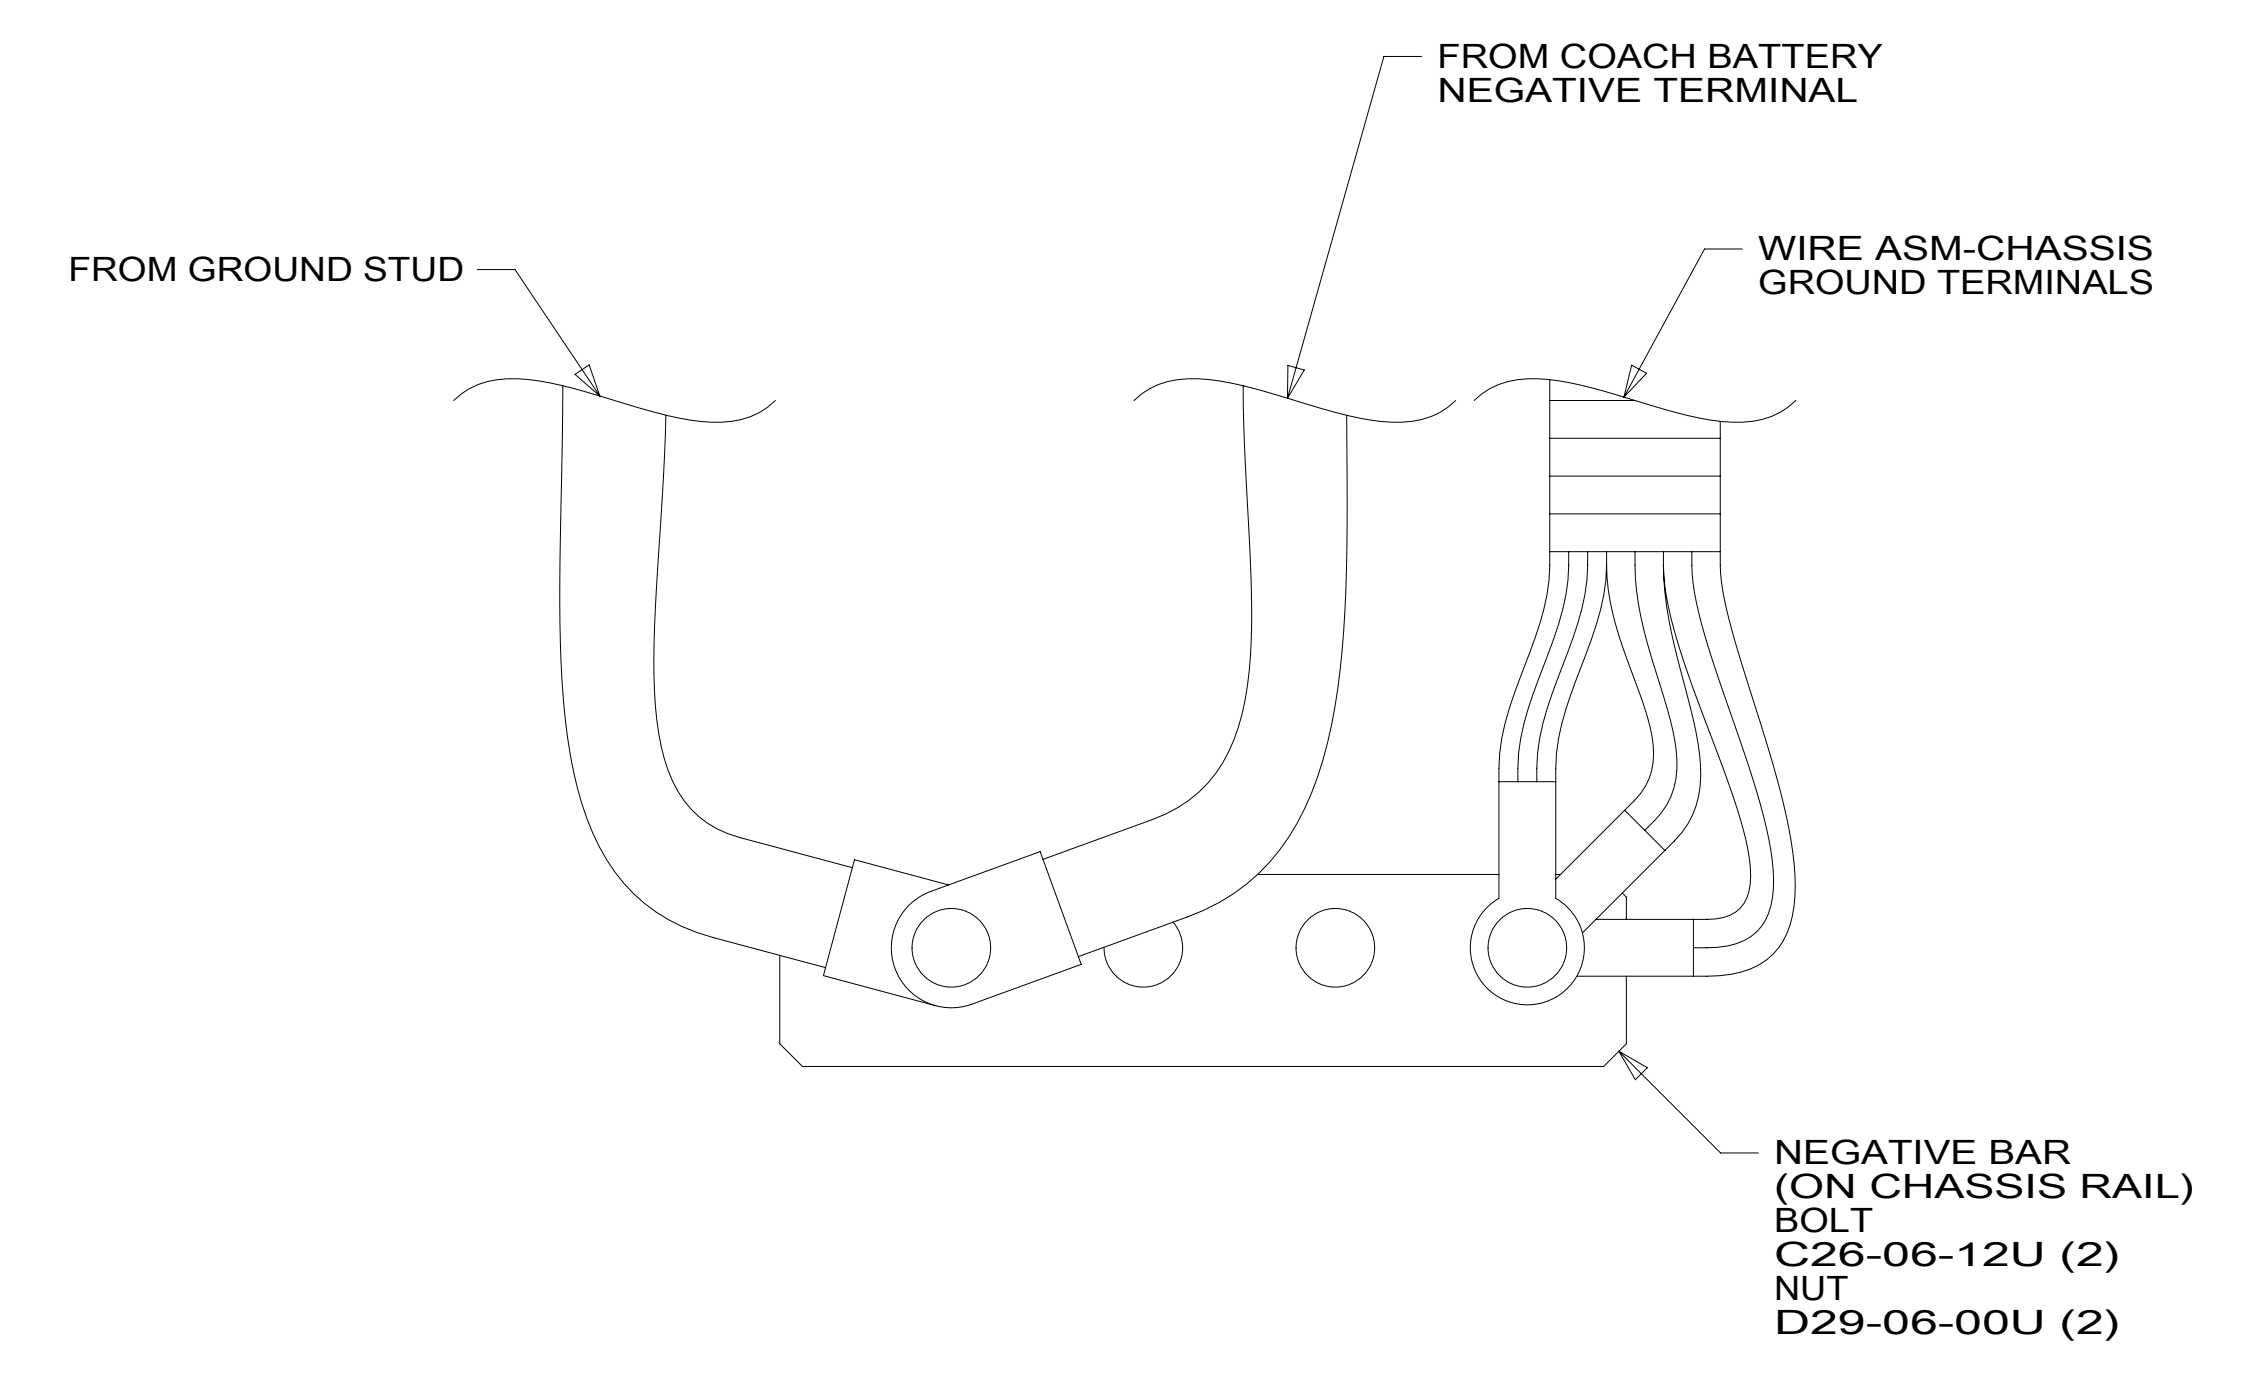

DETAIL BB

NOTES:

1. CUT OFF EXCESS END OF WIRE TIE.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

| | | | |
|-----------------------------|-------------------------|-----|-----|
| DESCRIPTION: | | 1B1 | 265 |
| WIRING INSTL-CHASSIS | | | |
| SHEET: | ITEM/PART NO.: | REV | |
| 2 OF 2 | 000043012 / 32026001000 | | |

8 7 6 5 4 3 2 1 13-Jun-2018