

- 9 ROUTE WIRE ALONG RUNNING BOARD SUPPORT. ATTACH WITH WIRE TIE USING HOLES PROVIDED IN SUPPORT.
- 8 SECURE ALARM BACK TO WIRE LOOM WITH TIE-WIRE 008343-03-000.
- 7 CONNECT KE TO RED MARKED TERMINAL; CONNECT AFM TO UNMARKED TERMINAL.
- 6 DRILL 12.7 MM HOLE INTO DASH PANEL.
- 5 DRILL 12.3 MM HOLE INTO DASH PANEL.
- 4 SEE DETAIL BB FOR CONNECTION OF BUTTON SWITCH.
- 3 SEE GENERATOR INSTL FOR ADDITIONAL INFORMATION.
- 2 SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.
- 1 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.


NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 401 INVERTER-DC/AC, 1000 WATT
- 64A JACKS-STABILIZING, ELECTRIC
- 384 GEN 2.5KW ONAN-MICROLITE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION:		1B1 265	
WIRING INSTL-CHASSIS			
SHEET:	ITEM/PART NO.:	REV	
2 OF 4	000118855 / 32248201000		

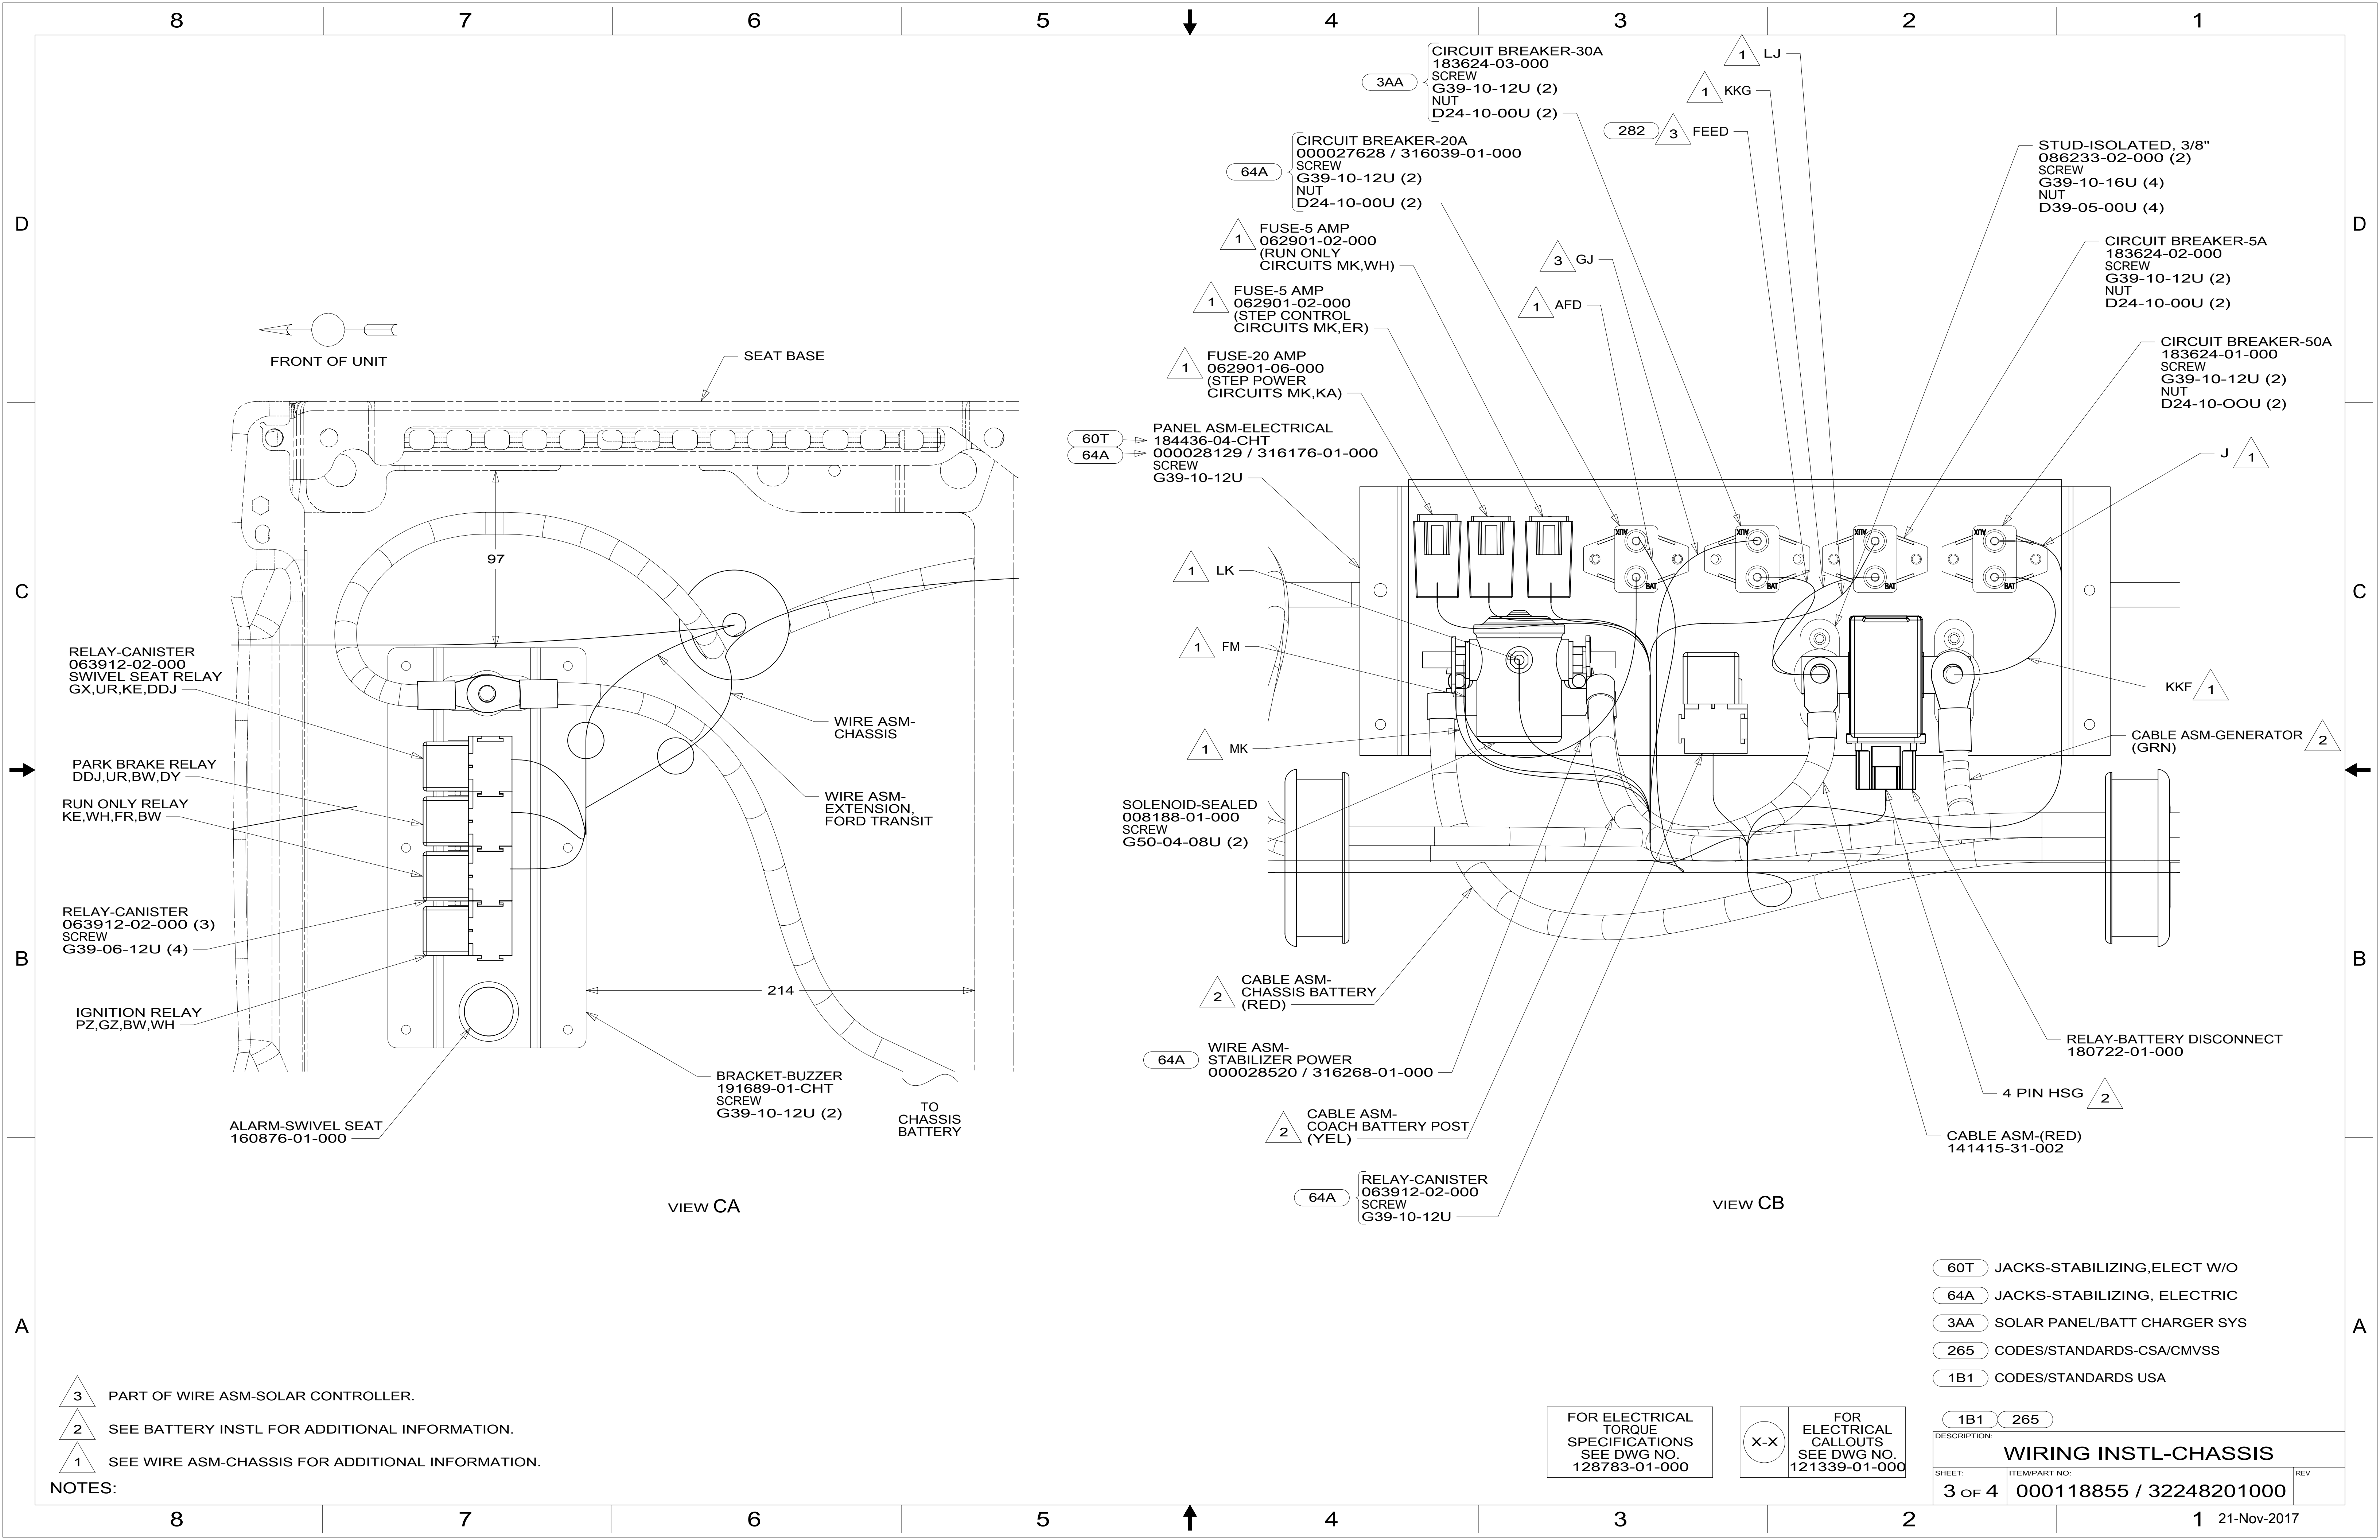

8 7 6 5 4 3 2 1

D

C

B

A

FRONT OF UNIT

SEAT BASE

97

RELAY-CANISTER
063912-02-000
SWIVEL SEAT RELAY
GX,UR,KE,DDJ

PARK BRAKE RELAY
DDJ,UR,BW,DY

RUN ONLY RELAY
KE,WH,FR,BW

RELAY-CANISTER
063912-02-000 (3)
SCREW
G39-06-12U (4)

IGNITION RELAY
PZ,GZ,BW,WH

ALARM-SWIVEL SEAT
160876-01-000

WIRE ASM-
CHASSIS

WIRE ASM-
EXTENSION,
FORD TRANSIT

214

BRACKET-BUZZER
191689-01-CHT
SCREW
G39-10-12U (2)

TO
CHASSIS
BATTERY

VIEW CA

CIRCUIT BREAKER-30A
183624-03-000
SCREW
G39-10-12U (2)
NUT
D24-10-00U (2)

CIRCUIT BREAKER-20A
000027628 / 316039-01-000
SCREW
G39-10-12U (2)
NUT
D24-10-00U (2)

FUSE-5 AMP
062901-02-000
(RUN ONLY
CIRCUITS MK,WH)

FUSE-5 AMP
062901-02-000
(STEP CONTROL
CIRCUITS MK,ER)

FUSE-20 AMP
062901-06-000
(STEP POWER
CIRCUITS MK,KA)

PANEL ASM-ELECTRICAL
184436-04-CHT
000028129 / 316176-01-000
SCREW
G39-10-12U

LK

FM

MK

SOLENOID-SEALED
008188-01-000
SCREW
G50-04-08U (2)

CABLE ASM-
CHASSIS BATTERY
(RED)

WIRE ASM-
STABILIZER POWER
000028520 / 316268-01-000

CABLE ASM-
COACH BATTERY POST
(YEL)

RELAY-CANISTER
063912-02-000
SCREW
G39-10-12U

VIEW CB

STUD-ISOLATED, 3/8"
086233-02-000 (2)
SCREW
G39-10-16U (4)
NUT
D39-05-00U (4)

CIRCUIT BREAKER-5A
183624-02-000
SCREW
G39-10-12U (2)
NUT
D24-10-00U (2)

CIRCUIT BREAKER-50A
183624-01-000
SCREW
G39-10-12U (2)
NUT
D24-10-00U (2)

J

KKF

CABLE ASM-GENERATOR
(GRN)

RELAY-BATTERY DISCONNECT
180722-01-000

4 PIN HSG

CABLE ASM-(RED)
141415-31-002

60T JACKS-STABILIZING,ELECT W/O

64A JACKS-STABILIZING, ELECTRIC

3AA SOLAR PANEL/BATT CHARGER SYS

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

- NOTES:
- 3 PART OF WIRE ASM-SOLAR CONTROLLER.
 - 2 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
 - 1 SEE WIRE ASM-CHASSIS FOR ADDITIONAL INFORMATION.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000



DESCRIPTION:	1B1 265	
WIRING INSTL-CHASSIS		
SHEET:	ITEM/PART NO:	REV
3 OF 4	000118855 / 32248201000	

8 7 6 5 4 3 2 1 21-Nov-2017

8 7 6 5 4 3 2 1

D
C
B
A

D
C
B
A

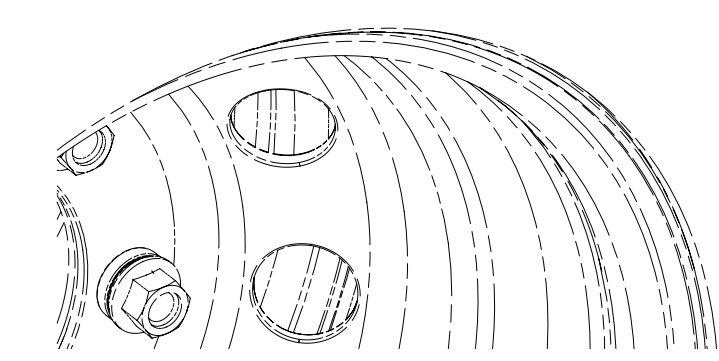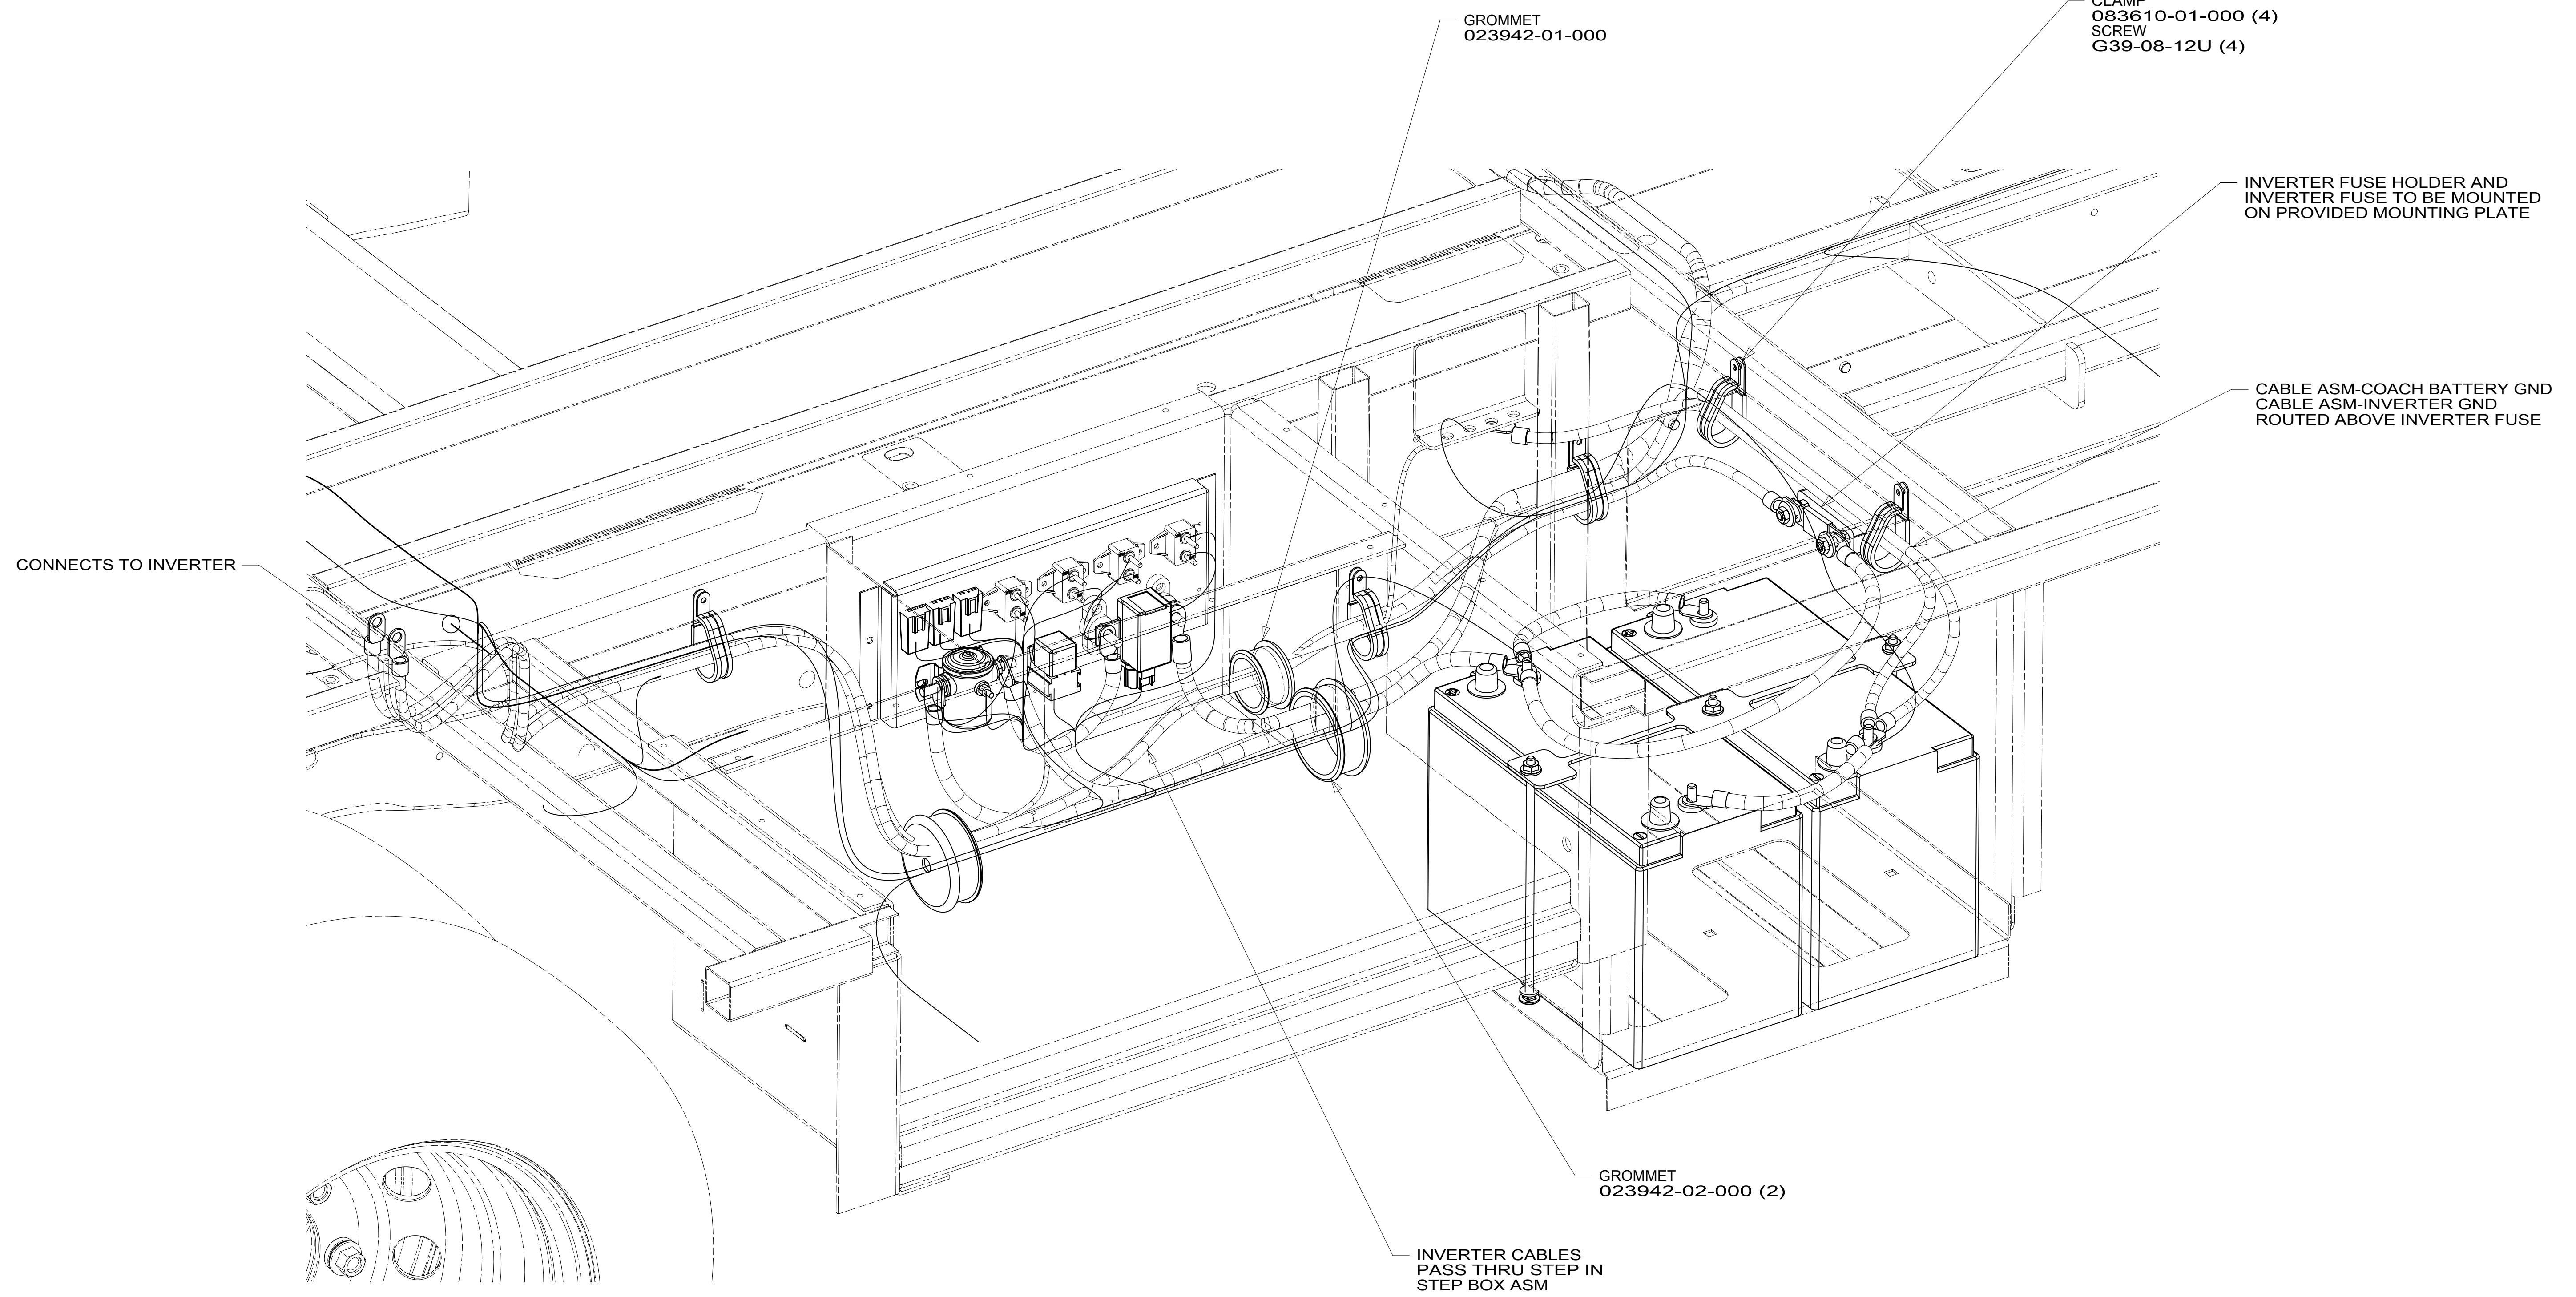

265 CODES/STANDARDS-CSA/CMVSS
 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:		1B1 265
WIRING INSTL-CHASSIS		
SHEET:	ITEM/PART NO.:	REV
4 OF 4	000118855 / 32248201000	

8 7 6 5 4 3 2 1 21-Nov-2017