



SOCKET 29 - CIRCUIT FR
 SOCKET 30 - CIRCUIT DY
 SOCKET 32 - CIRCUIT BW
 SOCKET 43 - CIRCUIT GZ

FORD HIGH SPECIFICATION VEHICLE
 INTERFACE CONNECTOR


DETAIL AA

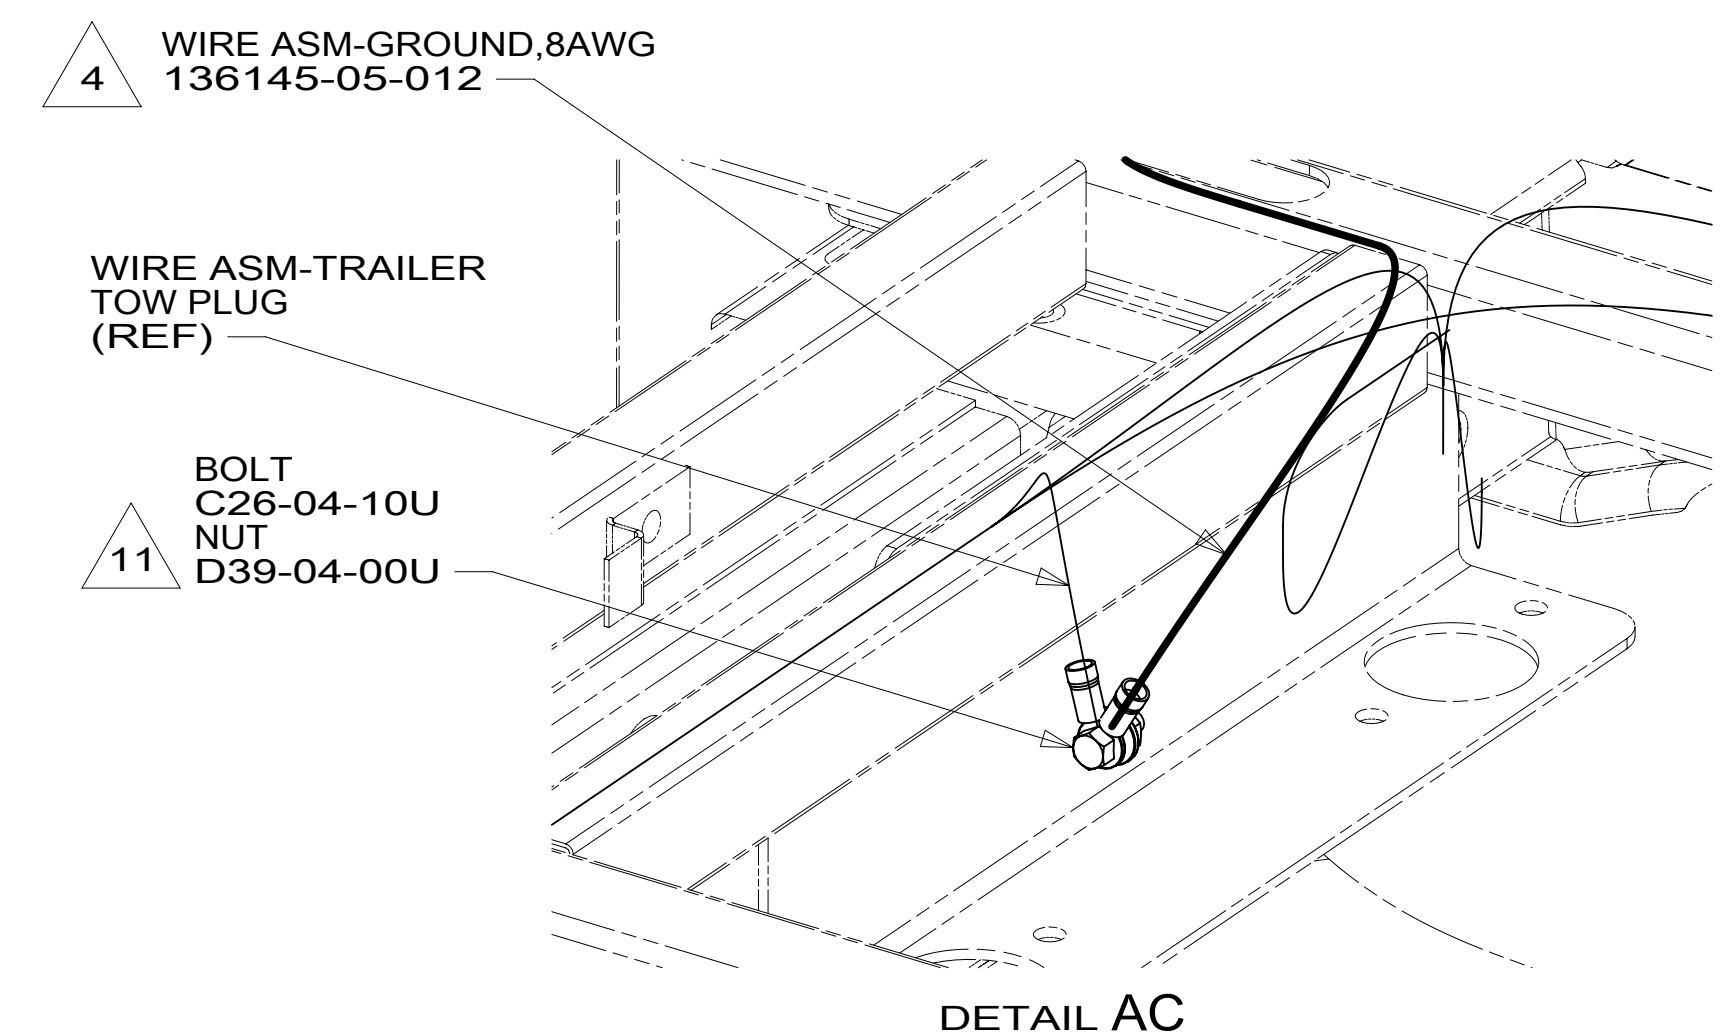

DETAIL AC

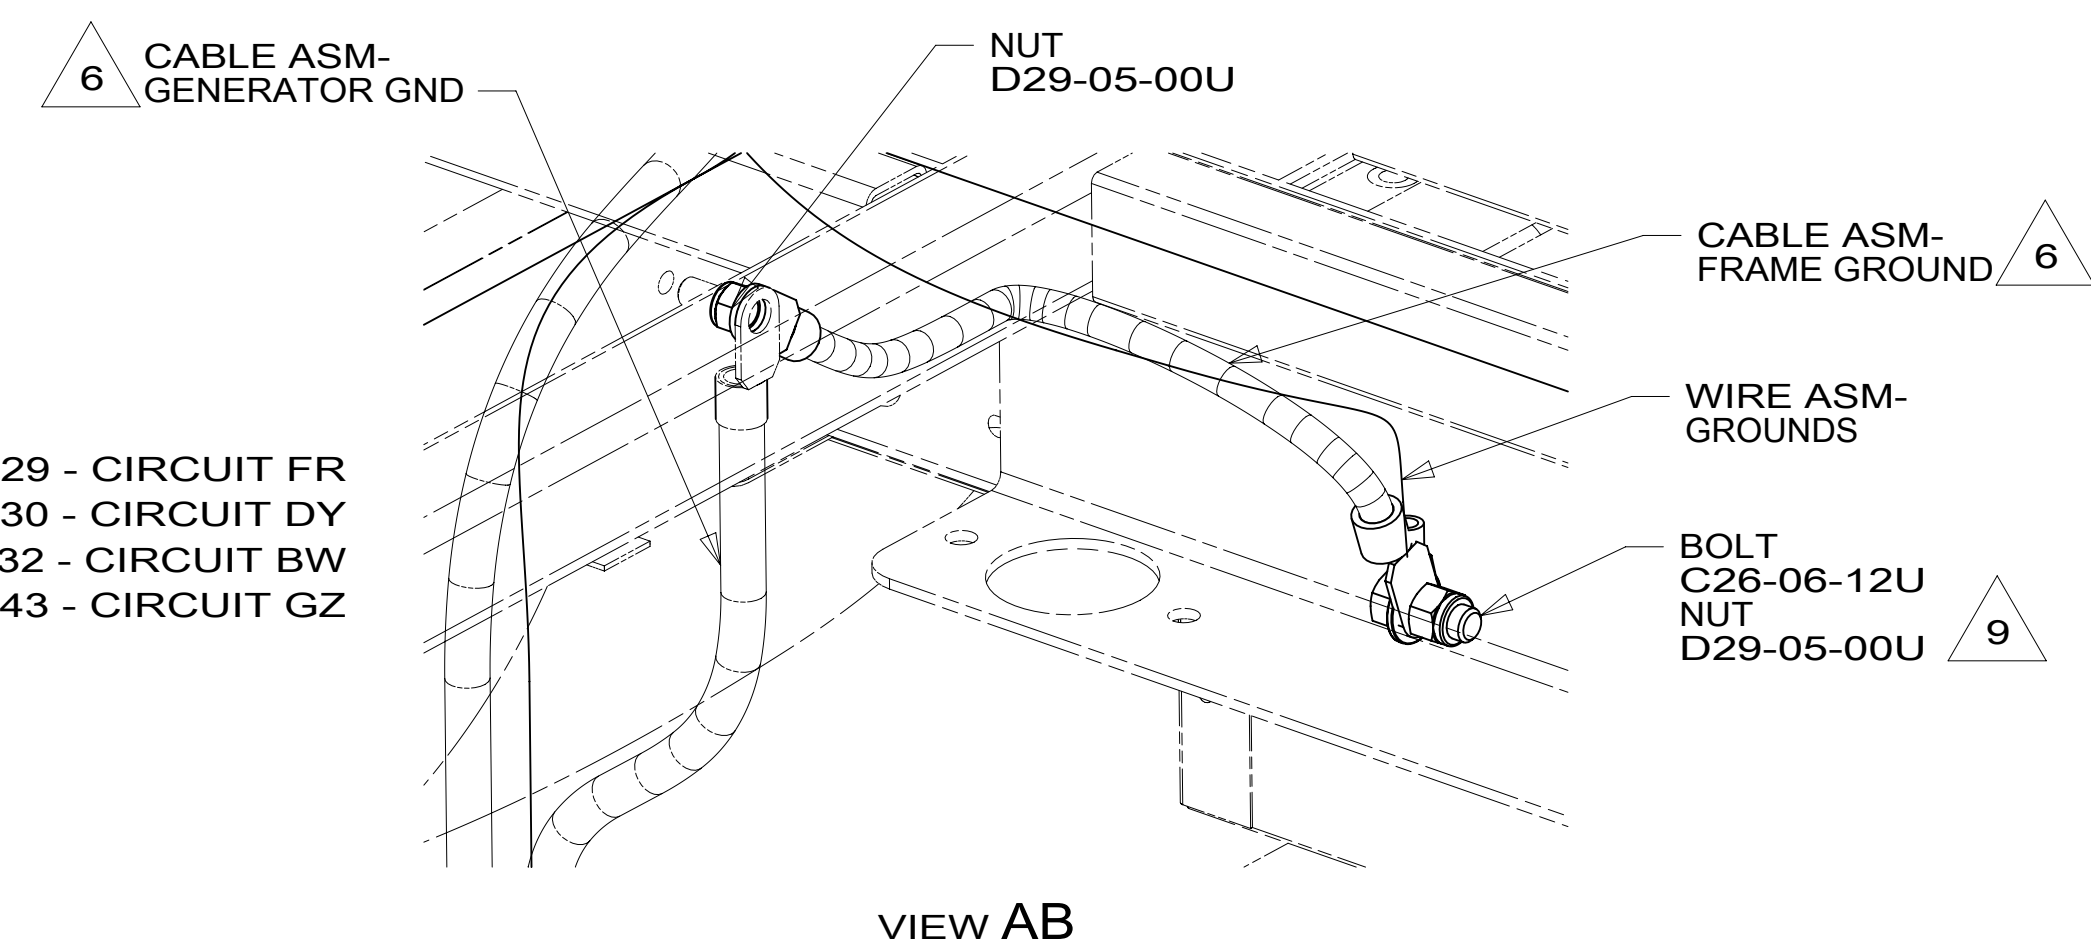


VIEW AB

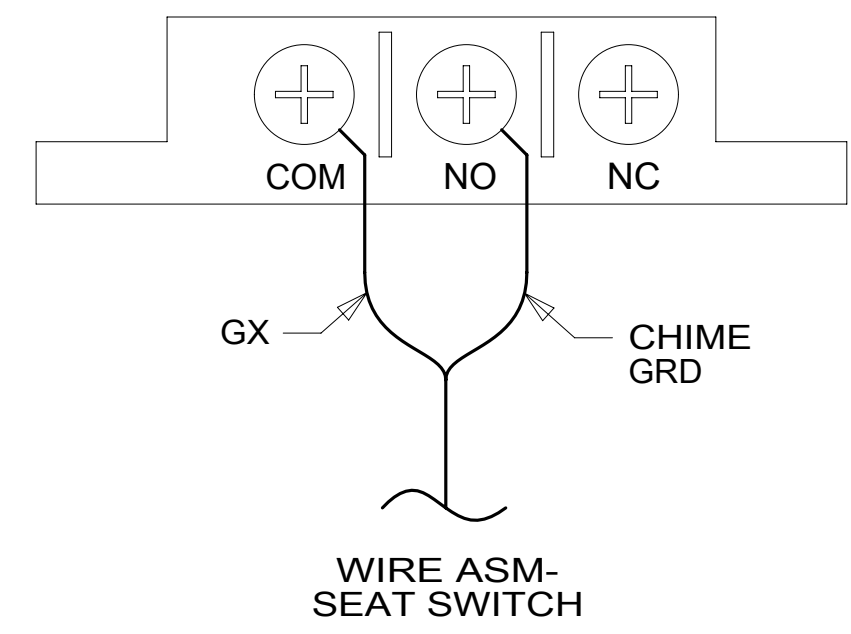

DETAIL AD
 (UNDER PASSENGER SEAT)

- NOTES:**
1. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
 2. USE WIRE TIES 8343-04-000 AND 116673-02-000 APPROXIMATELY 600MM ON CENTER UNLESS OTHERWISE SPECIFIED.
 3. SEE RADIO/MONITOR INSTL FOR ADDITIONAL INFORMATION.
 4. SEE LOAD CENTER/ATS ASM FOR ADDITIONAL INFORMATION.
 5. WIRING IS PART OF WIRE ASM-POWER MIRRORS.
 6. SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
 7. 10 PIN HSG CONNECTS TO GENERATOR.
 8. ROUTE GENERATOR CABLE ALONG WITH WIRE ASM-CHASSIS TO AND THROUGH FLOOR TO WIRE ASM-RIGHT. ROUTE UP TO MONITOR PANEL AREA.
 9. DRILL 10.4 MM HOLE IN CHASSIS RAIL FLANGE. CLEAN PAINT FROM FLANGE APPROXIMATELY 10 MM AROUND HOLE. BOLT AND NUT GROUND TERMINAL TO FLANGE.
 10. SEE DETAIL AB FOR CONNECTION OF CABLE ASM TO CHASSIS RAIL.
 11. DRILL 6.35 MM HOLE IN CHASSIS RAIL FLANGE. CLEAN PAINT FROM FLANGE APPROXIMATELY 10 MM AROUND HOLE. BOLT AND NUT GROUND RING FROM WIRE ASM-TRAILER TOW PLUG TO FLANGE.
 12. SEE INTERIOR INSTL-FRONT FOR ADDITIONAL INFORMATION.
 13. SEE DETAIL AA FOR CONNECTION OF WIRE ASM TO FORD SUPPLIED CONNECTOR LOCATED BEHIND GLOVE BOX.

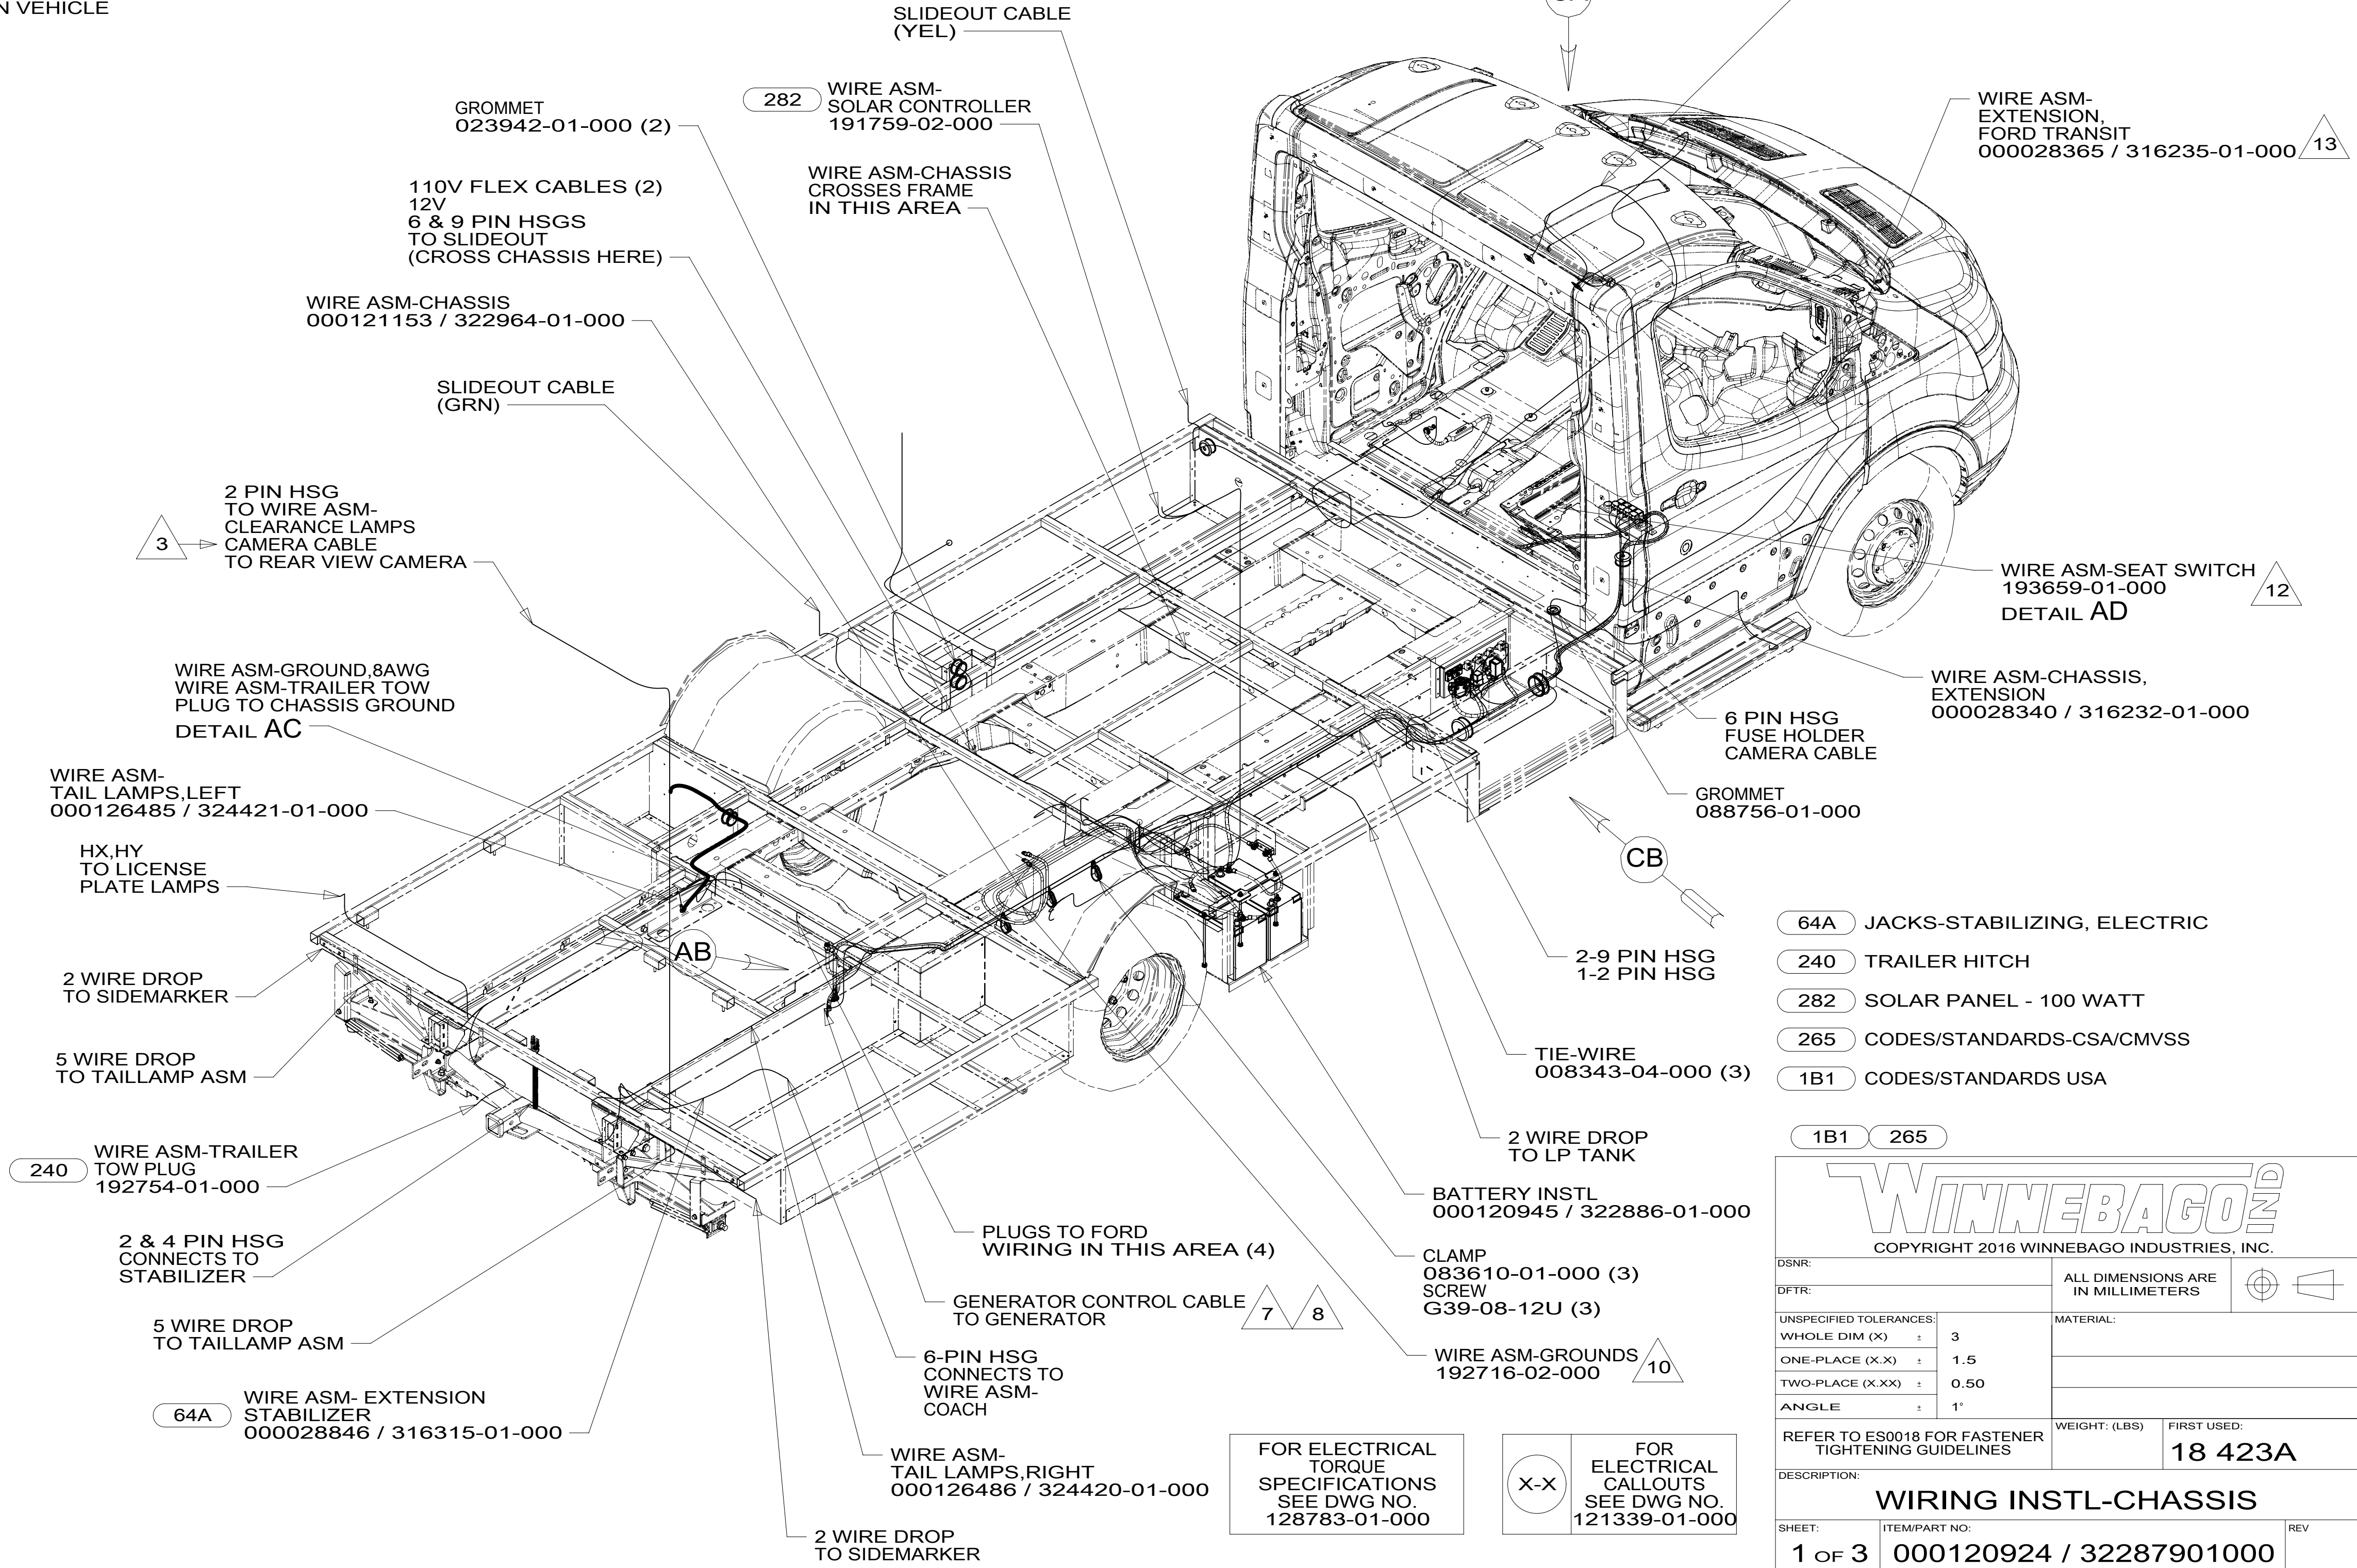


- 64A JACKS-STABILIZING, ELECTRIC
- 240 TRAILER HITCH
- 282 SOLAR PANEL - 100 WATT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

WINNEBAGO
 COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.



DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS
DFFR:	
UNSPECIFIED TOLERANCES:	MATERIAL:
WHOLE DIM (X) : 3	
ONE-PLACE (X.X) : 1.5	
TWO-PLACE (X.XX) : 0.50	
ANGLE : 1°	
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS) FIRST USED: 18 423A
DESCRIPTION: WIRING INSTL-CHASSIS	
SHEET: 1 OF 3	ITEM/PART NO: 000120924 / 32287901000
REF:	1 12-Dec-2017

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

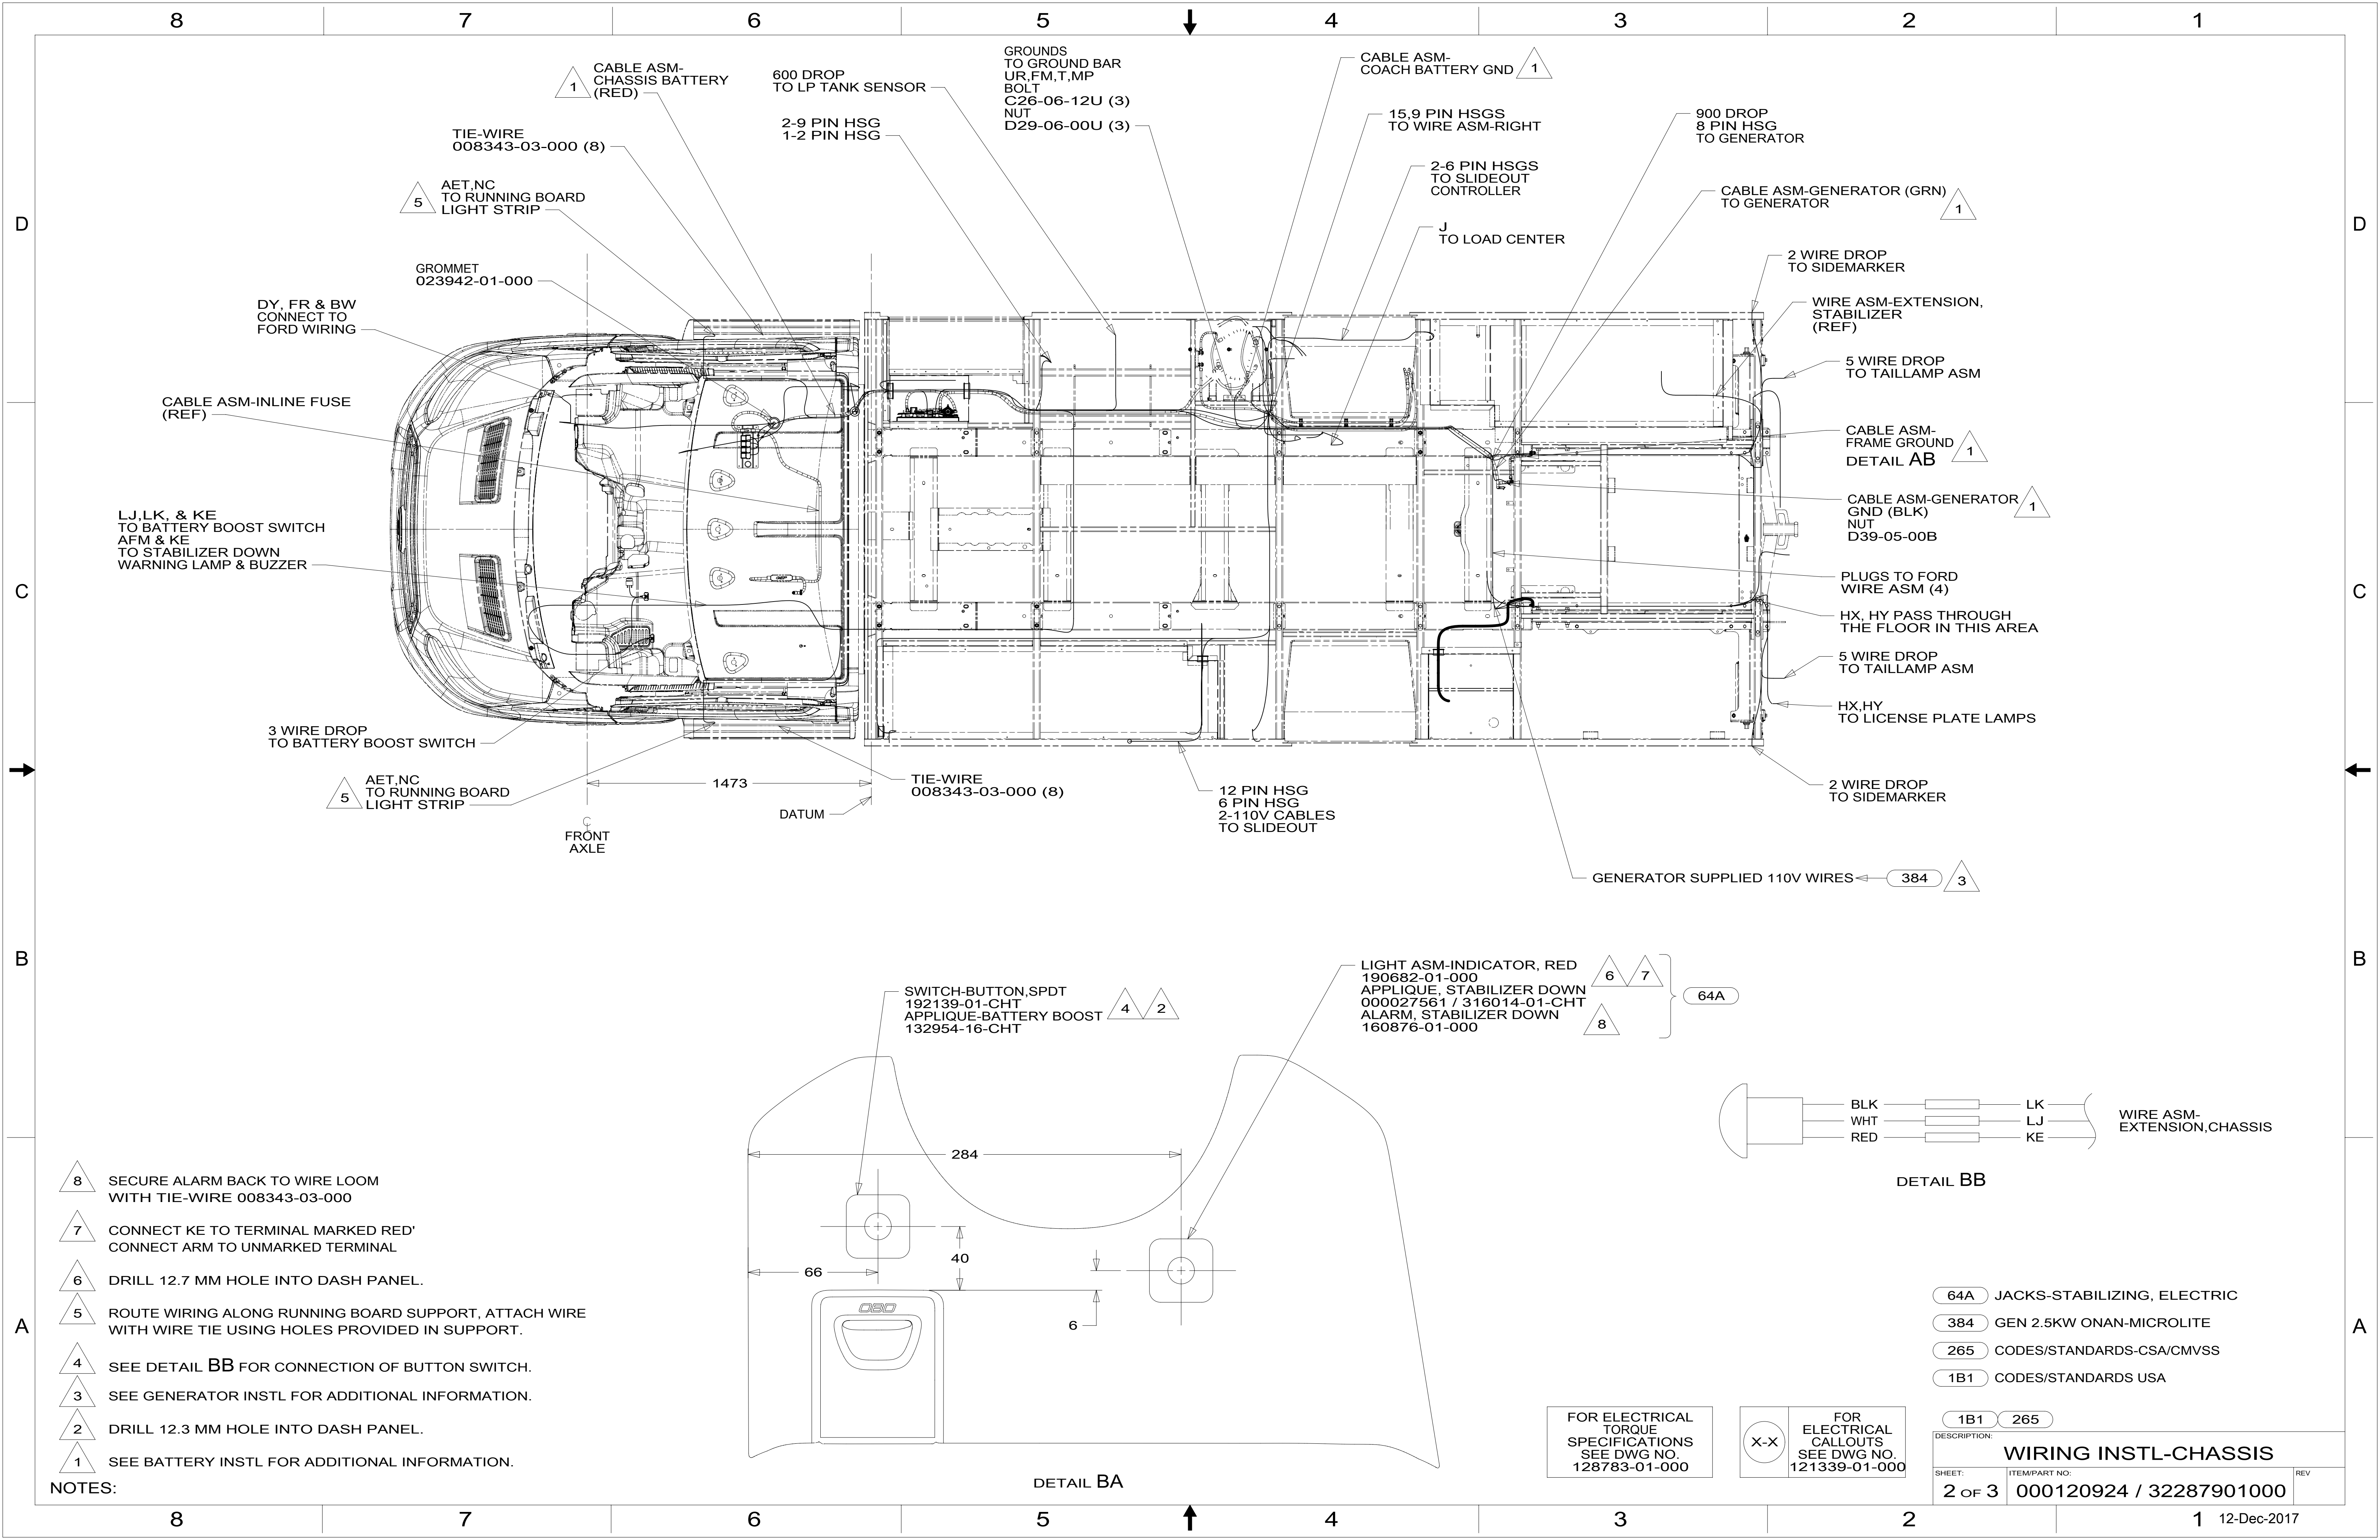

- NOTES:**
- 8 SECURE ALARM BACK TO WIRE LOOM WITH TIE-WIRE 008343-03-000
 - 7 CONNECT KE TO TERMINAL MARKED RED' CONNECT ARM TO UNMARKED TERMINAL
 - 6 DRILL 12.7 MM HOLE INTO DASH PANEL.
 - 5 ROUTE WIRING ALONG RUNNING BOARD SUPPORT, ATTACH WIRE WITH WIRE TIE USING HOLES PROVIDED IN SUPPORT.
 - 4 SEE DETAIL BB FOR CONNECTION OF BUTTON SWITCH.
 - 3 SEE GENERATOR INSTL FOR ADDITIONAL INFORMATION.
 - 2 DRILL 12.3 MM HOLE INTO DASH PANEL.
 - 1 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.

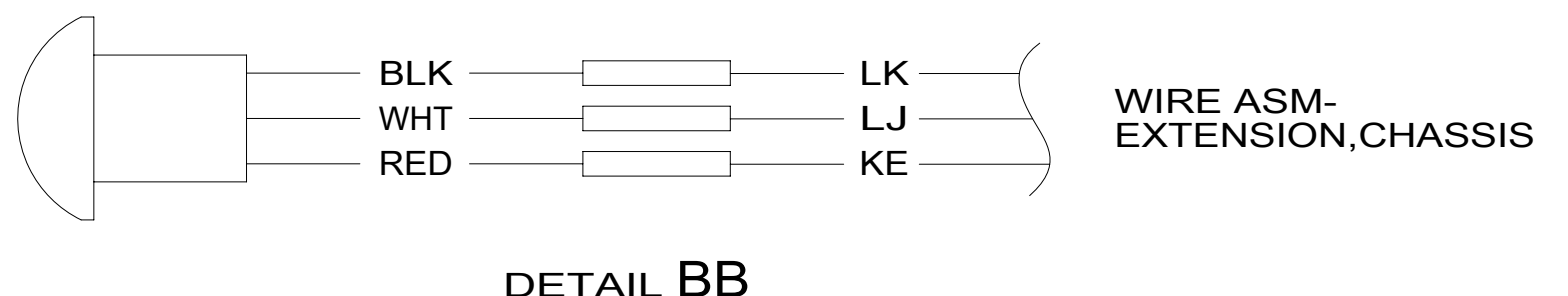
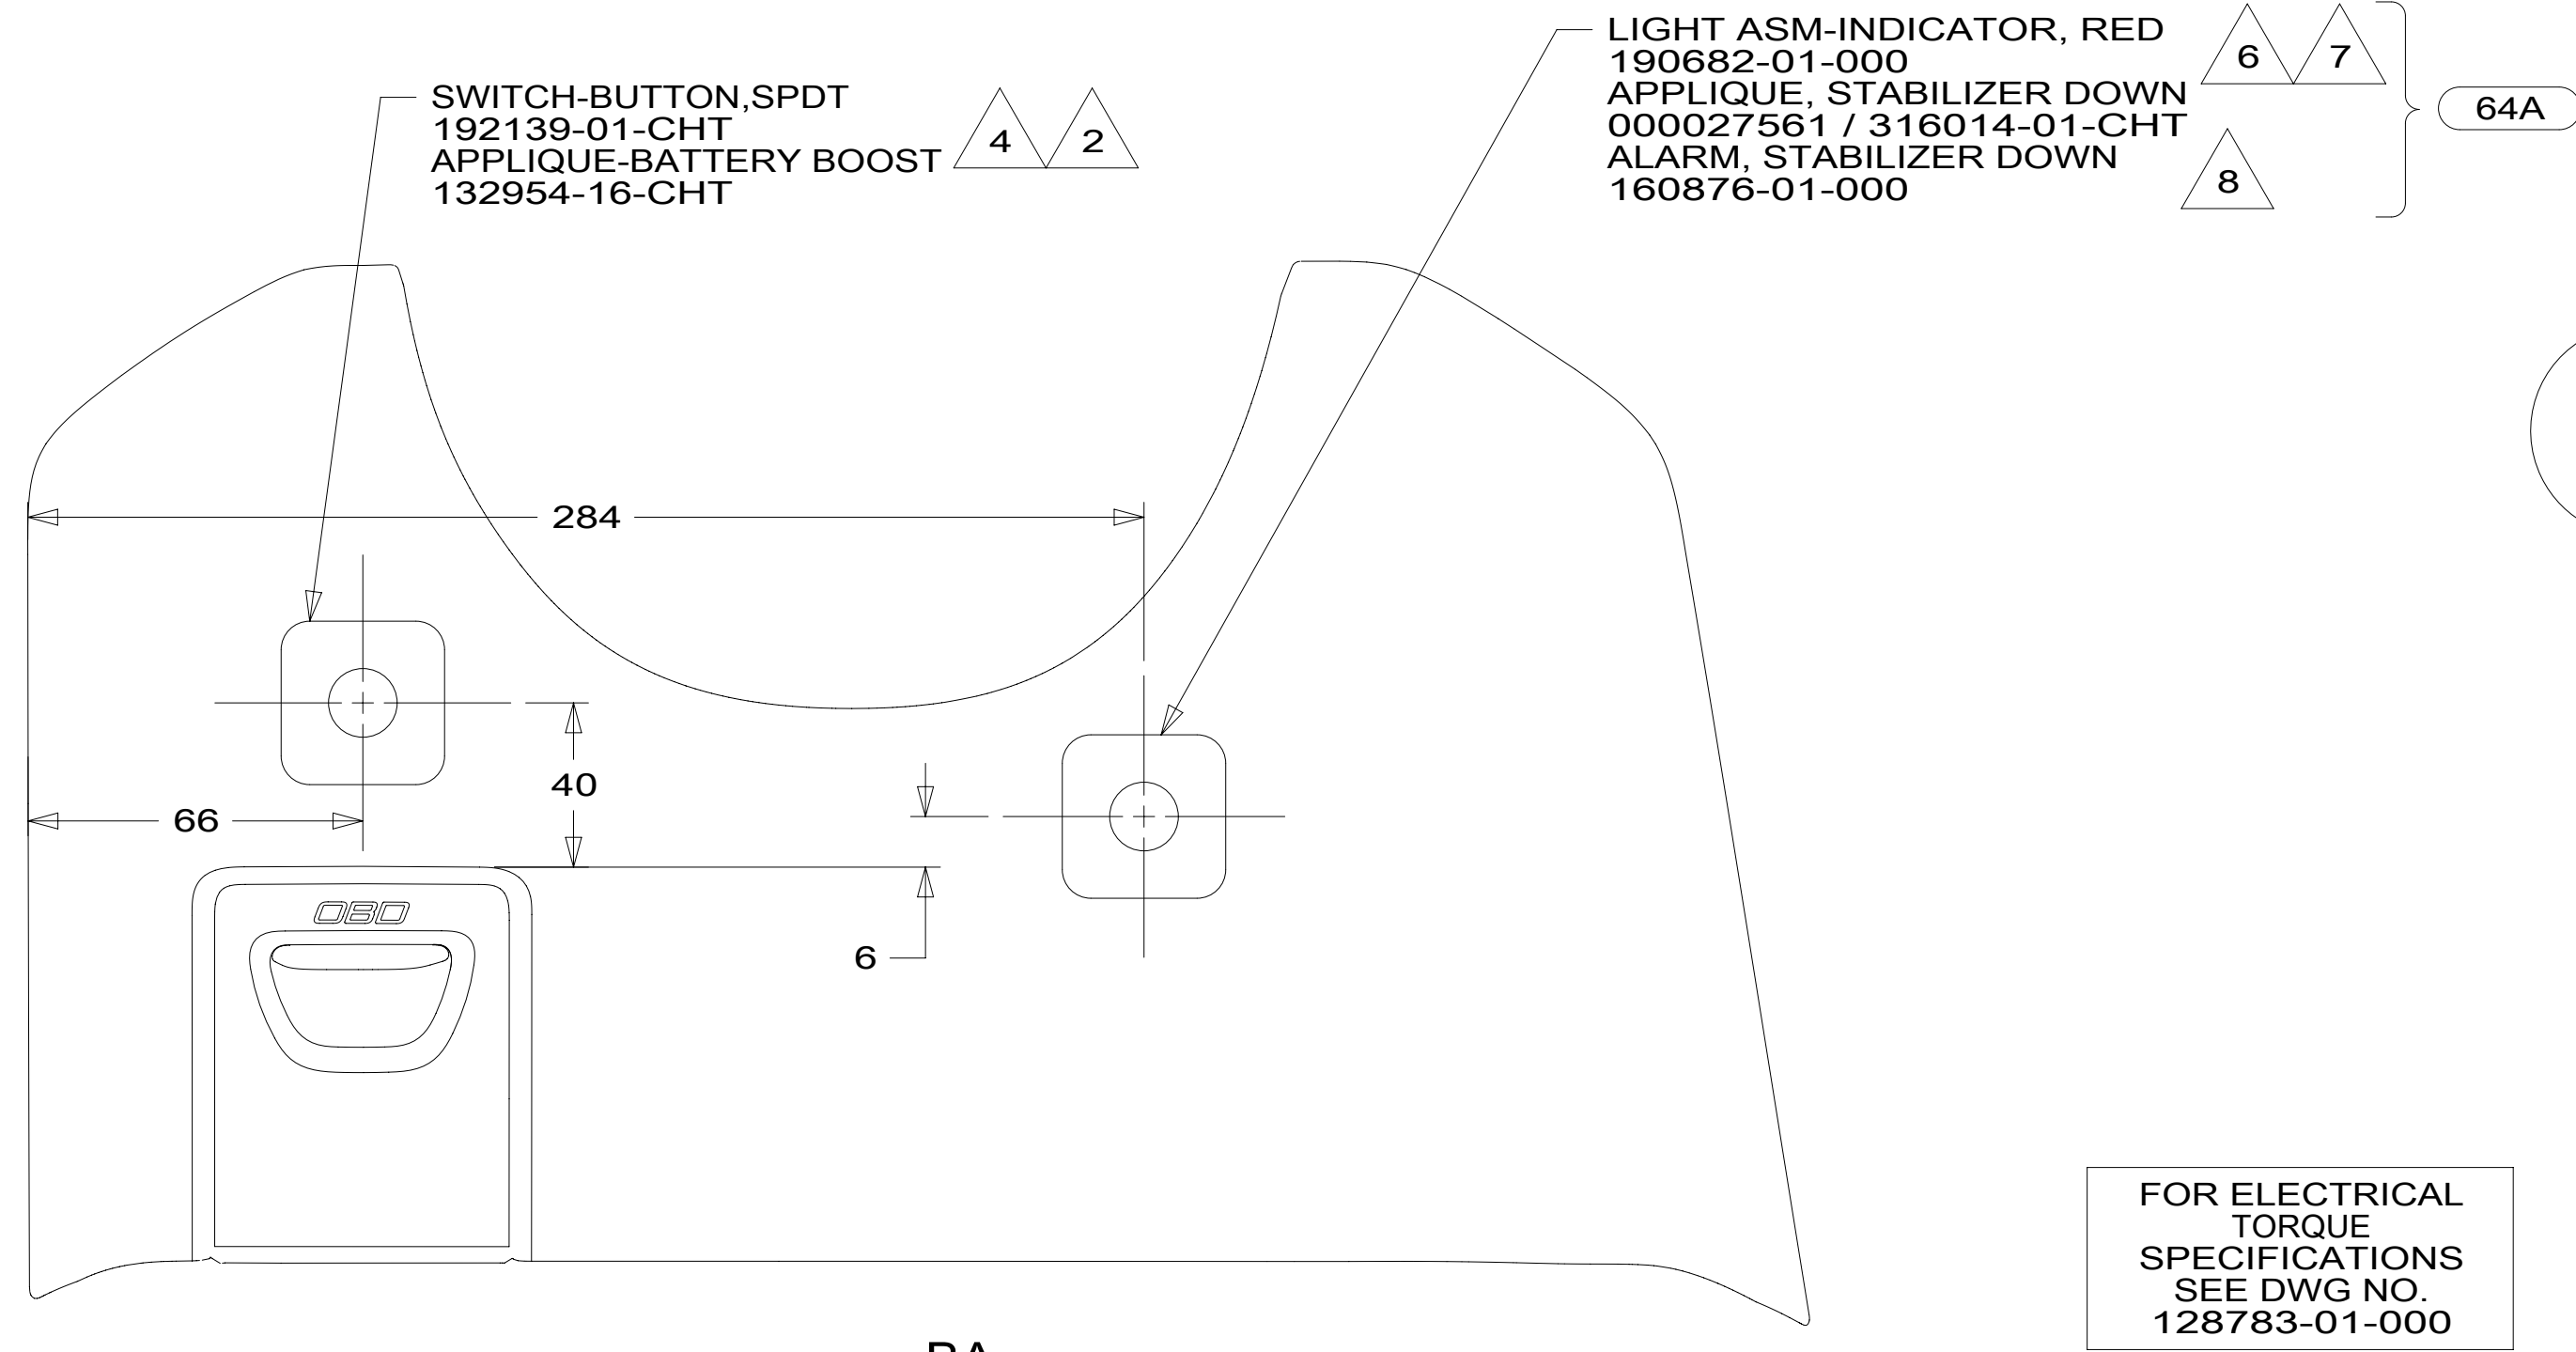


- 64A JACKS-STABILIZING, ELECTRIC
- 384 GEN 2.5KW ONAN-MICROLITE
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:		WIRING INSTL-CHASSIS	
SHEET:	ITEM/PART NO.:	REV	
2 OF 3	000120924 / 32287901000		

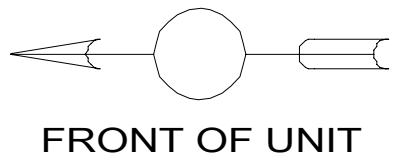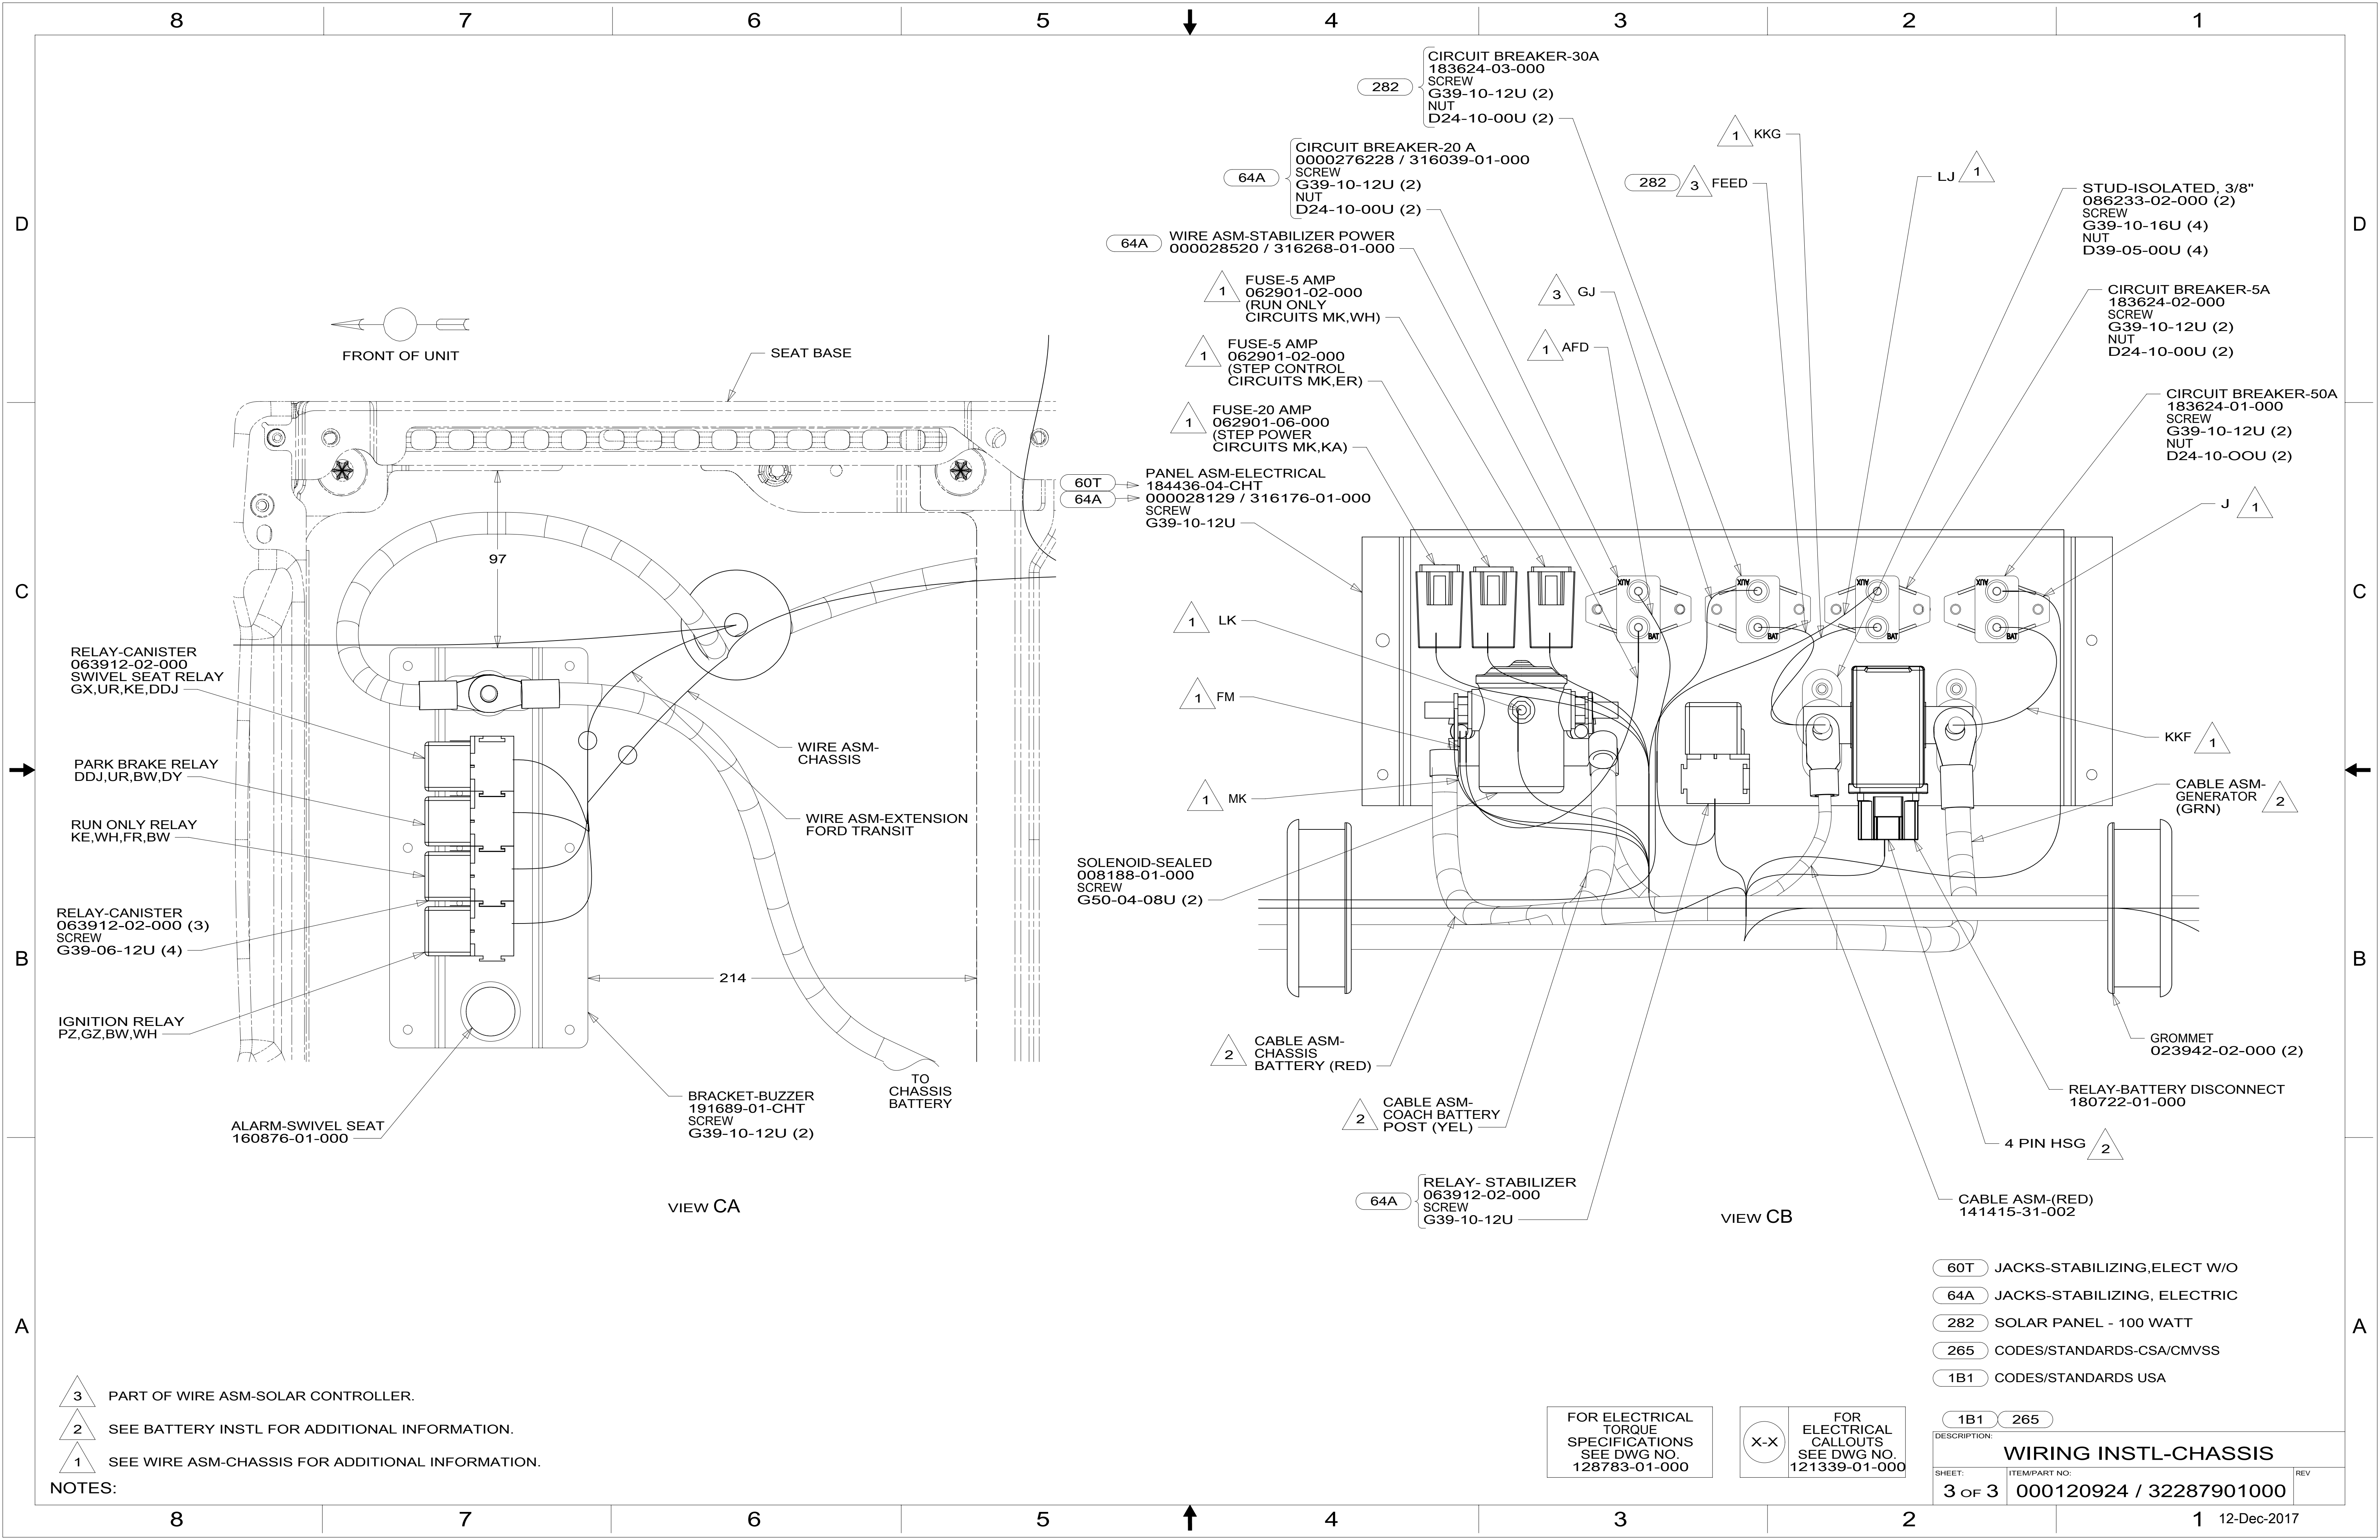

FRONT OF UNIT

SEAT BASE

97

214

VIEW CA

WIRE ASM-CHASSIS

WIRE ASM-EXTENSION FORD TRANSIT

TO CHASSIS BATTERY

BRACKET-BUZZER 191689-01-CHT
SCREW G39-10-12U (2)

ALARM-SWIVEL SEAT 160876-01-000

RELAY-CANISTER 063912-02-000
SWIVEL SEAT RELAY GX,UR,KE,DDJ

PARK BRAKE RELAY DDJ,UR,BW,DY

RUN ONLY RELAY KE,WH,FR,BW

RELAY-CANISTER 063912-02-000 (3)
SCREW G39-06-12U (4)

IGNITION RELAY PZ,GZ,BW,WH

CIRCUIT BREAKER-30A 183624-03-000
SCREW G39-10-12U (2)
NUT D24-10-00U (2)

CIRCUIT BREAKER-20 A 0000276228 / 316039-01-000
SCREW G39-10-12U (2)
NUT D24-10-00U (2)

WIRE ASM-STABILIZER POWER 000028520 / 316268-01-000

FUSE-5 AMP 062901-02-000 (RUN ONLY CIRCUITS MK,WH)

FUSE-5 AMP 062901-02-000 (STEP CONTROL CIRCUITS MK,ER)

FUSE-20 AMP 062901-06-000 (STEP POWER CIRCUITS MK,KA)

PANEL ASM-ELECTRICAL 184436-04-CHT
000028129 / 316176-01-000
SCREW G39-10-12U

LK

FM

MK

SOLENOID-SEALED 008188-01-000
SCREW G50-04-08U (2)

CABLE ASM-CHASSIS BATTERY (RED)

CABLE ASM-COACH BATTERY POST (YEL)

RELAY- STABILIZER 063912-02-000
SCREW G39-10-12U

VIEW CB

CABLE ASM-(RED) 141415-31-002

RELAY-BATTERY DISCONNECT 180722-01-000

4 PIN HSG

GROMMET 023942-02-000 (2)

CABLE ASM-GENERATOR (GRN)

KKF

J

CIRCUIT BREAKER-5A 183624-02-000
SCREW G39-10-12U (2)
NUT D24-10-00U (2)

STUD-ISOLATED, 3/8" 086233-02-000 (2)
SCREW G39-10-16U (4)
NUT D39-05-00U (4)

LJ

FEED

GJ

AFD

KKG

60T JACKS-STABILIZING,ELECT W/O

64A JACKS-STABILIZING, ELECTRIC

282 SOLAR PANEL - 100 WATT

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

- 3 PART OF WIRE ASM-SOLAR CONTROLLER.
- 2 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
- 1 SEE WIRE ASM-CHASSIS FOR ADDITIONAL INFORMATION.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:	1B1 265	
WIRING INSTL-CHASSIS		
SHEET:	ITEM/PART NO:	REV
3 OF 3	000120924 / 32287901000	