
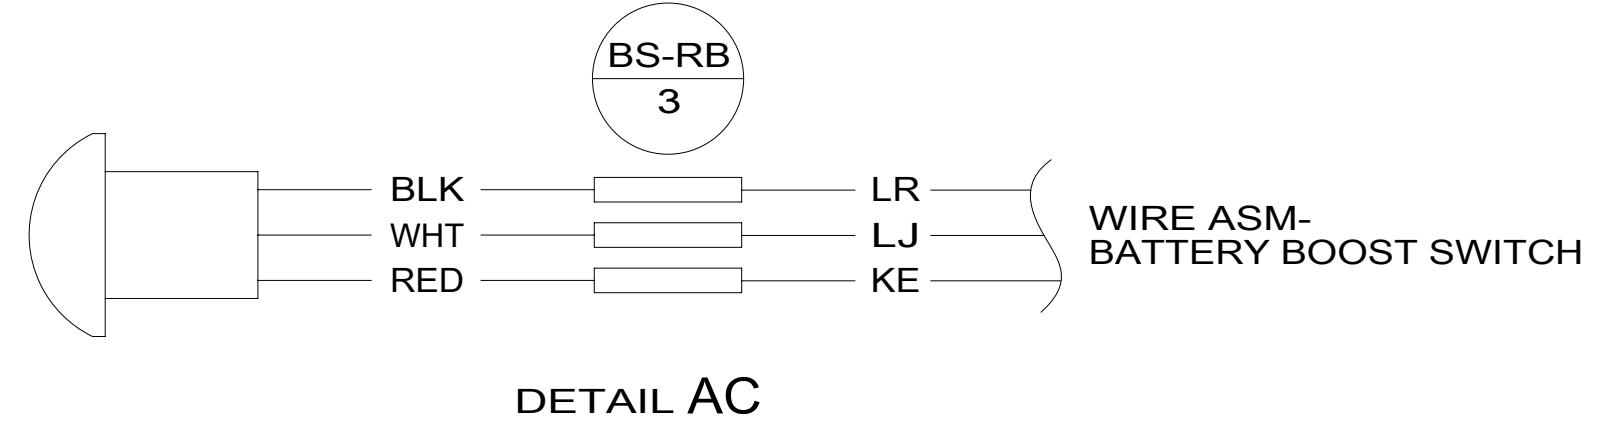
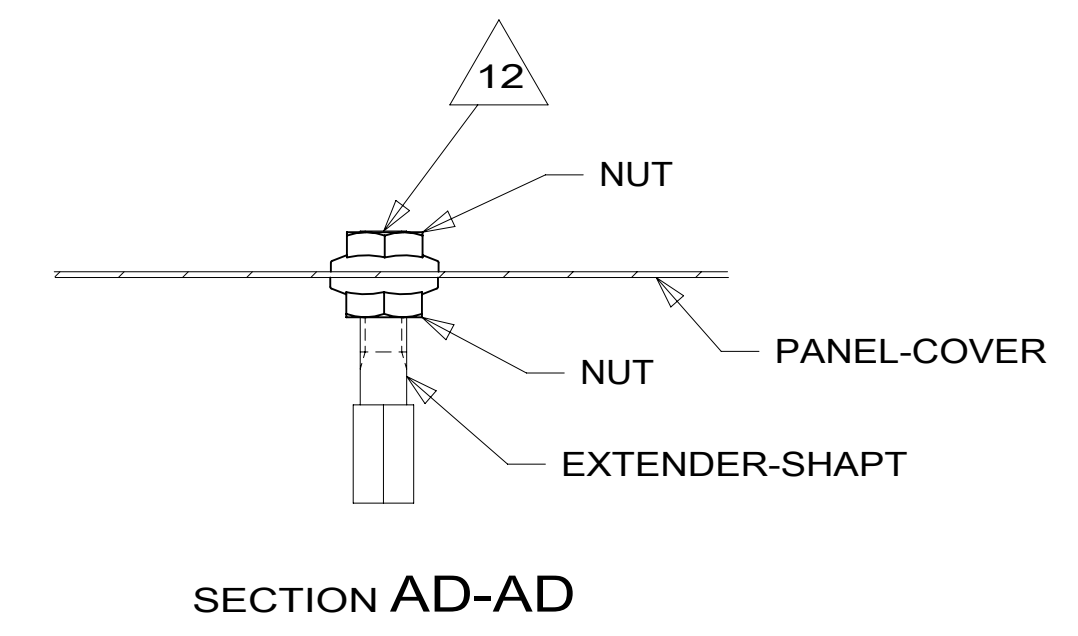


- 12 INSTALL NUT SO THAT IT IS FLUSH WITH TOP OF EXTENDER-SHAFT.
- 11 SEE SPARE TIRE INSTALLATION FOR ADDITIONAL INFORMATION.
- 10 DRILL 12.3 MM HOLE INTO DASH PANEL.
- 9 REMOVE REAR VIEW MIRROR & MOUNT CAMERA TO CENTER OF WINDSHIELD AND 25MMBELOW REAR VIEW MIRROR BUTTON. ROUTE CABLE UP ABOVE HEADLINER THEN LEFT DOWN LEFT A-POST COVER TO CENTER DASH TO CONNECT TO WIRE ASM-CHASSIS.
- 8 NOTCH A-POST COVER WHERE IT MEETS THE DASH TO ALLOW DISPLAY CABLE THROUGH. MOUNT DISPLAY TO A-POST COVER AND ADJUST FOR DRIVER'S VIEWING. ROUTE DISPLAY CABLE TO CENTER DASH AND CONNECT TO CAMERA HARNESS.
- 7 REMOVE PLASTIC TRAY AND DISCARD.
- 6 SEE SHT 5 AND SHT 6 FOR ADDITIONAL INFORMATION.
- 5 REMOVE PAINT AND UNDER COATING FROM GROUND BOLT AND NUT TO INSURE PROPER CONTACT.
- 4 SEE WIRING INSTL-BODY,12V FOR ADDITIONAL INFORMATION.
- 3 CUT WIRE TIE AROUND SPRINTER SEAL, ROUTE THE CHASSIS WIRING THROUGH HOLE AND WIRE TIE SEAL WITH WIRE TIE 8343-04-000.
- 2 SEE BATTERY INSTL. FOR ADDITIONAL INFORMATION.

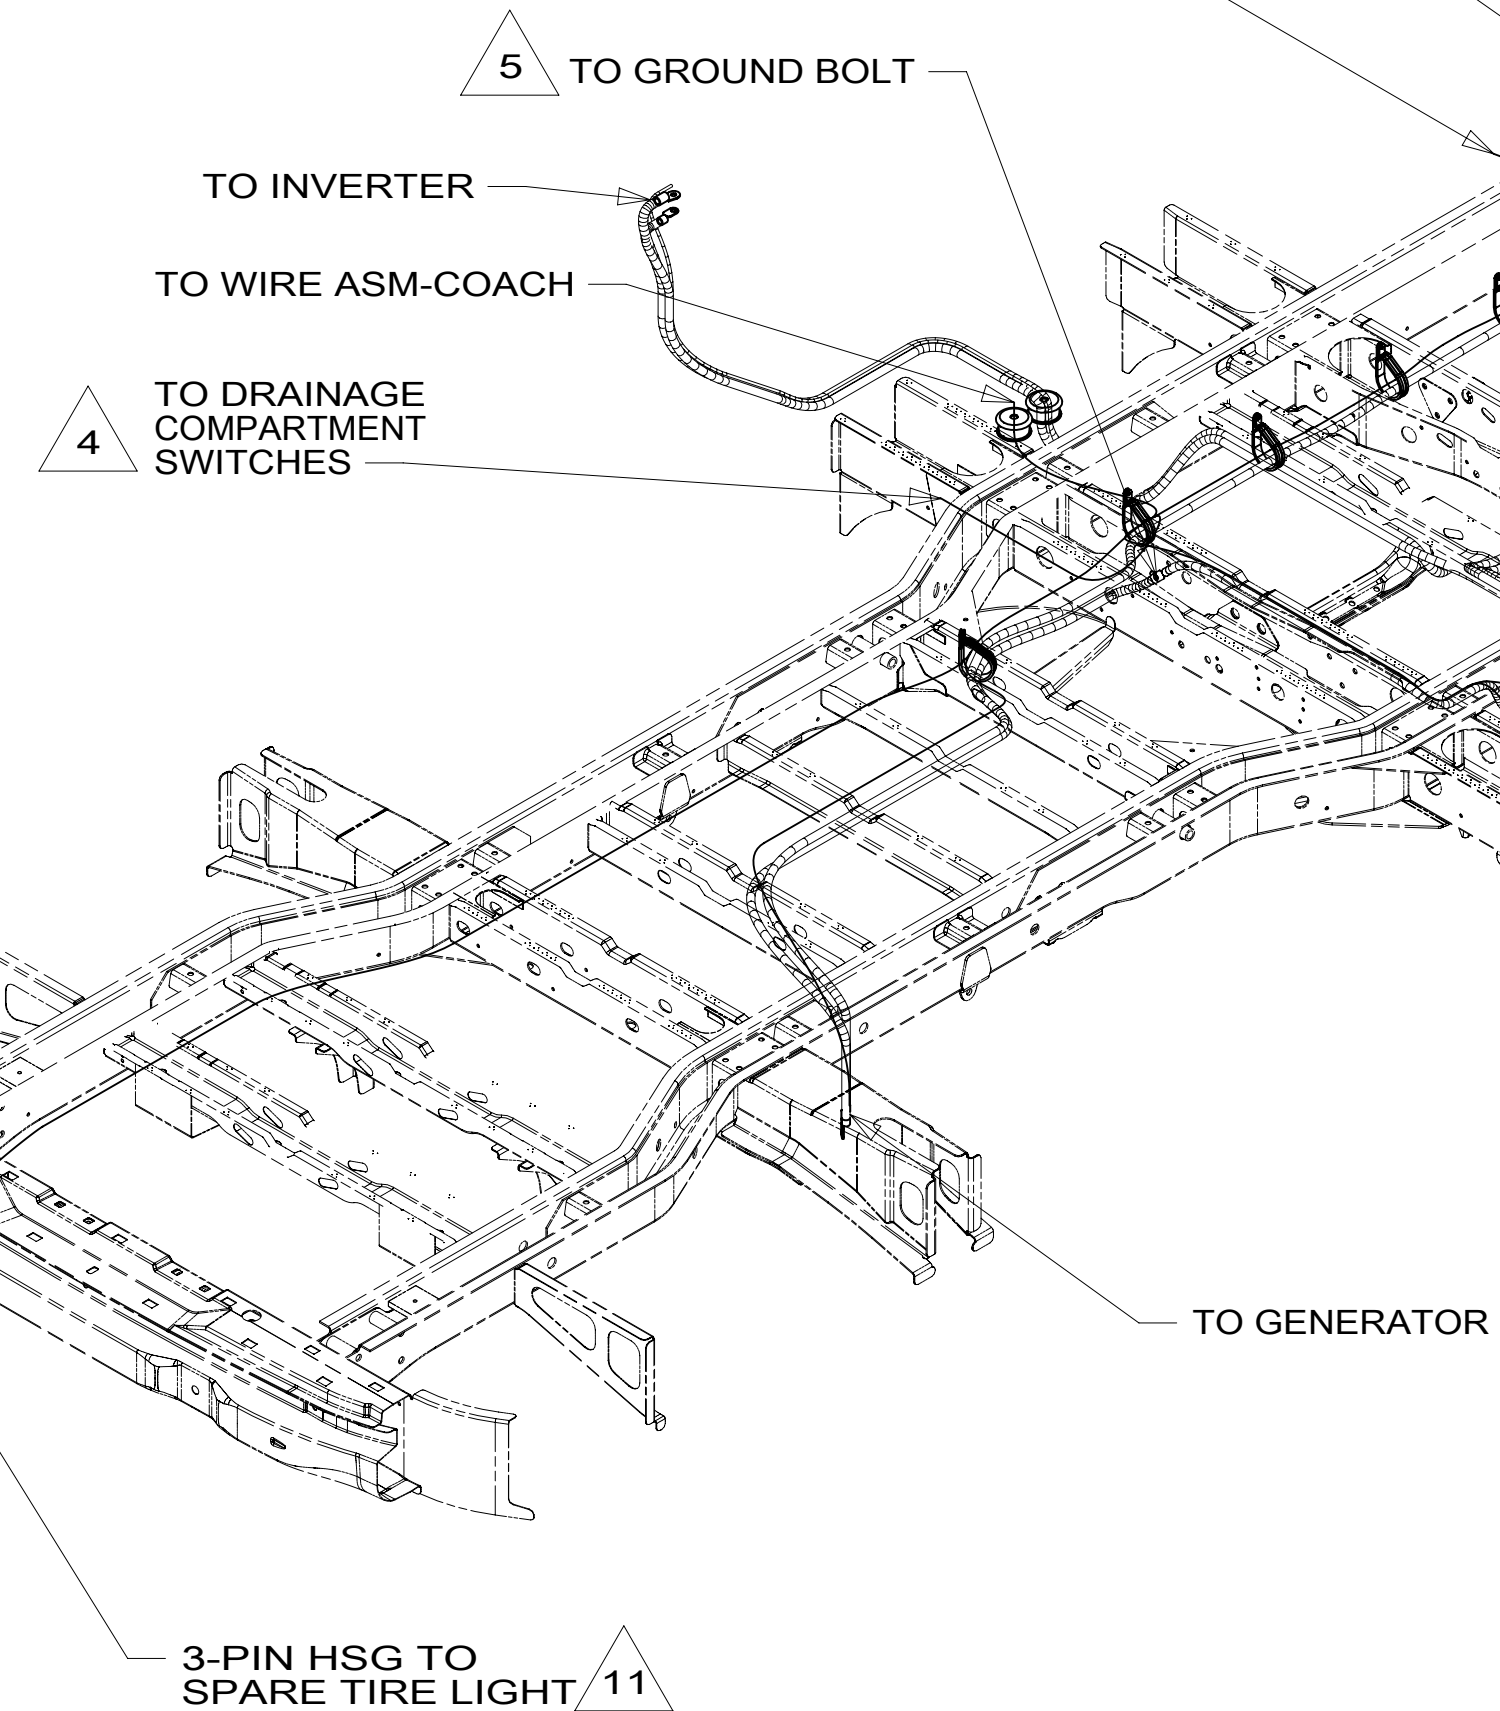


- 36C COLLISION AVOIDANCE SYSTEM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

WINNEBAGO COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.	
DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS
DFFR:	
UNSPECIFIED TOLERANCES:	MATERIAL:
WHOLE DIM (X) : 3	
ONE-PLACE (X.X) : 1.5	
TWO-PLACE (X.XX) : 0.50	
ANGLE : 1°	
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS) FIRST USED: 18 170M
DESCRIPTION: WIRING INSTL-CHASSIS	
SHEET: 1 OF 7	ITEM/PART NO.: 000121786 / 32310701000
REF:	REV:


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

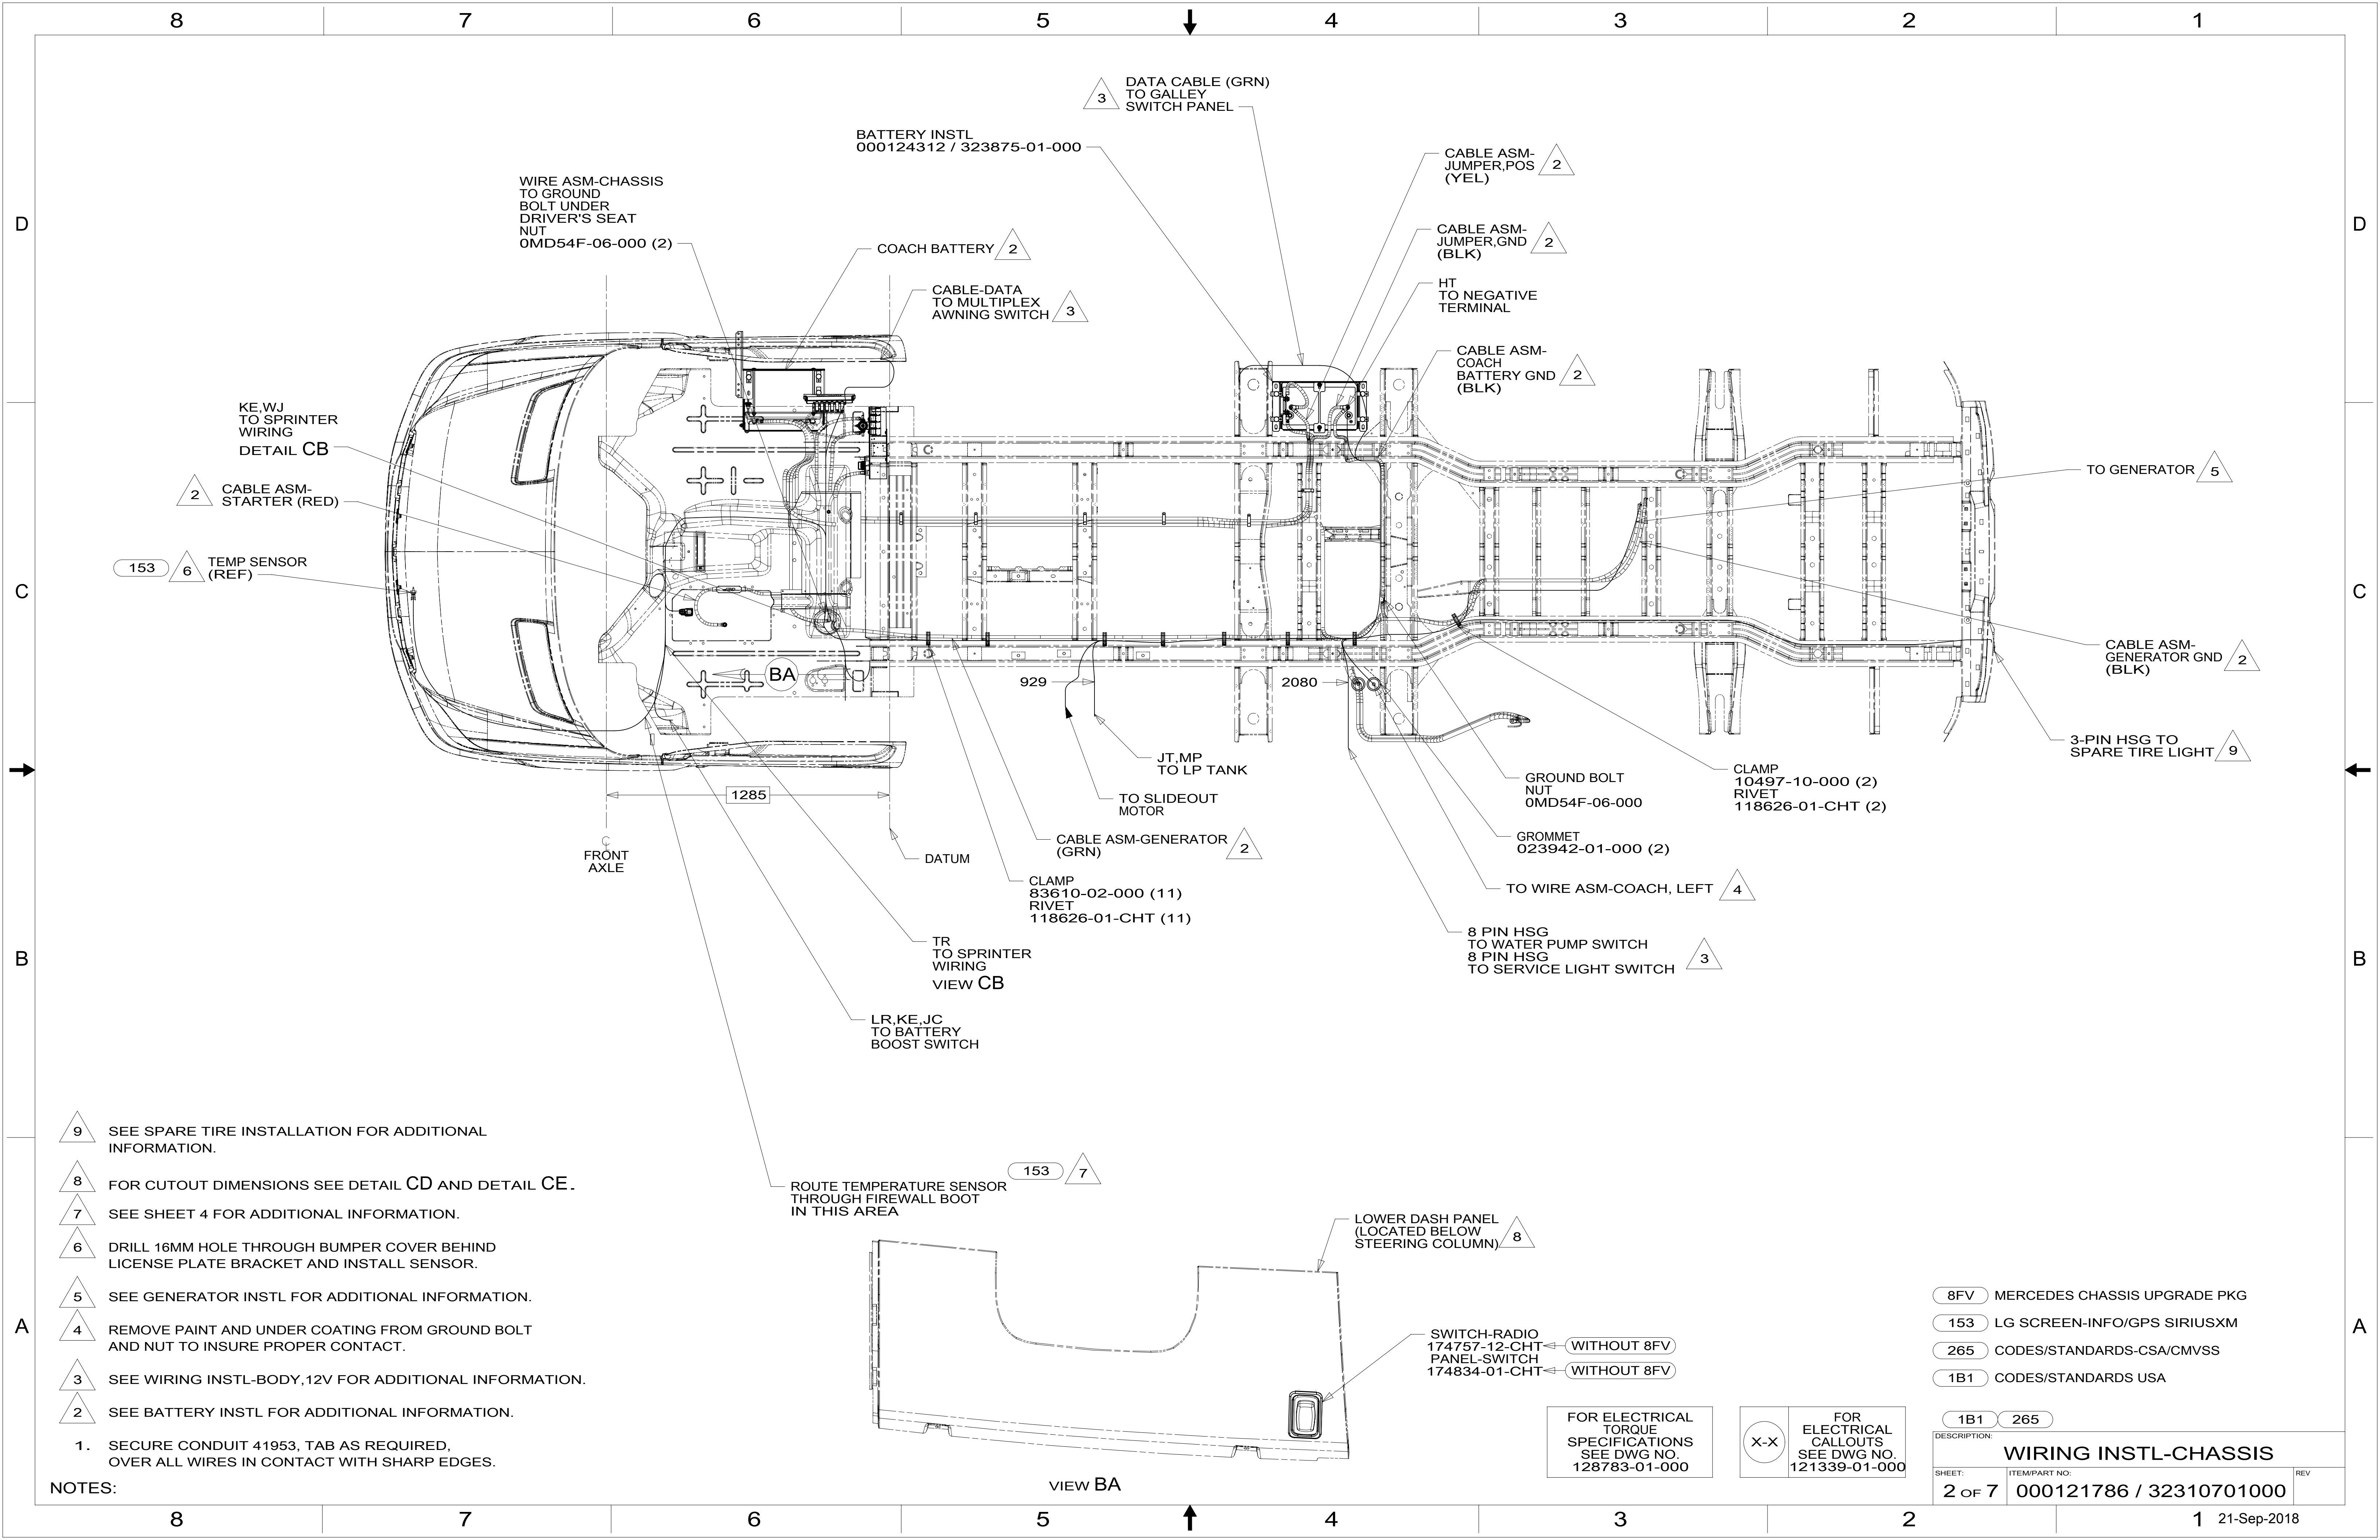

- 9 SEE SPARE TIRE INSTALLATION FOR ADDITIONAL INFORMATION.
- 8 FOR CUTOUT DIMENSIONS SEE DETAIL CD AND DETAIL CE.
- 7 SEE SHEET 4 FOR ADDITIONAL INFORMATION.
- 6 DRILL 16MM HOLE THROUGH BUMPER COVER BEHIND LICENSE PLATE BRACKET AND INSTALL SENSOR.
- 5 SEE GENERATOR INSTL FOR ADDITIONAL INFORMATION.
- 4 REMOVE PAINT AND UNDER COATING FROM GROUND BOLT AND NUT TO INSURE PROPER CONTACT.
- 3 SEE WIRING INSTL-BODY, 12V FOR ADDITIONAL INFORMATION.
- 2 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.

1. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

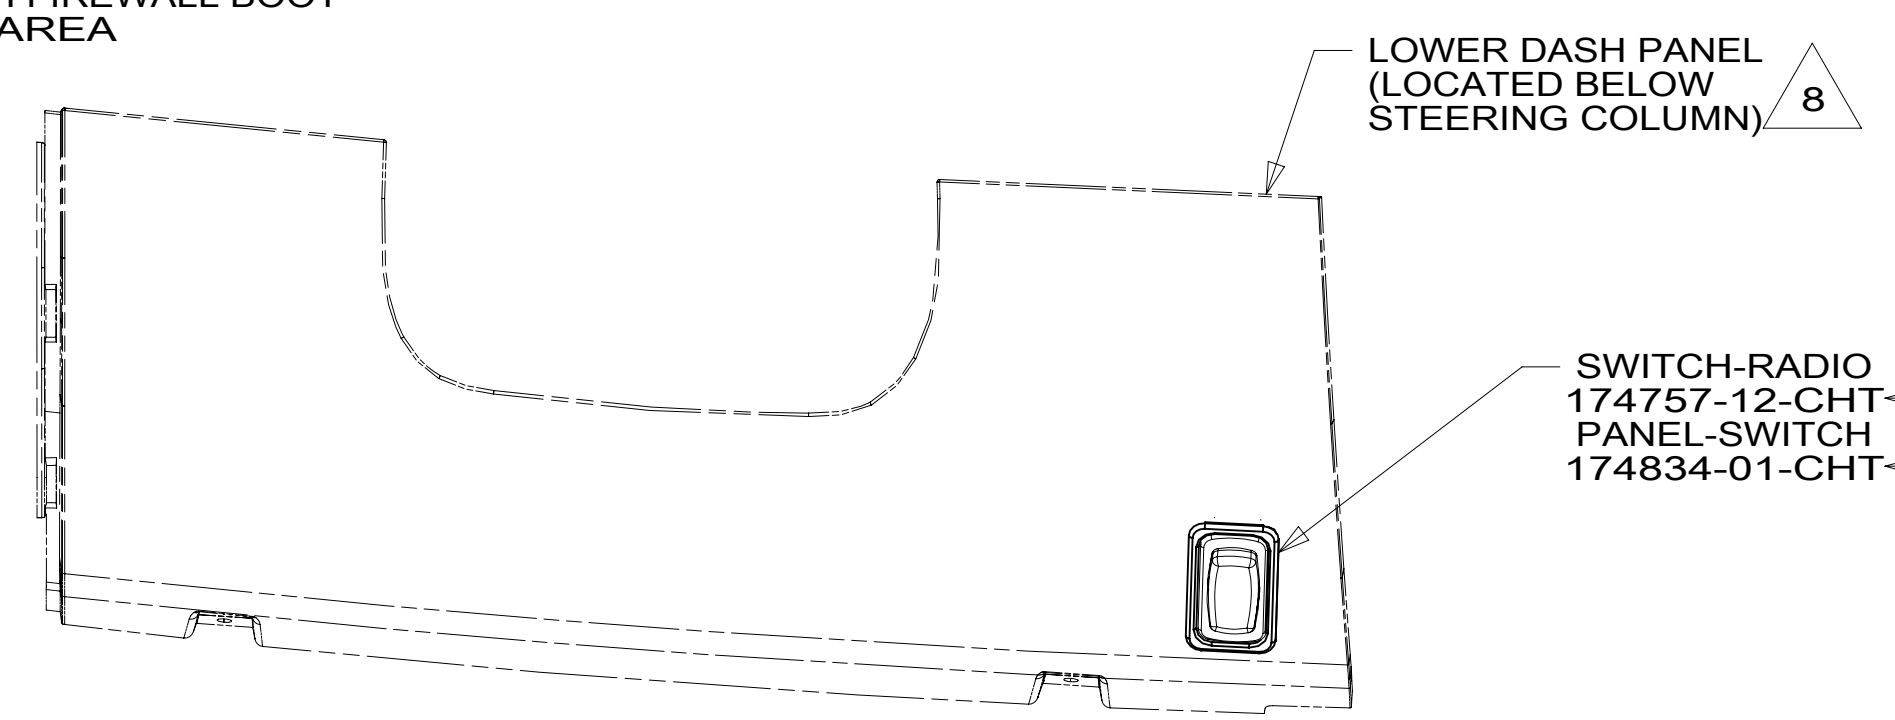


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 8FV MERCEDES CHASSIS UPGRADE PKG
- 153 LG SCREEN-INFO/GPS SIRIUSXM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


DESCRIPTION:		1B1 265	
WIRING INSTL-CHASSIS			
SHEET:	ITEM/PART NO.:	REV:	
2 OF 7	000121786 / 32310701000		

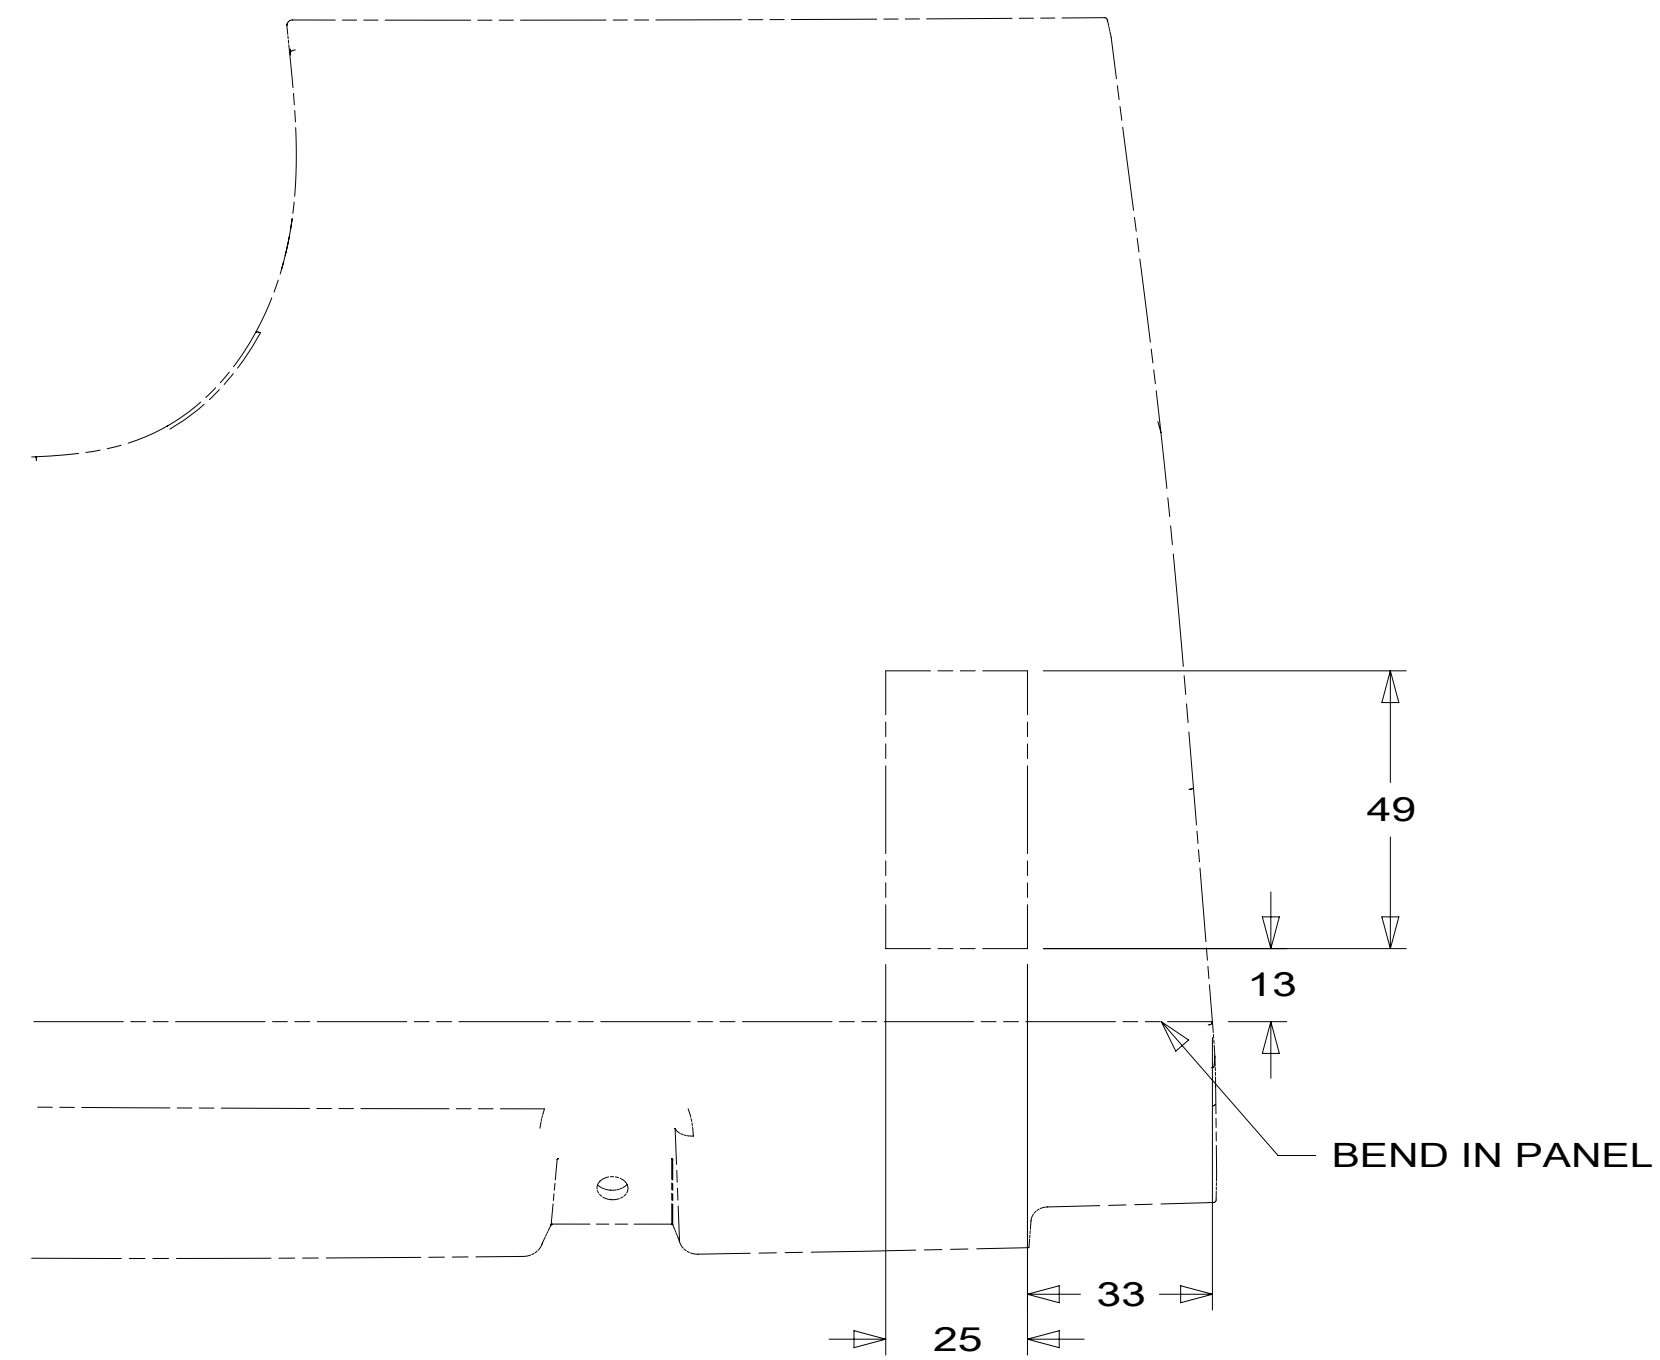


DETAIL CD 5

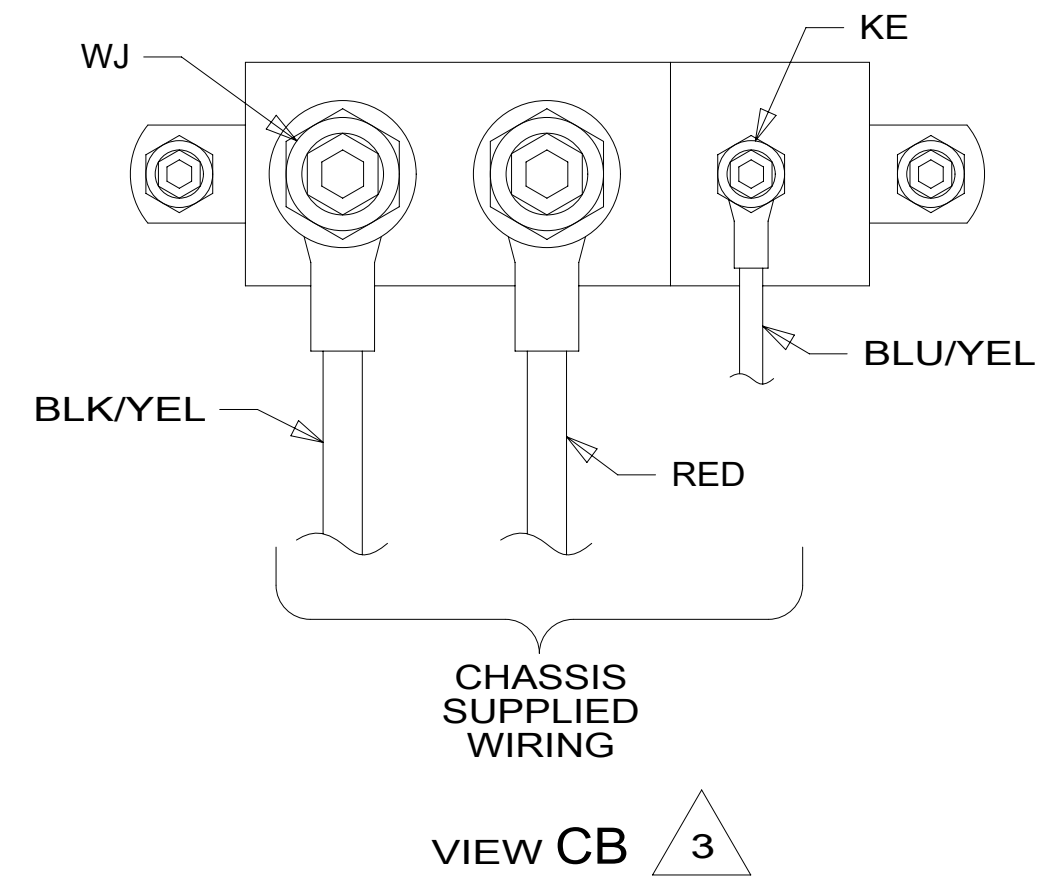


VIEW CB 3

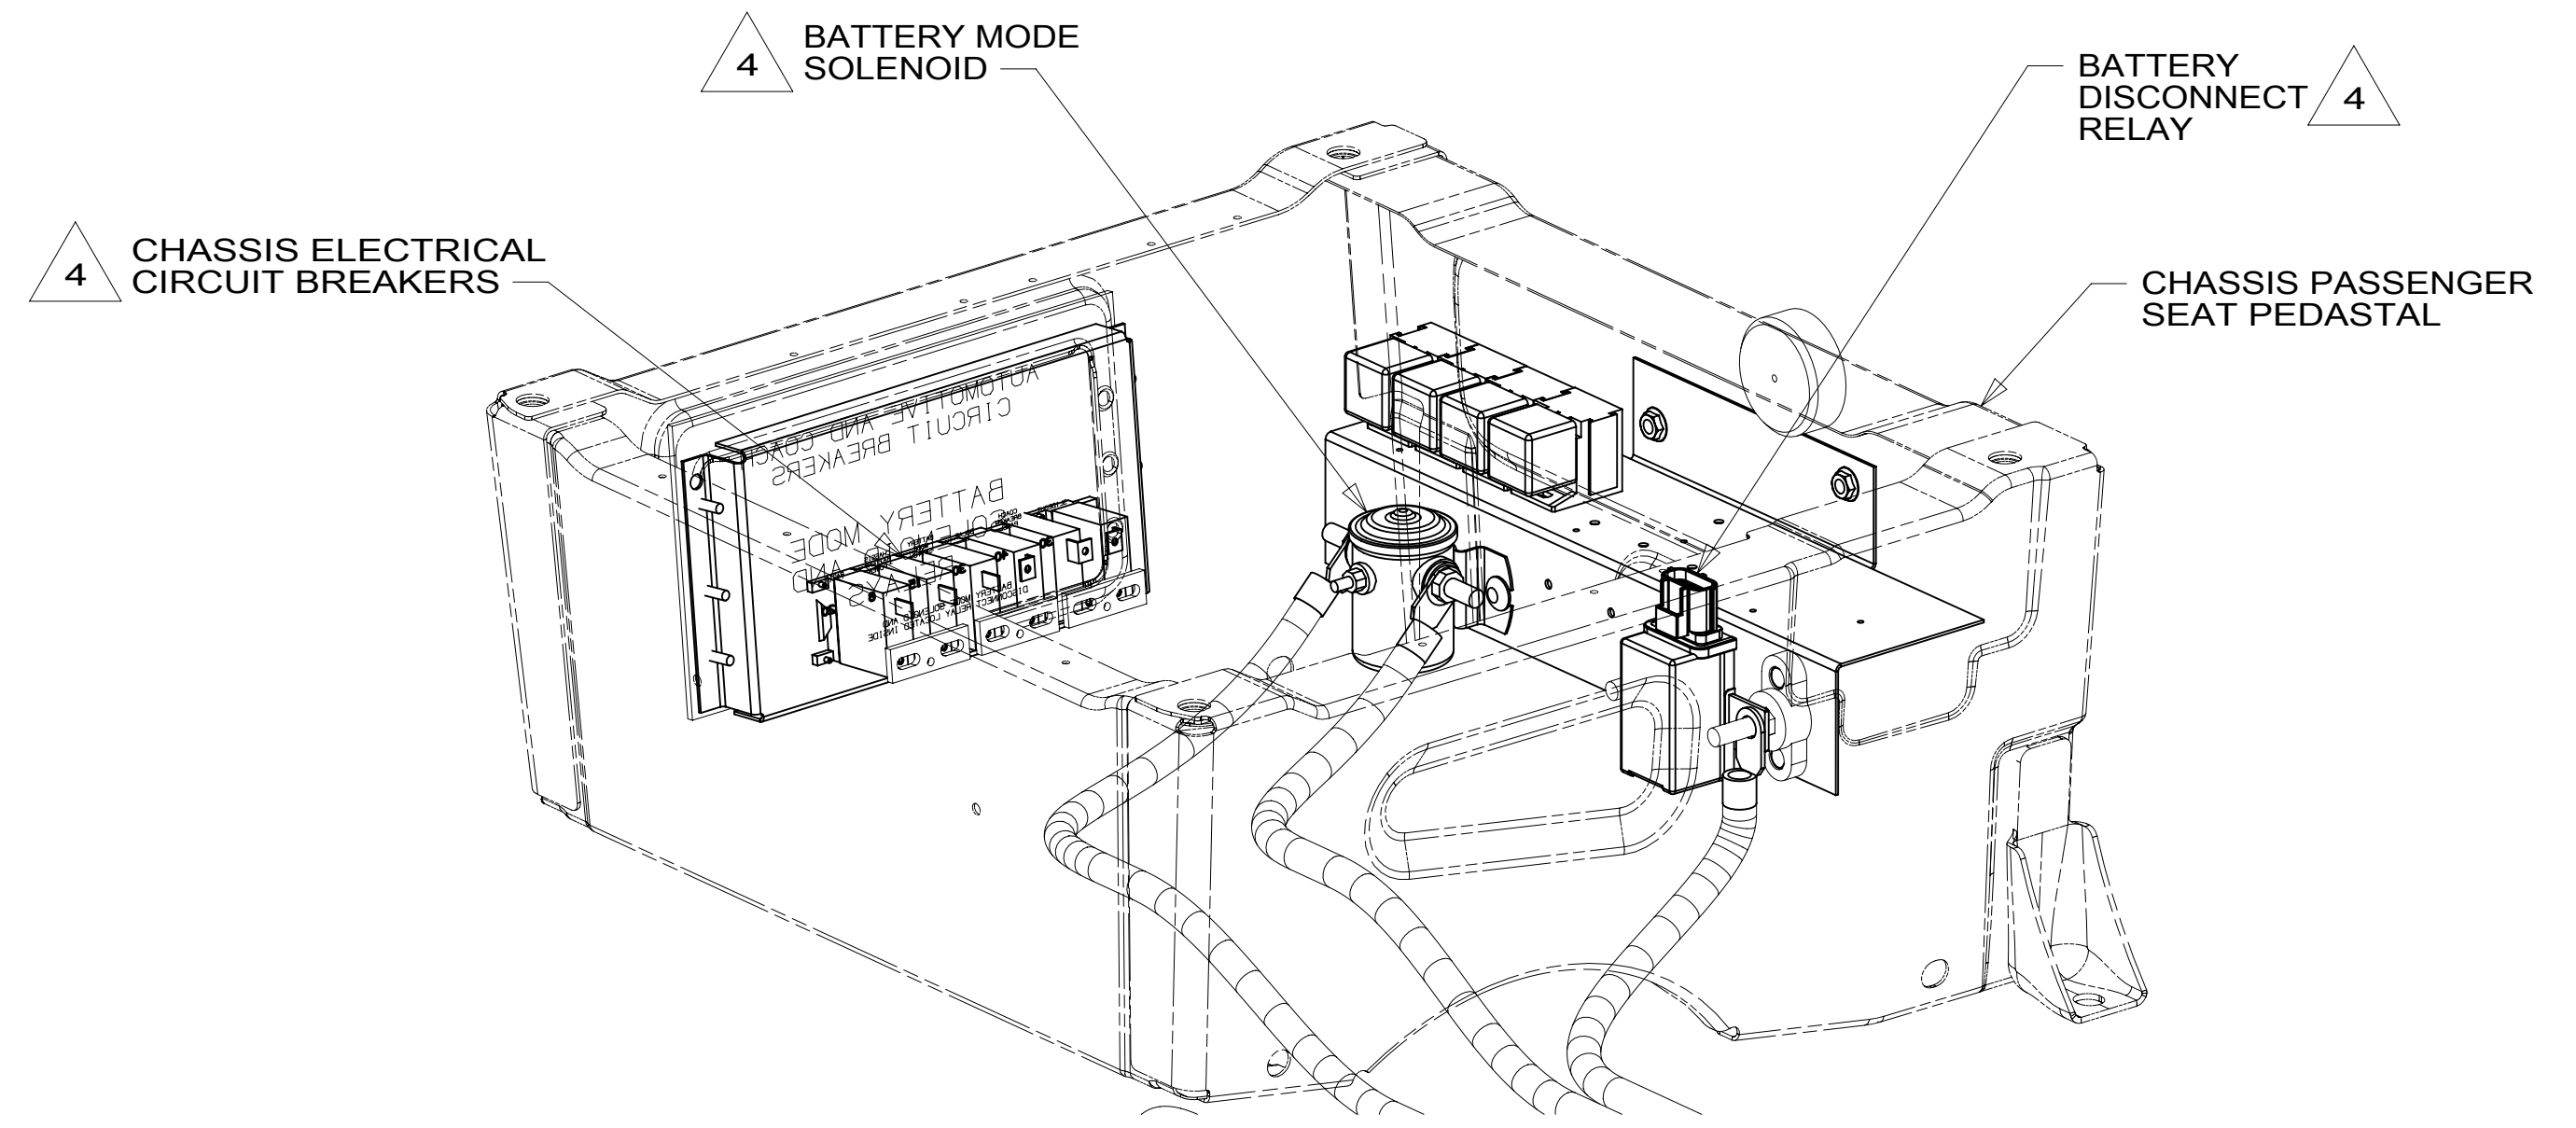

DETAIL CC

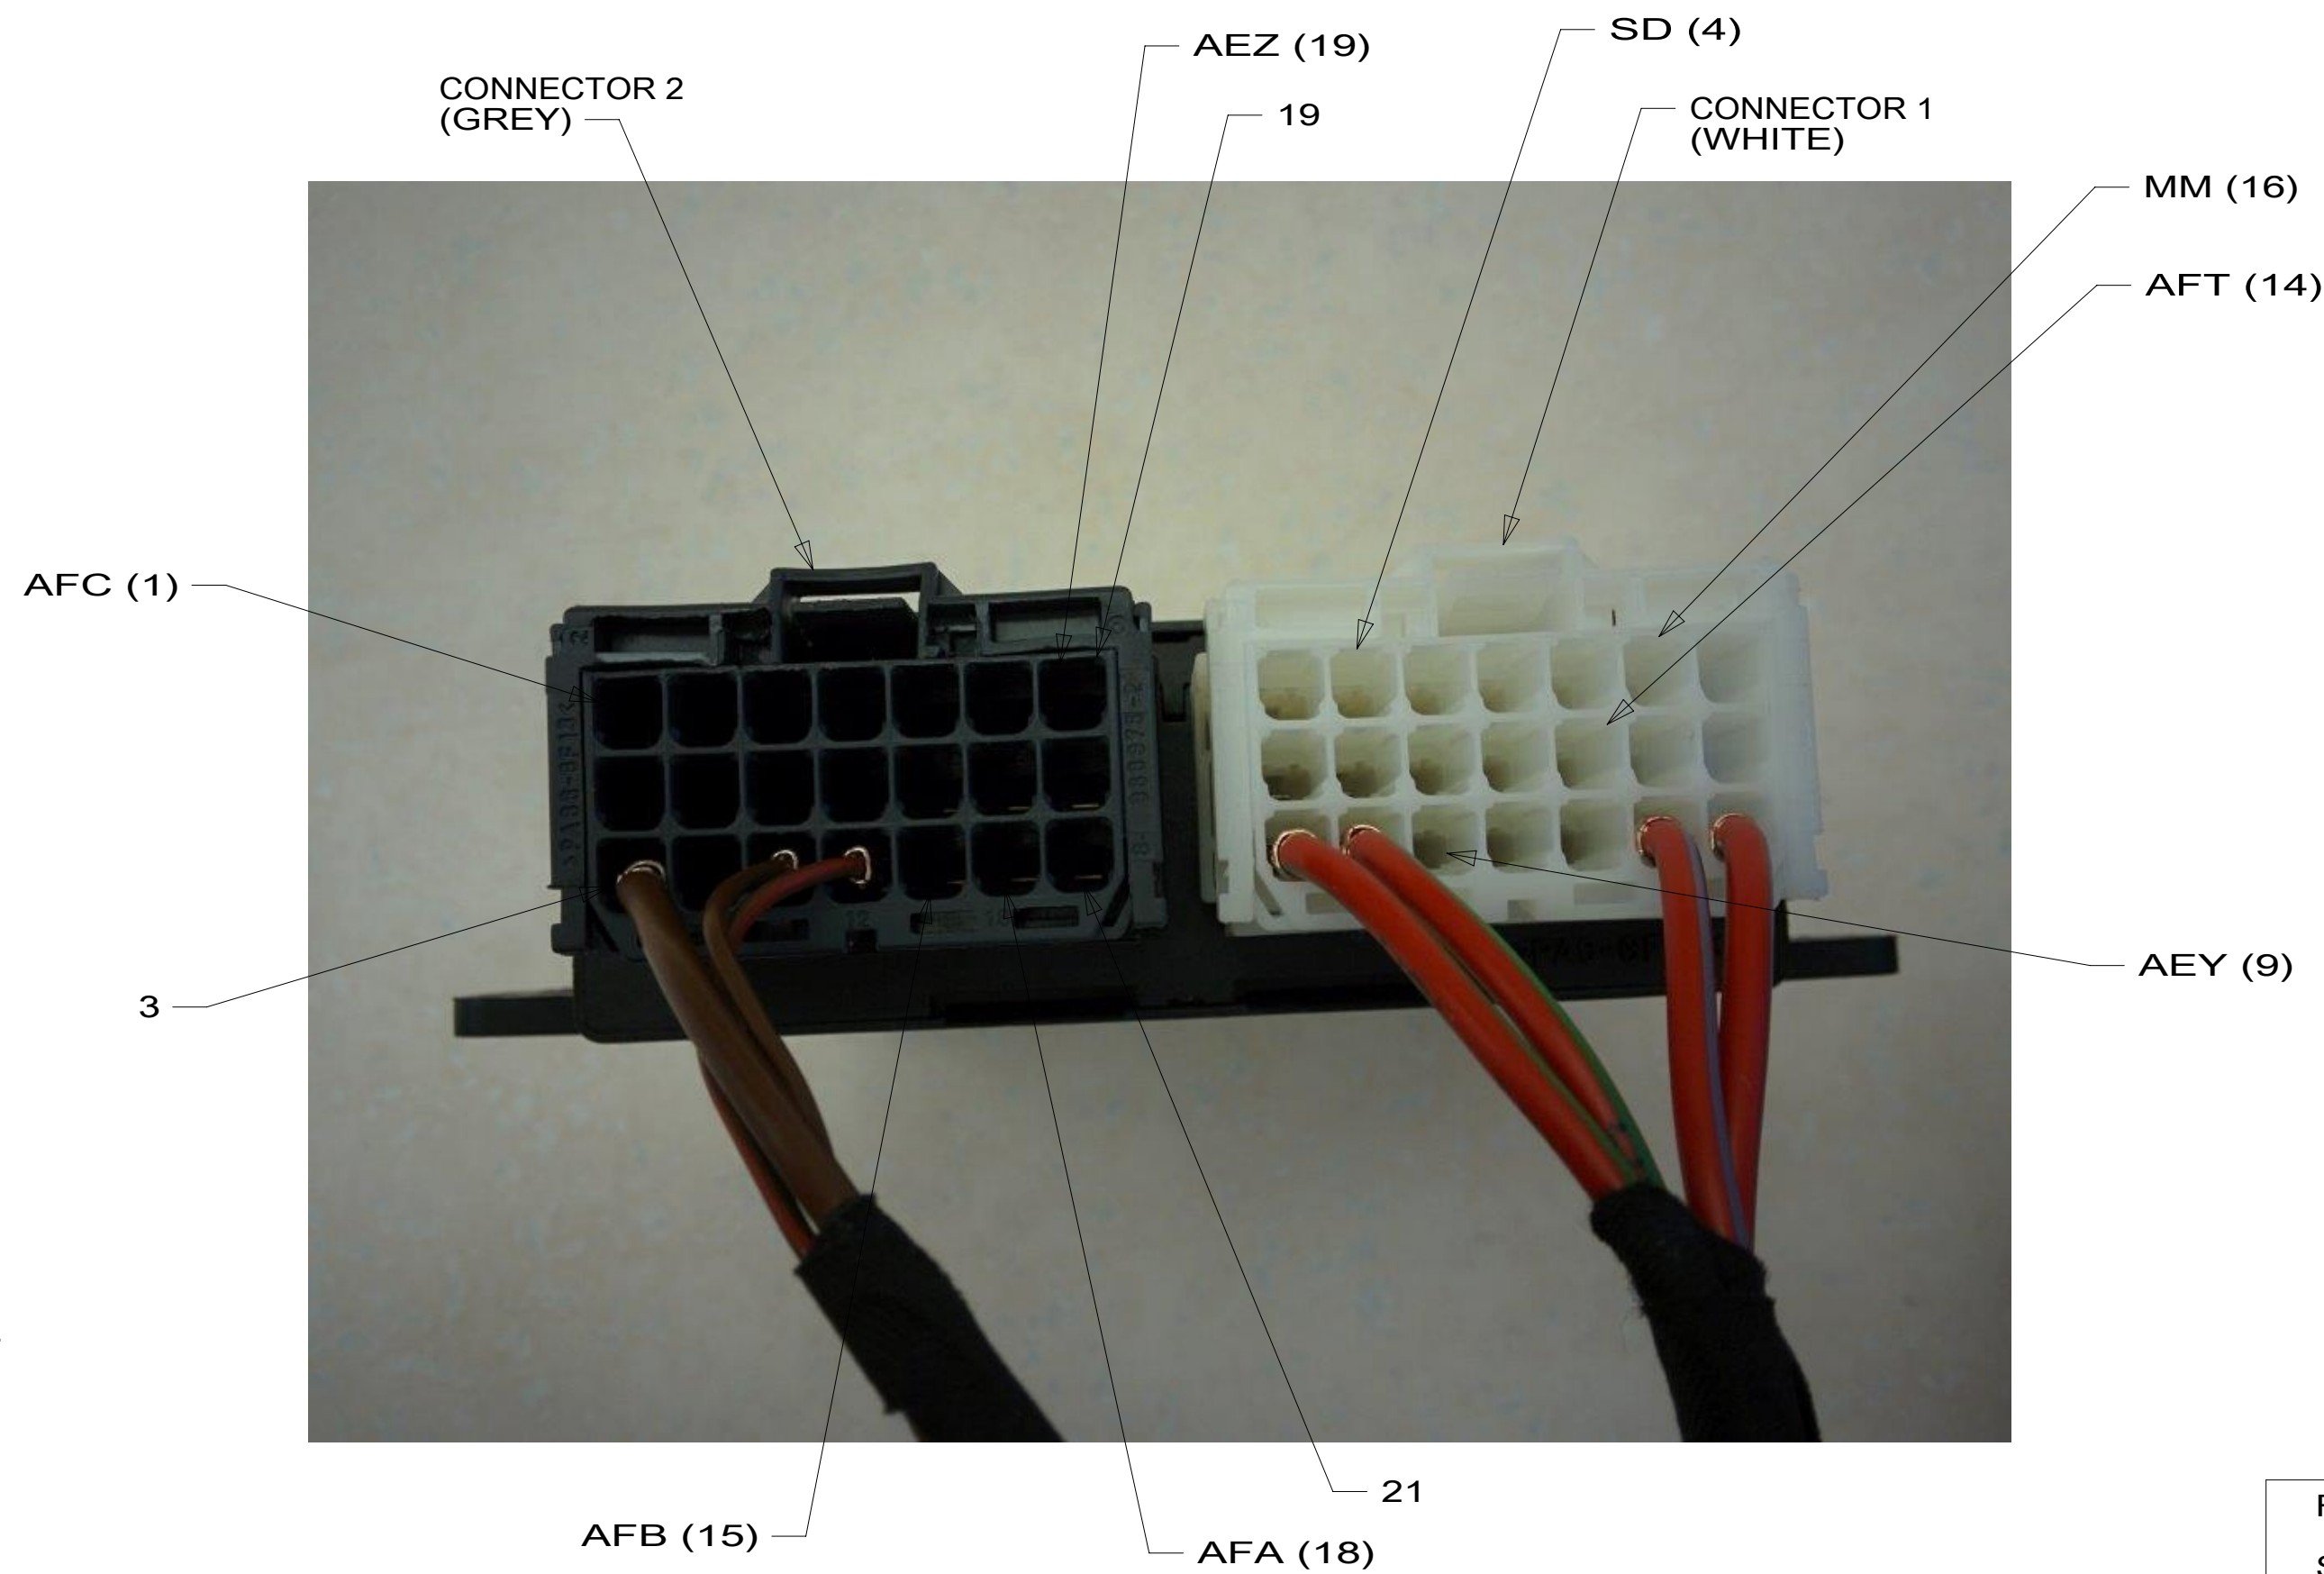

DETAIL CA 2

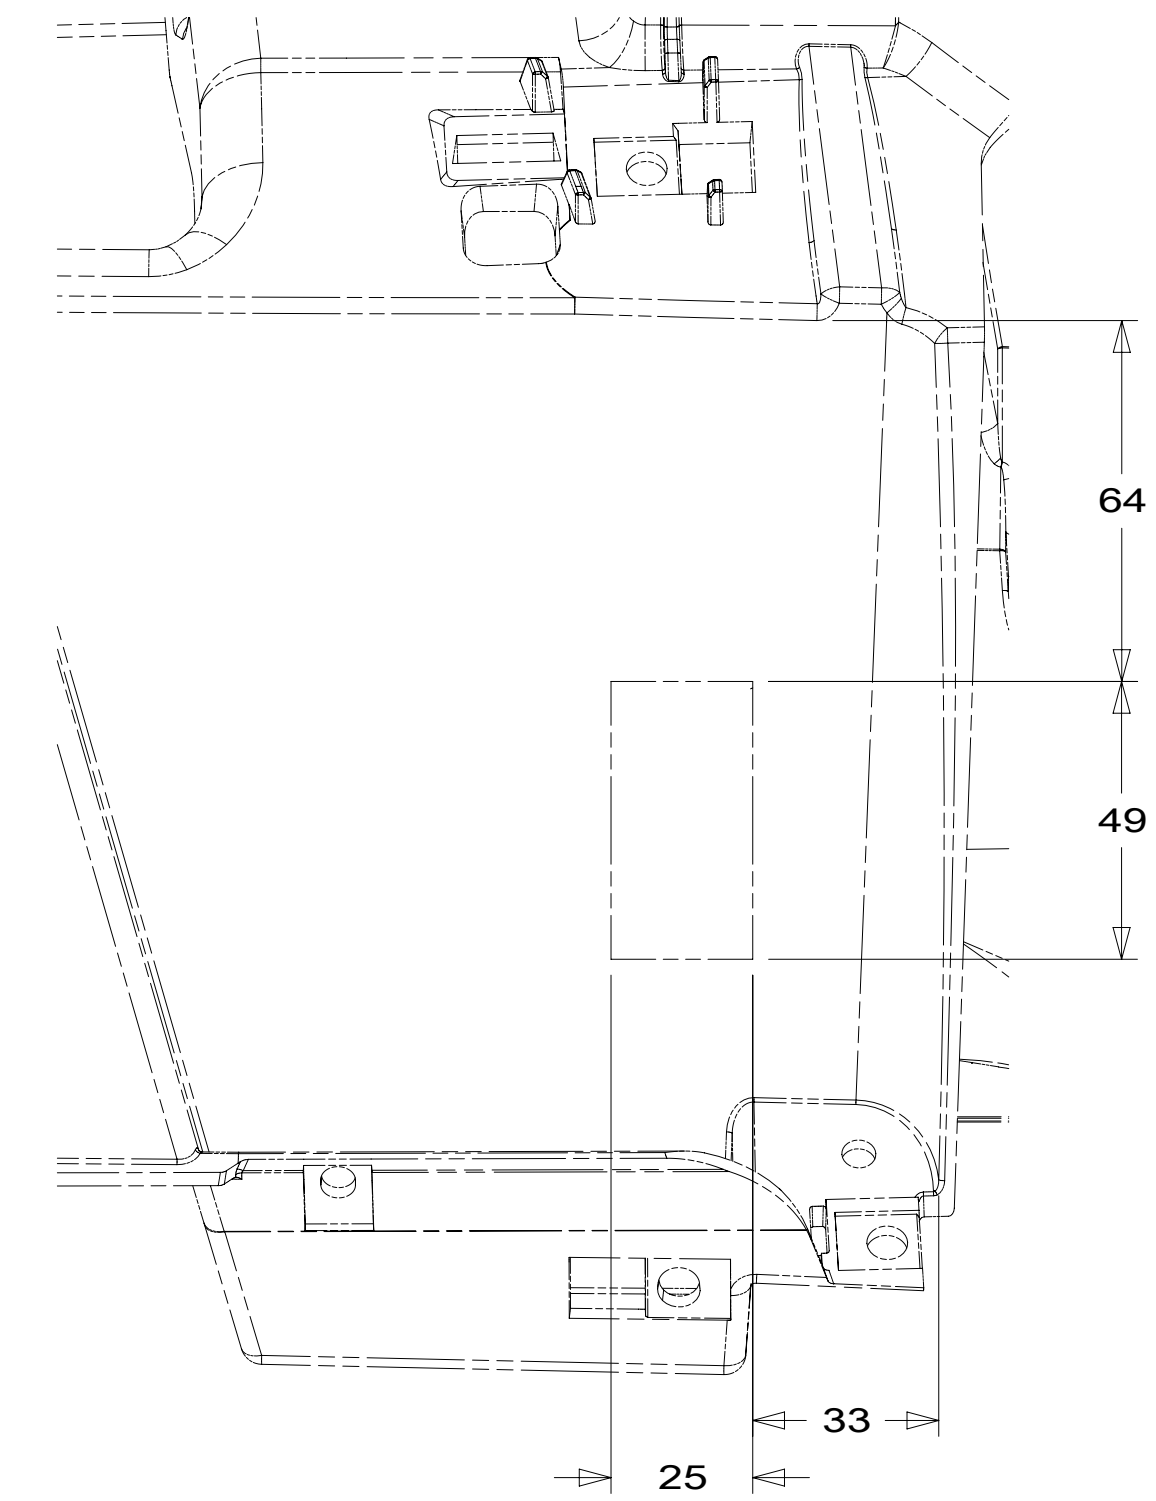

DETAIL CE 6

- 6 DASH STRUCTURE LOCATED BEHIND LOWER DASH PANEL.
- 5 LOWER DASH PANEL.
- 4 SEE CHASSIS ELECTRICAL BOX ASM FOR ADDITIONAL INFORMATION.
- 3 CONNECTION POINT IS LOCATED UNDER DRIVERS SEAT.
- 2 LOCATED UNDER DRIVER'S SEAT.

1. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS


1B1 CODES/STANDARDS USA

1B1 265

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION: WIRING INSTL-CHASSIS		
SHEET: 3 OF 7	ITEM/PART NO.: 000121786 / 32310701000	REV

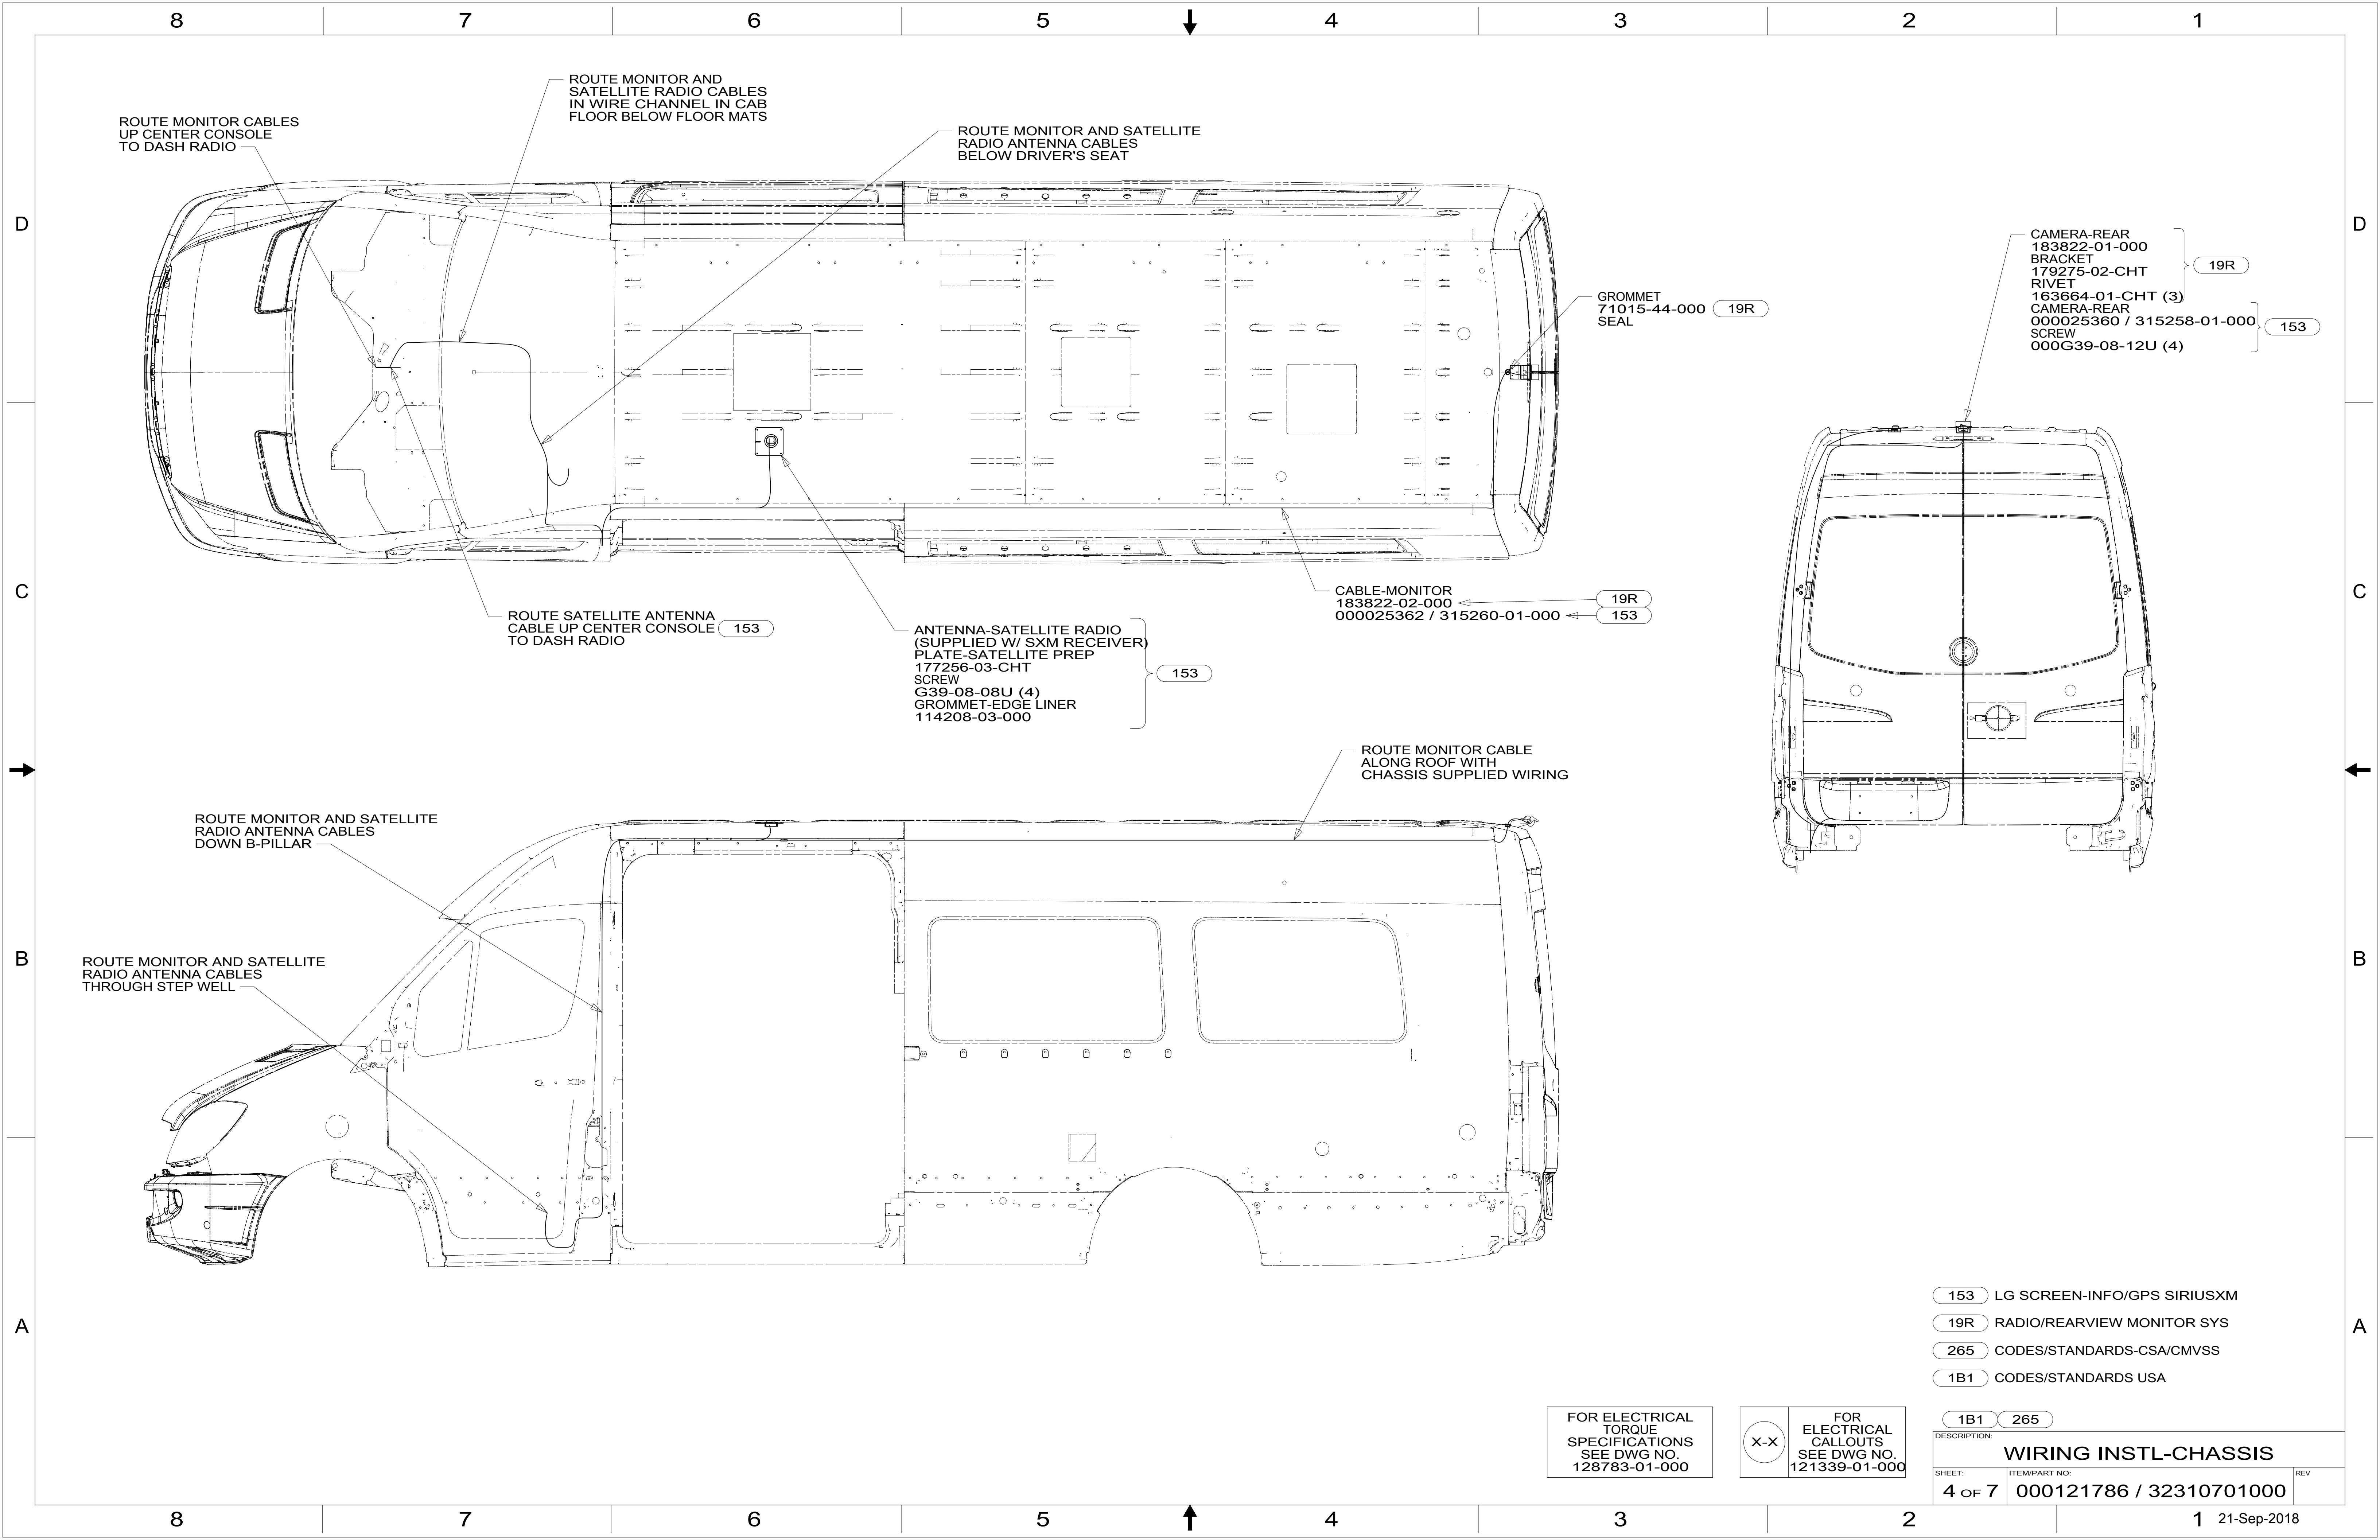

ROUTE MONITOR CABLES UP CENTER CONSOLE TO DASH RADIO

ROUTE MONITOR AND SATELLITE RADIO CABLES IN WIRE CHANNEL IN CAB FLOOR BELOW FLOOR MATS

ROUTE MONITOR AND SATELLITE RADIO ANTENNA CABLES BELOW DRIVER'S SEAT

GROMMET 71015-44-000 SEAL 19R

CAMERA-REAR 183822-01-000 BRACKET 179275-02-CHT RIVET 163664-01-CHT (3) CAMERA-REAR 000025360 / 315258-01-000 SCREW 000G39-08-12U (4) 153

ROUTE SATELLITE ANTENNA CABLE UP CENTER CONSOLE TO DASH RADIO 153

ANTENNA-SATELLITE RADIO (SUPPLIED W/ SXM RECEIVER) PLATE-SATELLITE PREP 177256-03-CHT SCREW G39-08-08U (4) GROMMET-EDGE LINER 114208-03-000 153

CABLE-MONITOR 183822-02-000 000025362 / 315260-01-000 19R 153

ROUTE MONITOR CABLE ALONG ROOF WITH CHASSIS SUPPLIED WIRING

ROUTE MONITOR AND SATELLITE RADIO ANTENNA CABLES DOWN B-PILLAR

ROUTE MONITOR AND SATELLITE RADIO ANTENNA CABLES THROUGH STEP WELL


- 153 LG SCREEN-INFO/GPS SIRIUSXM
- 19R RADIO/REARVIEW MONITOR SYS
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


DESCRIPTION:	1B1 265	
WIRING INSTL-CHASSIS		
SHEET:	ITEM/PART NO:	REV
4 OF 7	000121786 / 32310701000	

8 7 6 5 4 3 2 1

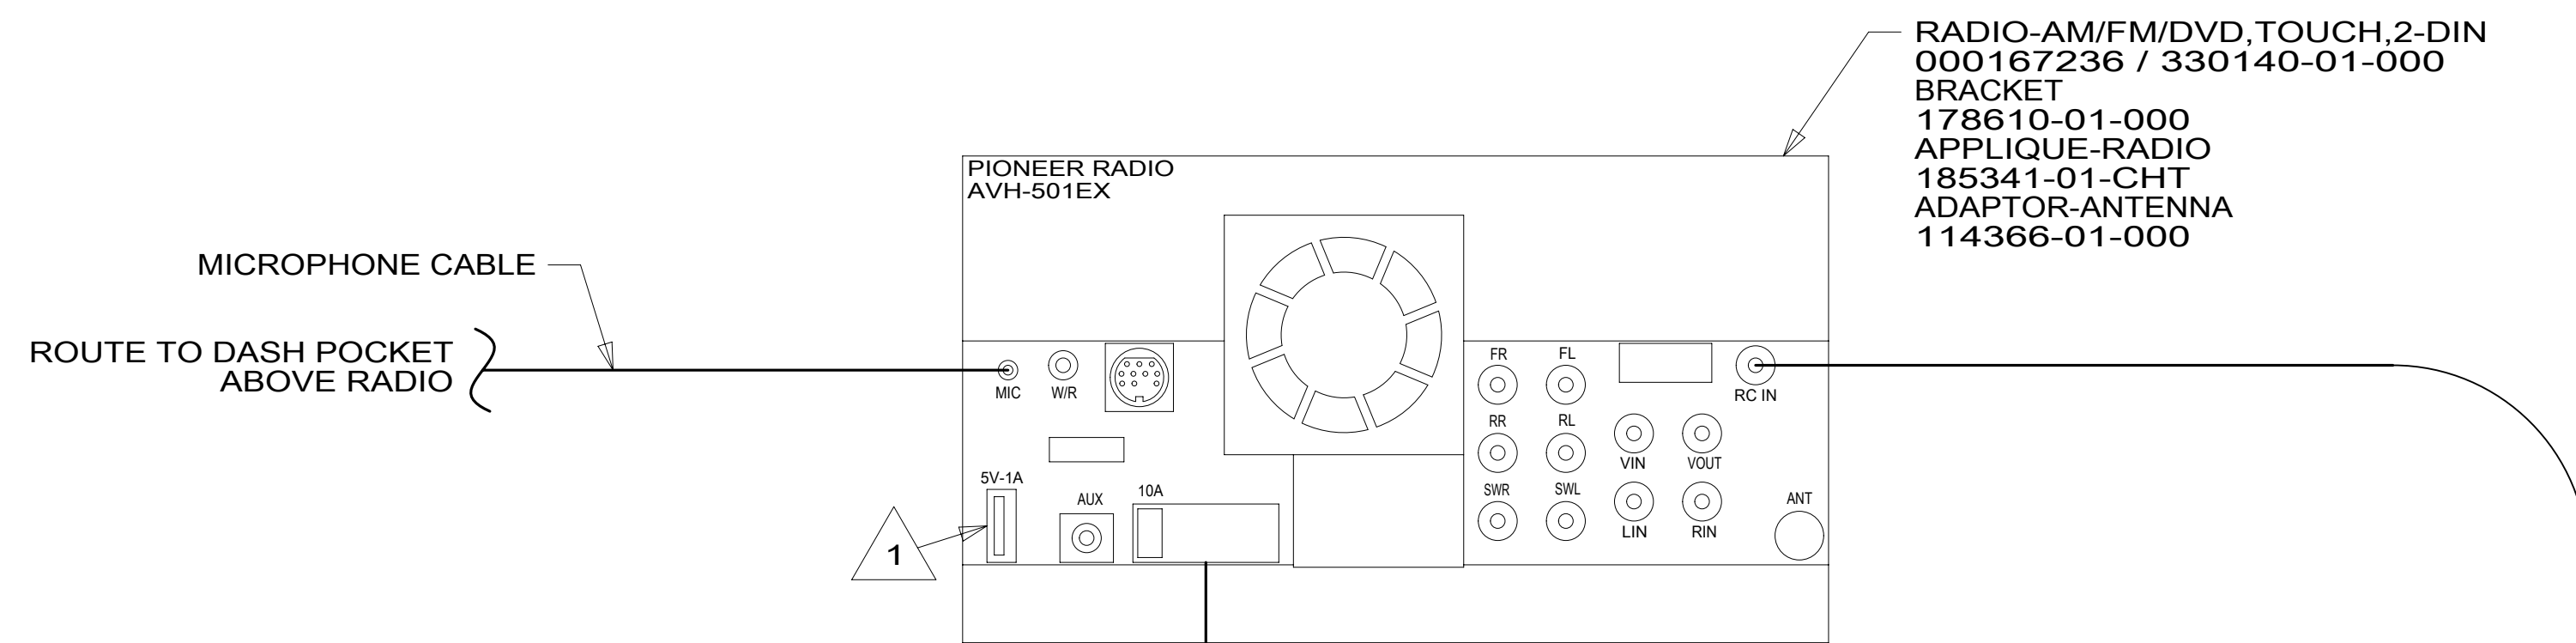


HARNESS-RADIO, 12 PIN
183820-19-000


TO WIRE ASM-
CHASSIS



TO WIRE ASM-
CHASSIS



TO WIRE ASM-
CHASSIS



HARNESS-CAMERA ADAPTER
183820-03-000

CABLE-CAMERA, 20M
(REF)

TO REAR
CAMERA

1 PLUG USB CABLE SUPPLIED WITH RADIO INTO LEAD ON BACK OF RADIO MARKED 'USB'. DRILL 16MM DIAMETER HOLE IN THE TRAY ABOVE RADIO. THE HOLE IS TO BE LOCATED ON THE PASSENGER SIDE OF THE TRAY 50MM FROM THE END NEAREST THE WINDSHIELD. ROUTE CABLE INTO TRAY AND LEAVE 200MM OF CABLE IN THE TRAY.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000



FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 19R RADIO/REARVIEW MONITOR SYS
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


1B1 265 19R

DESCRIPTION: WIRING INSTL-CHASSIS		
SHEET: 5 OF 7	ITEM/PART NO: 000121786 / 32310701000	REV

8 7 6 5 4 3 2 1 21-Sep-2018

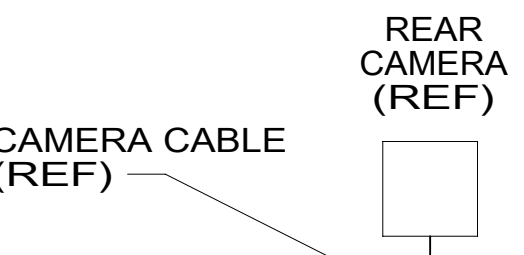






BRACKET-CLAMP,HDMI
000038736 / 318986-01-CHT
TAPE-FOAM DBL COATED
076322-22-000 (40 MM)

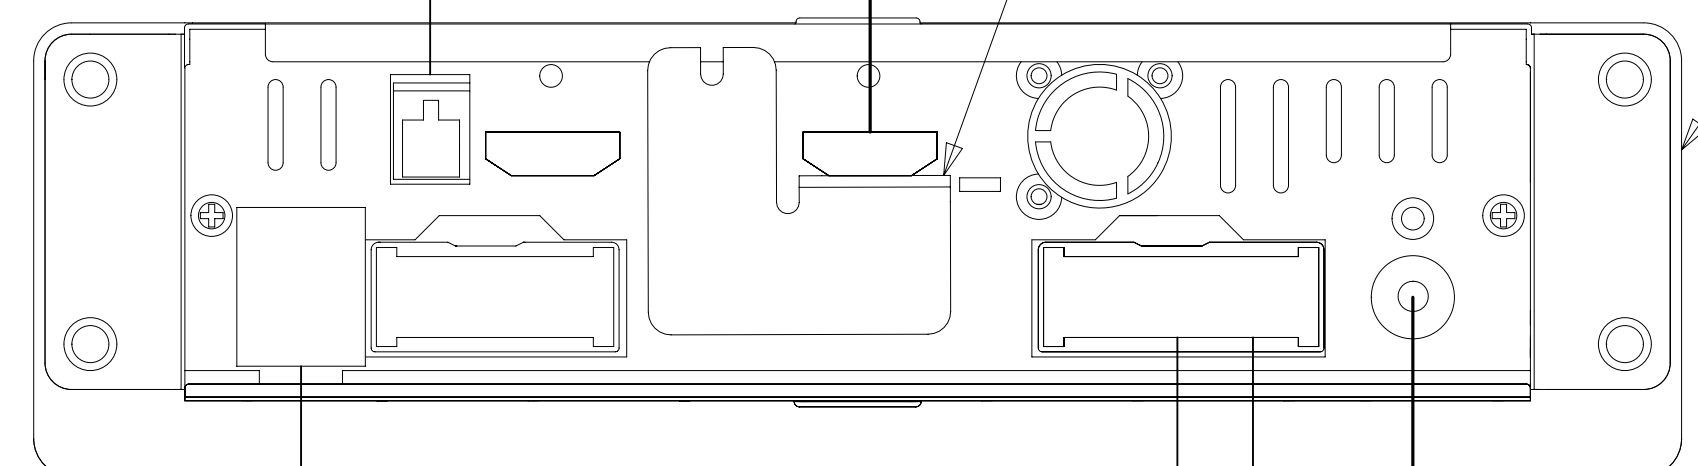

RADIO-INFOTAINMENT, 9"
000025353 / 315254-01-000
REMOTE
176654-04-000
RADIO-KIT,SXM
000111632 / 321635-01-000
TEMP SENSOR
176654-13-000
ADAPTOR-ANTENNA
114366-01-000



DETAIL FA

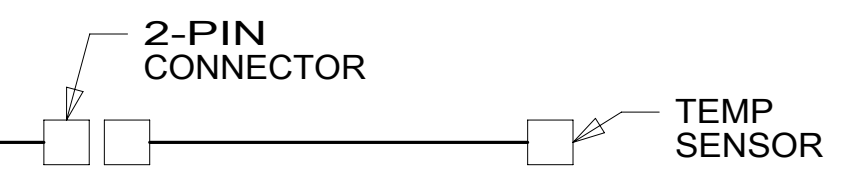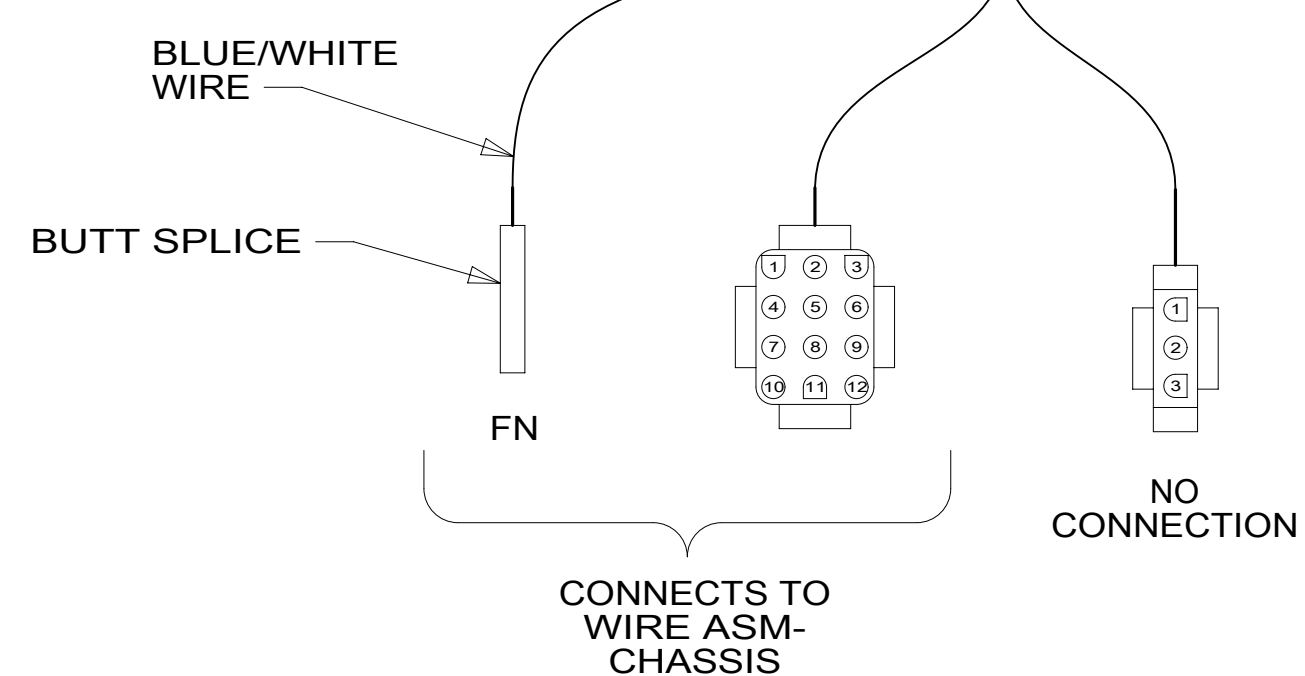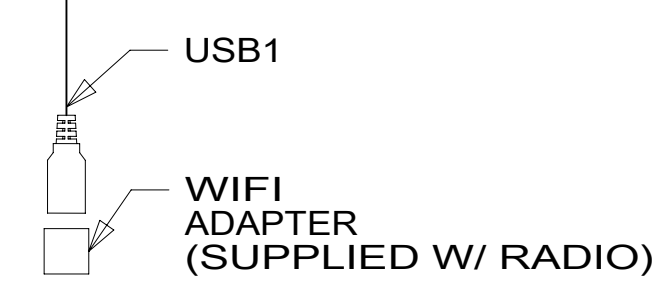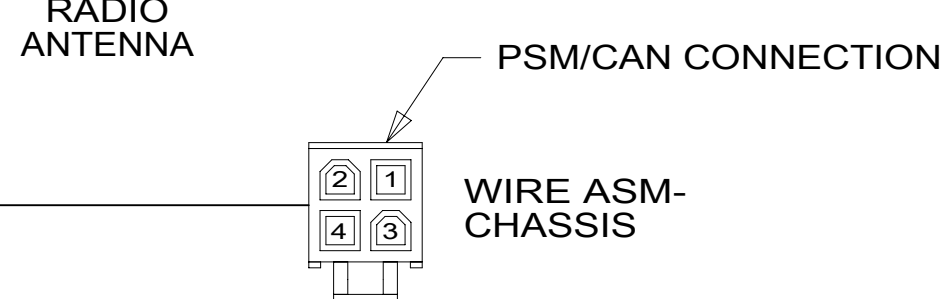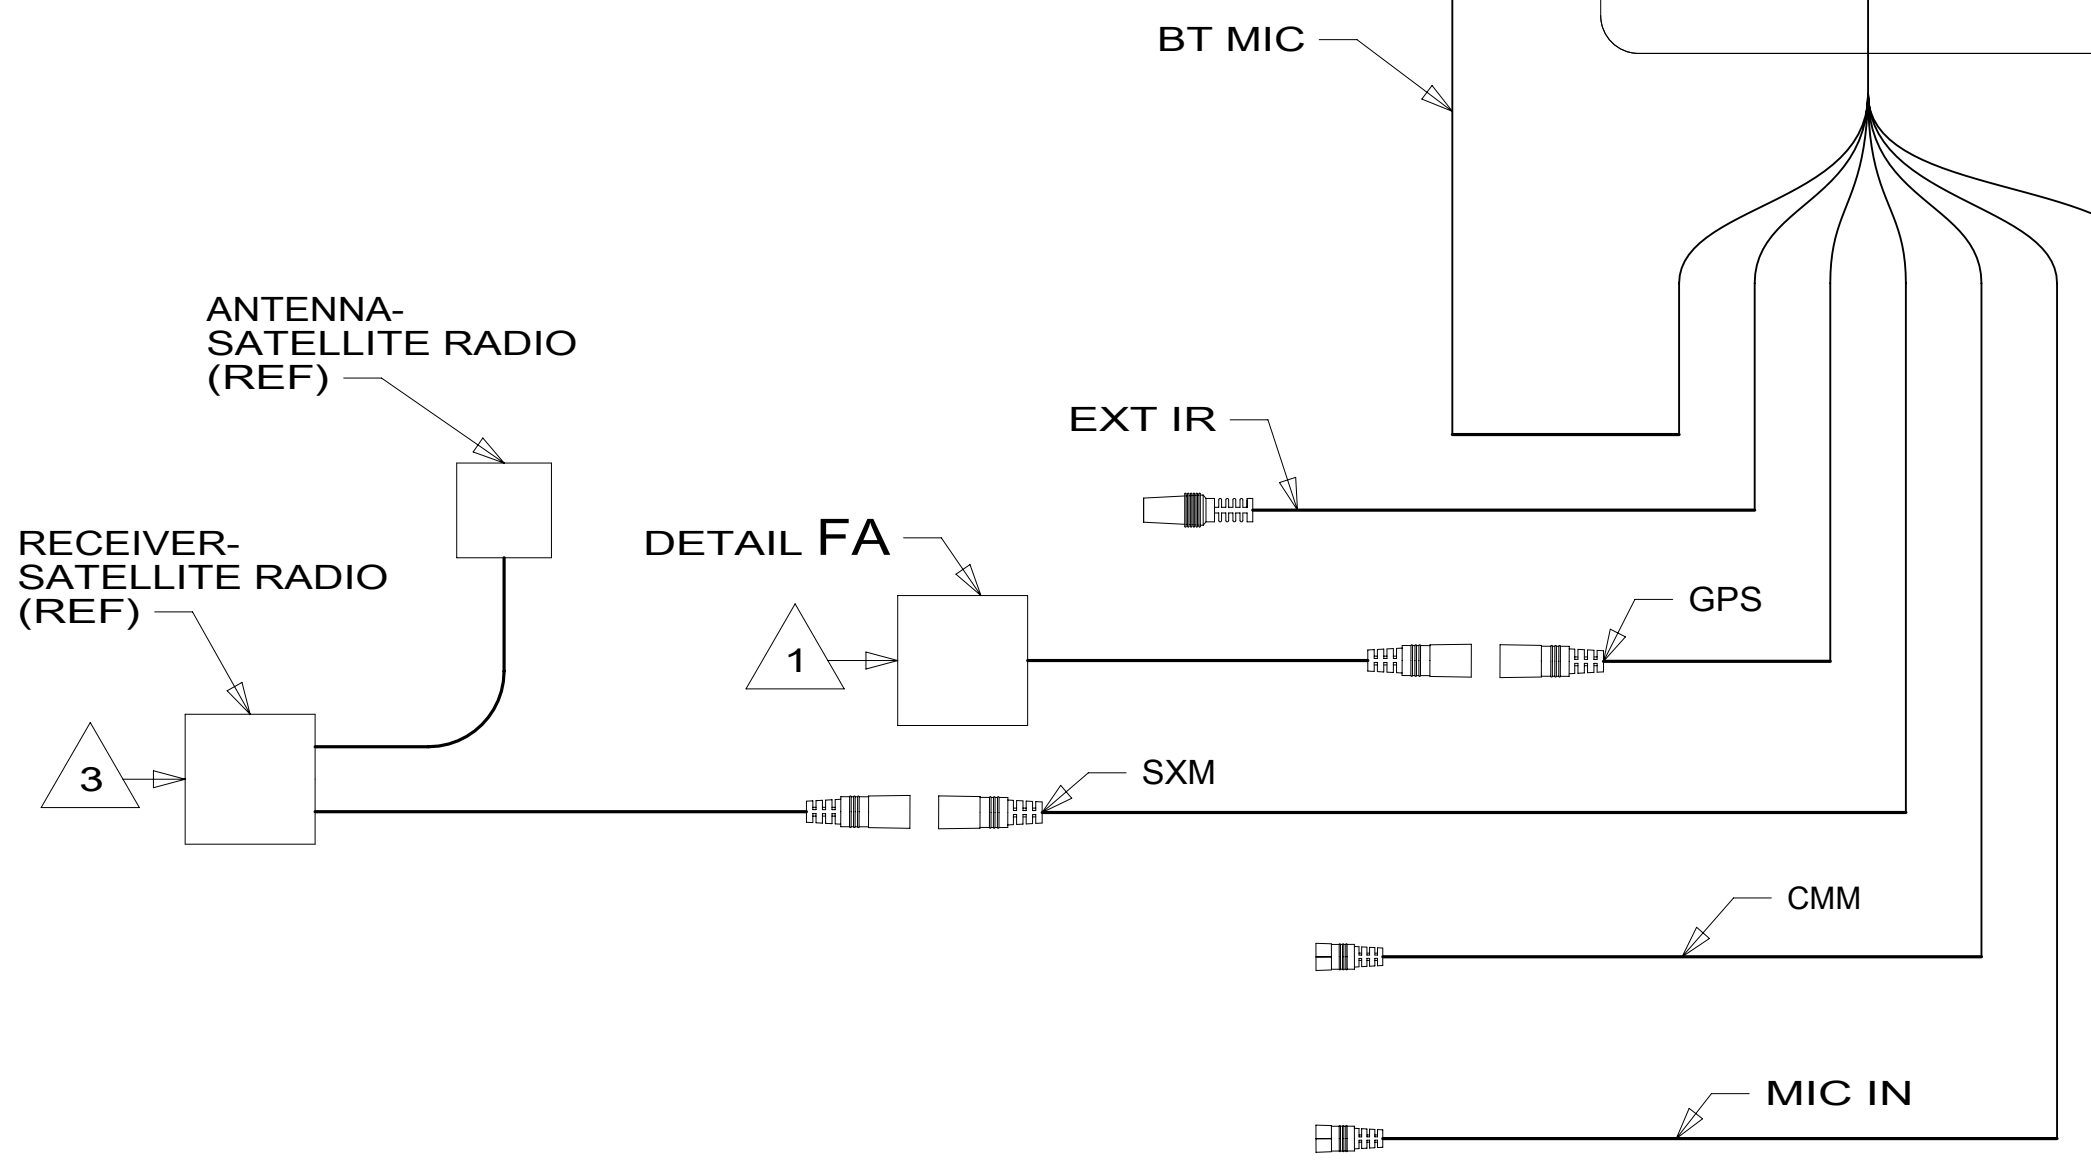


- NOTES:
- 4 WIRE TIE TO DASH RADIO WIRING BEHIND THE RADIO.
 - 3 PLUG CABLE INTO LEAD ON BACK OF RADIO.
 - 2 SEE SHT 2 FOR ADDITIONAL INFORMATION.
 - 1 MOUNT GPS ANTENNA TO TOP OF DEFROST PLENUM BEHIND RADIO.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 153 LG SCREEN-INFO/GPS SIRIUSXM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION:	1B1 265 153	
WIRING INSTL-CHASSIS		
SHEET:	ITEM/PART NO:	REV
6 OF 7	000121786 / 32310701000	

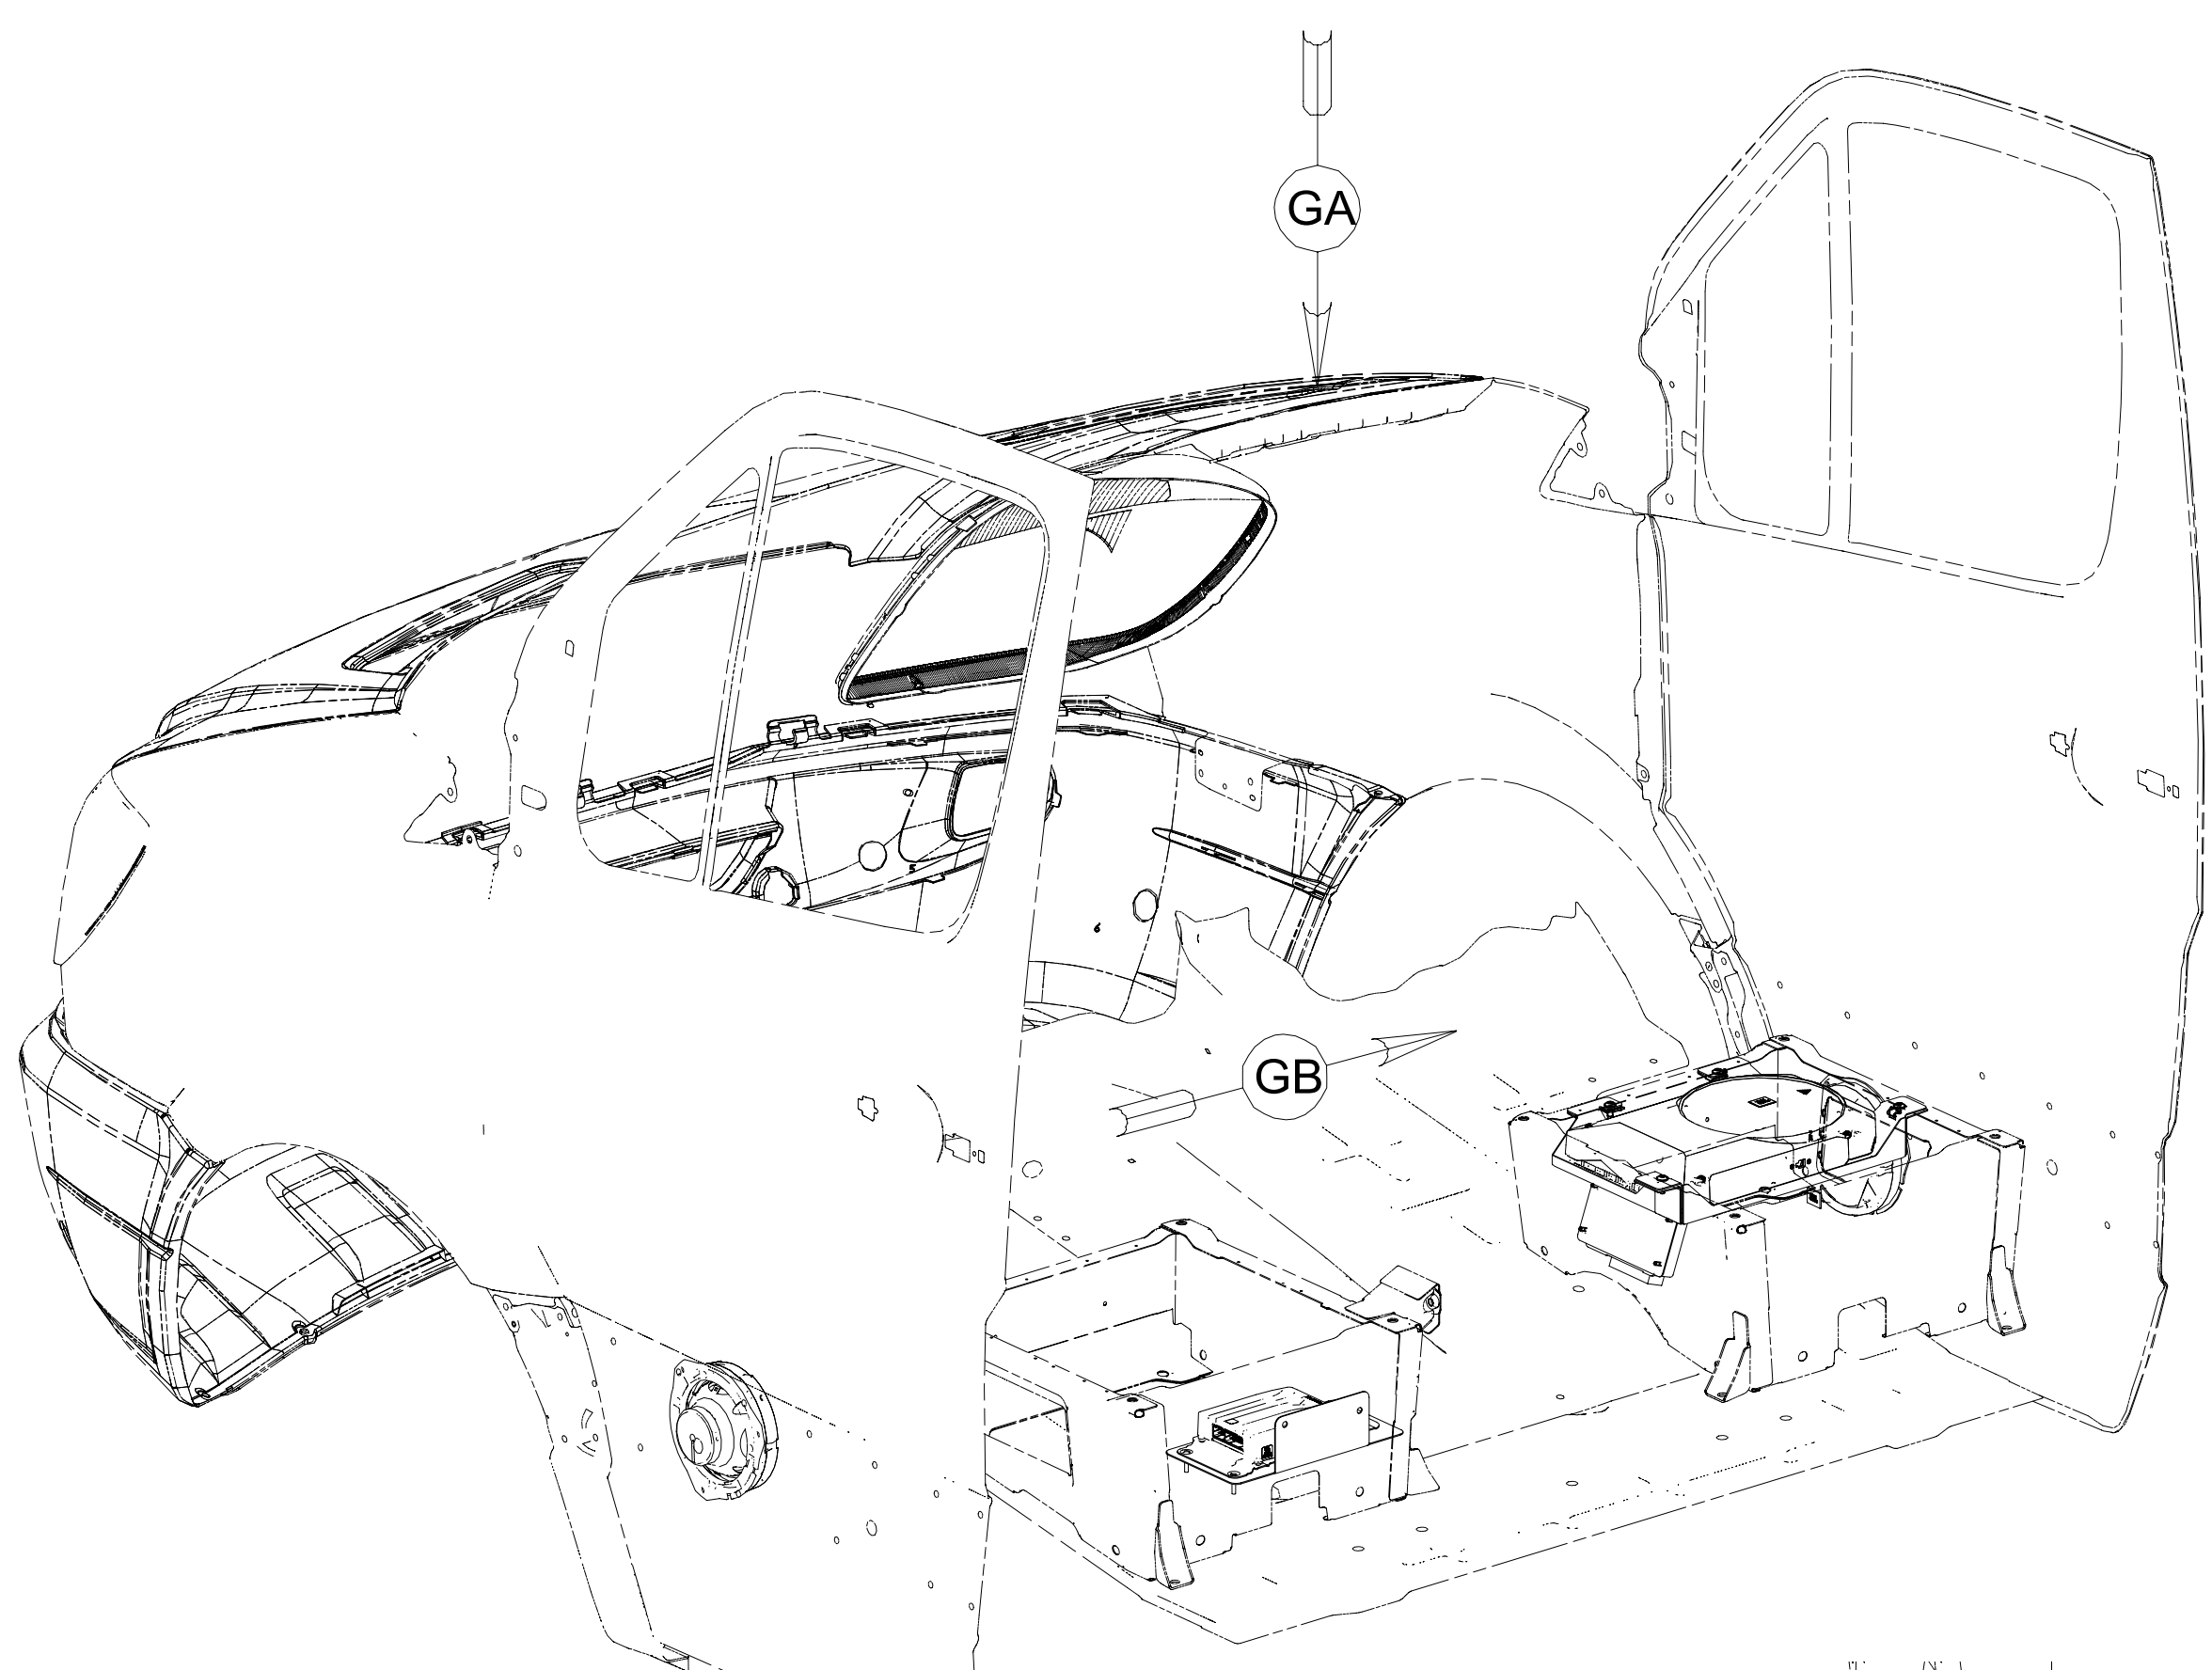


LOGO-JBL
000209969 / 302951-01-000 (2) 1
DETAIL GB



VELCRO- 1/2"
088792-08-000 (50 MM)
TAPE
086276-01-000 (2) (50 MM)

VELCRO- 1/2"
088792-08-000 (50 MM)
TAPE
086276-01-000 (2) (50 MM)

DETAIL GC 4 57P

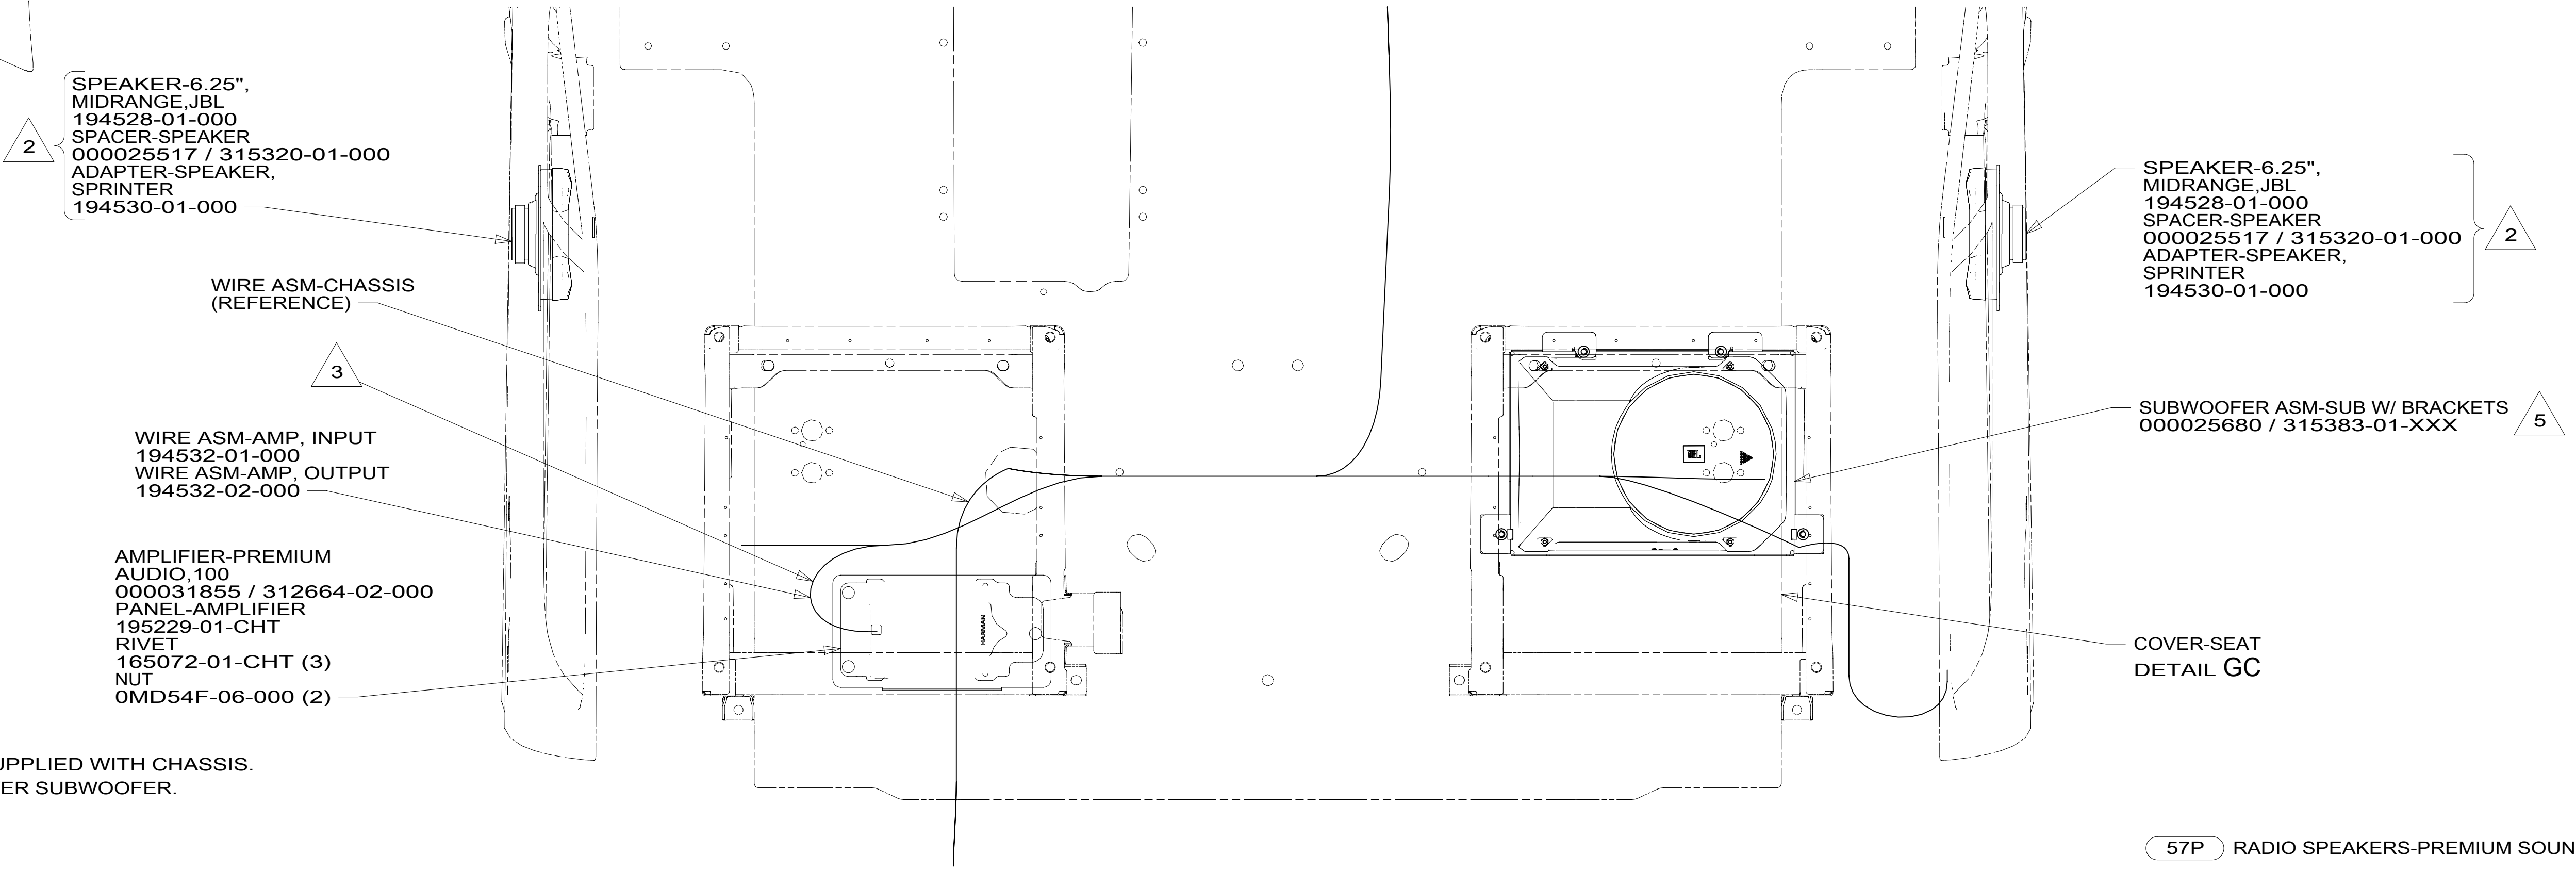

VIEW GA

- 5 RELOCATE 4WD MODULE TO SUBWOOFER BRACKET WHEN NEEDED WITH SCREW 000G55-08-08U (4).
- 4 CUT SEAT PEDESTAL COVER THAT IS SUPPLIED WITH CHASSIS. PLACE COVER SO THAT IT DOES NOT COVER SUBWOOFER. SECURE COVER IN PLACE WITH VELCRO.
- 3 WITH 57P CONNECT 15 PIN HSGS FROM WIRE ASM-CHASSIS TO WIRE ASM-AMP WITHOUT 57P CONNECT 15 PIN HSGS IN WIRE ASM-CHASSIS TOGETHER.
- 2 REPLACE FACTORY DOOR SPEAKER WITH SPEAKER CALLED OUT.
- 1 CENTER ON BOTTOM OF SPEAKER GRILL ON DOOR PANEL. CLEAN SURFACE WITH PROMOTER 087211-01-000.

- 57P RADIO SPEAKERS-PREMIUM SOUND
265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION: WIRING INSTL-CHASSIS		
SHEET: 7 OF 7	ITEM/PART NO: 000121786 / 32310701000	REV