

- 5 PLUG TRANSFER SWITCH INTO OUTLET IN INVERTER FRONT.
  - 4 CONNECT INVERTER INPUT TO LOAD CENTER, INVERTER TO LOADS (RCP-MAIN TV, RCP-SOFA, RCP-SAT PREP, RCP BDRM TV, RCP-BDRM).
  - 3 CONNECT ORG CABLE TO RED (+) TERMINAL, WHITE CABLE TO WHITE (-) TERMINAL.
2. ALL 110V WIRES TO BE CLAMPED WITH CLAMP 10497-05-000 WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12B.
1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

INLET-30A, 125V, EXTERIOR  
000037518 / 318581-01-CHT  
BRACKET-PLUG  
168924-01-CHT  
SCREW  
000G11-07-12U (4)

DETAIL AA

RECEPTACLE ASM-GFI, US-20A 1B1  
000120177 / 322738-01-XXX  
RECEPTACLE ASM-GFI, CAN-20A 265  
000120178 / 322739-01-XXX  
(WHT) (HEATER)  
PANEL-RCP, GFCI  
188004-03-CHT  
SCREW  
G67-10-10U (2)

TO RIGHT SIDE

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS  
1B1 CODES/STANDARDS USA


1B1 265

**WINNEBAGO**  
COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.

DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS	
DFFR:		
UNSPECIFIED TOLERANCES:	MATERIAL:	
WHOLE DIM (X) : 3		
ONE-PLACE (X.X) : 1.5		
TWO-PLACE (X.XX) : 0.50		
ANGLE : 1°		
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS)	FIRST USED:
		18 170A
DESCRIPTION: <b>WIRING INSTL-BODY, 110V</b>		
SHEET: 1 OF 4	ITEM/PART NO: 000123644 / 32387201000	REV:
REF:		1 26-Jan-2018

8 7 6 5 4 3 2 1

D  
C  
B  
A

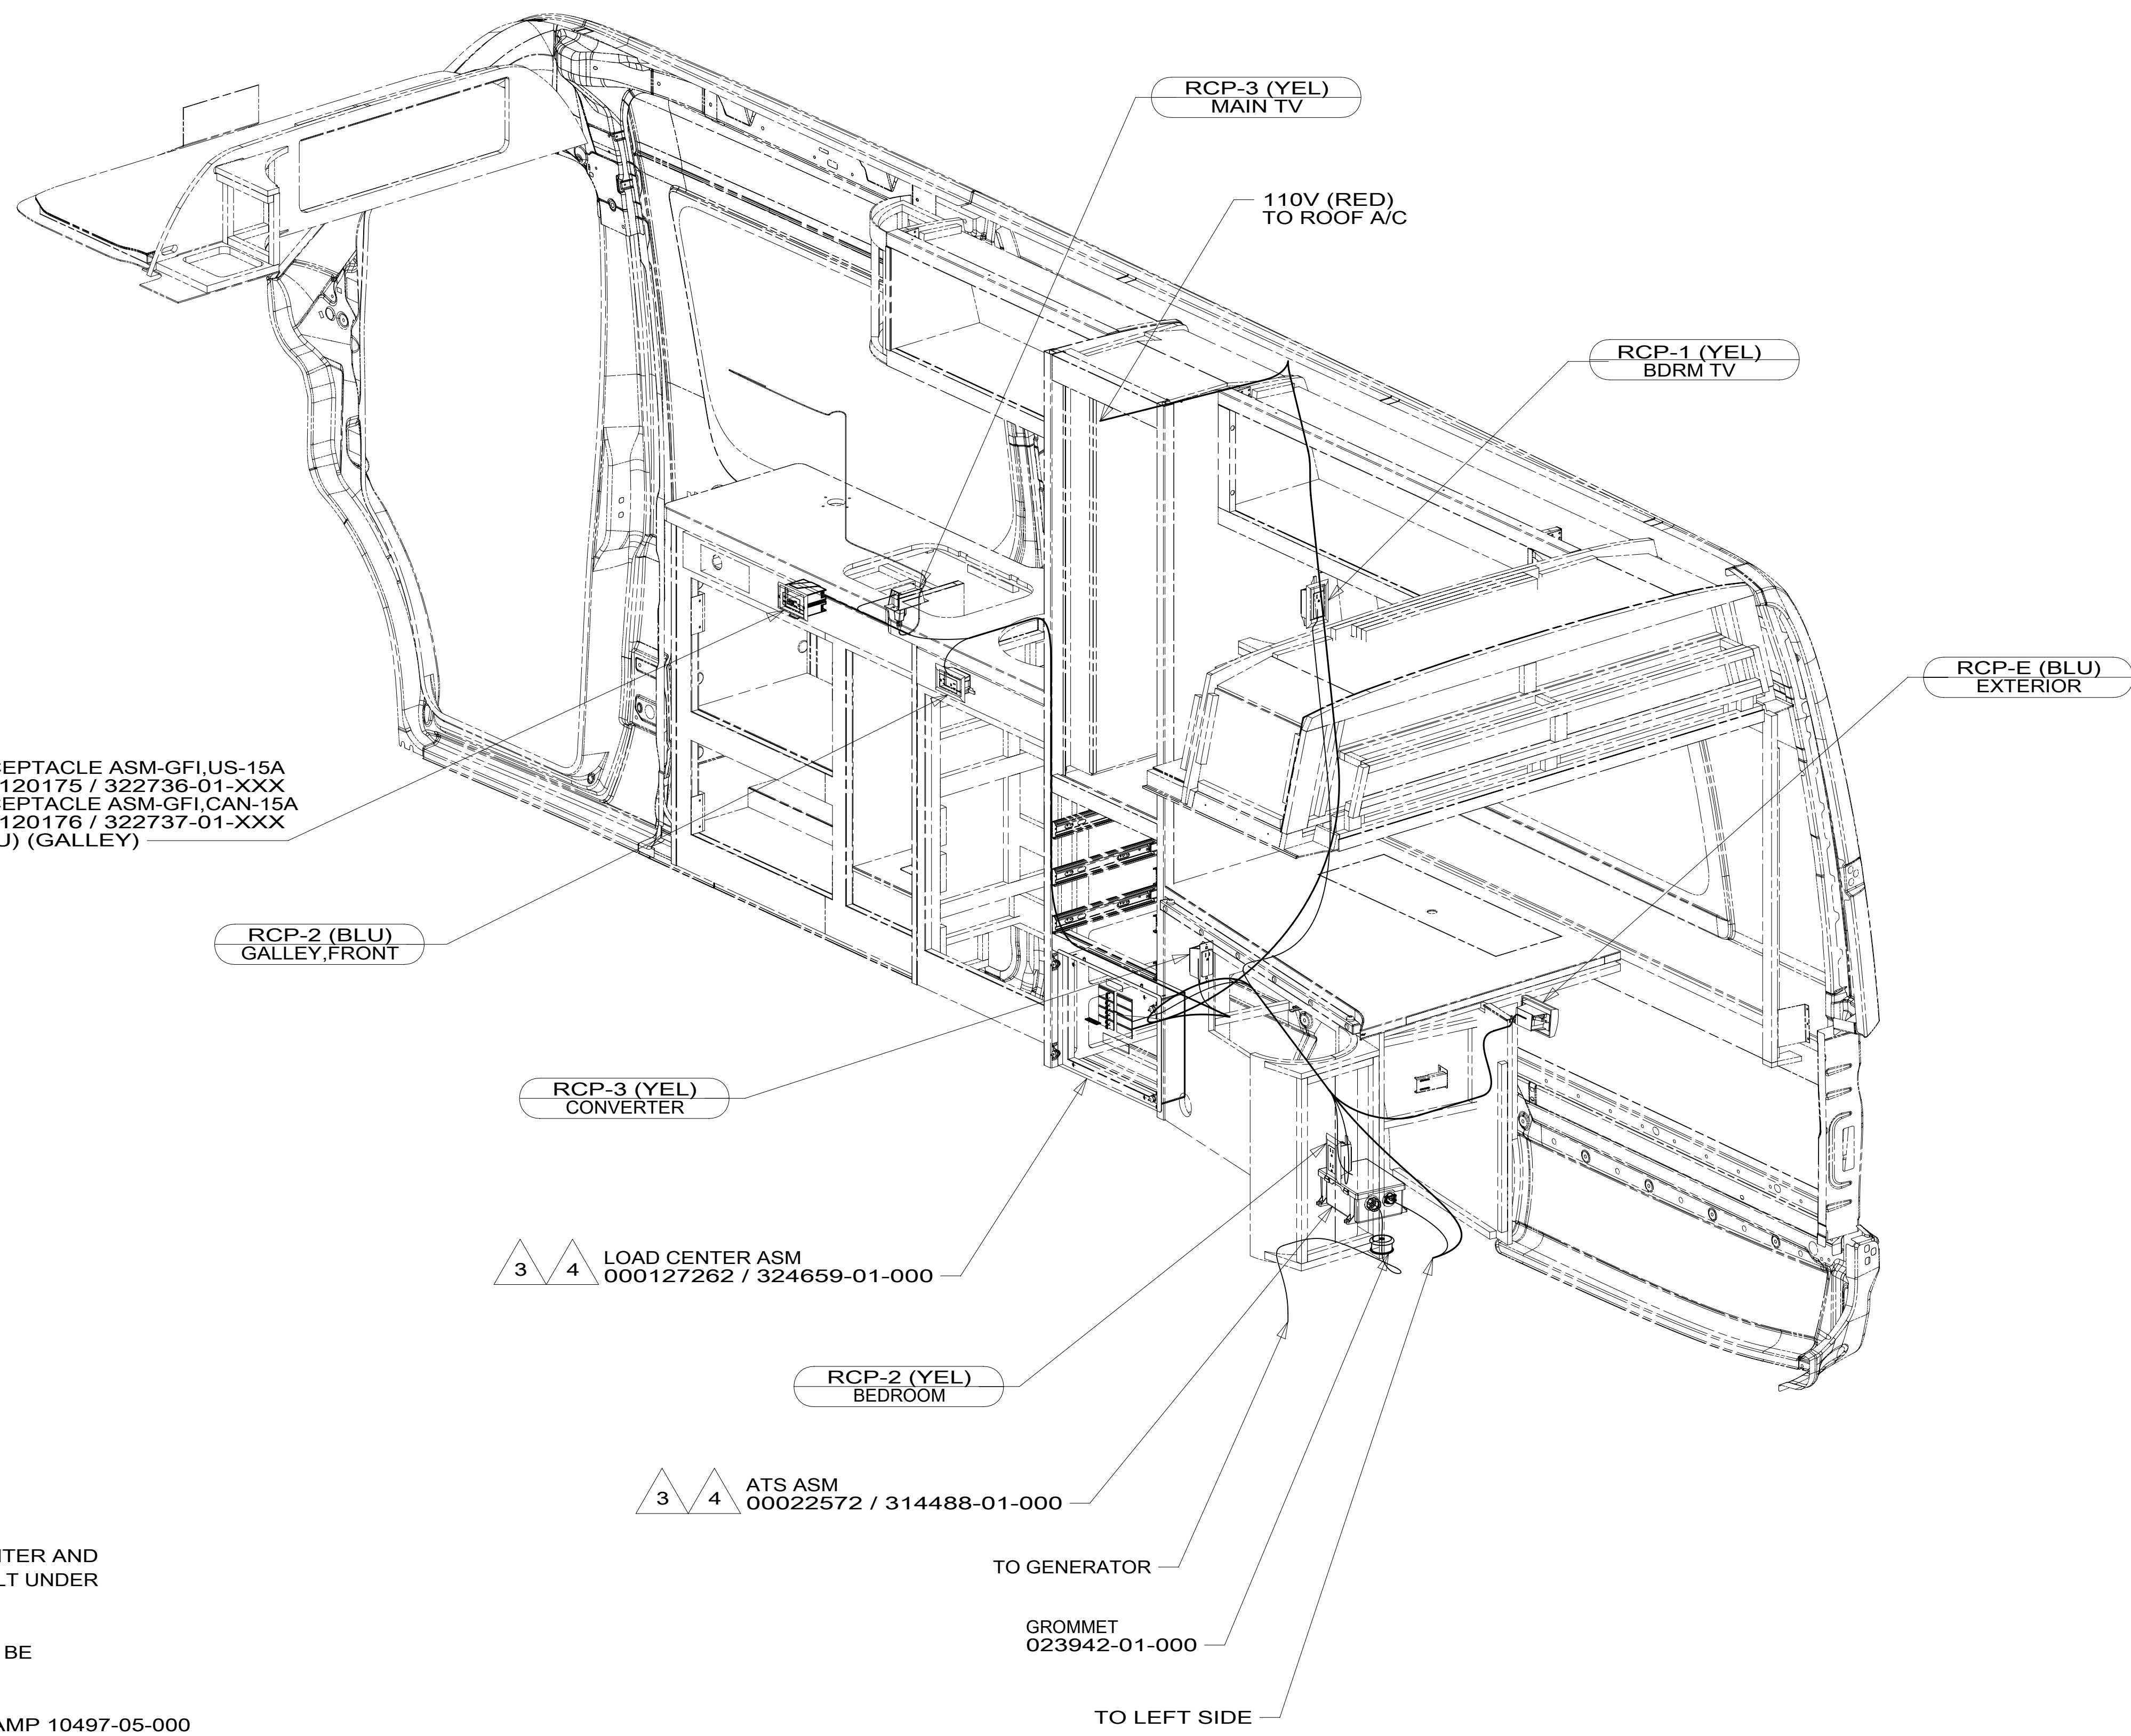

1B1 RECEPTACLE ASM-GFI,US-15A  
000120175 / 322736-01-XXX  
265 RECEPTACLE ASM-GFI,CAN-15A  
000120176 / 322737-01-XXX  
(BLU) (GALLEY)

RCP-2 (BLU)  
GALLEY FRONT

RCP-3 (YEL)  
CONVERTER

3 4 LOAD CENTER ASM  
000127262 / 324659-01-000

RCP-2 (YEL)  
BEDROOM

3 4 ATS ASM  
00022572 / 314488-01-000

TO GENERATOR

GROMMET  
023942-01-000

TO LEFT SIDE

4 GROUND WIRES (8 GA WIRE) FROM LOAD CENTER AND  
ATS ROUTES THROUGH FLOOR TO GROUND BOLT UNDER  
DRIVER'S SEAT.

3 LOAD CENTER AND ATS GROUND WIRES MUST BE  
ATTACHED DIRECTLY TO CHASSIS GROUND.

2. ALL 110V WIRES TO BE CLAMPED WITH CLAMP 10497-05-000  
WITHIN 200MM OF OUTLET BOXES, USE SCREW G67-10-12U.

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER  
CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE  
TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX  
AS APPROPRIATE FOR INSTALLATION.

NOTES:

FOR ELECTRICAL  
TORQUE  
SPECIFICATIONS  
SEE DWG NO.  
128783-01-000


FOR  
ELECTRICAL  
CALLOUTS  
SEE DWG NO.  
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS  
1B1 CODES/STANDARDS USA

DESCRIPTION:	
1B1 265	
WIRING INSTL-BODY, 110V	
SHEET:	ITEM/PART NO:
2 OF 4	000123644 / 32387201000
REV	
1 26-Jan-2018	

8 7 6 5 4 3 2 1

RED	1B1	136135-07-042
	265	136136-07-042
ORG	1B1	136131-16-016
	265	136134-16-016
BLK	1B1	136131-06-085
	265	136134-06-085
BLU	1B1	136131-02-120
	265	136134-02-120
WHT	1B1	136135-09-045
	265	136136-09-045
YEL	1B1	136131-05-073
	265	136134-05-073
MAIN	1B1	136137-01-028
	265	136138-01-028
GROUND MAIN		136145-05-085
MAIN EXTENSION	1B1	136137-01-028
	265	136138-01-028
CORD-POWER ASM		183140-01-000
GROUND ATS		136145-05-080
THROW IN #1	1B1	136131-13-143
	265	136131-13-143
THROW IN #2	1B1	136131-13-055
	265	136131-13-055

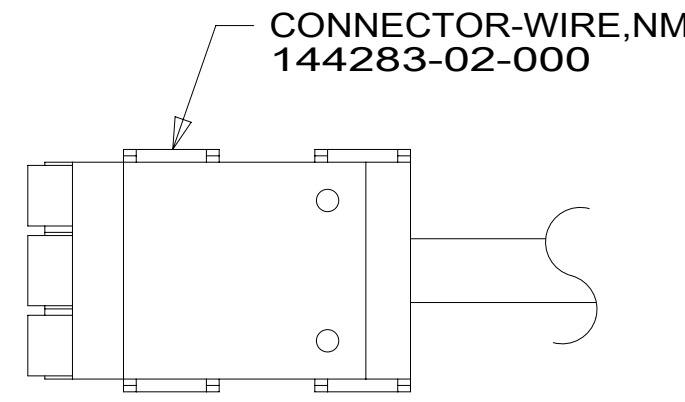

DETAIL CA


- NOTES:
- 6 SEE DETAIL CA FOR CONNECTOR INSTALLATION.
  - 5 DO NOT HI-POT POWER CORD, LED INDICATOR LIGHT MAY FAIL.
  - 4 GROUND WIRES TO BE INSTALLED ON MFG LINE. SHIP GROUND WIRES LOOSE WITH LOAD CENTER.
  - 3. SEE WIRING INSTL-BODY, 12V FOR ADDITIONAL INFORMATION.
  - 2. SECURE WIRES TO BACKSIDE OF LOAD CENTER WITH WIRE TIE 116673-01-000.
  - 1. ALL GROUNDS WIRES TO BE COVERED WITH TUBING 8041-02-000.

265 CODES/STANDARDS-CSA/CMVSS  
 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

1B1	265
DESCRIPTION: <b>WIRING INSTL-BODY, 110V</b>	
SHEET: 3 OF 4	ITEM/PART NO: 000123644 / 32387201000
REV	

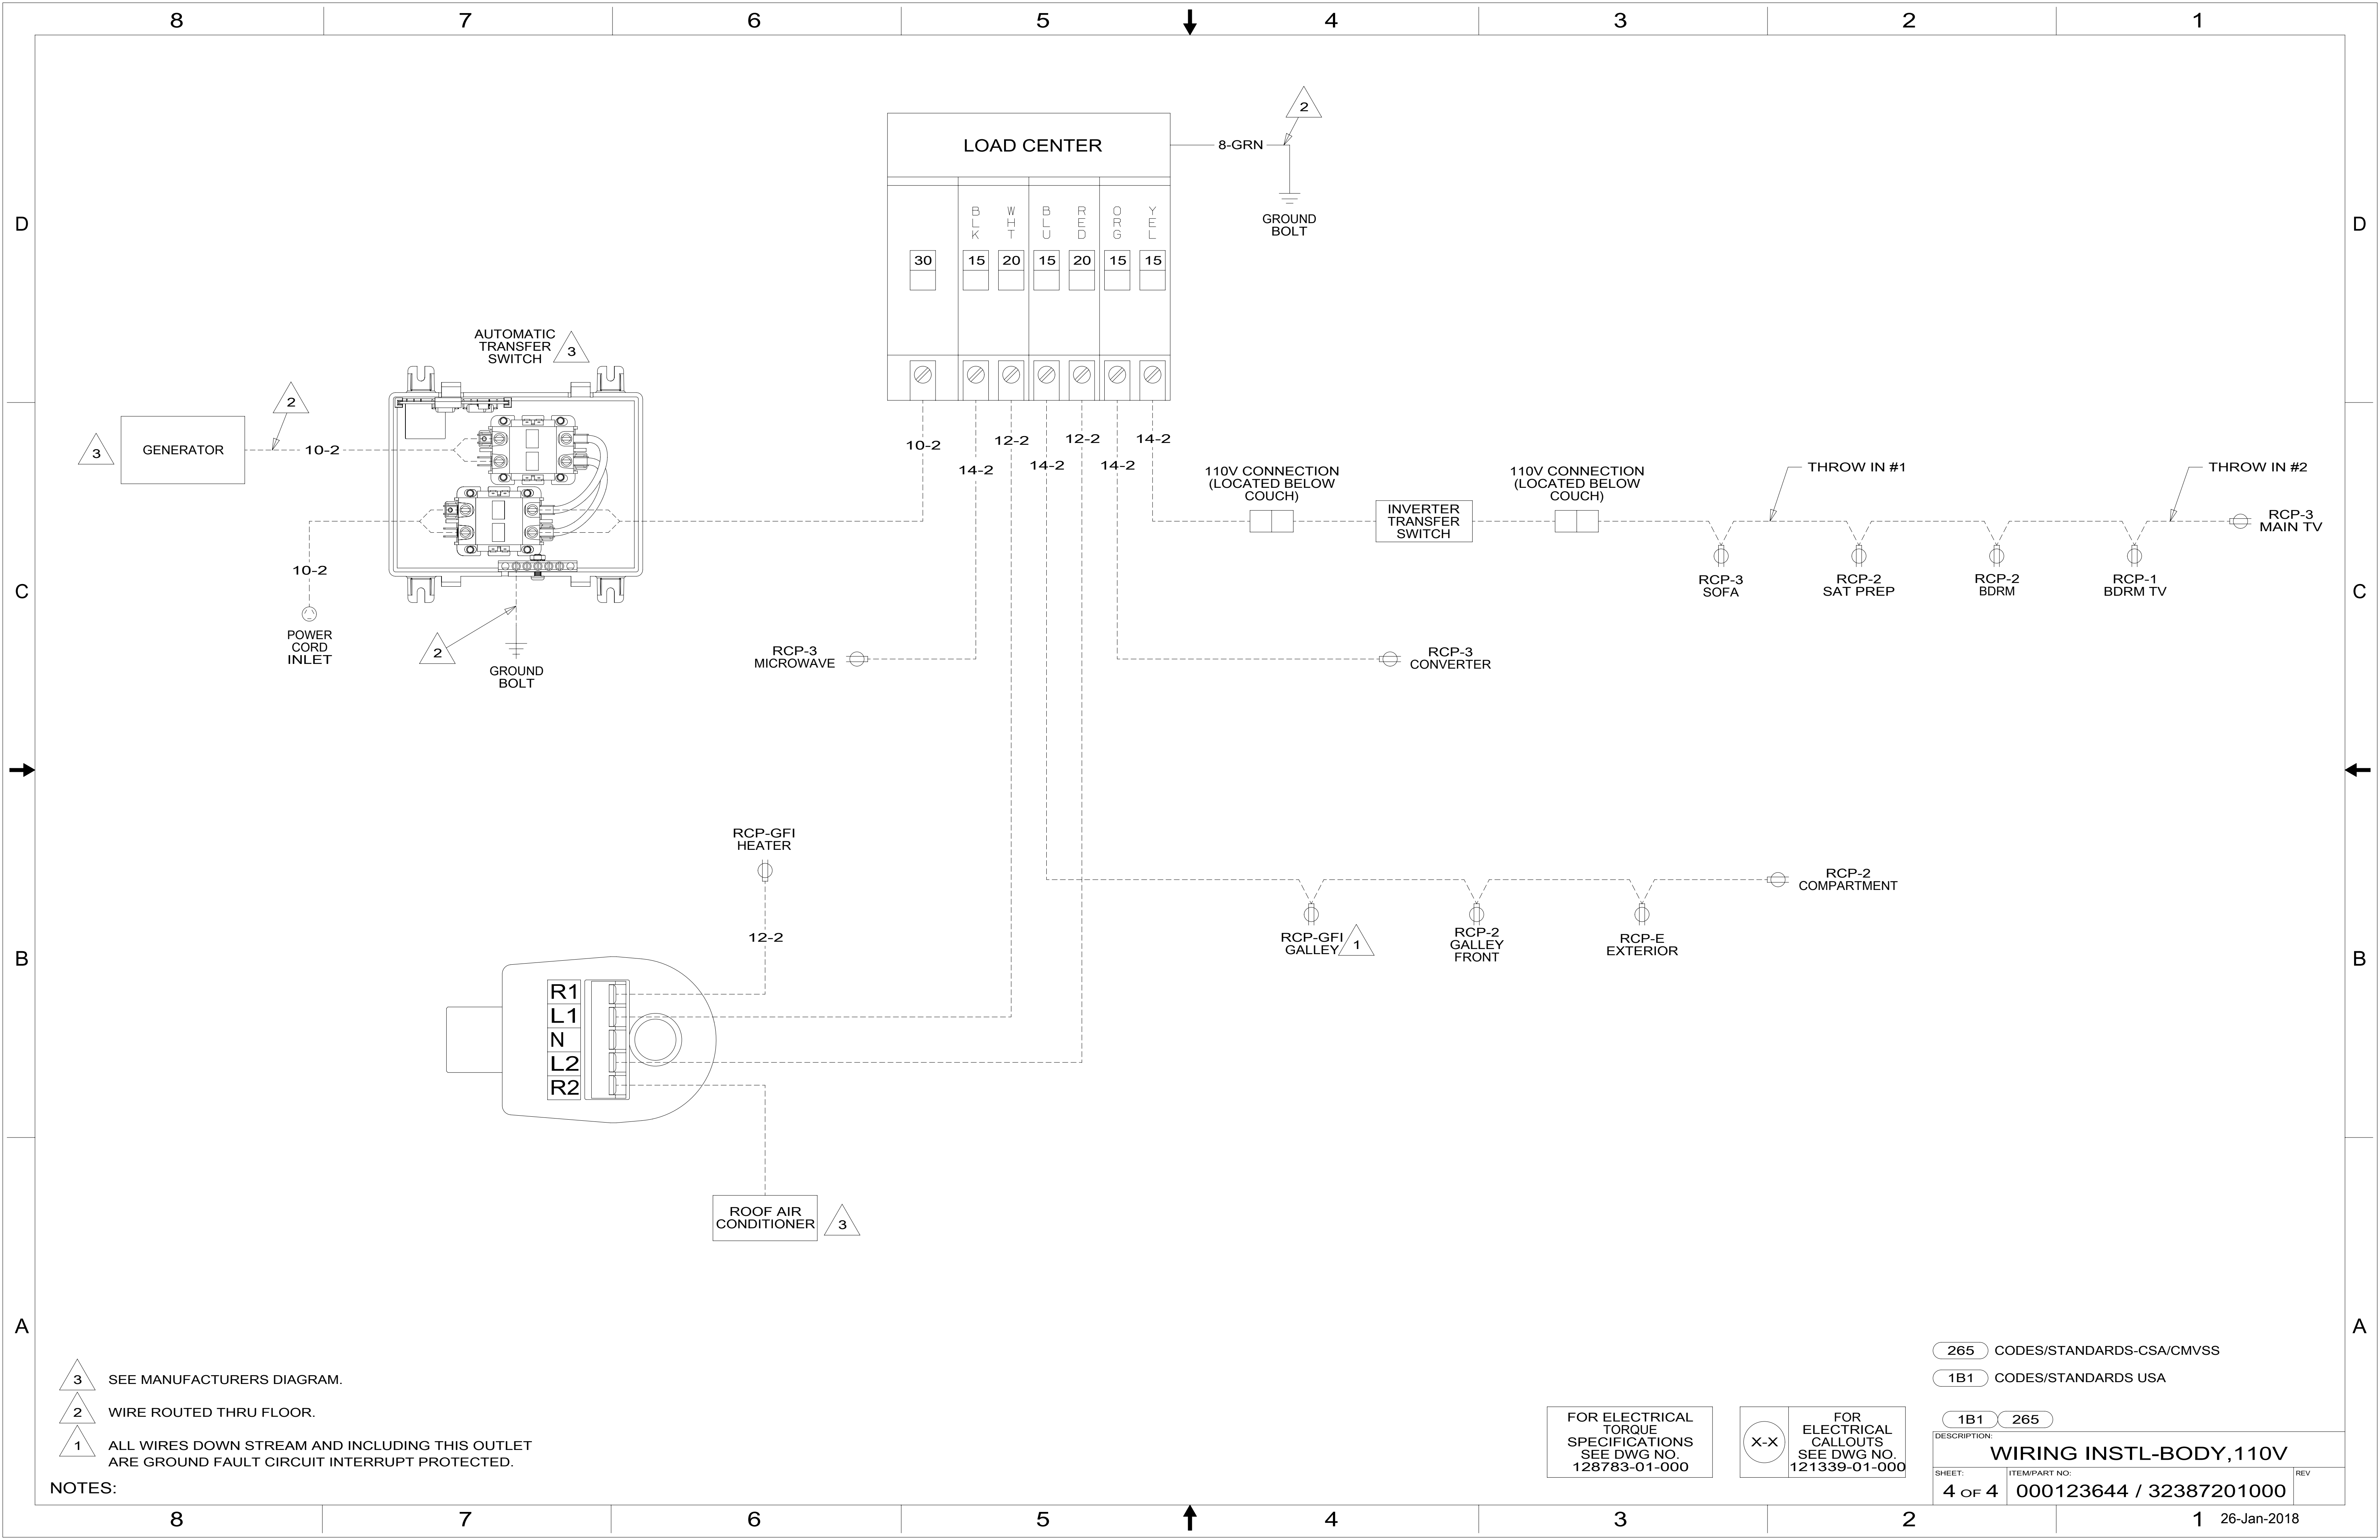

- NOTES:
- 3 SEE MANUFACTURERS DIAGRAM.
  - 2 WIRE ROUTED THRU FLOOR.
  - 1 ALL WIRES DOWN STREAM AND INCLUDING THIS OUTLET ARE GROUND FAULT CIRCUIT INTERRUPT PROTECTED.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS  
 1B1 CODES/STANDARDS USA

DESCRIPTION:		1B1 265	
<b>WIRING INSTL-BODY, 110V</b>			
SHEET:	ITEM/PART NO.:	REV	
4 OF 4	000123644 / 32387201000		