


- NOTES:**
- 1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.
 - 2. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

- 8 REMOVE REAR VIEW MIRROR & MOUNT CAMERA TO CENTER OF WINDSHIELD AND 25 MM BELOW REAR VIEW MIRROR BUTTON. ROUTE CABLE UP ABOVE HEADLINER THEN LEFT DOWN LEFT A-POST COVER TO CENTER DASH TO CONNECT TO WIRE ASM-CHASSIS.
- 7 NOTCH A-POST COVER WHERE IT MEETS THE DASH TO ALLOW DISPLAY CABLE THROUGH. MOUNT DISPLAY TO A-POST COVER AND ADJUST FOR DRIVER'S VIEWING. ROUTE DISPLAY CABLE TO CENTER DASH AND CONNECT TO CAMERA HARNESS.
- 6 REMOVE PLASTIC TRAY AND DISCARD.
- 5 REMOVE PAINT AND UNDER COATING FROM GROUND BOLT AND NUT TO INSURE PROPER CONTACT.
- 4 SEE WIRING INSTL-BODY, 12V FOR ADDITIONAL INFORMATION.
- 3 CUT WIRE TIE AROUND SPRINTER SEAL, ROUTE THE CHASSIS WIRING THROUGH HOLE AND WIRE TIE SEAL WITH WIRE TIE 8343-04-000.
- 12 INSTALL NUT SO THAT IT IS FLUSH WITH TOP OF EXTENDER-SHAFT.
- 11 DRILL 12.3 MM HOLE INTO DASH PANEL.
- 10 SEE SHT 5 & SHT 6 FOR ADDITIONAL INFORMATION.
- 9 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.

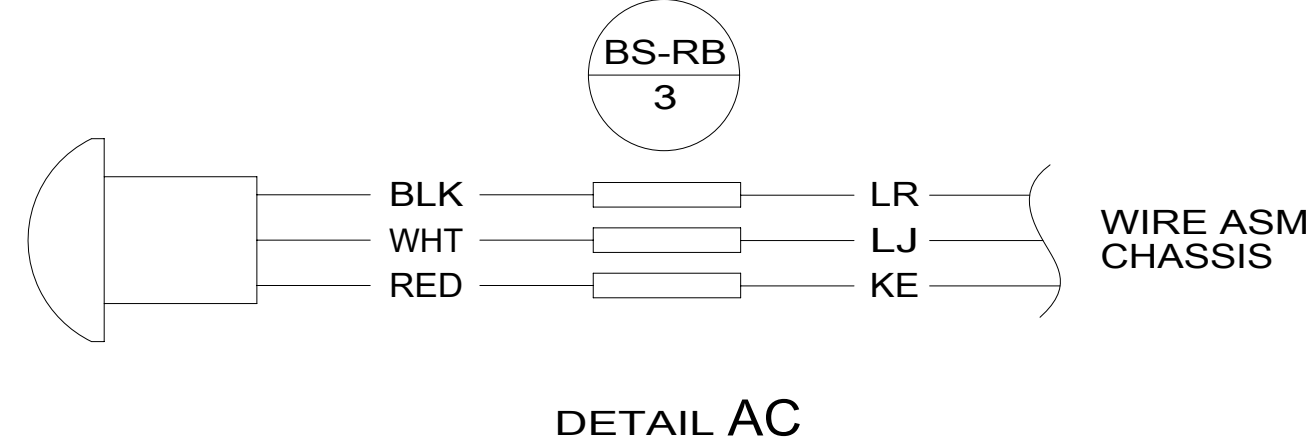


- 36C COLLISION AVOIDANCE SYSTEM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

WINNEBAGO COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.	
DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS
DFFR:	
UNSPECIFIED TOLERANCES:	MATERIAL:
WHOLE DIM (X) : 3	
ONE-PLACE (X.X) : 1.5	
TWO-PLACE (X.XX) : 0.50	
ANGLE : 1°	
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS) FIRST USED: 18 170A
DESCRIPTION: WIRING INSTL-CHASSIS	
SHEET: 1 OF 7	ITEM/PART NO.: 000123661 / 32387701000
REF:	1 21-Sep-2018

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

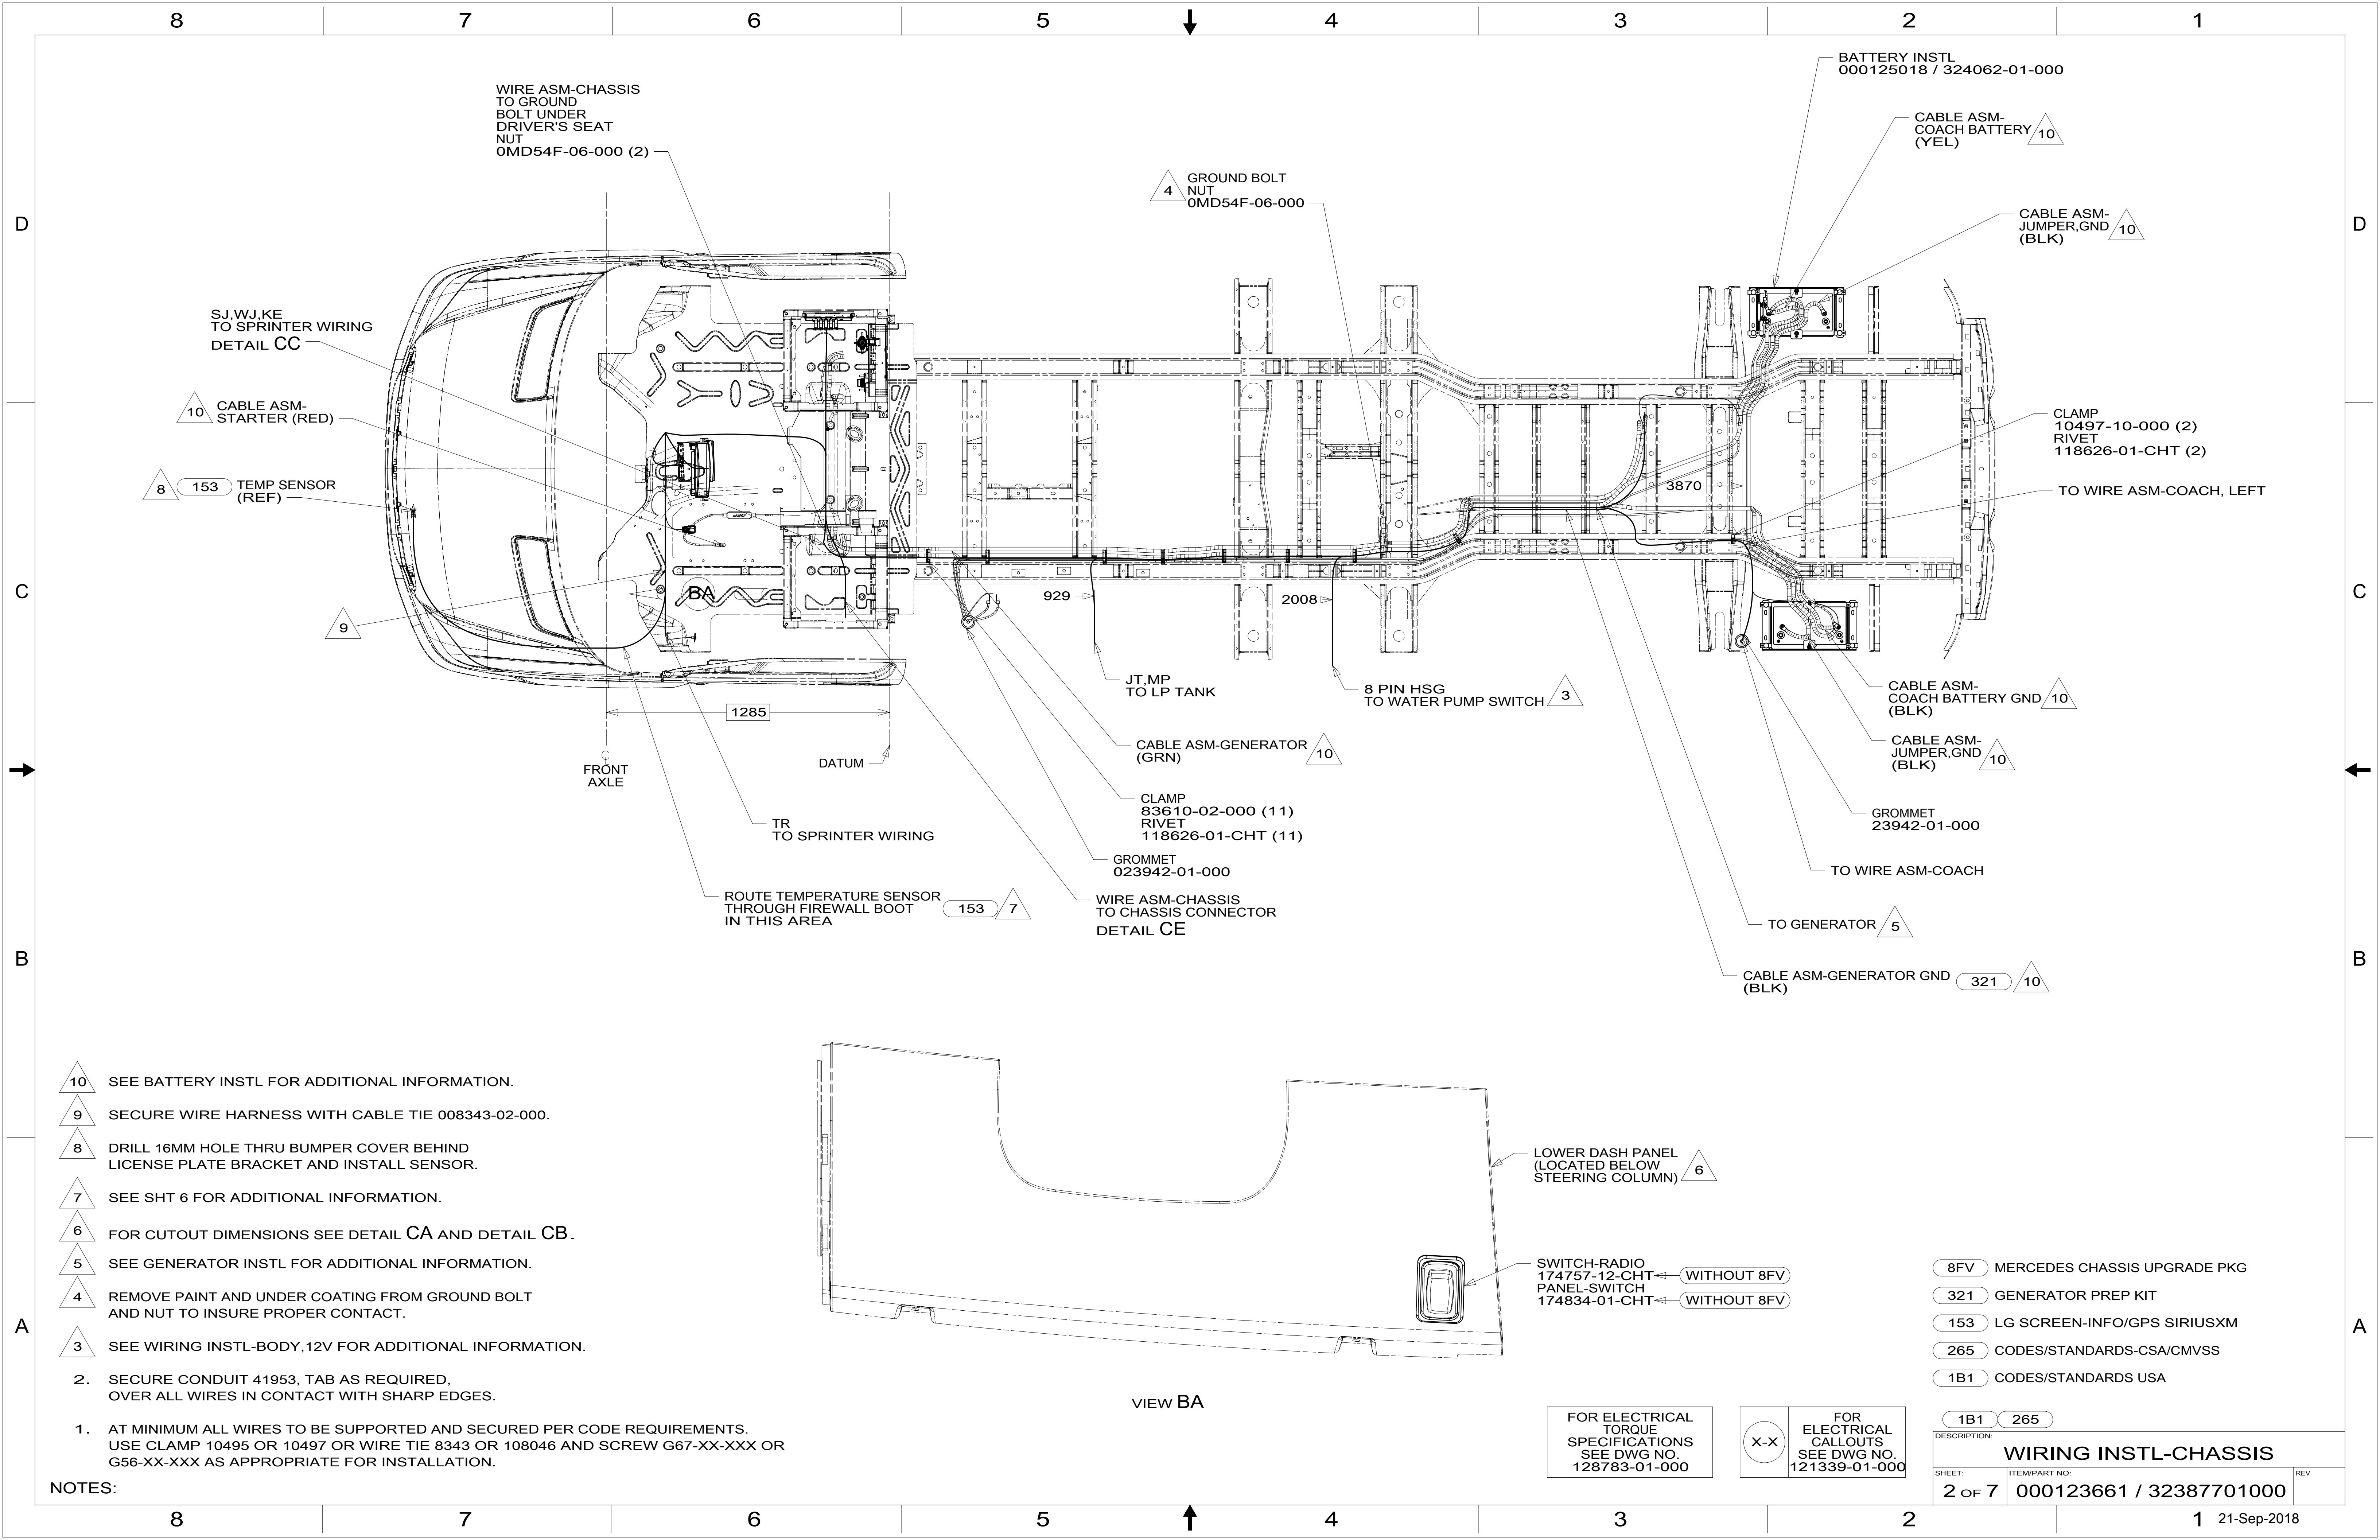

WIRE ASM-CHASSIS TO GROUND BOLT UNDER DRIVER'S SEAT NUT OMD54F-06-000 (2)

BATTERY INSTL 000125018 / 324062-01-000

CABLE ASM-COACH BATTERY (YEL) 10

CABLE ASM-JUMPER,GND (BLK) 10

4 GROUND BOLT NUT OMD54F-06-000

SJ,WJ,KE TO SPRINTER WIRING DETAIL CC

10 CABLE ASM-STARTER (RED)

CLAMP 10497-10-000 (2) RIVET 118626-01-CHT (2)

8 153 TEMP SENSOR (REF)

TO WIRE ASM-COACH, LEFT

9

929

2008

3870

JT,MP TO LP TANK

8 PIN HSG TO WATER PUMP SWITCH 3

CABLE ASM-COACH BATTERY GND (BLK) 10

1285

CABLE ASM-JUMPER,GND (BLK) 10

FRONT AXLE

DATUM

CABLE ASM-GENERATOR (GRN) 10

CLAMP 83610-02-000 (11) RIVET 118626-01-CHT (11)

GROMMET 23942-01-000

TR TO SPRINTER WIRING

GROMMET 023942-01-000

TO WIRE ASM-COACH


ROUTE TEMPERATURE SENSOR THROUGH FIREWALL BOOT IN THIS AREA 153 7

WIRE ASM-CHASSIS TO CHASSIS CONNECTOR DETAIL CE

TO GENERATOR 5

CABLE ASM-GENERATOR GND (BLK) 321 10

- 10 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
- 9 SECURE WIRE HARNESS WITH CABLE TIE 008343-02-000.
- 8 DRILL 16MM HOLE THRU BUMPER COVER BEHIND LICENSE PLATE BRACKET AND INSTALL SENSOR.
- 7 SEE SHT 6 FOR ADDITIONAL INFORMATION.
- 6 FOR CUTOUT DIMENSIONS SEE DETAIL CA AND DETAIL CB.
- 5 SEE GENERATOR INSTL FOR ADDITIONAL INFORMATION.
- 4 REMOVE PAINT AND UNDER COATING FROM GROUND BOLT AND NUT TO INSURE PROPER CONTACT.
- 3 SEE WIRING INSTL-BODY,12V FOR ADDITIONAL INFORMATION.

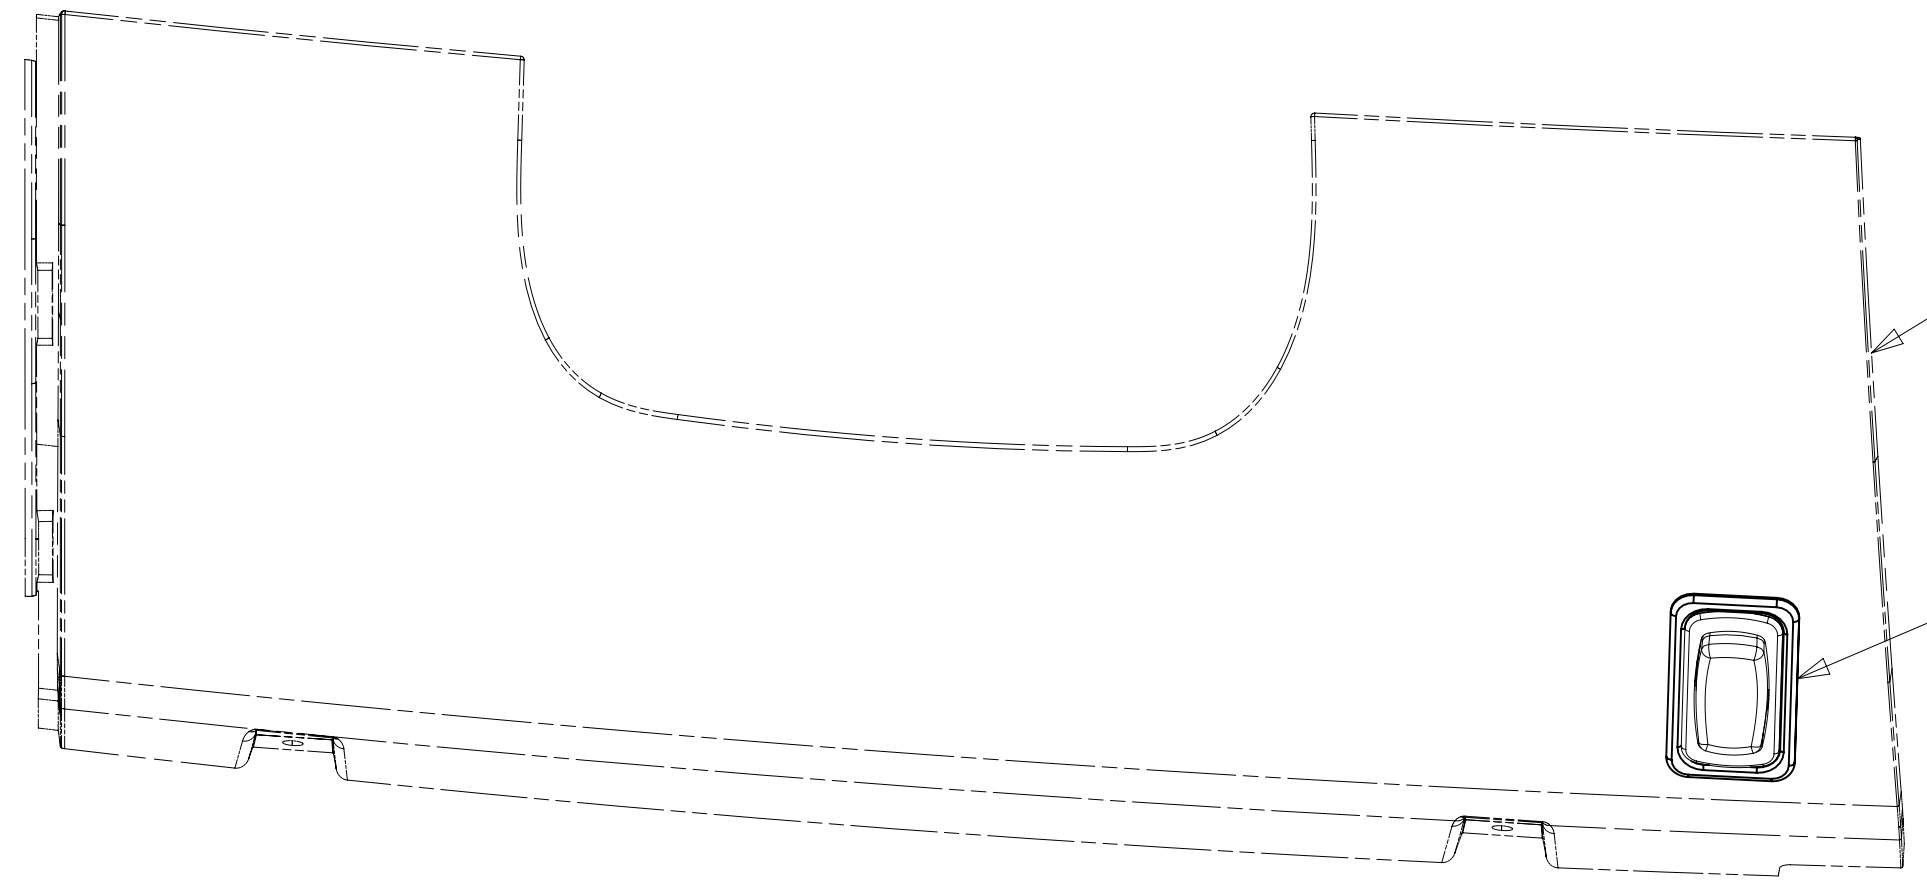

LOWER DASH PANEL (LOCATED BELOW STEERING COLUMN) 6

SWITCH-RADIO 174757-12-CHT WITHOUT 8FV
PANEL-SWITCH 174834-01-CHT WITHOUT 8FV

- 8FV MERCEDES CHASSIS UPGRADE PKG
- 321 GENERATOR PREP KIT
- 153 LG SCREEN-INFO/GPS SIRIUSXM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


- 2. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
- 1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:	1B1 265	
WIRING INSTL-CHASSIS		
SHEET:	ITEM/PART NO:	REV
2 OF 7	000123661 / 32387701000	


NOTES:

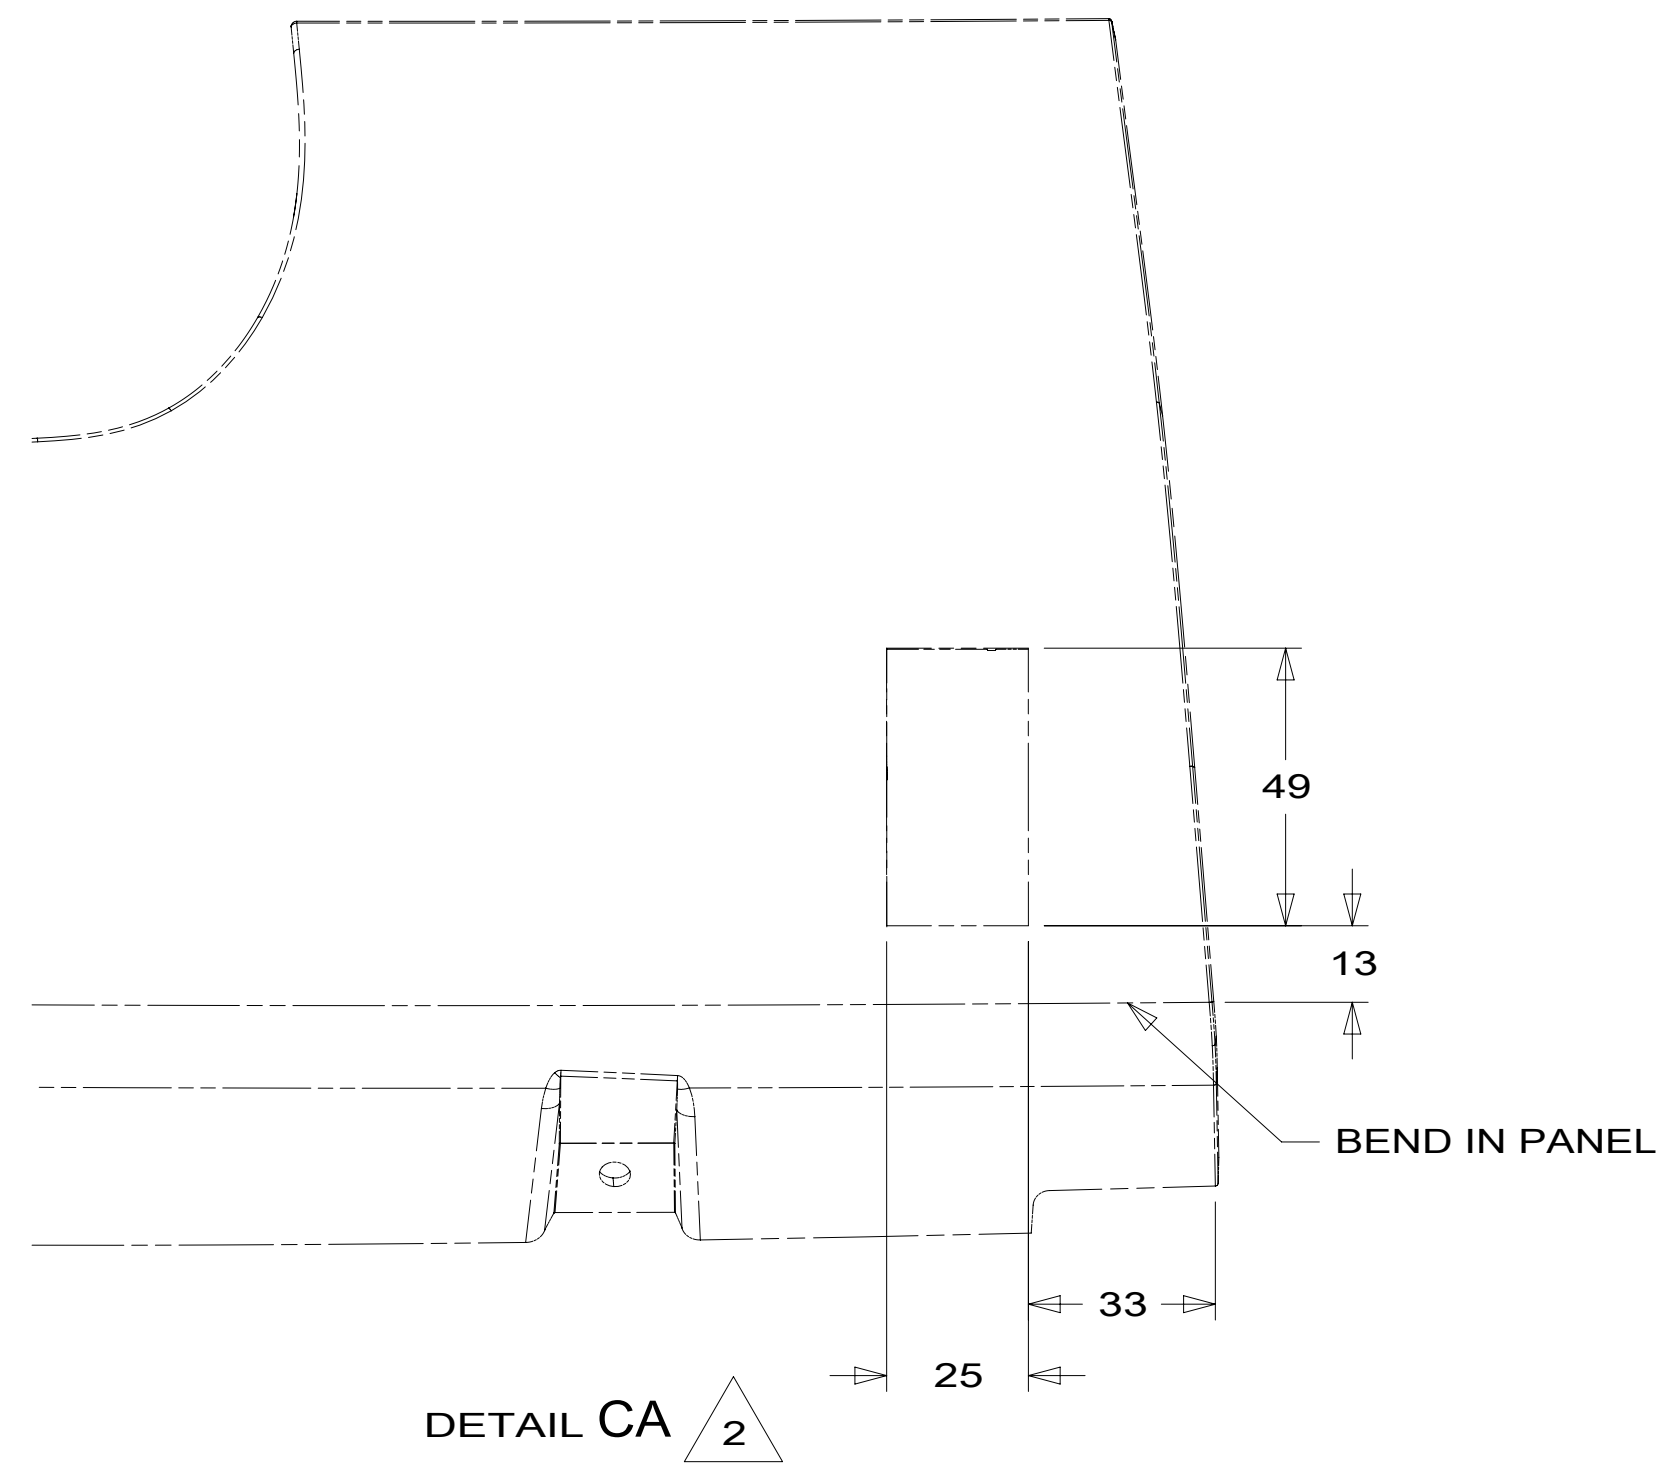


DETAIL CA 2

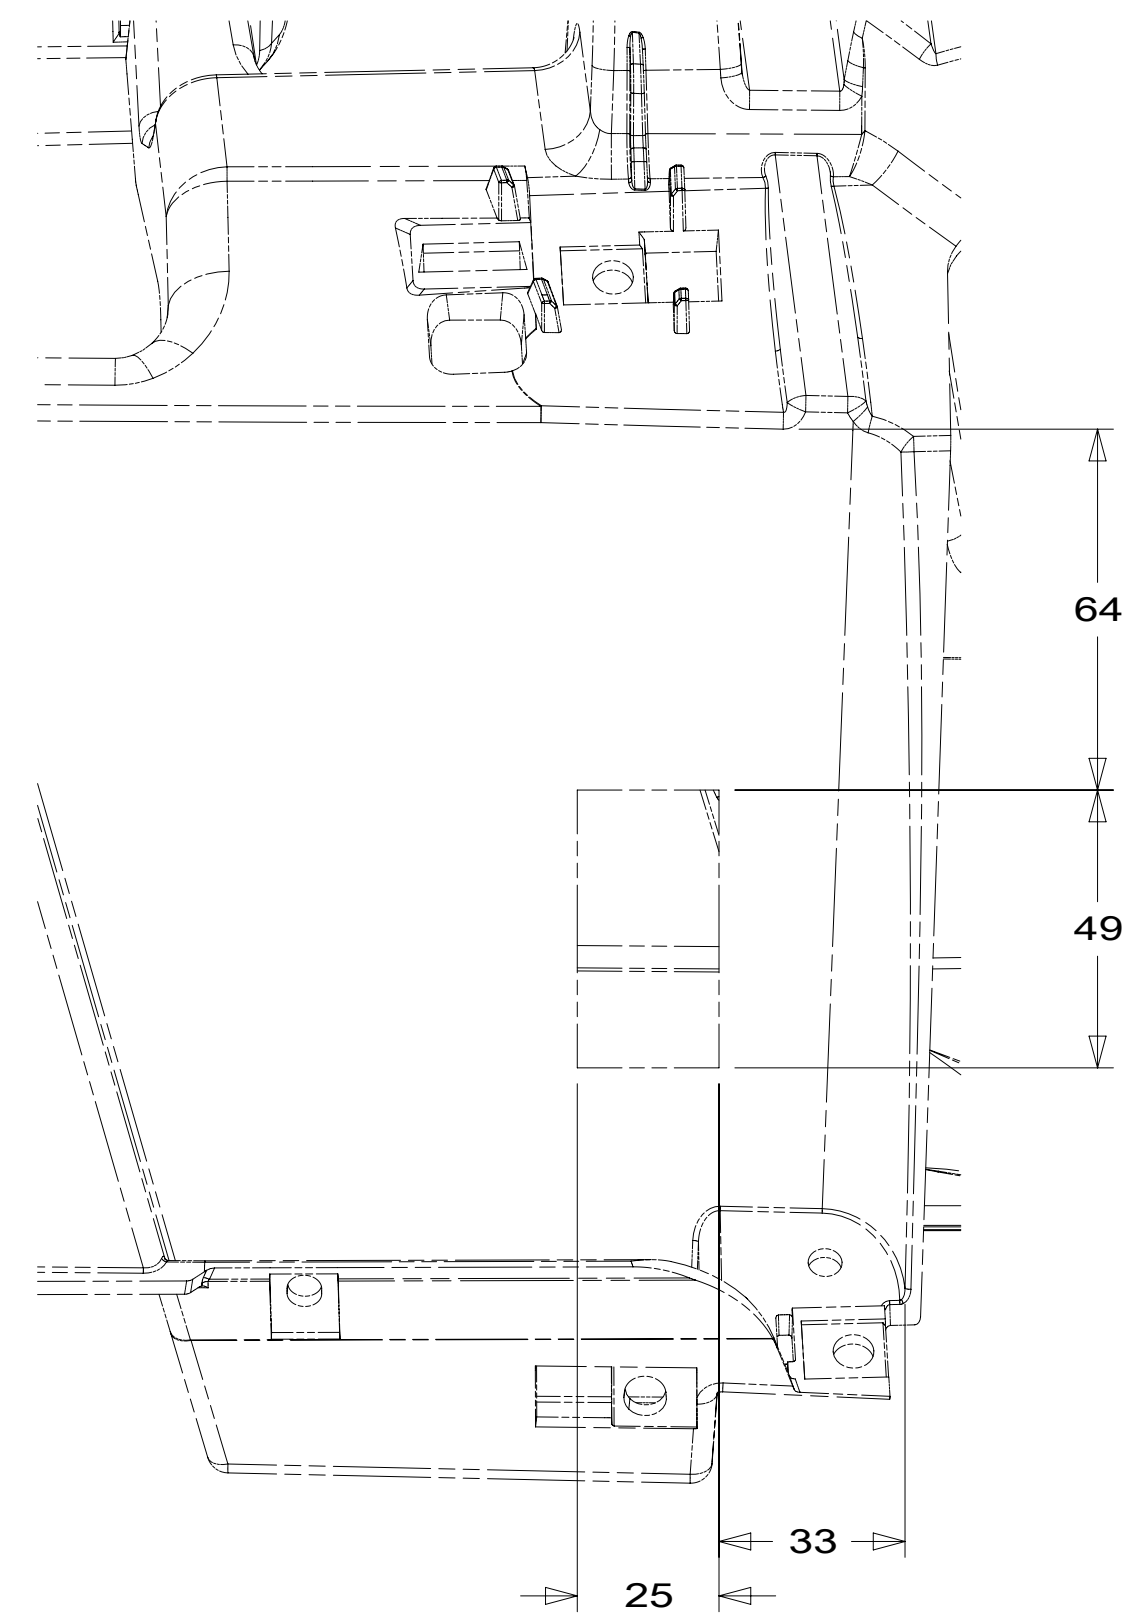


VIEW CB 6

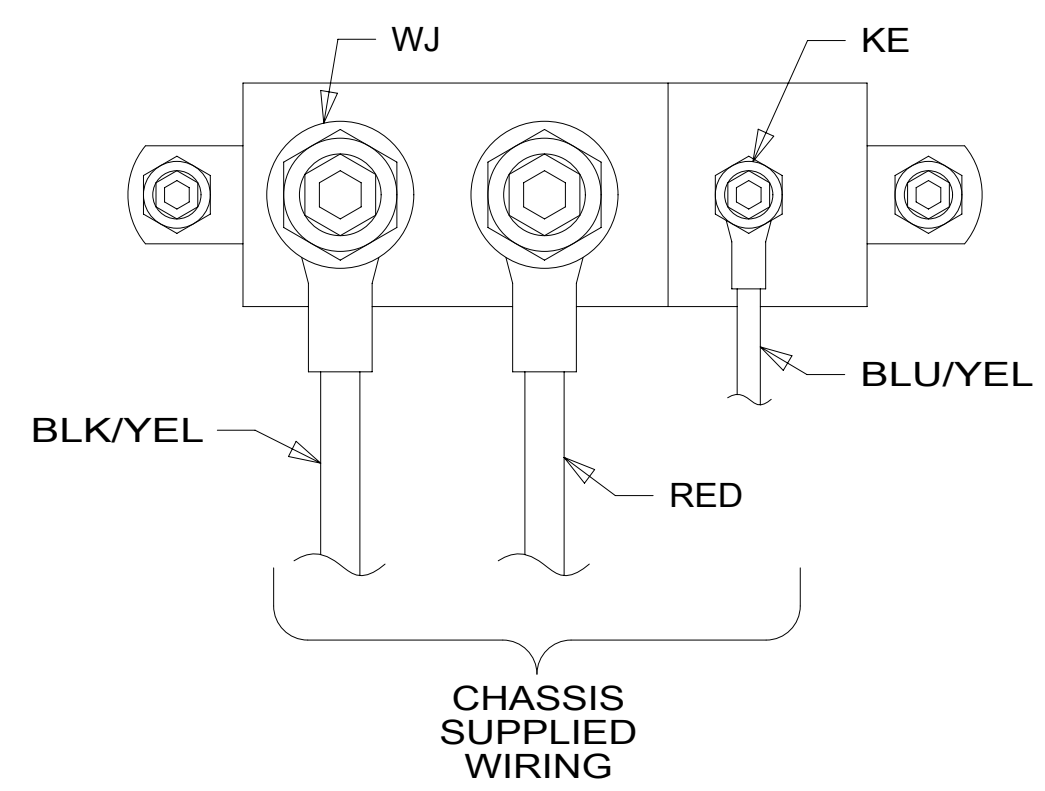

DETAIL CC 3

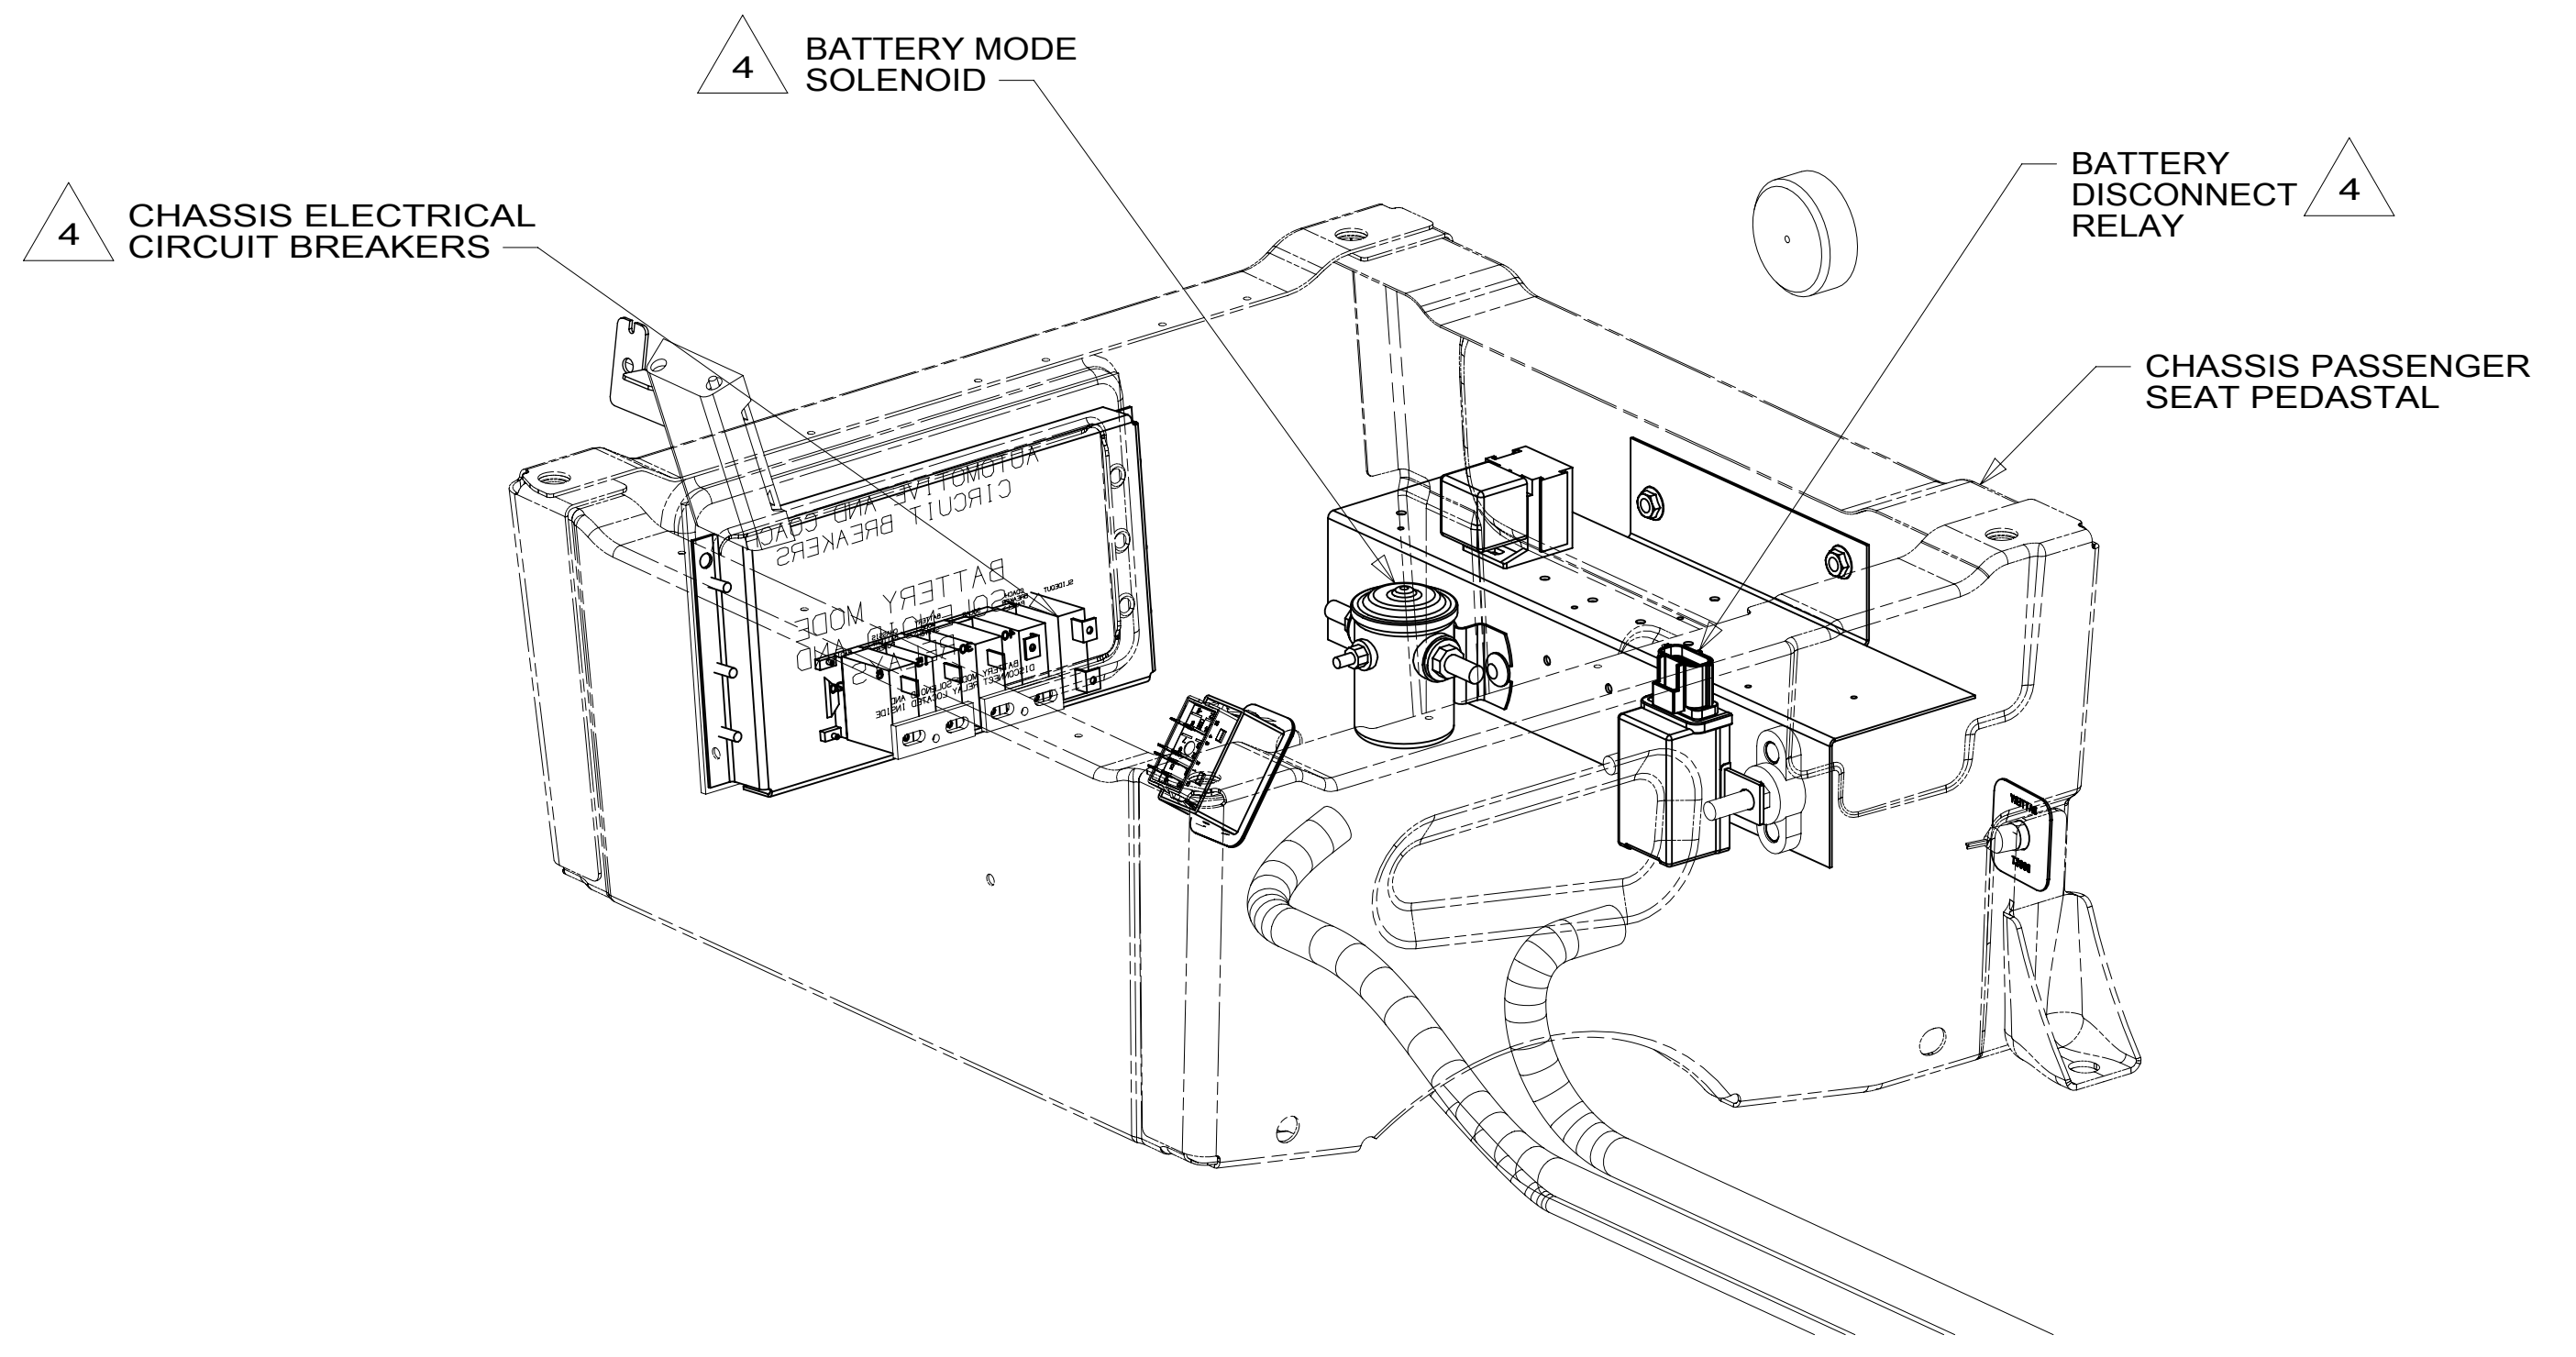

DETAIL CD

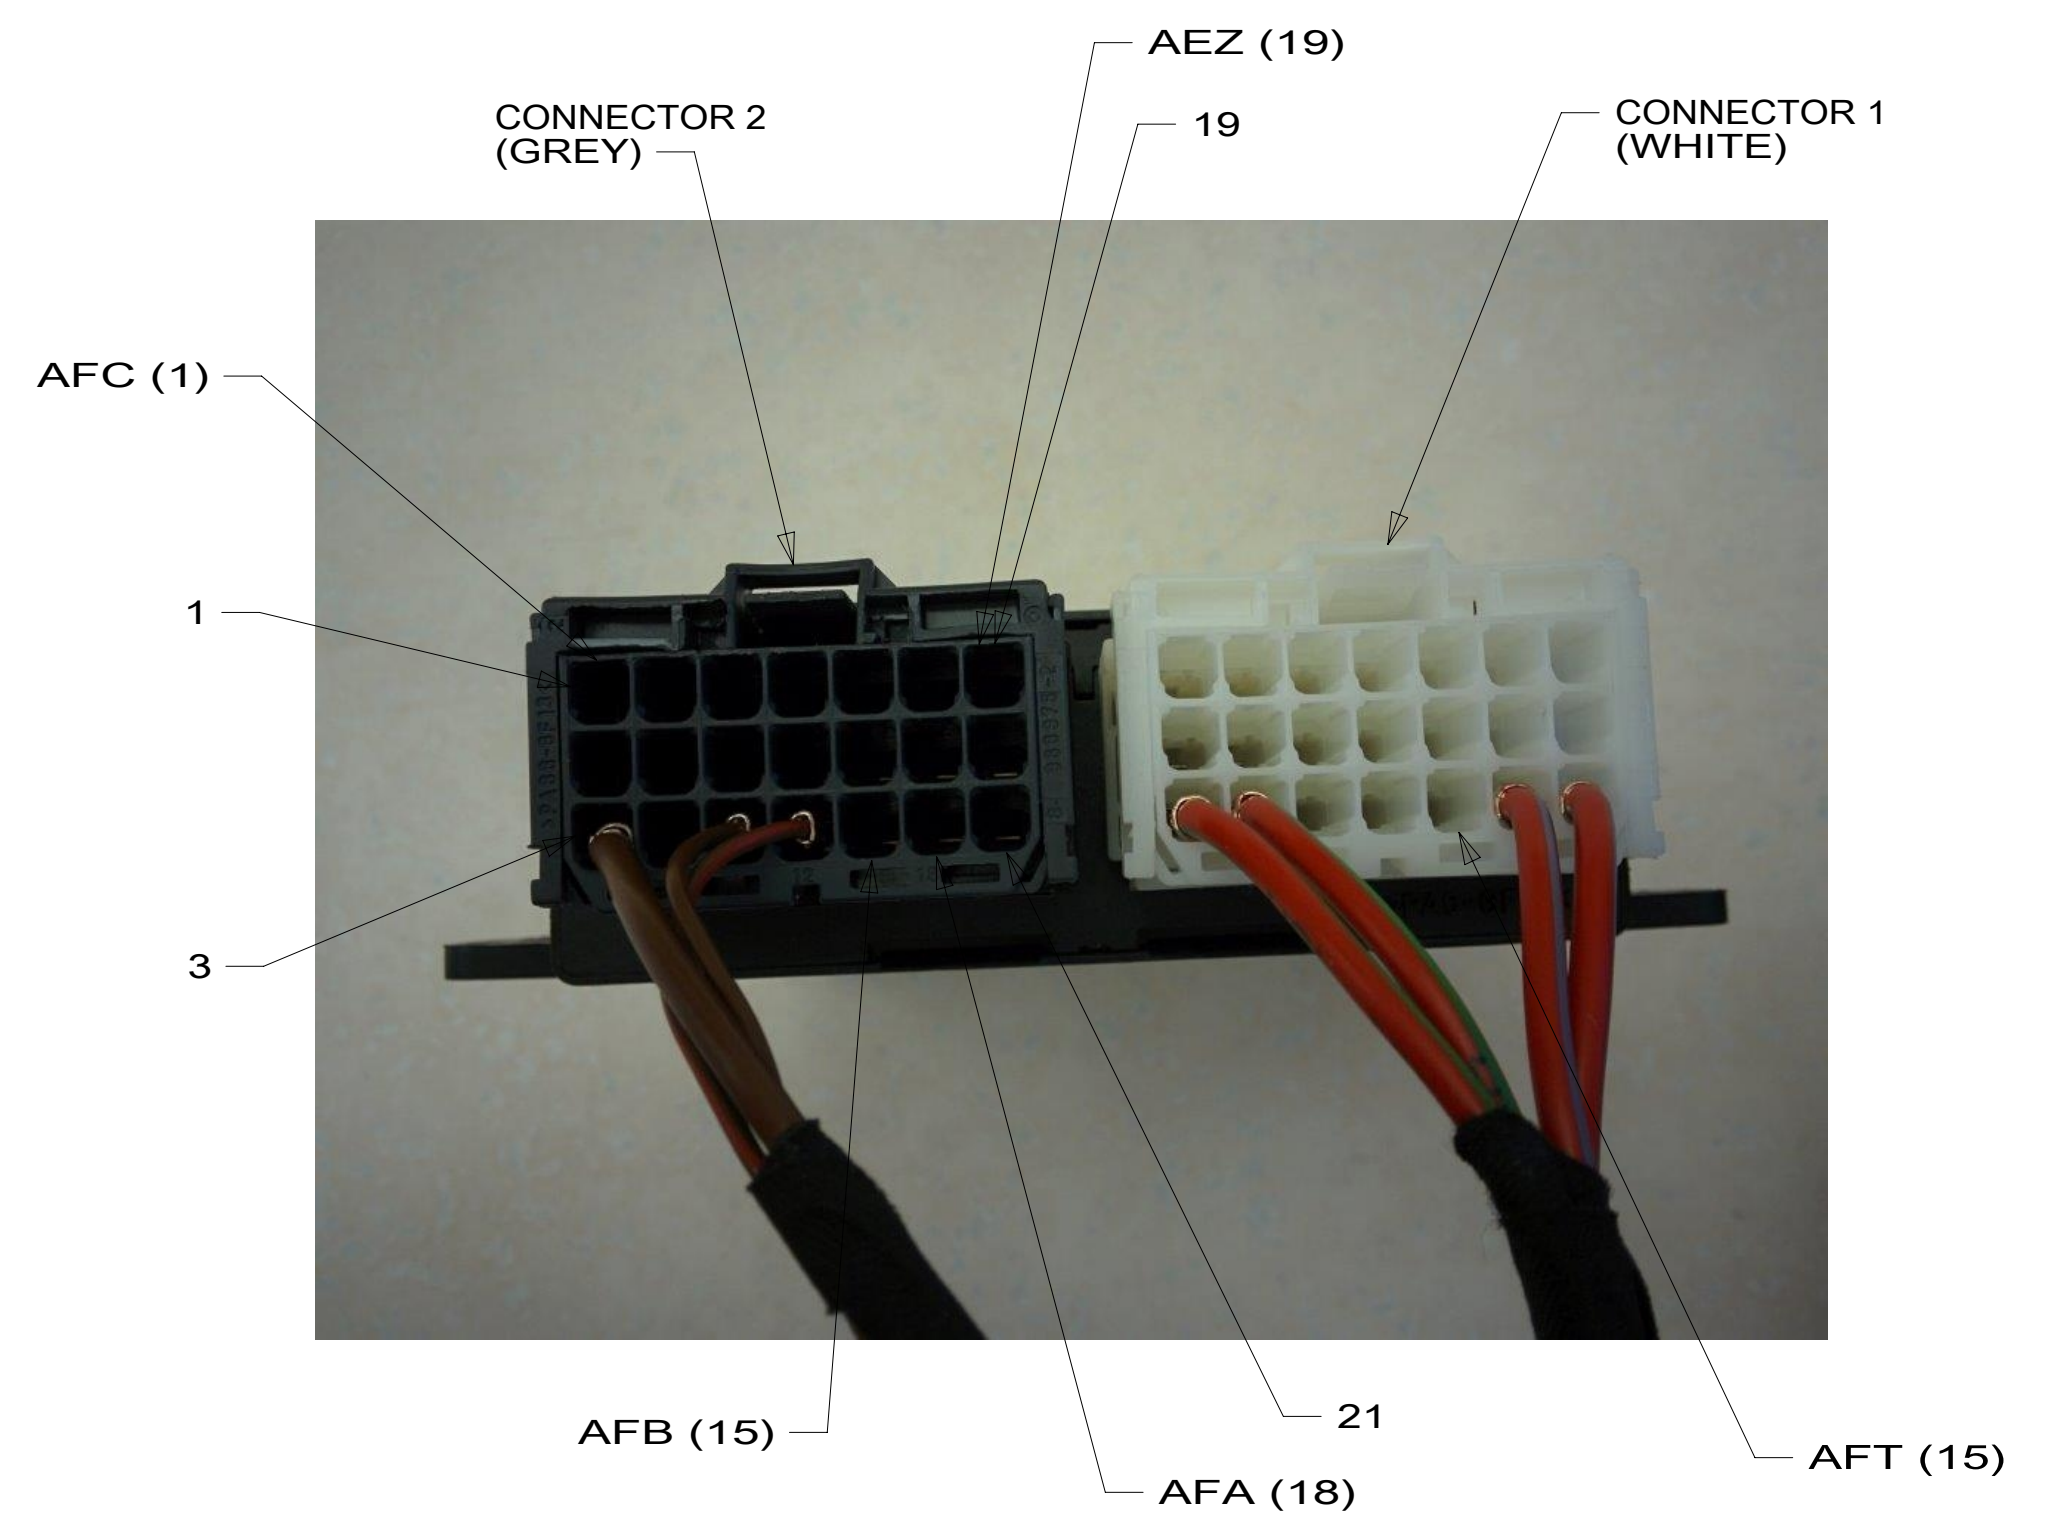

DETAIL CE 5

- 6 DASH STRUCTURE LOCATED BEHIND LOWER DASH PANEL.
- 5 LOCATED UNDER DRIVER'S SEAT.
- 4 SEE CHASSIS ELECTRICAL BOX ASM FOR ADDITIONAL INFORMATION.
- 3 CONNECTION POINT IS LOCATED UNDER DRIVERS SEAT.
- 2 LOWER DASH PANEL.


NOTES:
1. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

1B1 265	
DESCRIPTION: WIRING INSTL-CHASSIS	
SHEET: 3 OF 7	ITEM/PART NO: 000123661 / 32387701000
REV	

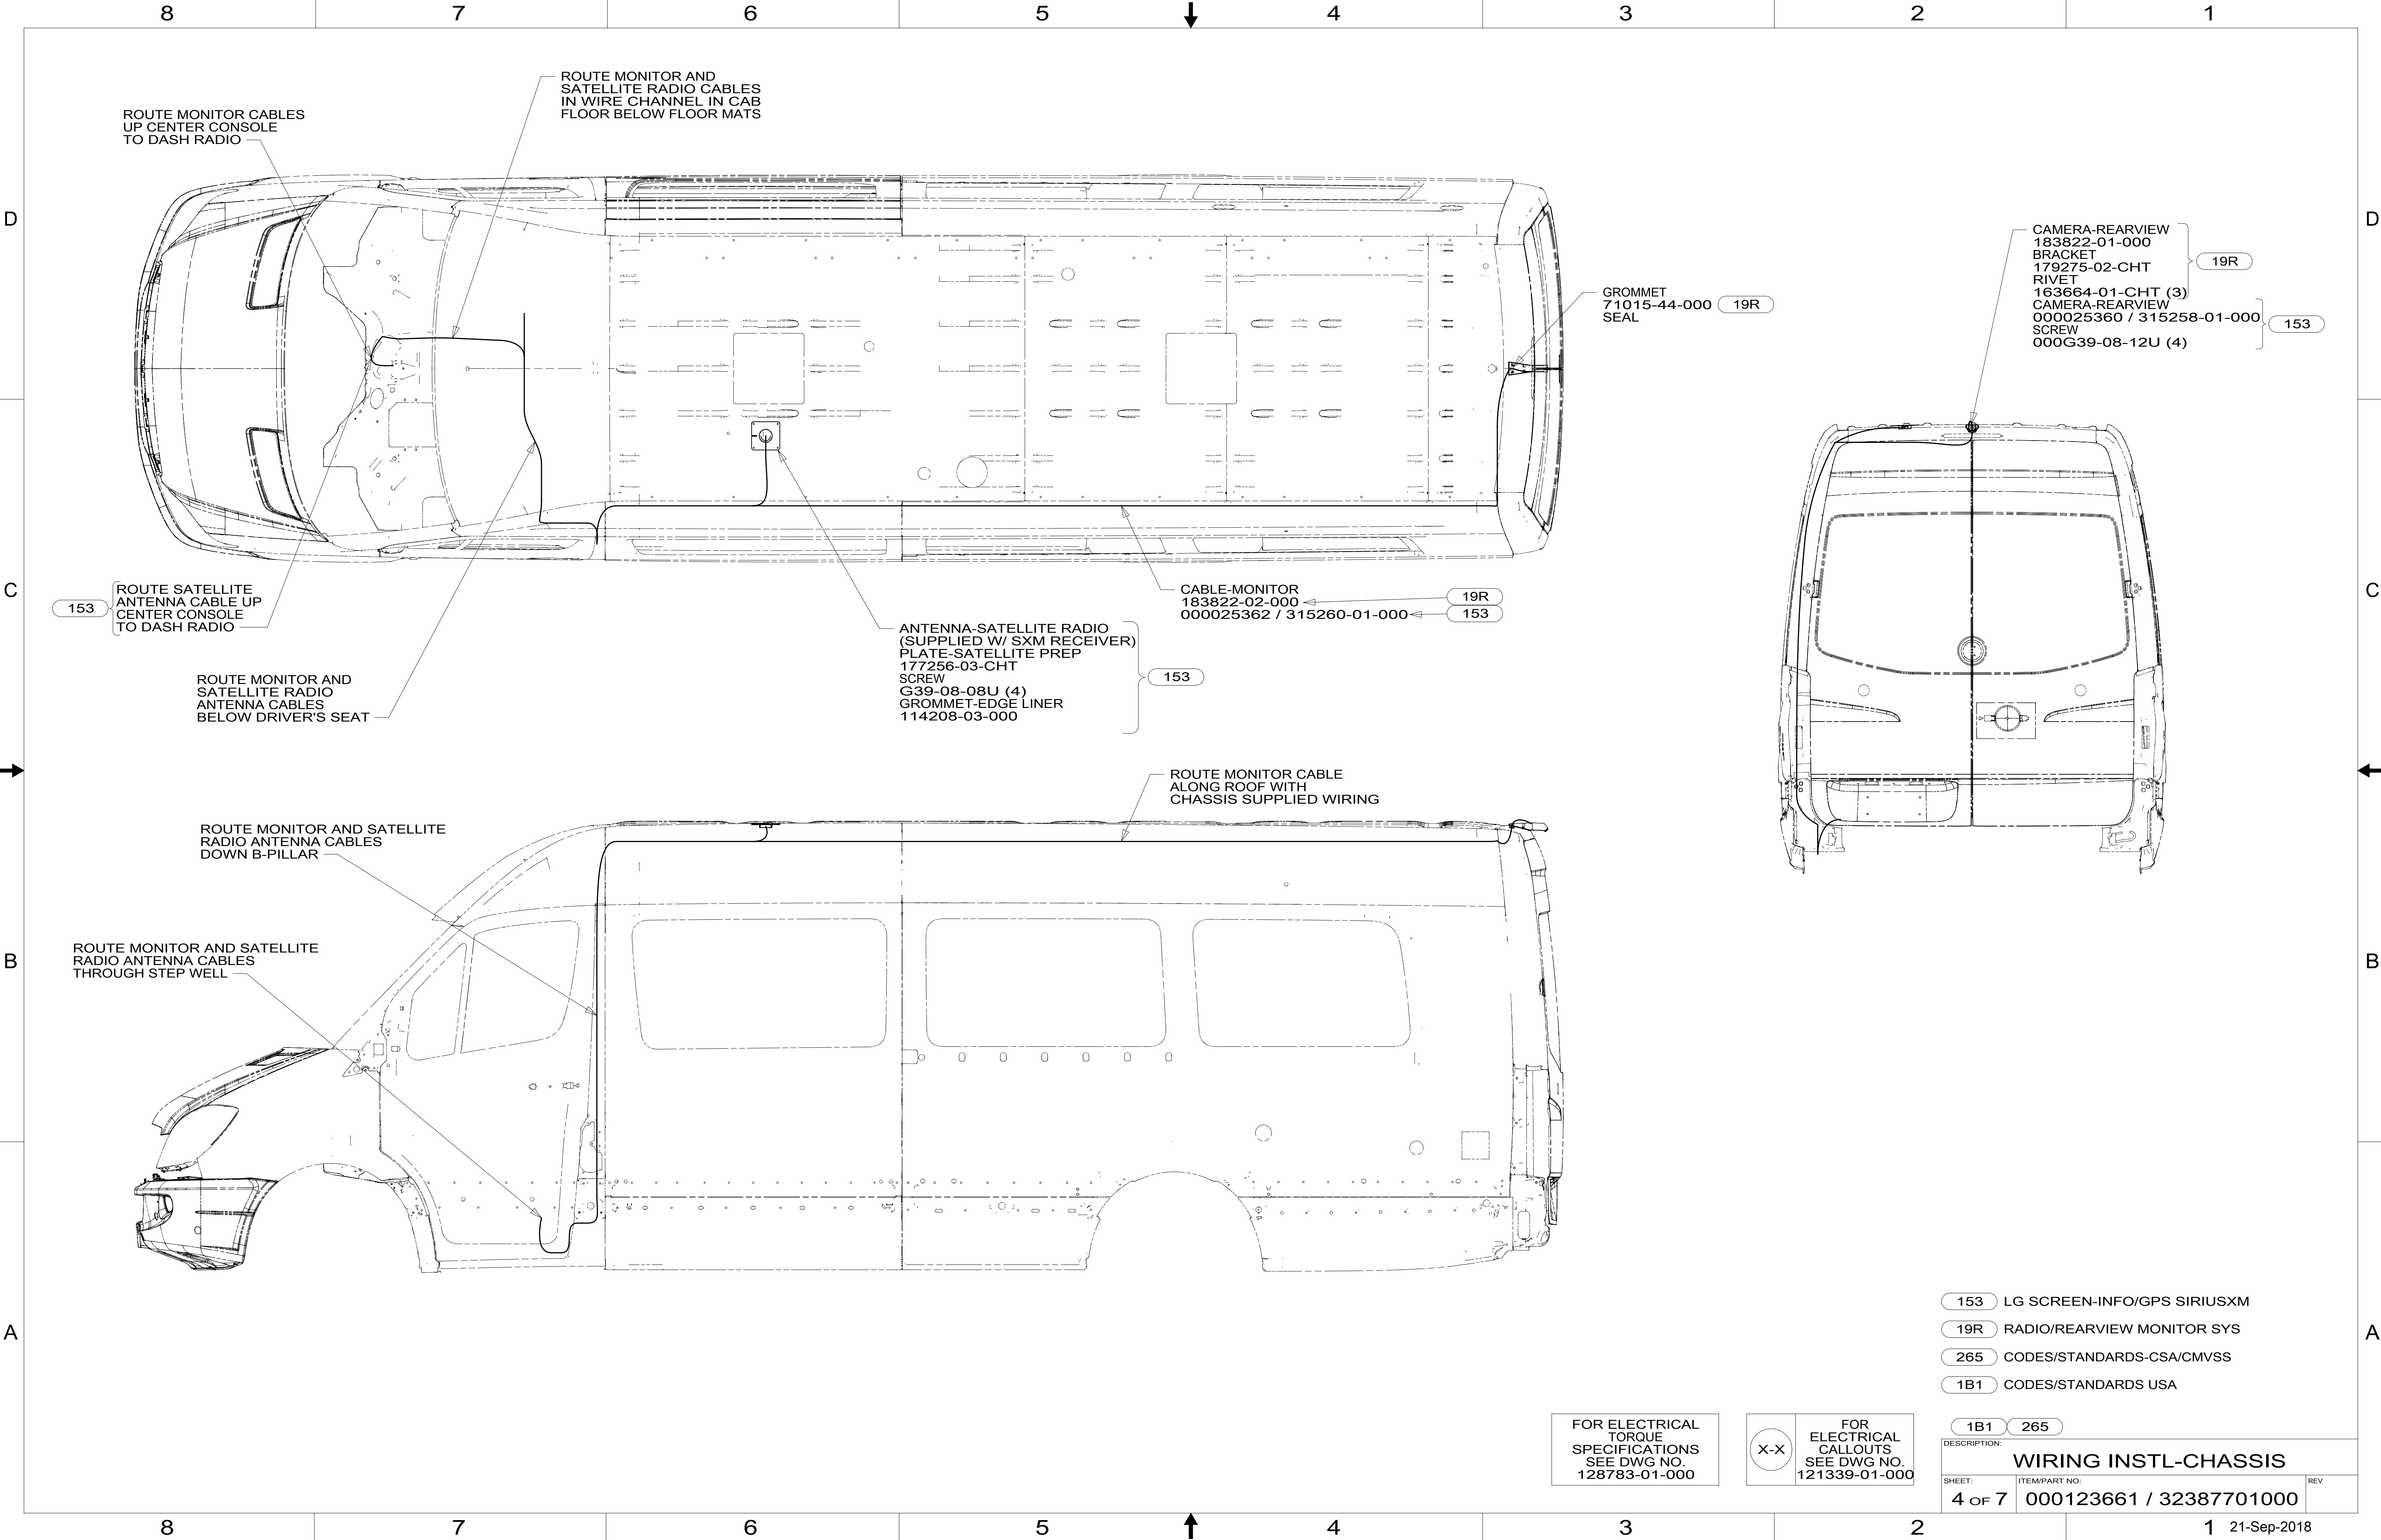

8 7 6 5 4 3 2 1

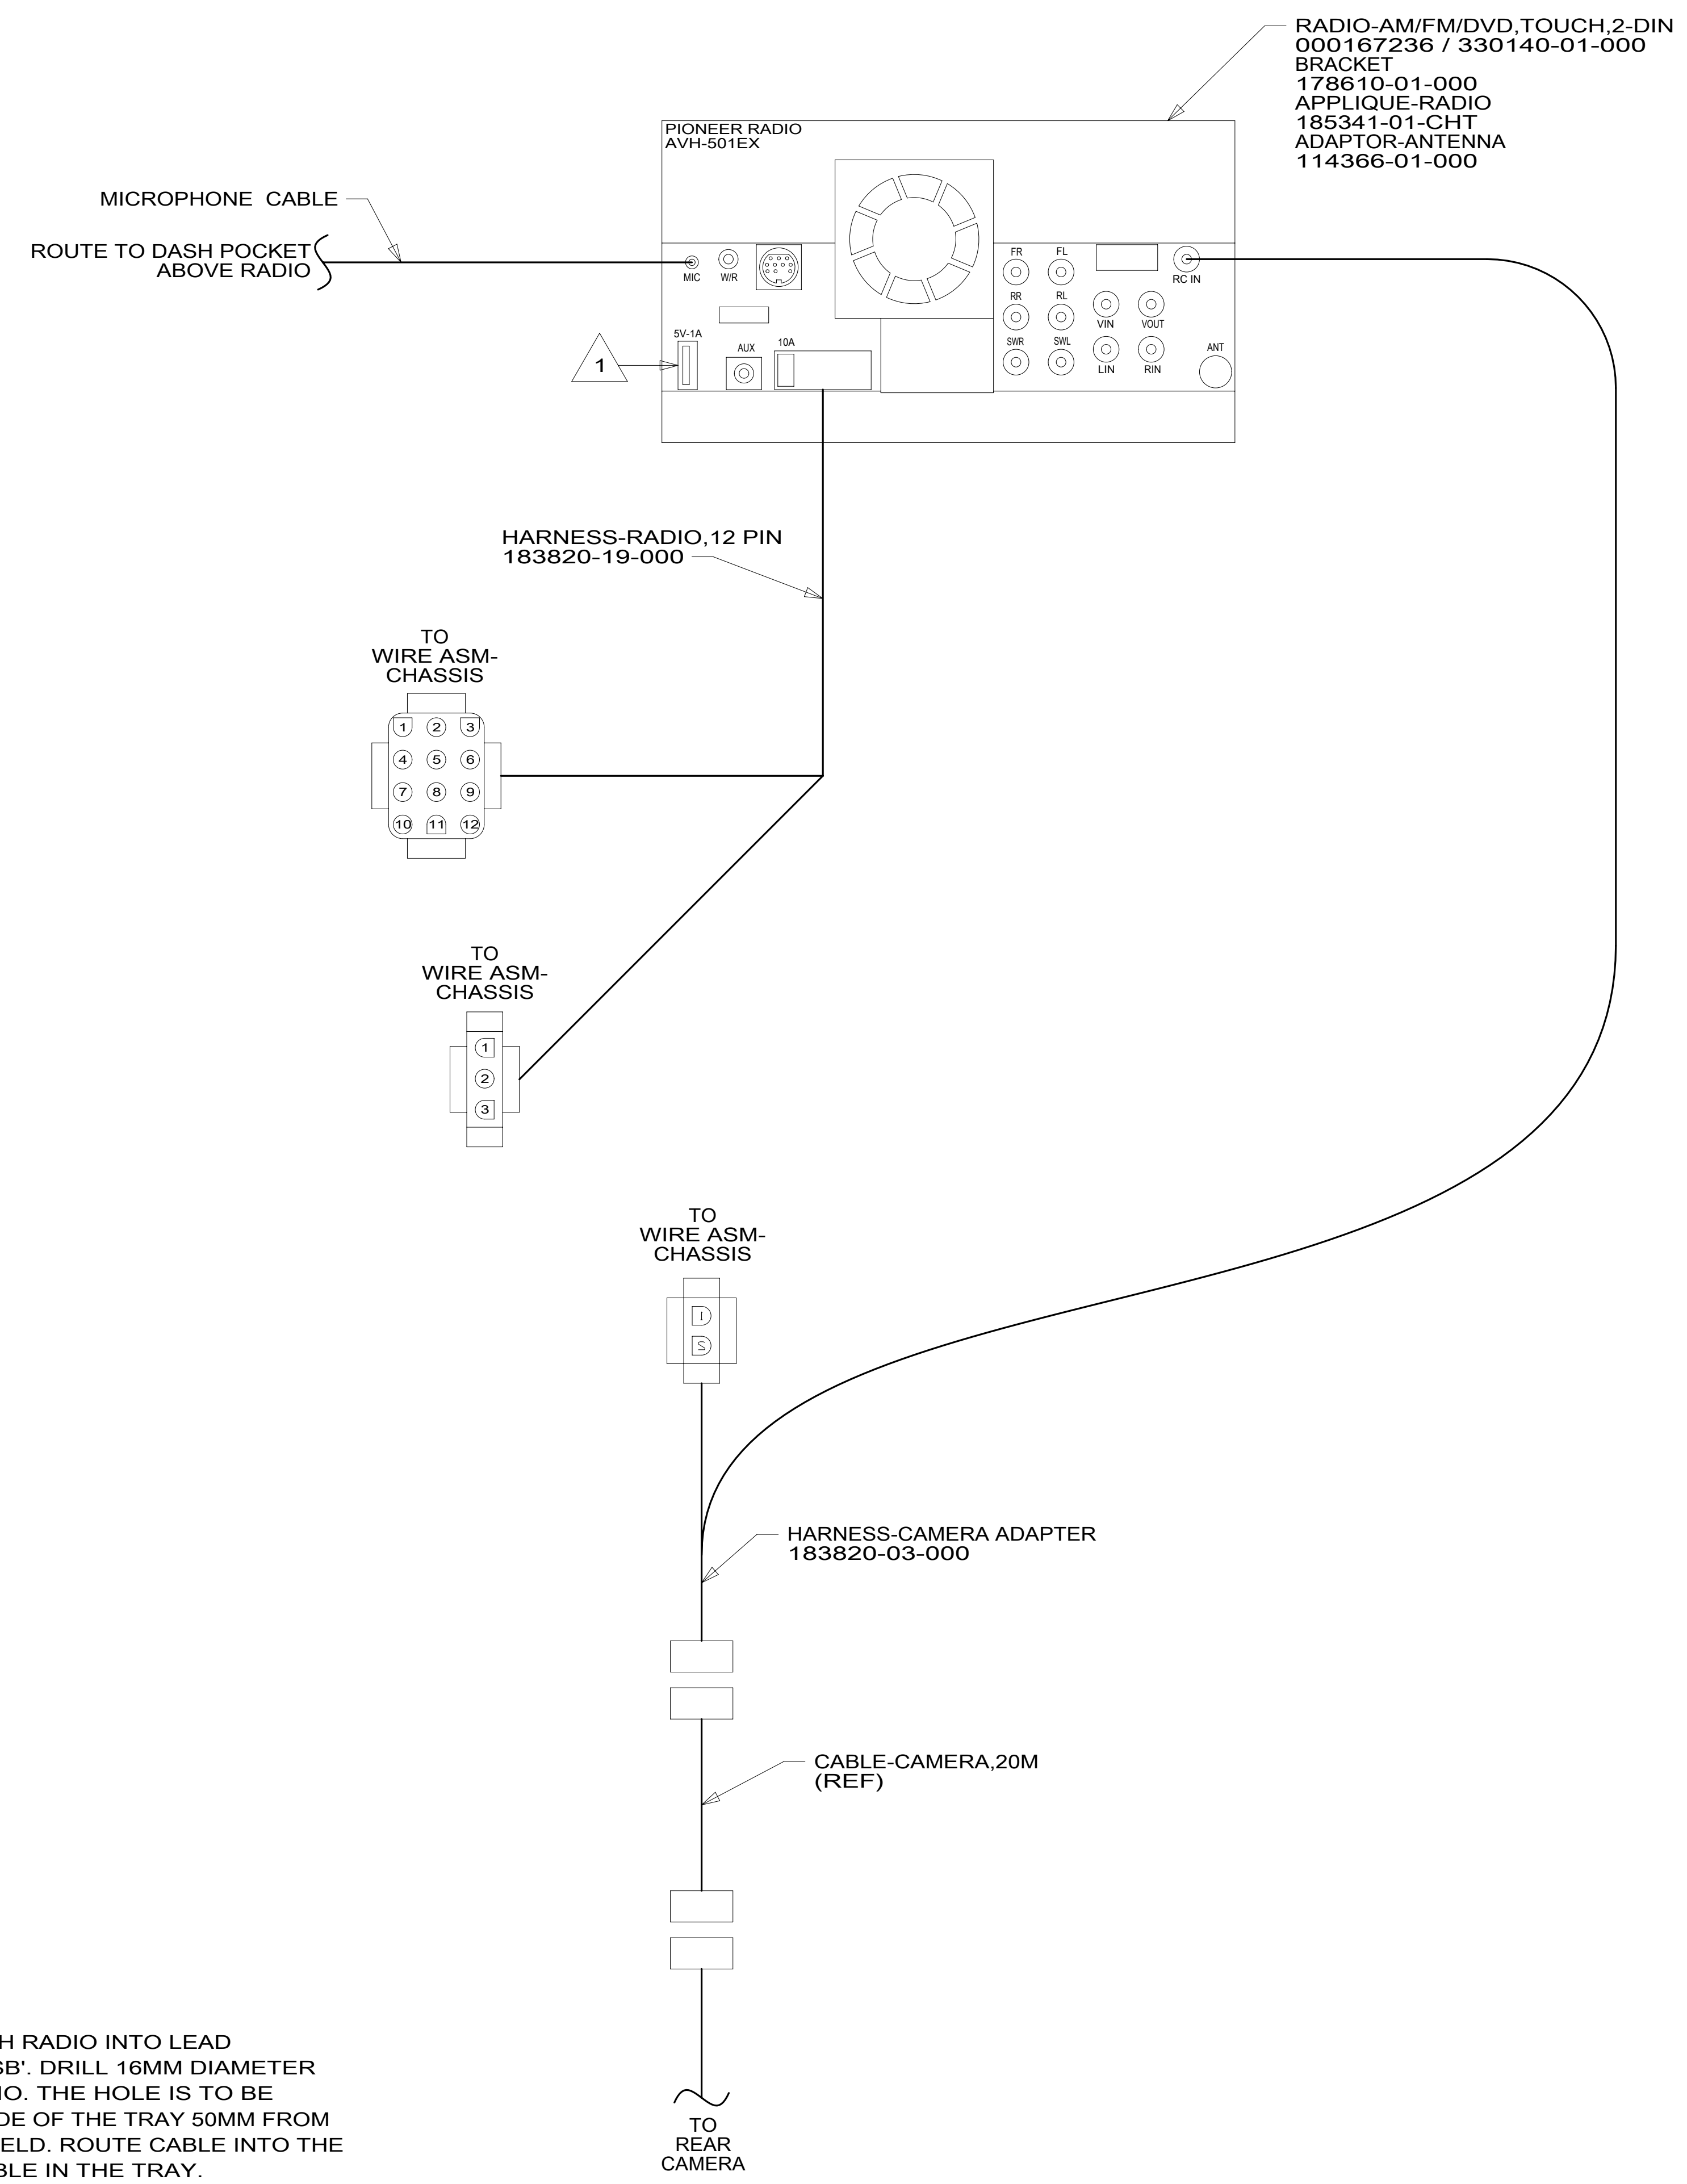


RADIO-AM/FM/DVD, TOUCH, 2-DIN
 000167236 / 330140-01-000
 BRACKET
 178610-01-000
 APPLIQUE-RADIO
 185341-01-CHT
 ADAPTOR-ANTENNA
 114366-01-000


MICROPHONE CABLE
 ROUTE TO DASH POCKET
 ABOVE RADIO

HARNESS-RADIO, 12 PIN
 183820-19-000


TO WIRE ASM-
 CHASSIS



TO WIRE ASM-
 CHASSIS



TO WIRE ASM-
 CHASSIS



HARNESS-CAMERA ADAPTER
 183820-03-000

CABLE-CAMERA, 20M
 (REF)

TO REAR
 CAMERA

1 PLUG USB CABLE SUPPLIED WITH RADIO INTO LEAD ON BACK OF RADIO MARKED 'USB'. DRILL 16MM DIAMETER HOLE IN THE TRAY ABOVE RADIO. THE HOLE IS TO BE LOCATED ON THE PASSENGER SIDE OF THE TRAY 50MM FROM THE END NEAREST THE WINDSHIELD. ROUTE CABLE INTO THE TRAY AND LEAVE 200MM OF CABLE IN THE TRAY.

NOTES:



FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


- 19R RADIO/REARVIEW MONITOR SYS
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION:		1B1 265 19R	
WIRING INSTL-CHASSIS			
SHEET:	ITEM/PART NO.:	REV:	
5 OF 7	000123661 / 32387701000		

8 7 6 5 4 3 2 1 21-Sep-2018

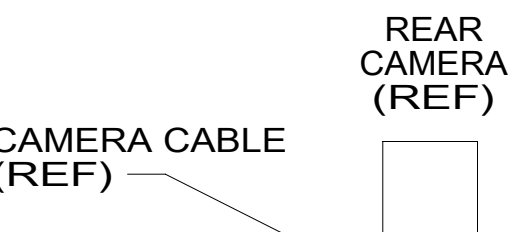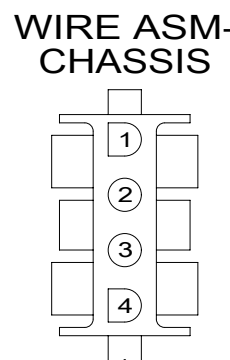

BRACKET-CLAMP,HDMI
000038736 / 318986-01-CHT
TAPE-FOAM DBL COATED
076322-22-000 (40 MM)

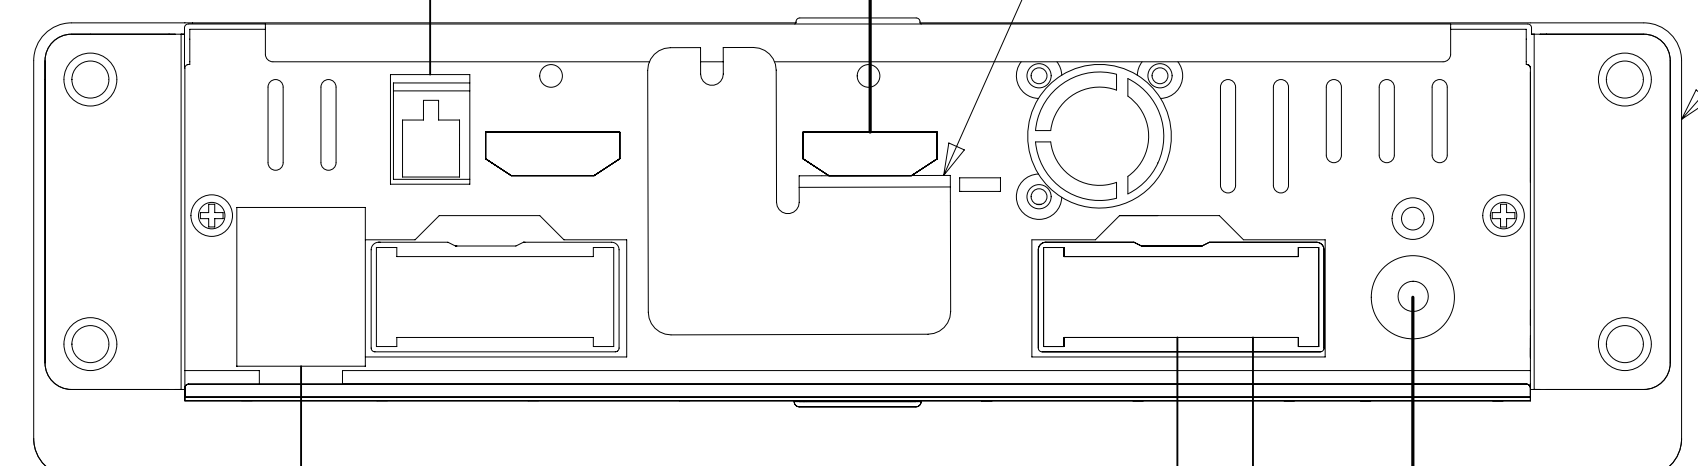


RADIO-INFOTAINMENT, 9"
000025353 /315254-01-000
REMOTE
176654-04-000
RADIO-KIT,SXM
000111632 / 321635-01-000
TEMP SENSOR
176654-13-000
ADAPTOR-ANTENNA
114366-01-000






GPS ANTENNA


DETAIL FA

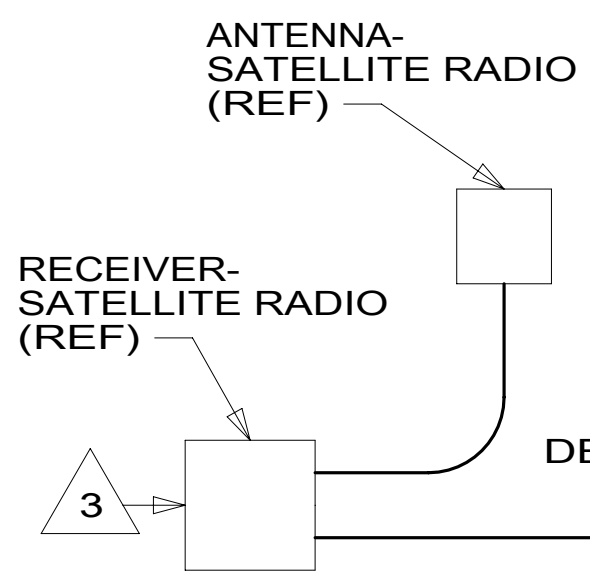


DETAIL FA



PSM/CAN CONNECTION



CONNECTS TO WIRE ASM-CHASSIS



NO CONNECTION

- NOTES:
- 4 WIRE TIE TO DASH RADIO WIRING BEHIND THE RADIO.
 - 3 PLUG CABLE INTO LEAD ON BACK OF RADIO.
 - 2 SEE SHT 2 FOR ADDITIONAL INFORMATION.
 - 1 MOUNT GPS ANTENNA TO TOP OF DEFROST PLENUM BEHIND RADIO.

- 153 LG SCREEN-INFO/GPS SIRIUSXM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 1B1 265 153

DESCRIPTION: WIRING INSTL-CHASSIS		
SHEET: 6 OF 7	ITEM/PART NO: 000123661 / 32387701000	REV

8 7 6 5 4 3 2 1

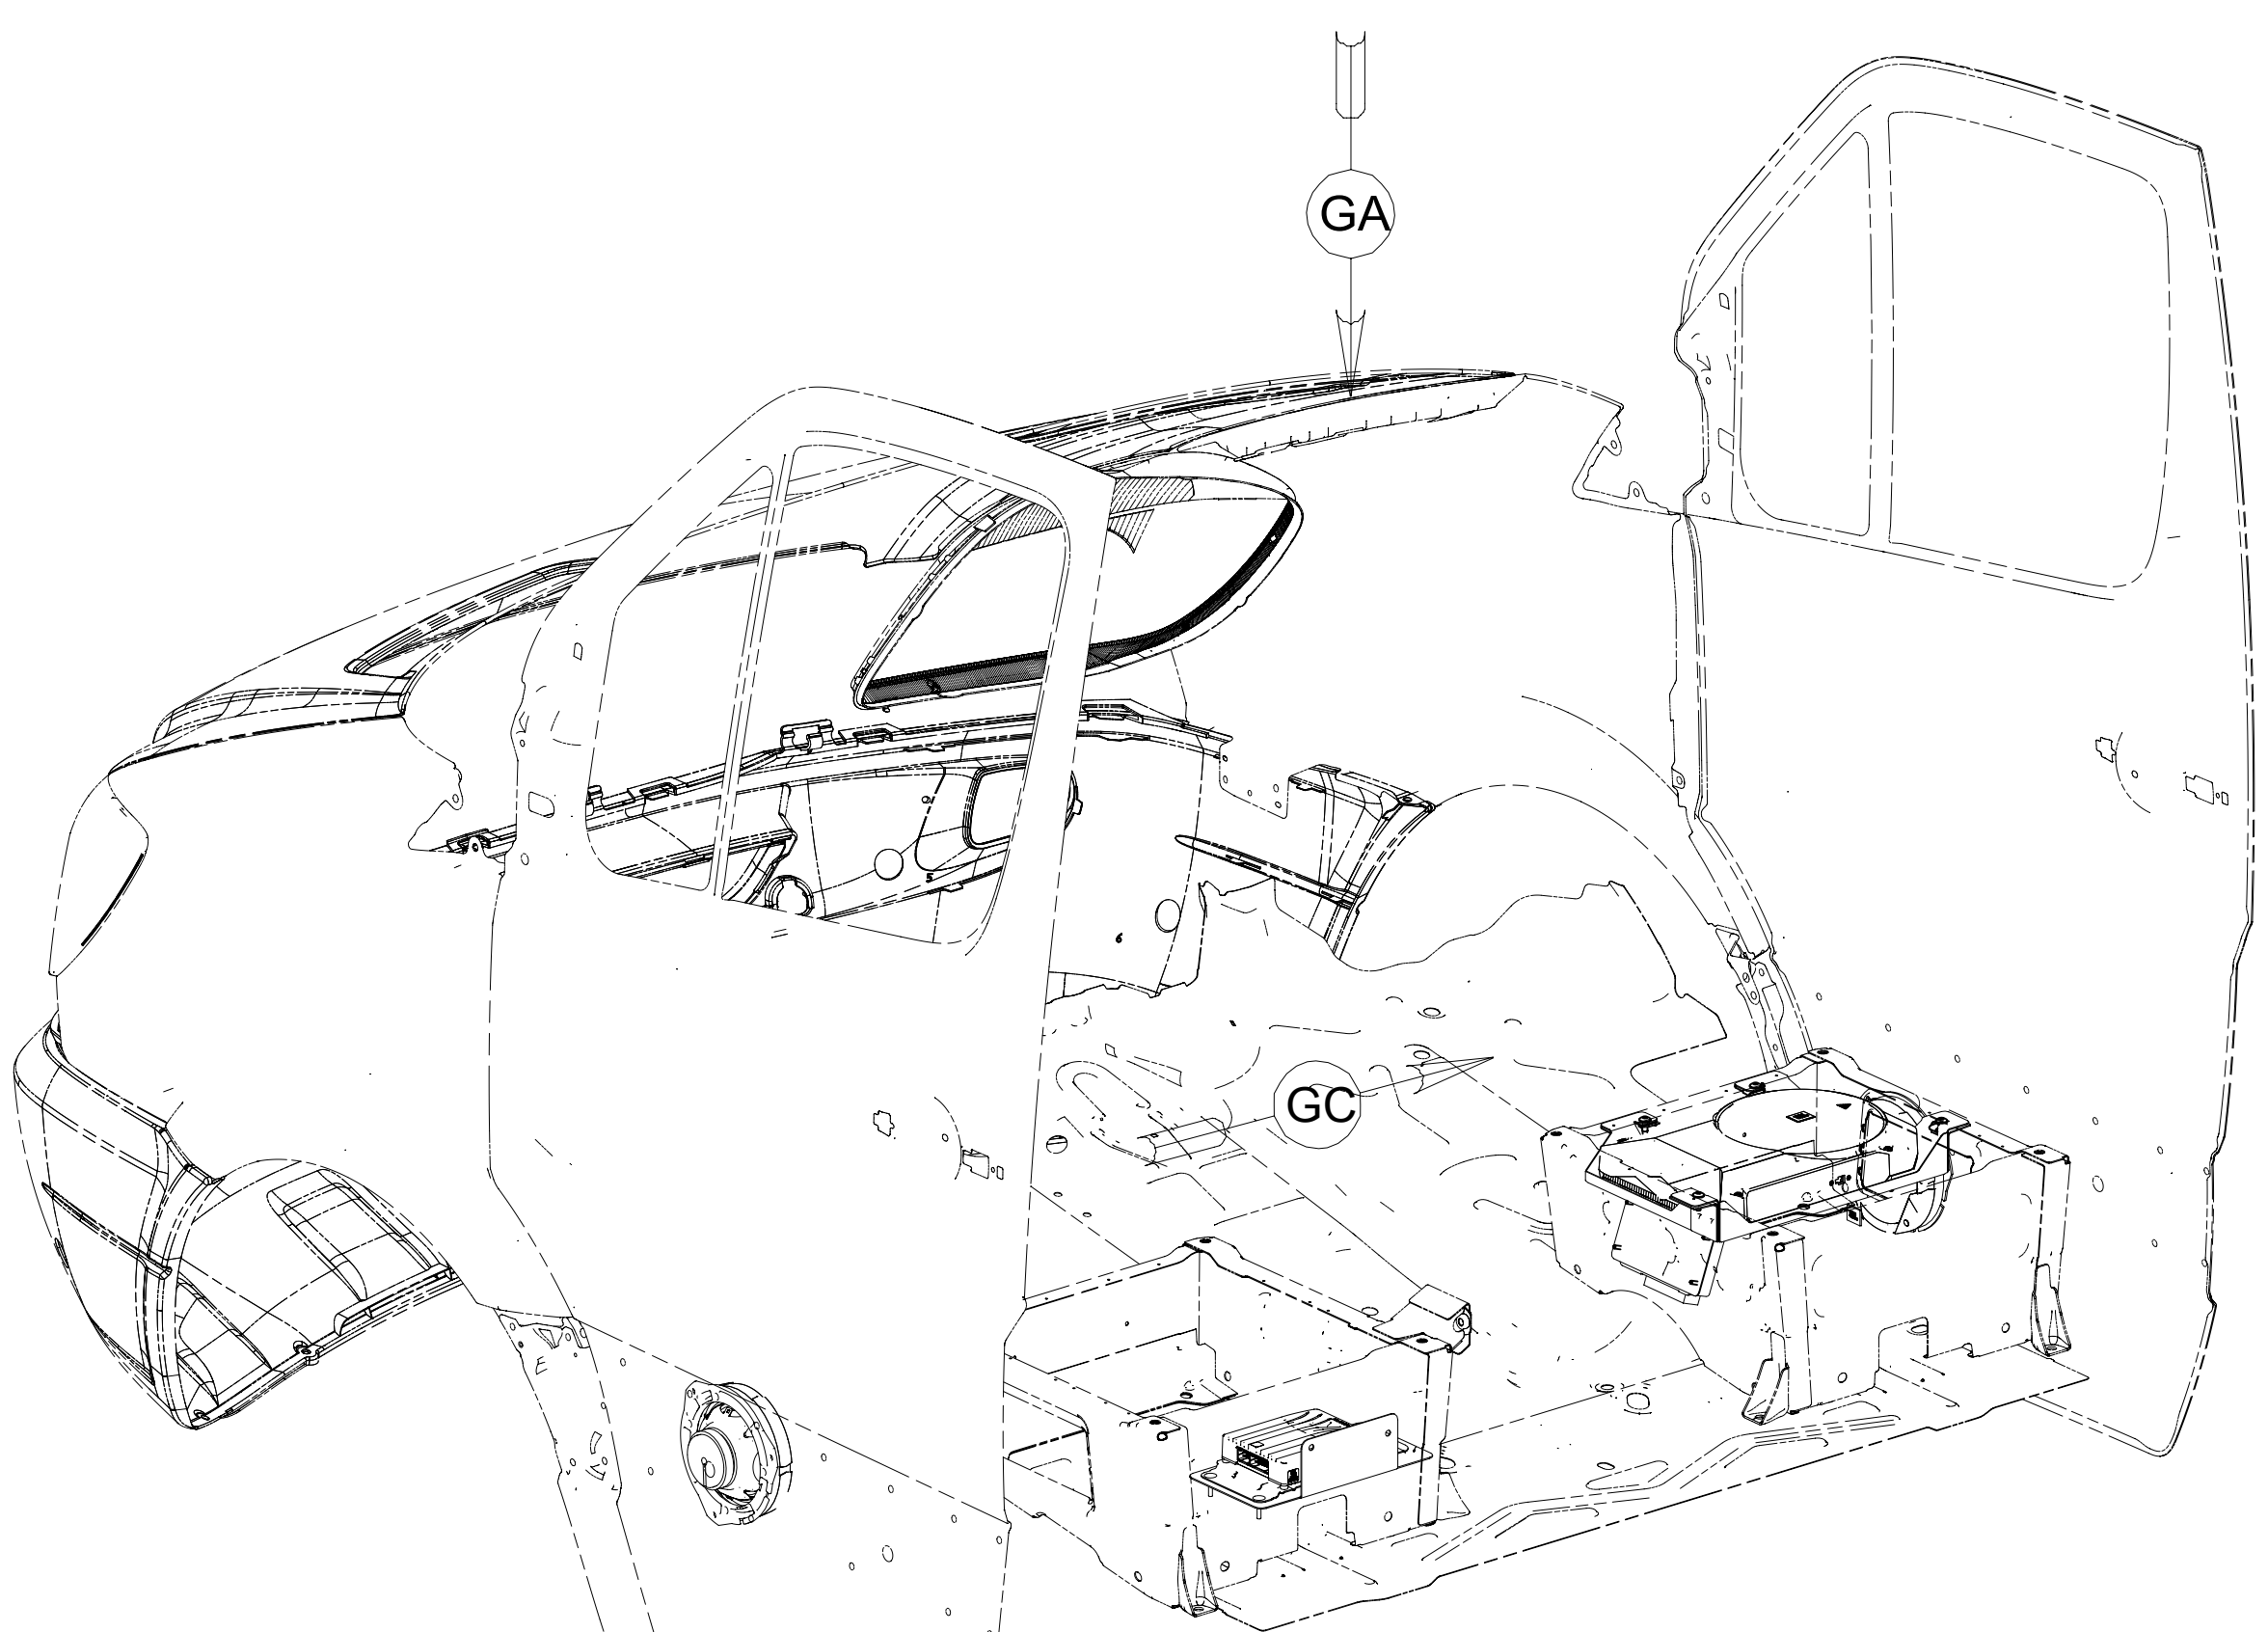


DETAIL GC
 LOGO-JBL
 302951-01-000 (2) 1



VELCRO - 1/2"
 088792-08-000 (50 MM)
 TAPE - DOUBLE SIDED
 086276-01-000 (2) (50 MM)

DETAIL GD 4 57P

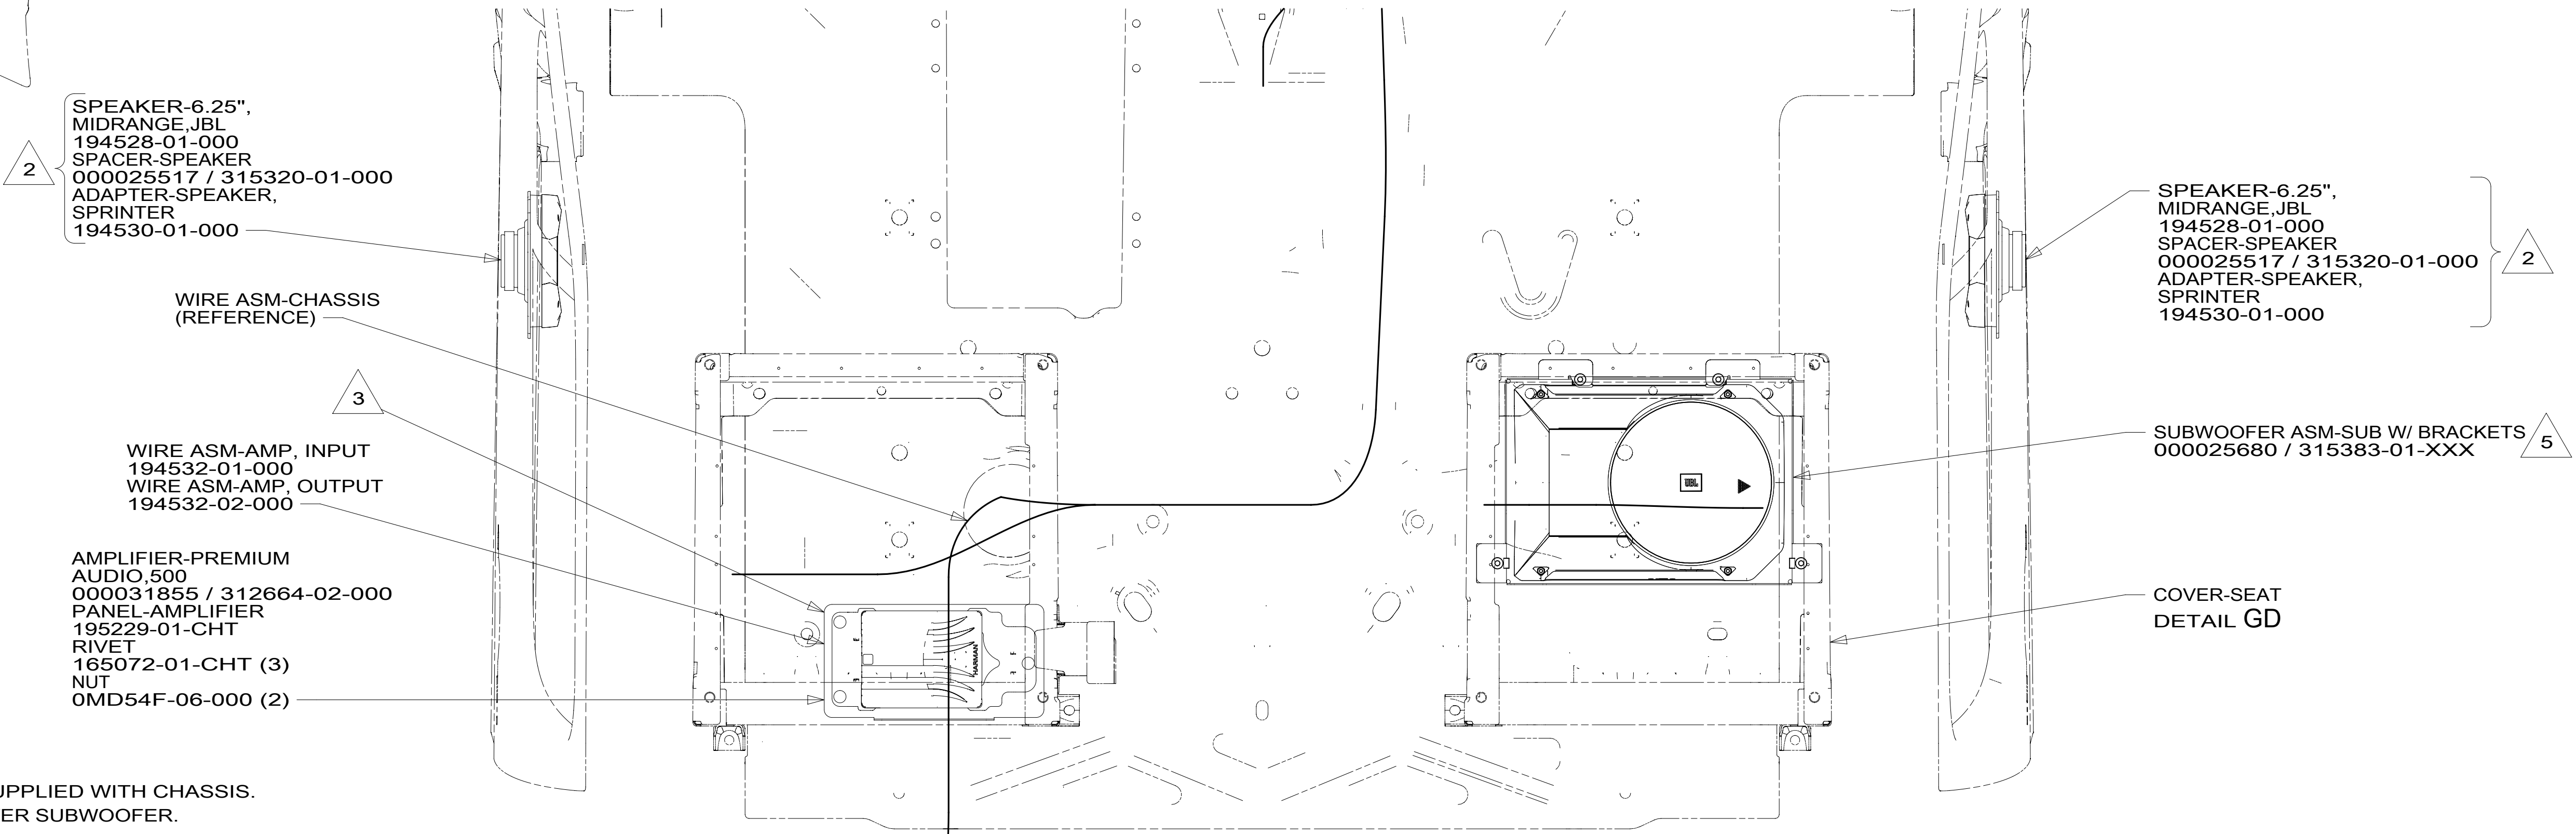

2
 SPEAKER-6.25",
 MIDRANGE,JBL
 194528-01-000
 SPACER-SPEAKER
 000025517 / 315320-01-000
 ADAPTER-SPEAKER,
 SPRINTER
 194530-01-000

WIRE ASM-CHASSIS
 (REFERENCE)

3
 WIRE ASM-AMP, INPUT
 194532-01-000
 WIRE ASM-AMP, OUTPUT
 194532-02-000

AMPLIFIER-PREMIUM
 AUDIO,500
 000031855 / 312664-02-000
 PANEL-AMPLIFIER
 195229-01-CHT
 RIVET
 165072-01-CHT (3)
 NUT
 0MD54F-06-000 (2)

2
 SPEAKER-6.25",
 MIDRANGE,JBL
 194528-01-000
 SPACER-SPEAKER
 000025517 / 315320-01-000
 ADAPTER-SPEAKER,
 SPRINTER
 194530-01-000

5
 SUBWOOFER ASM-SUB W/ BRACKETS
 000025680 / 315383-01-XXX

COVER-SEAT
 DETAIL GD

5 RELOCATE 4WD MODULE TO SUBWOOFER BRACKET WHEN NEEDED.

4 CUT SEAT PEDESTAL COVER THAT IS SUPPLIED WITH CHASSIS. PLACE COVER SO THAT IT DOES NOT COVER SUBWOOFER. SECURE COVER IN PLACE WITH VELCRO.

3 WITH 57P CONNECT 15 PIN HSGS FROM WIRE ASM-CHASSIS TO WIRE ASM-AMP WITHOUT 57P CONNECT 15 PIN HSGS IN WIRE ASM-CHASSIS TOGETHER.

2 REPLACE FACTORY DOOR SPEAKER WITH SPEAKER CALLED OUT.

1 CENTER ON BOTTOM OF SPEAKER GRILL ON DOOR PANEL. CLEAN SURFACE WITH PROMOTER 087211-01-000.

NOTES:

- 57P RADIO SPEAKERS-PREMIUM SOUND
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION: WIRING INSTL-CHASSIS		
SHEET: 7 OF 7	ITEM/PART NO.: 000123661 / 32387701000	REV

8 7 6 5 4 3 2 1 21-Sep-2018