
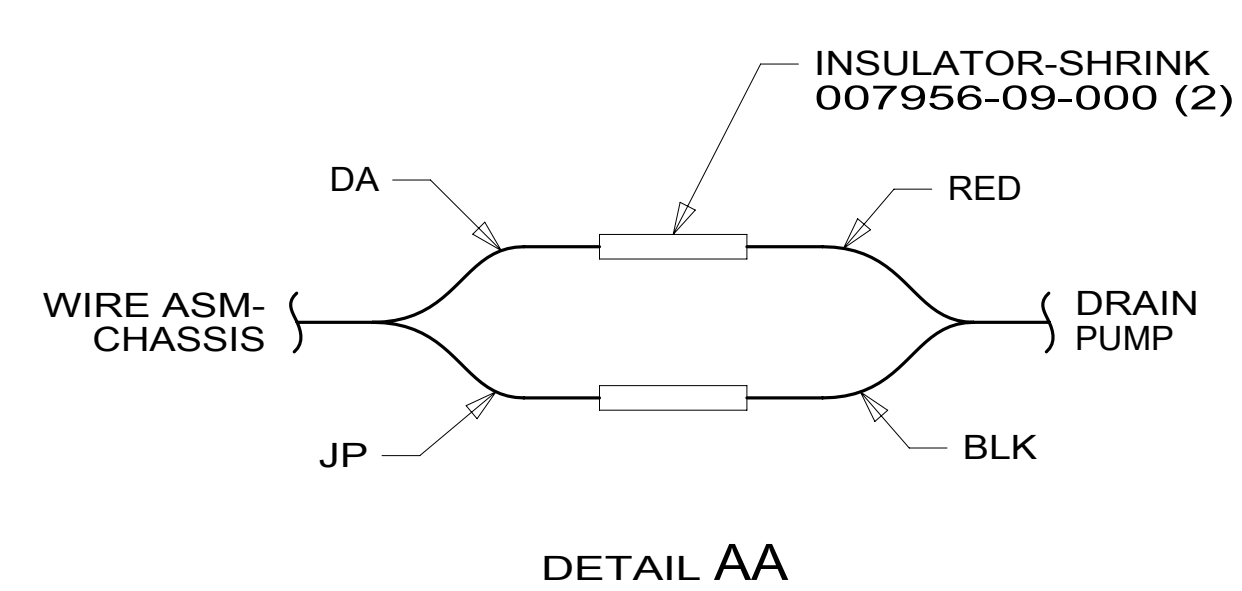


- 11 INSTALL NUT SO THAT IT IS FLUSH WITH TOP OF EXTENDER-SHAFT.
- 10 DRILL 12.3 MM HOLE INTO DASH PANEL.
- 9 NOTCH A-POST COVER WHERE IT MEETS THE DASH TO ALLOW DISPLAY CABLE THROUGH. MOUNT DISPLAY TO A-POST COVER AND ADJUST FOR DRIVER'S VIEWING. ROUTE DISPLAY CABLE TO CENTER DASH AND CONNECT TO CAMERA HARNESS.
- 8 REMOVE PLASTIC TRAY AND DISCARD.
- 7 SEE SHT 5 AND SHT 6 FOR ADDITIONAL INFORMATION.
- 6 REMOVE REAR VIEW MIRROR AND MOUNT CAMERA TO CENTER OF WINDSHIELD AND 25MM BELOW REAR VIEW MIRROR BUTTON. ROUTE CABLE UP ABOVE HEADLINER THEN LEFT DOWN LEFT A-POST COVER TO CENTER DASH TO CONNECT TO WIRE ASM-CHASSIS.
- 5 REMOVE PAINT AND UNDER COATING FROM GROUND BOLT AND NUT TO INSURE PROPER CONTACT.
- 4 SEE WIRING INSTL-BODY,12V FOR ADDITIONAL INFORMATION.
- 3 CUT WIRE TIE AROUND SPRINTER SEAL, ROUTE THE CHASSIS WIRING THROUGH HOLE AND WIRE TIE SEAL WITH WIRE TIE 8343-04-000.
- 2 SEE BATTERY INSTL. FOR ADDITIONAL INFORMATION.
- 1. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

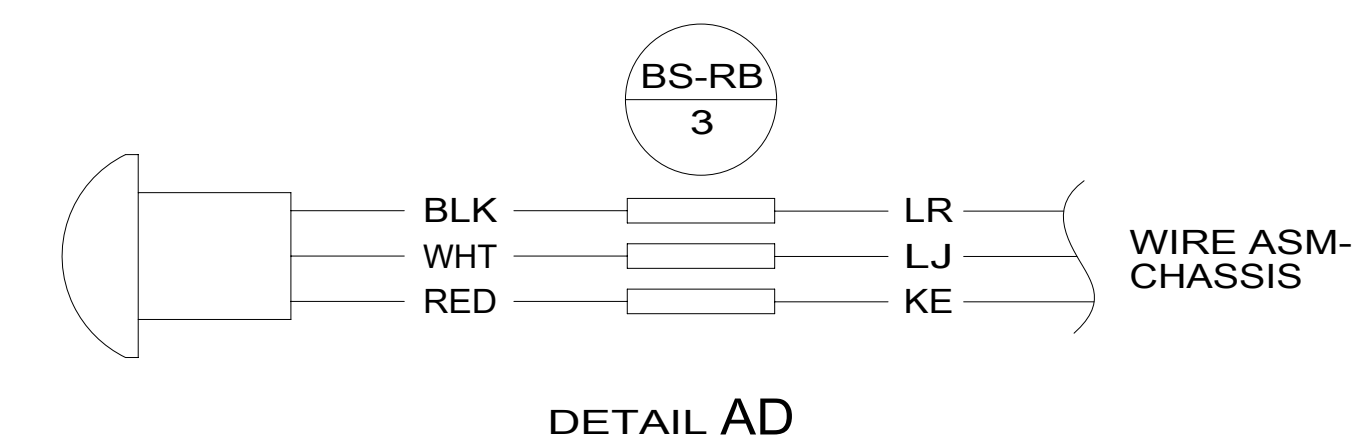


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


- 36C COLLISION AVOIDANCE SYSTEM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

<b>WINNEBAGO</b> COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.	
DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS
DIFTR:	
UNSPECIFIED TOLERANCES:	MATERIAL:
WHOLE DIM (X) : 3	
ONE-PLACE (X.X) : 1.5	
TWO-PLACE (X.XX) : 0.50	
ANGLE : 1°	
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS) FIRST USED: 18 170X
<b>WIRING INSTL-CHASSIS</b>	
SHEET: 1 OF 7	ITEM/PART NO: 000123713 / 32389201000
REF:	REV:




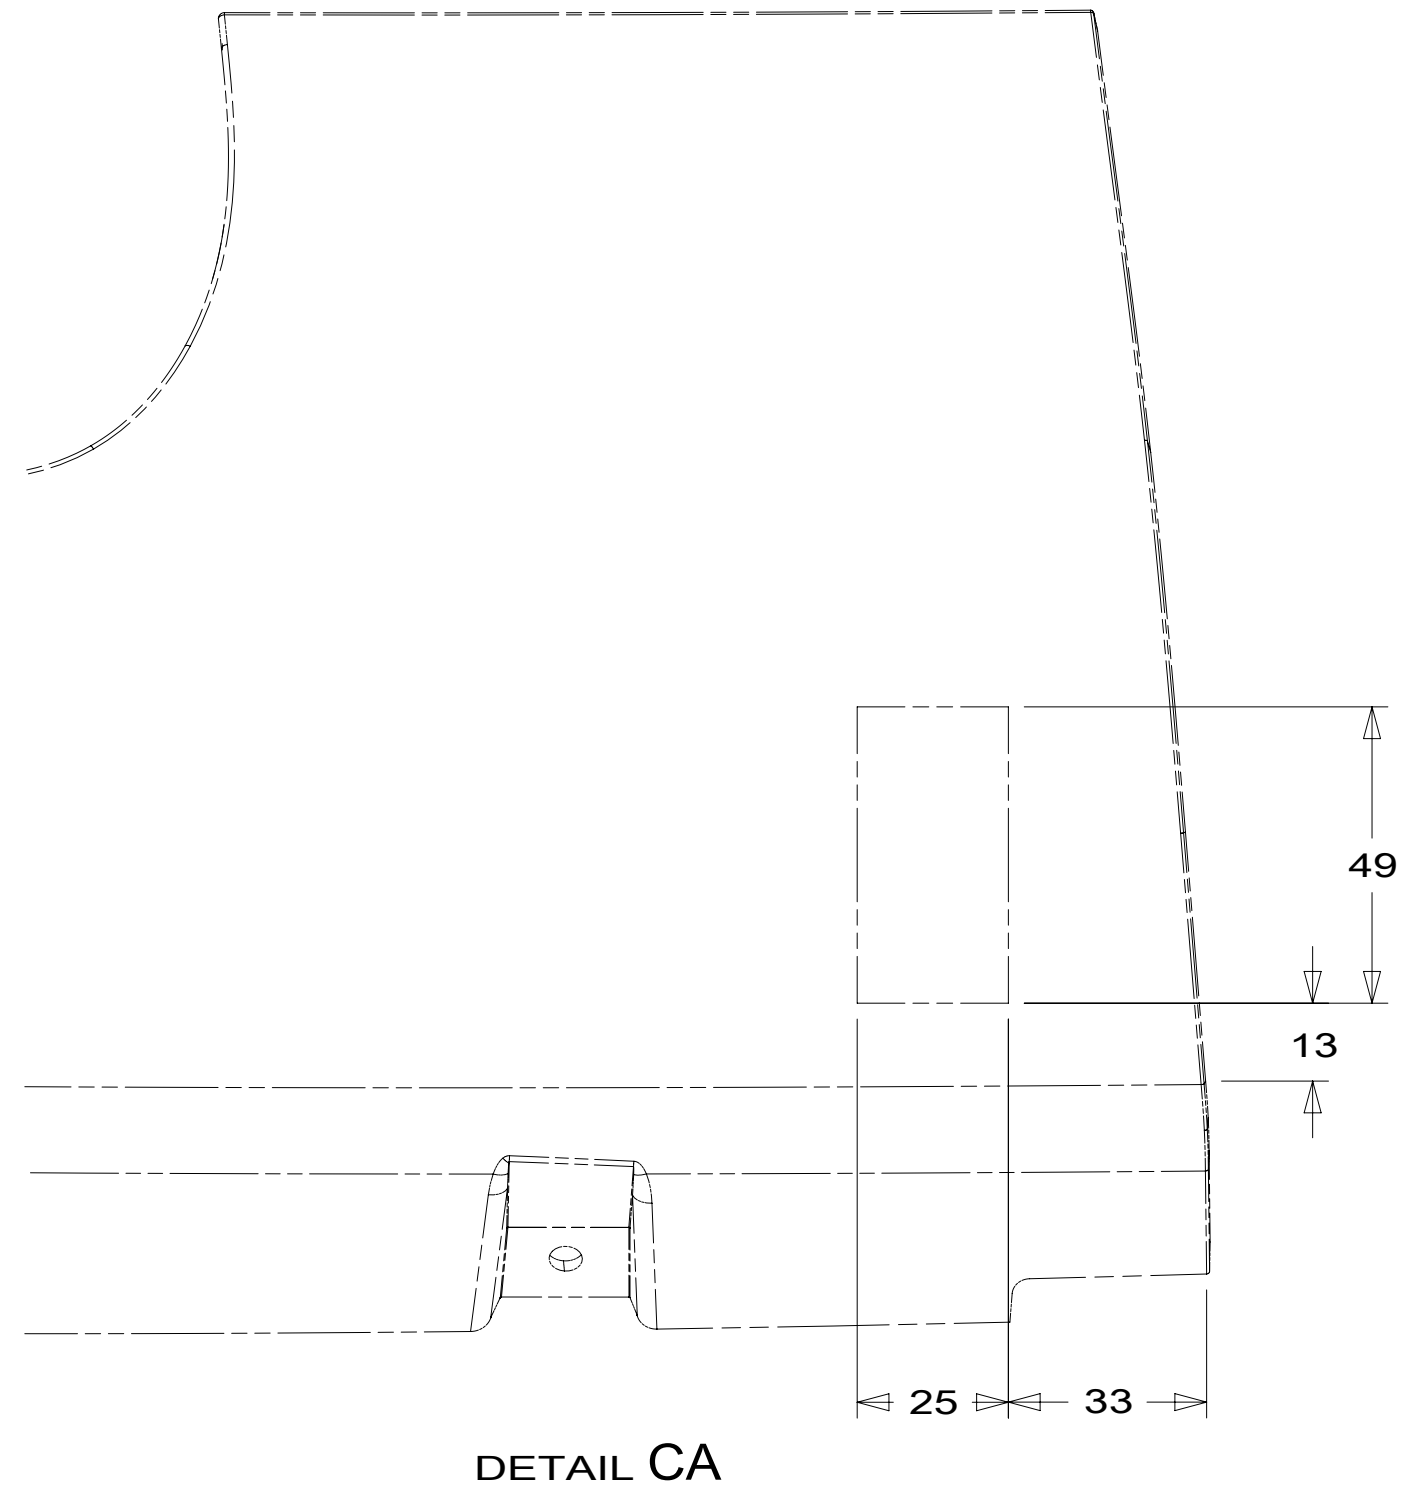


DETAIL CA

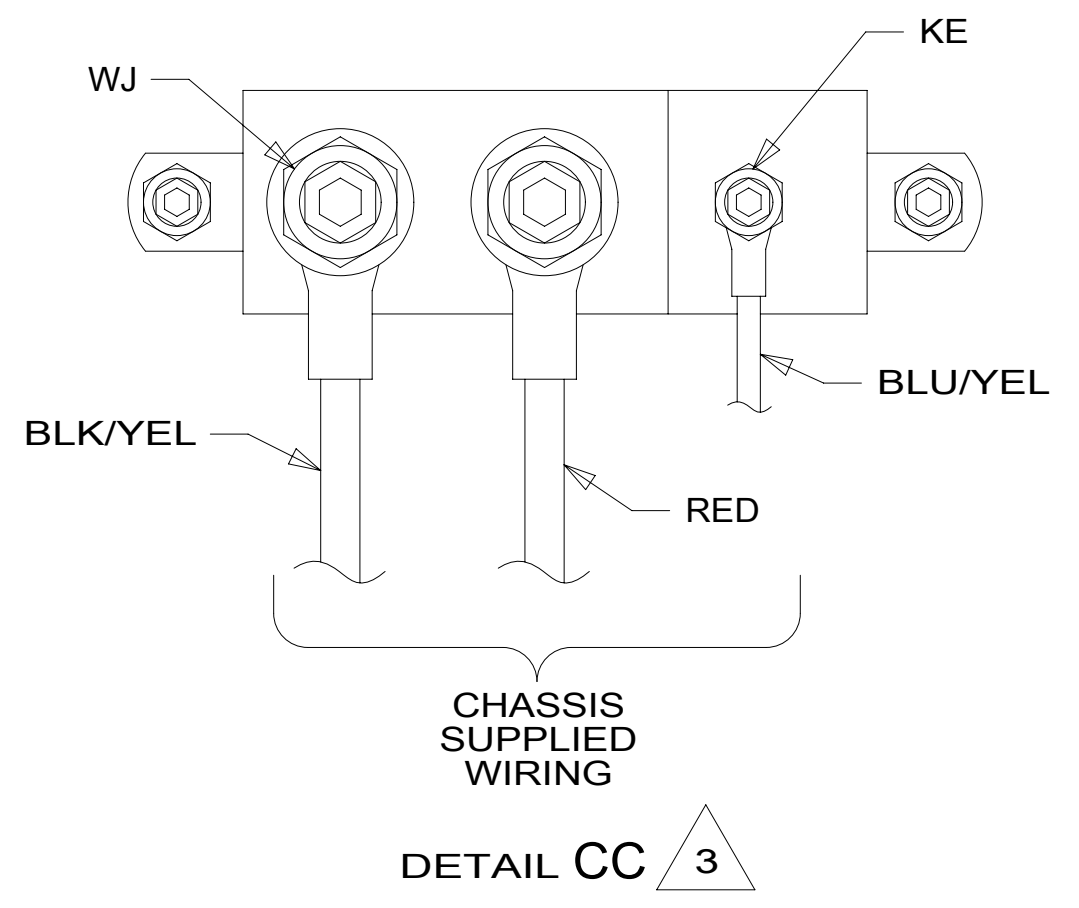


DETAIL CC 3

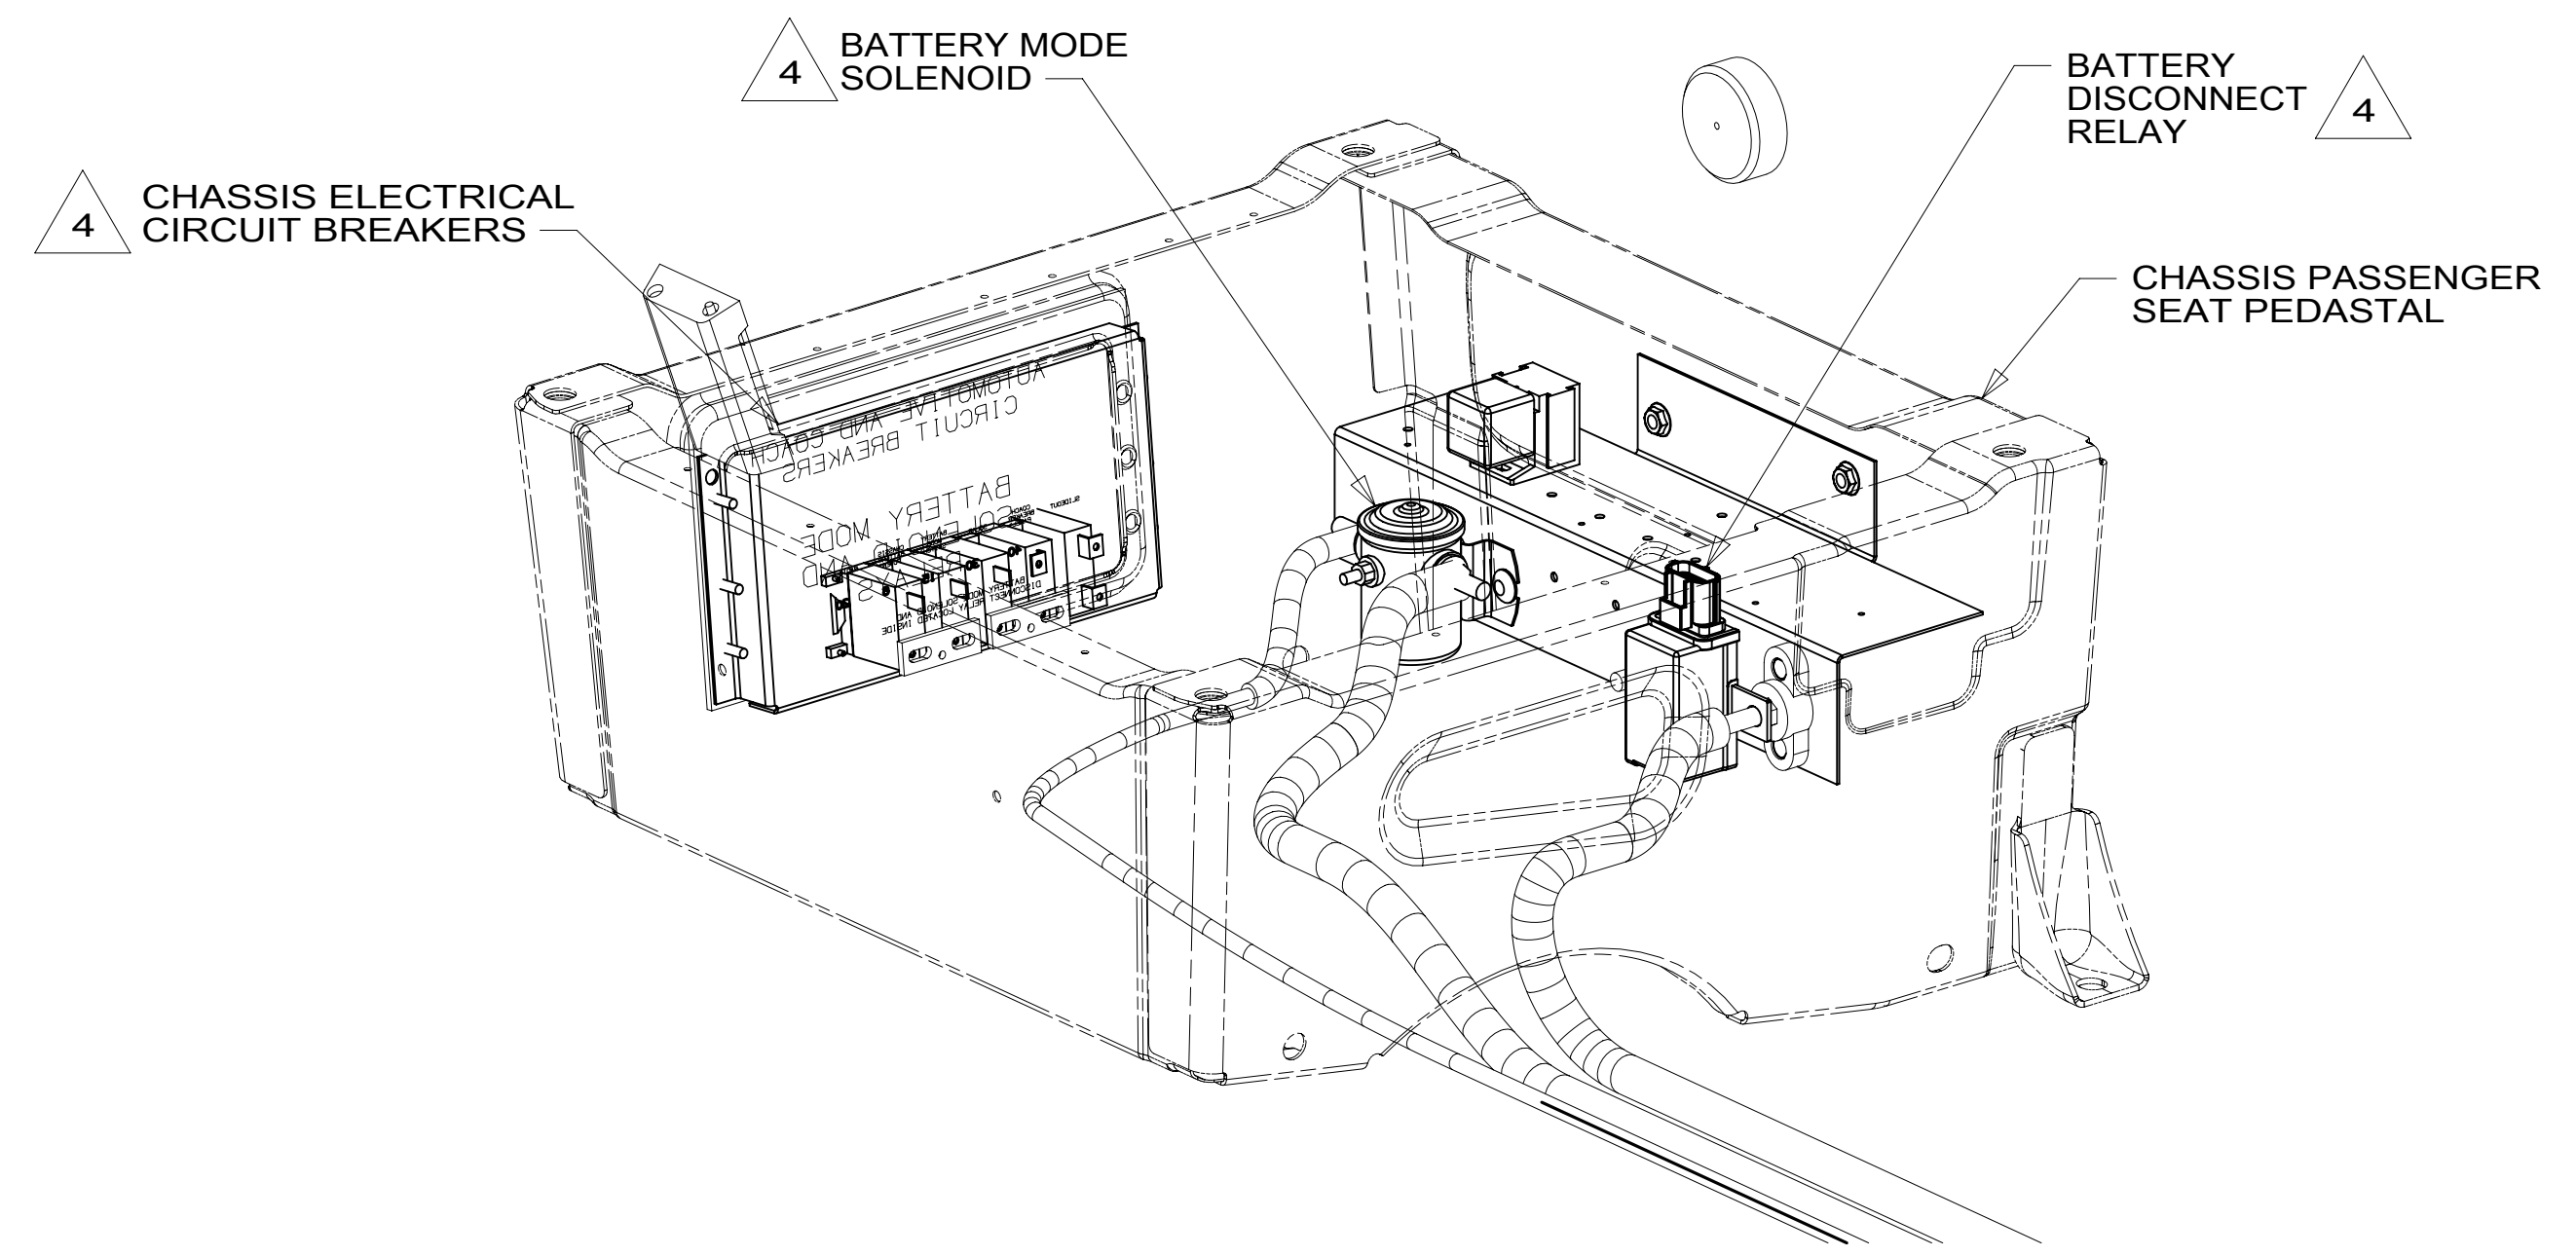

DETAIL CD

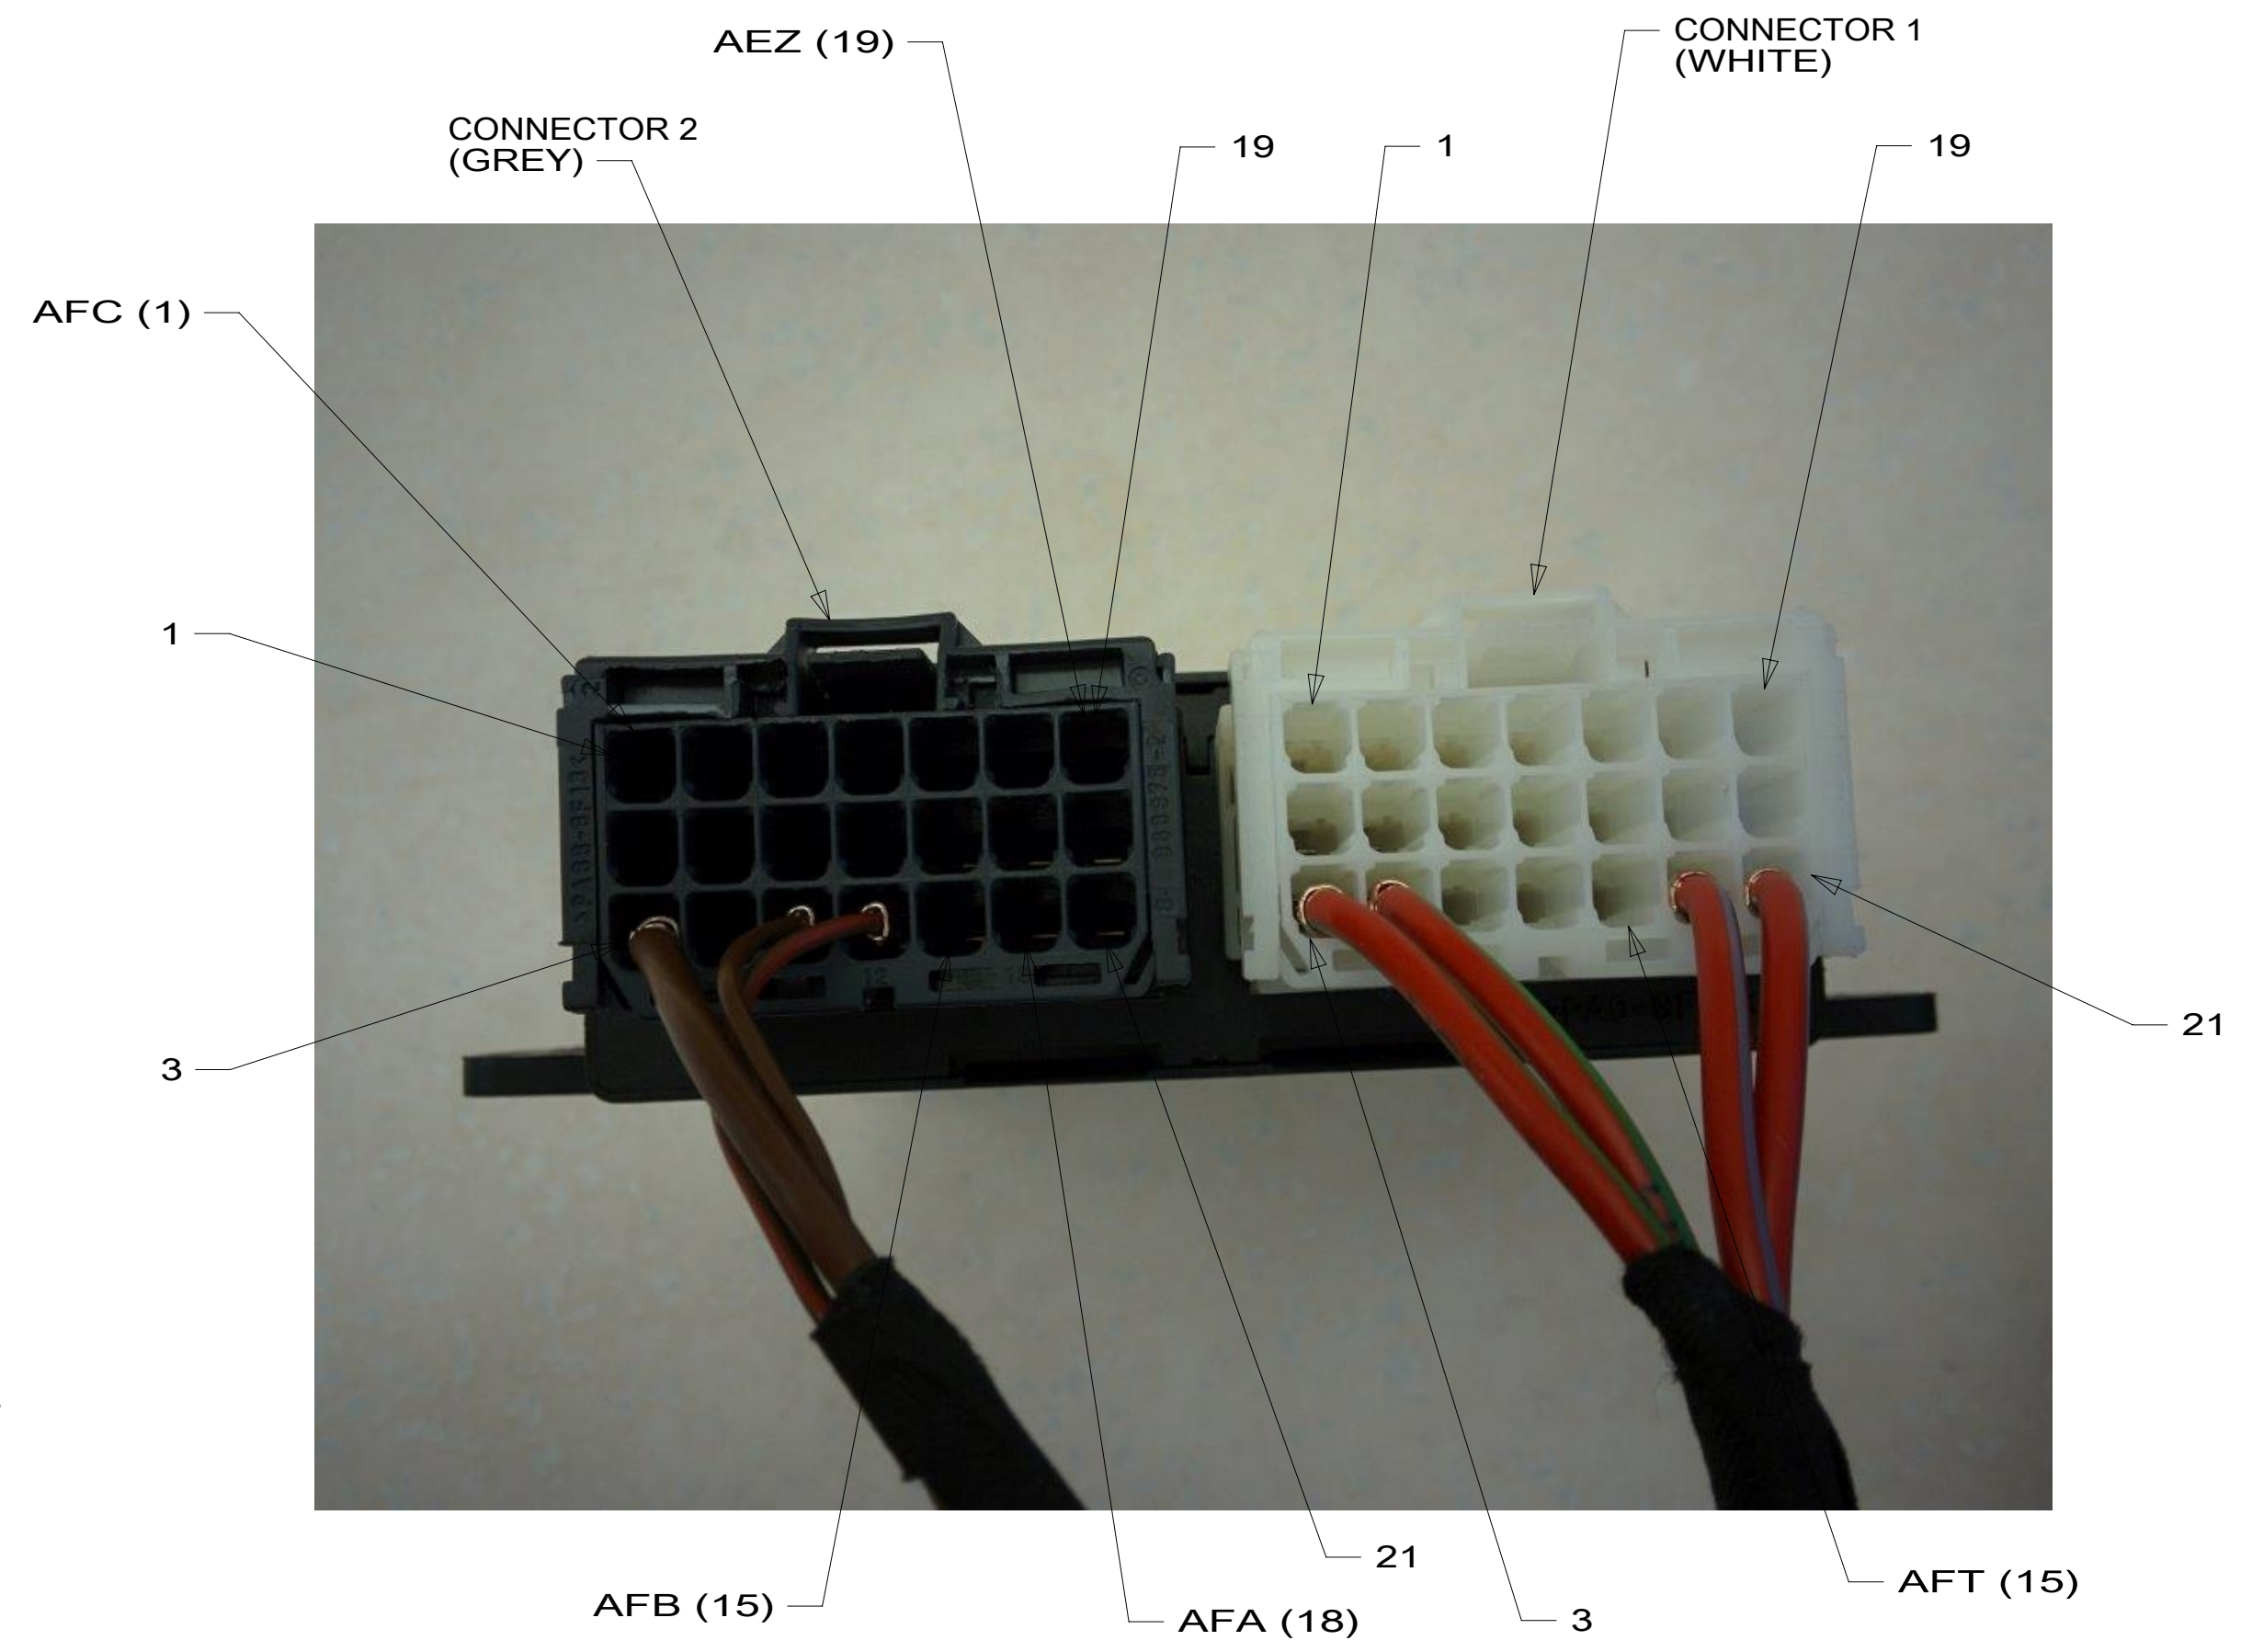

DETAIL CF 5

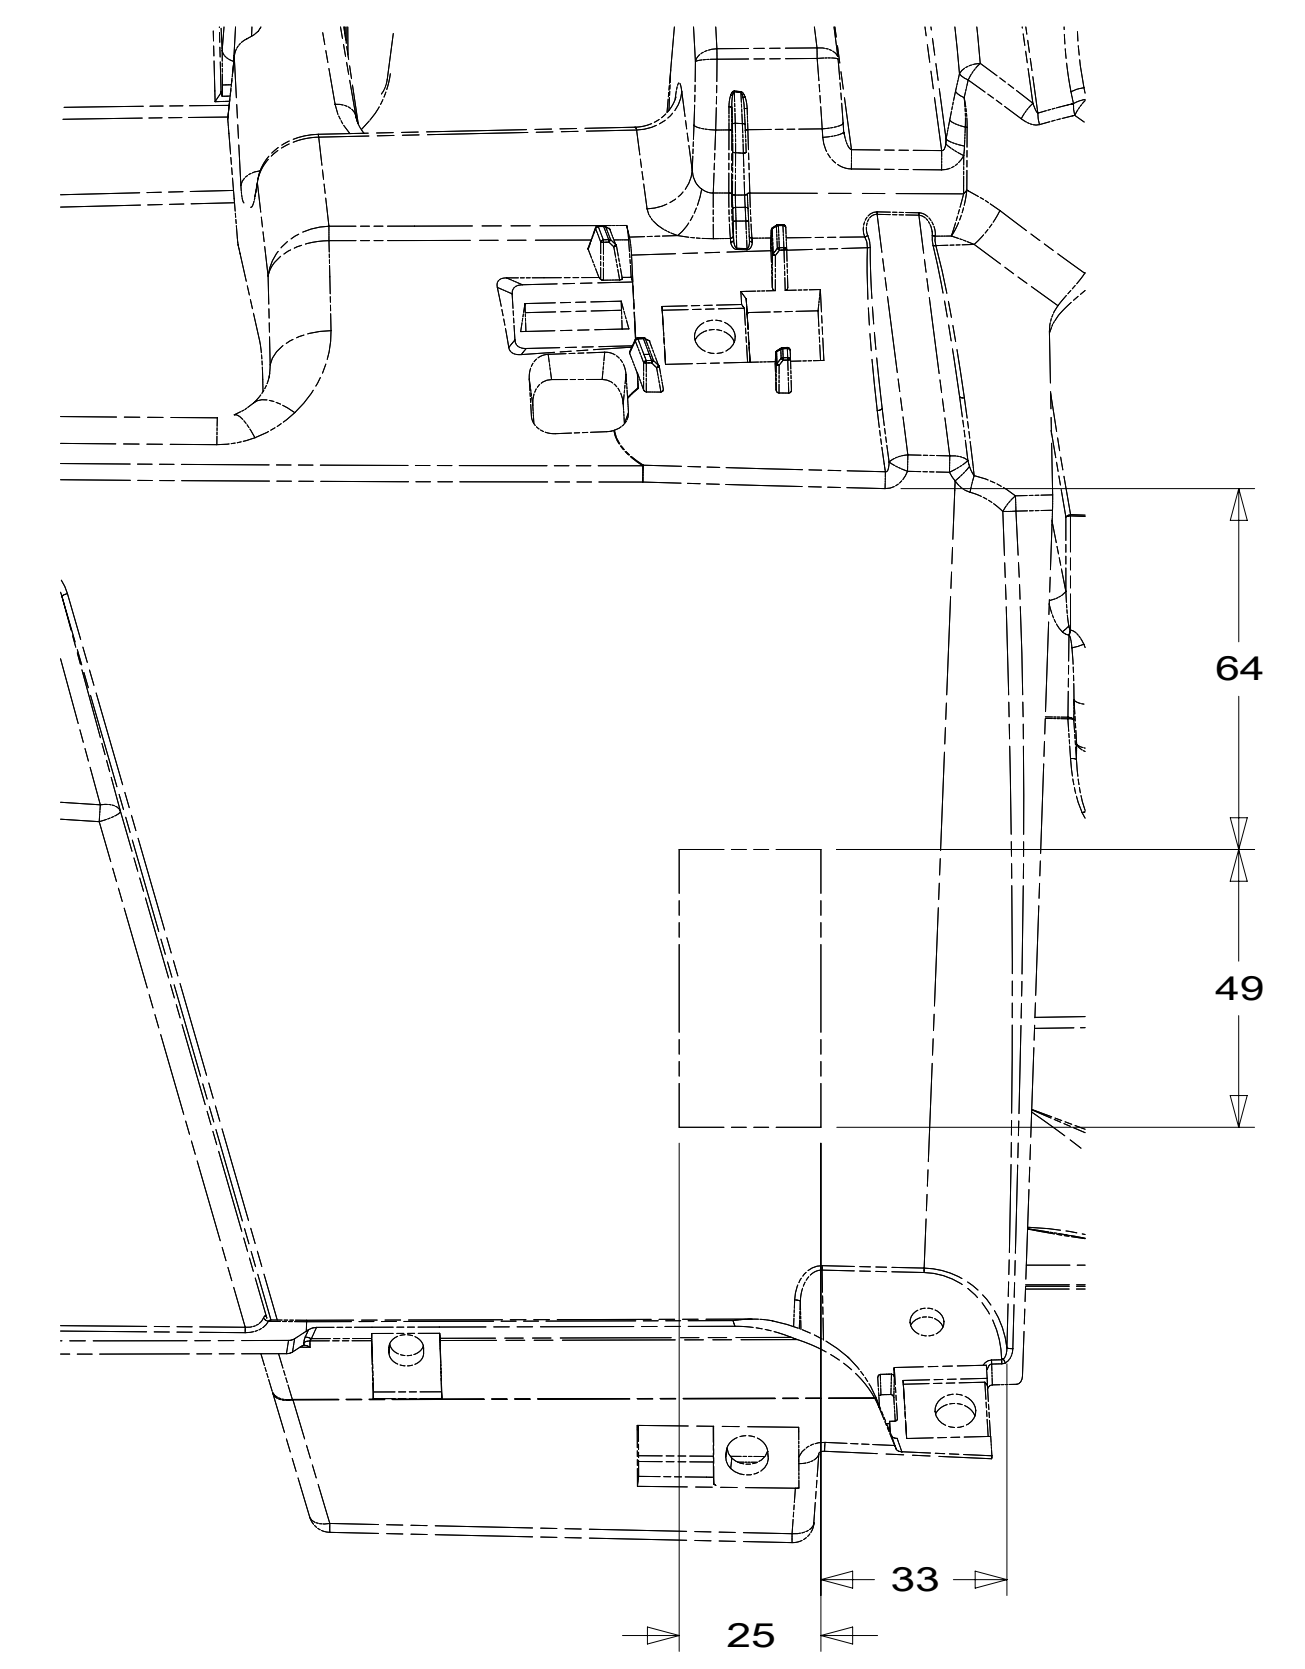

VIEW CB 6

- 6 DASH STRUCTURE LOCATED BEHIND LOWER DASH PANEL.
- 5 LOCATED UNDER DRIVER'S SEAT.
- 4 SEE CHASSIS ELECTRICAL BOX ASM FOR ADDITIONAL INFORMATION.
- 3 CONNECTION POINT IS LOCATED UNDER DRIVERS SEAT.
- 2 LOWER DASH PANEL.

1. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

NOTES:


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000









FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 1MV MERCEDES-11030#DSL,4CYL,VAN
- 1MM MERCEDES-11,030# DIESEL, VAN
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION: <b>WIRING INSTL-CHASSIS</b>		
SHEET: 3 OF 7	ITEM/PART NO: 000123713 / 32389201000	REV



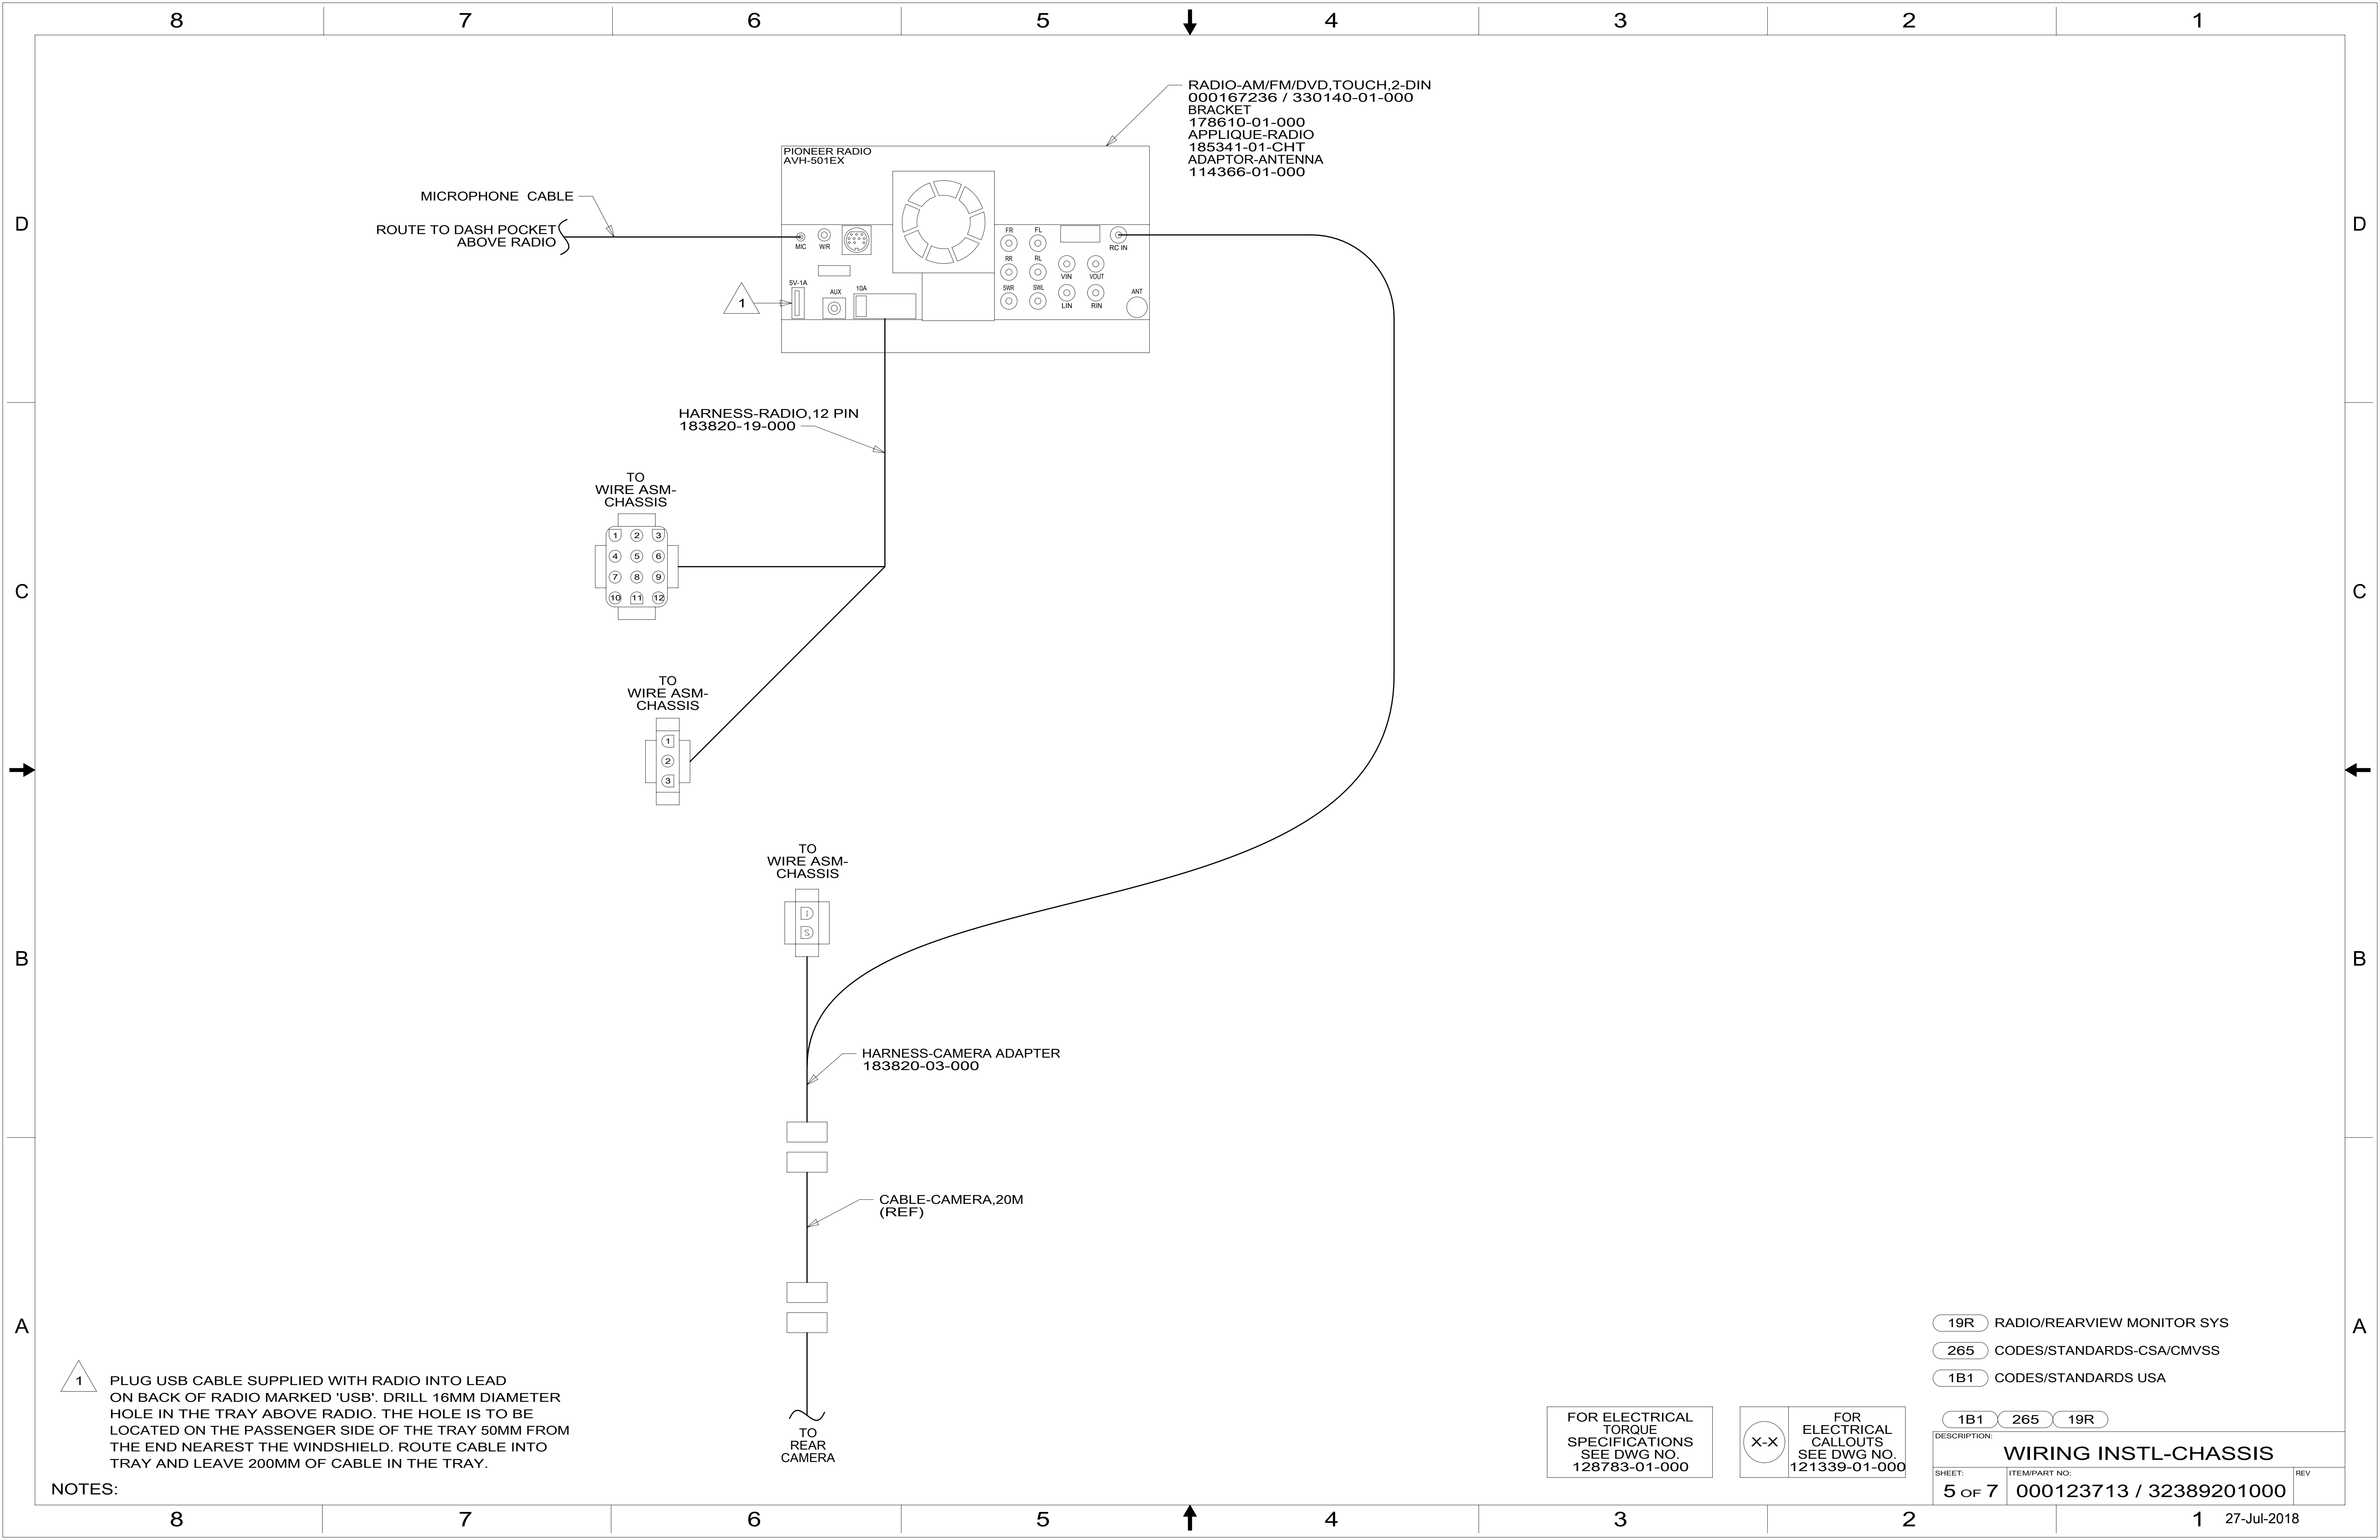

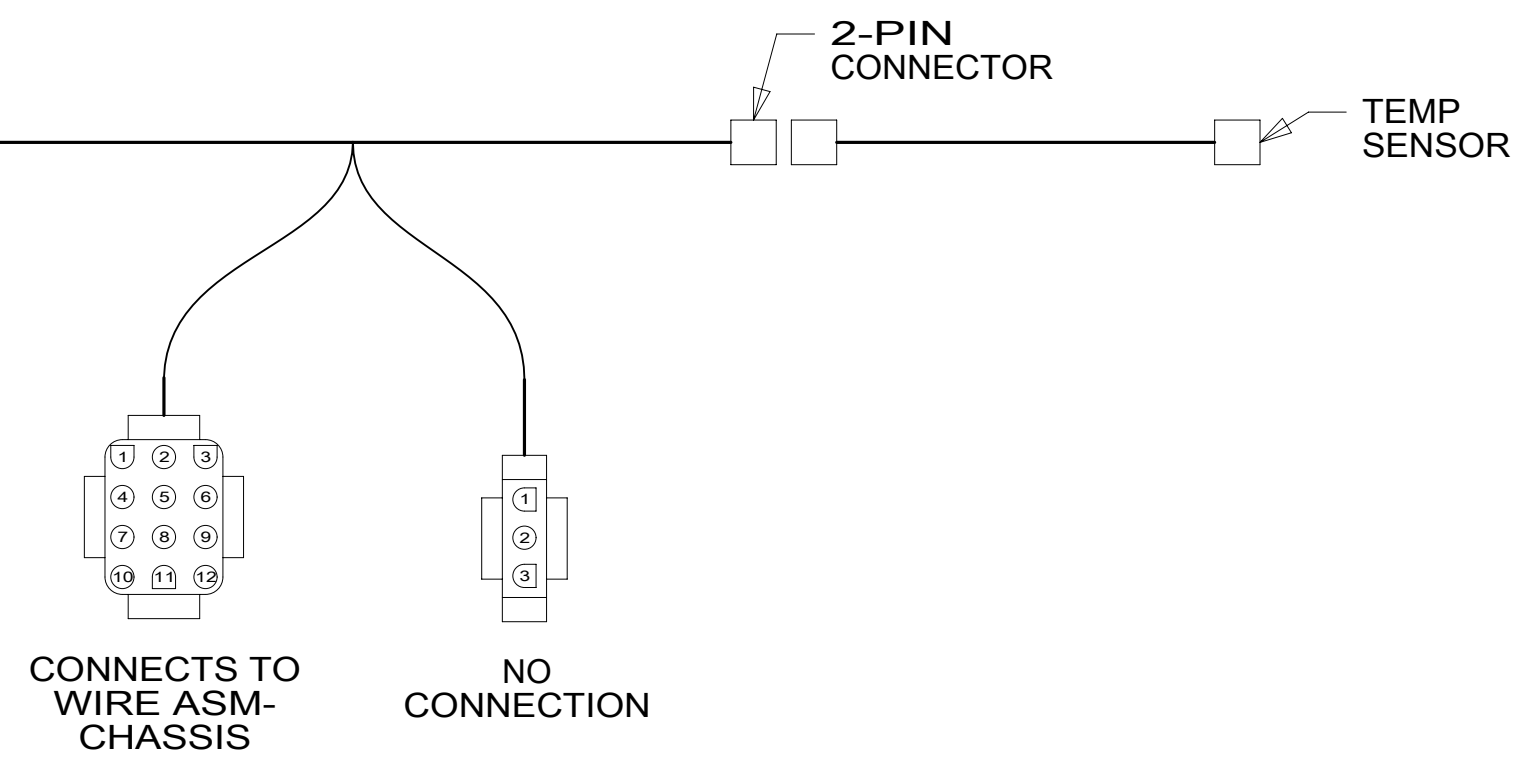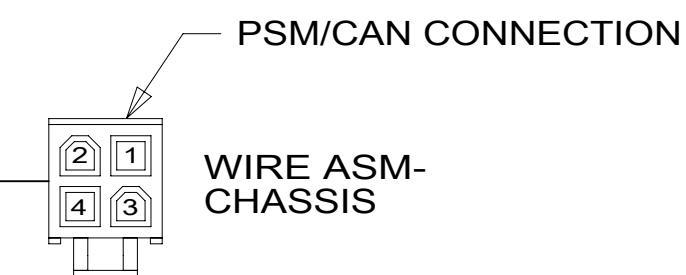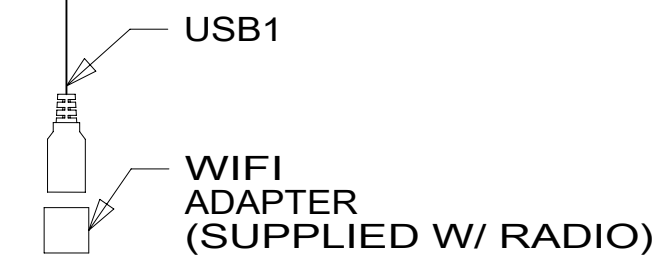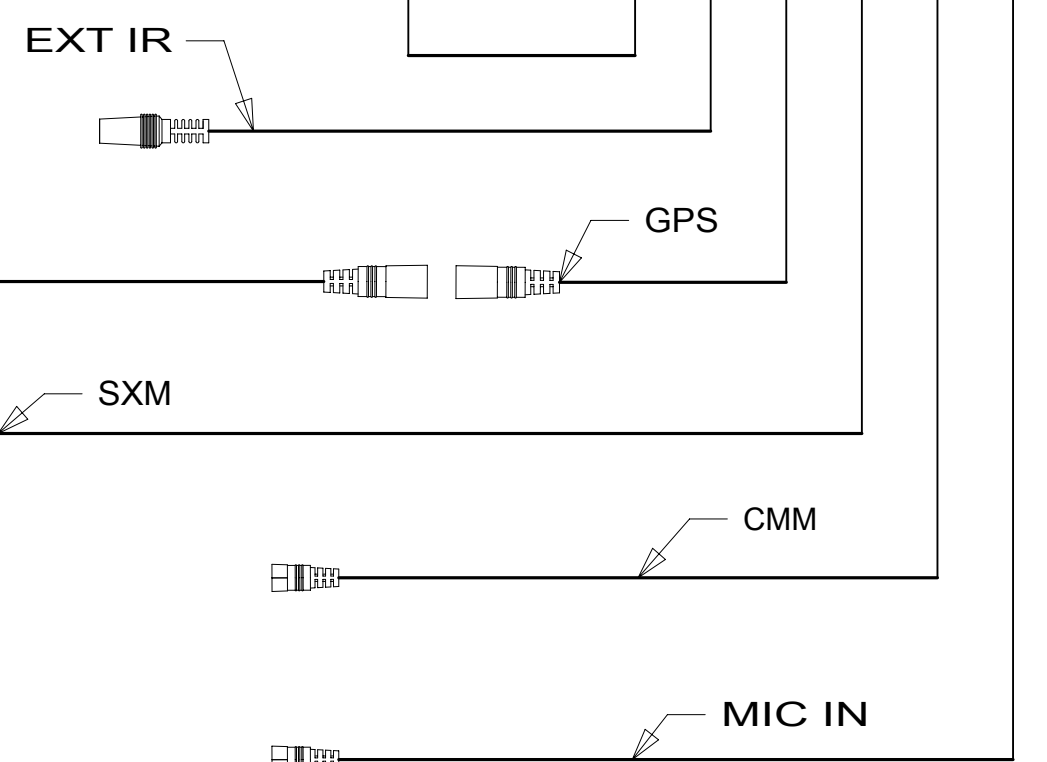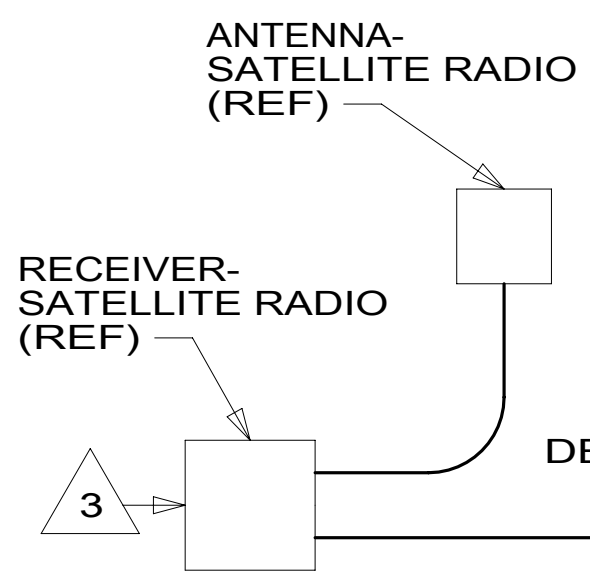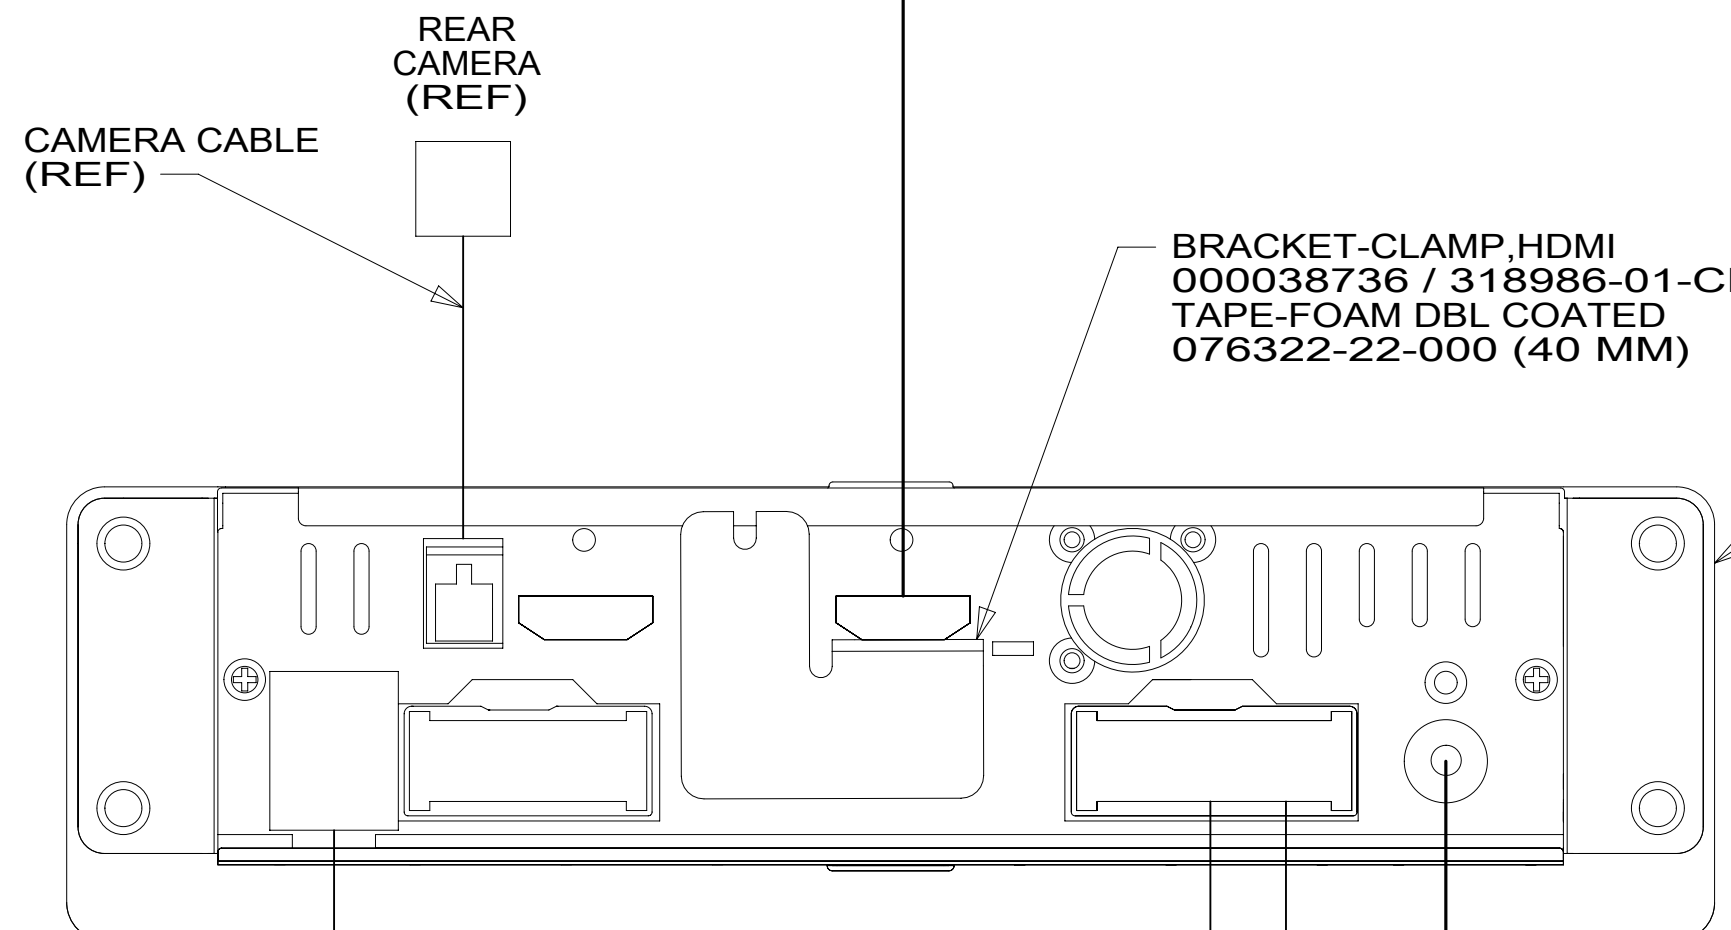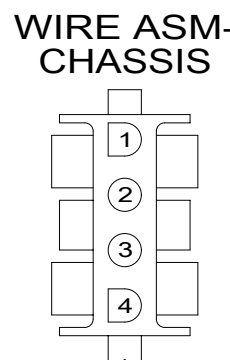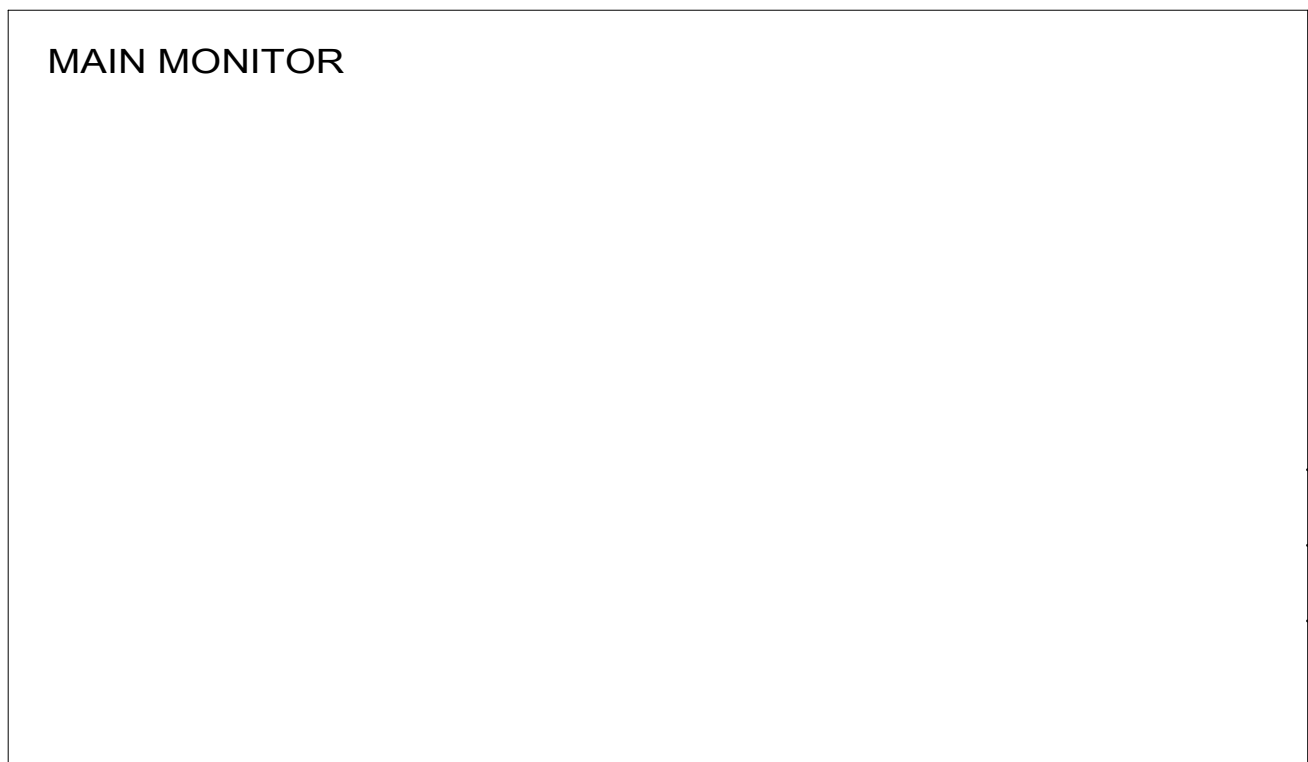

- NOTES:
- 4 MOUNT GPS ANTENNA TO TOP OF DEFROST PLENUM BEHIND RADIO.
  - 3 WIRE TIE TO DASH RADIO WIRING BEHIND THE RADIO.
  - 2 PLUG CABLE INTO LEAD ON BACK OF RADIO.
  - 1 SEE SHT 2 FOR ADDITIONAL INFORMATION.


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


- 153 LG SCREEN-INFO/GPS SIRIUSXM
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION: <b>WIRING INSTL-CHASSIS</b>		
SHEET: 6 OF 7	ITEM/PART NO: 000123713 / 32389201000	REV

8 7 6 5 4 3 2 1

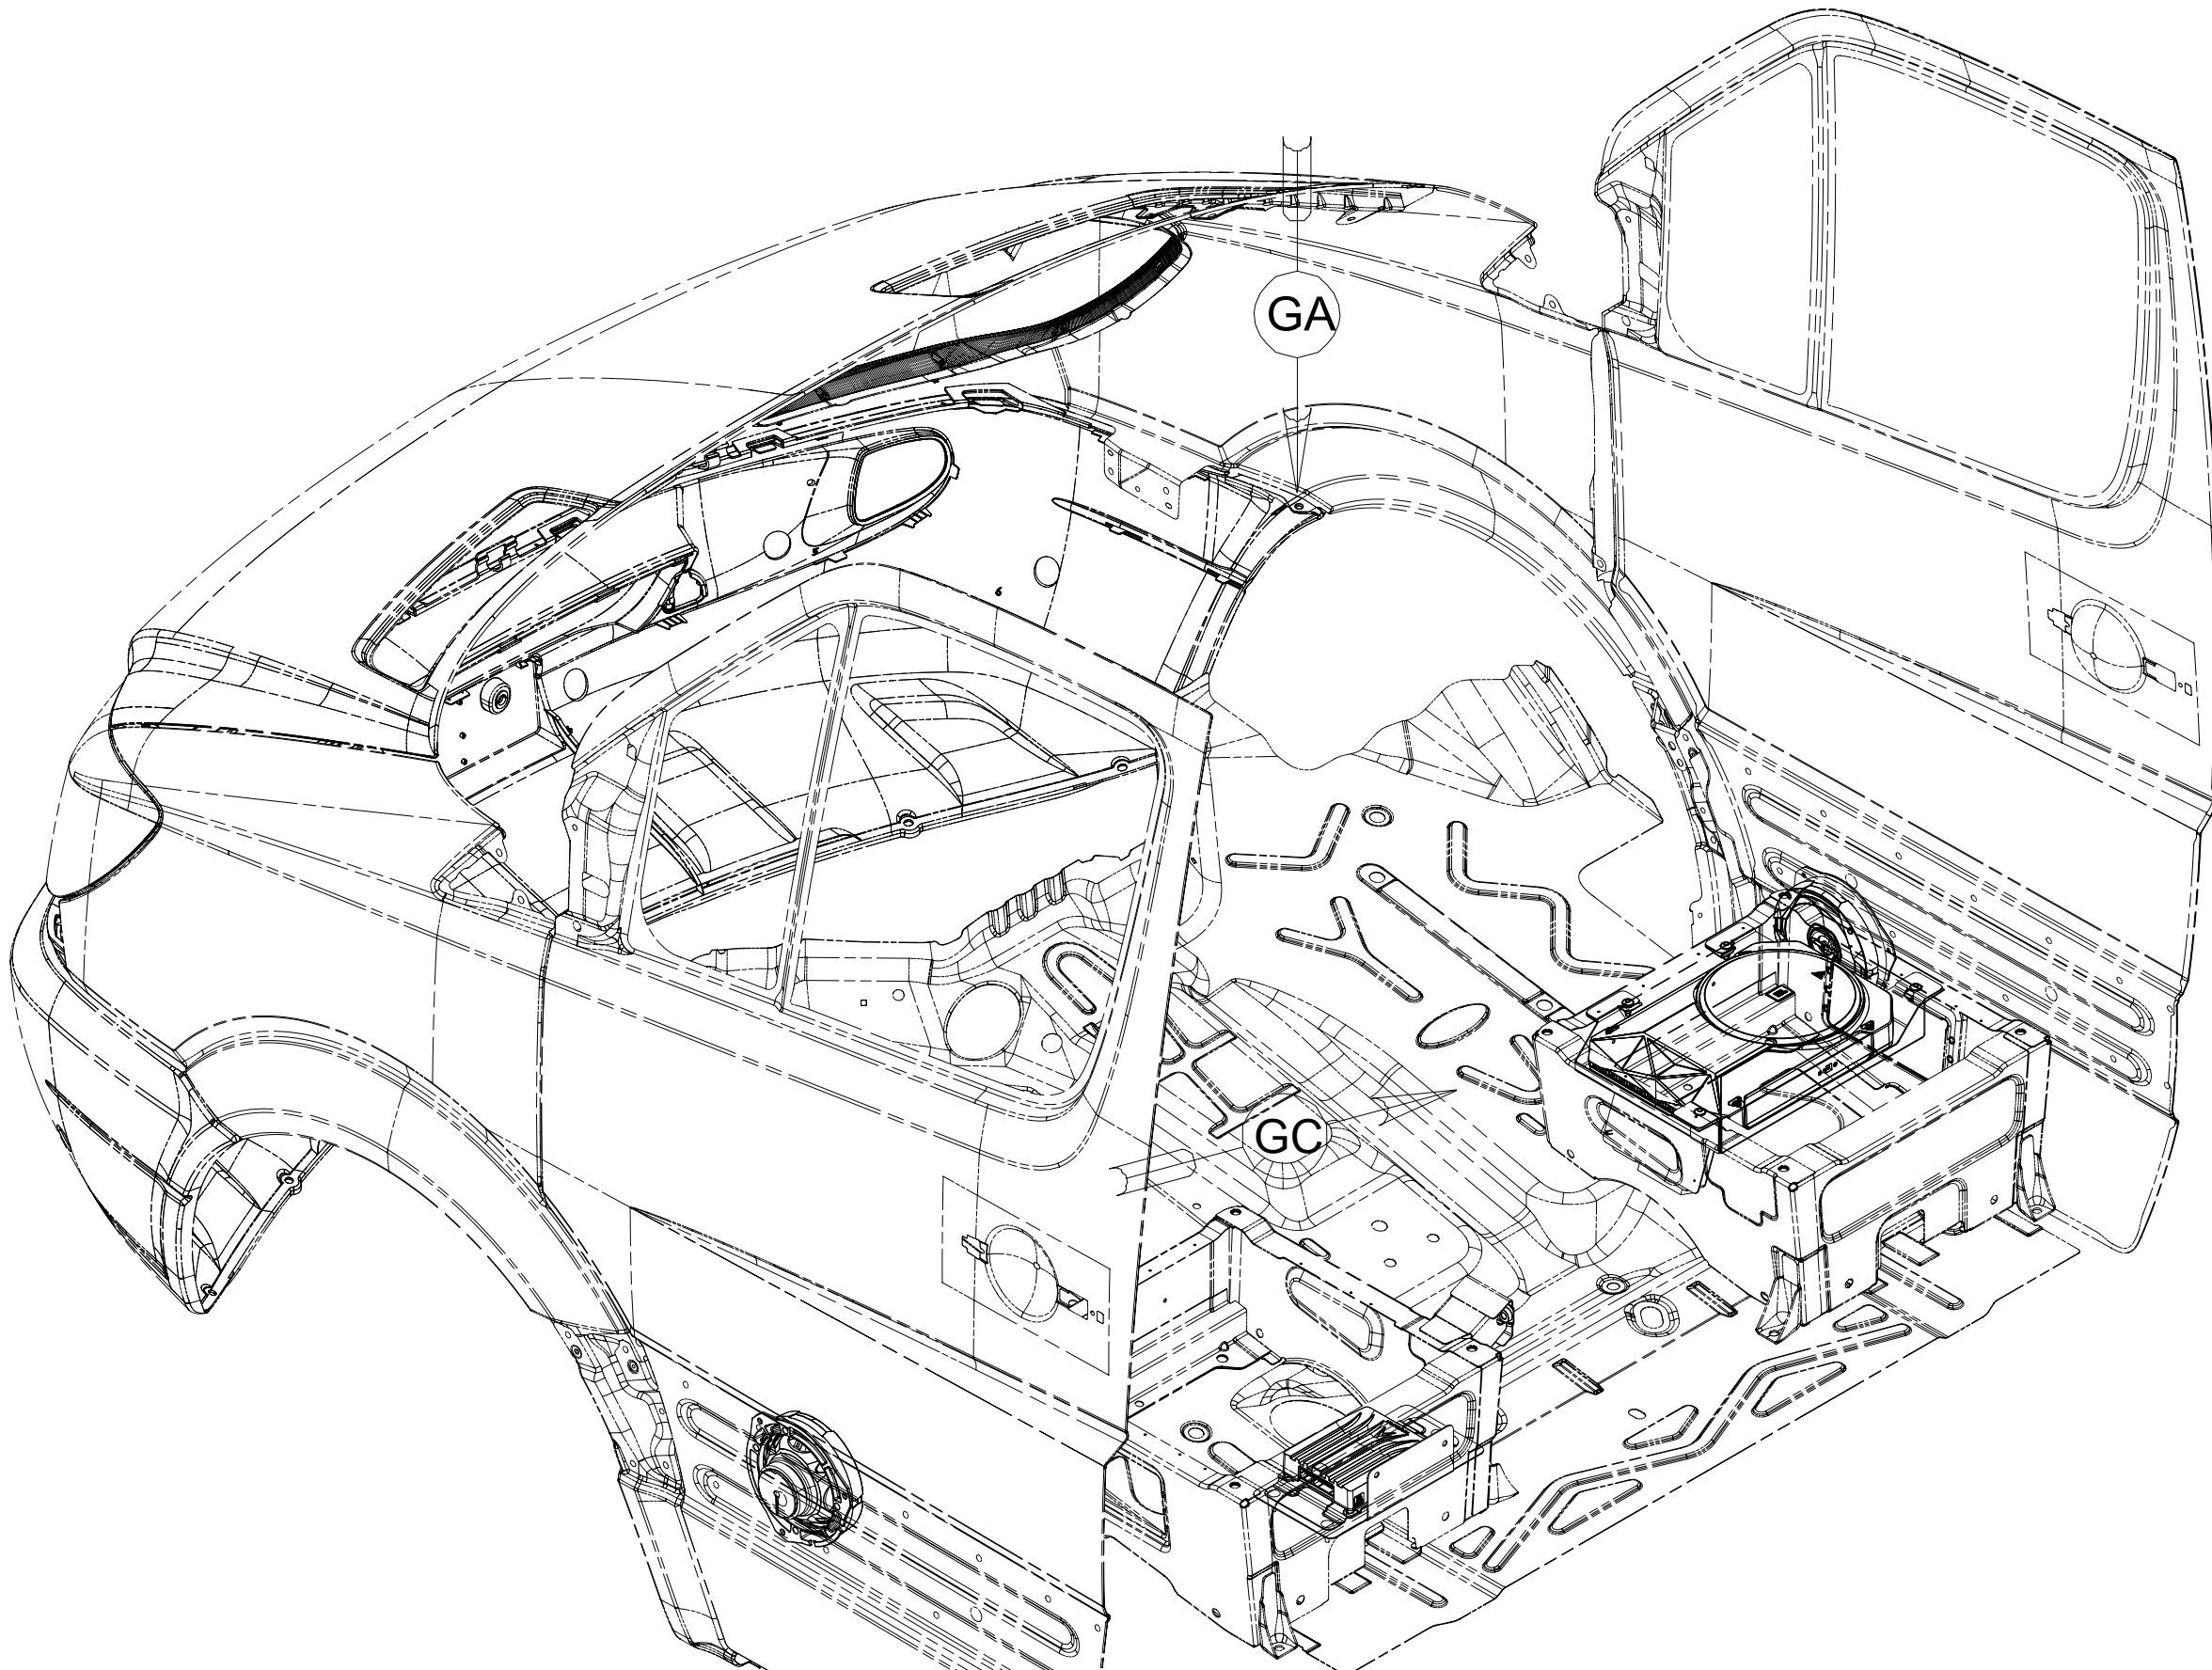

DETAIL GC  
LOGO-JBL  
302951-01-000 (2) 1

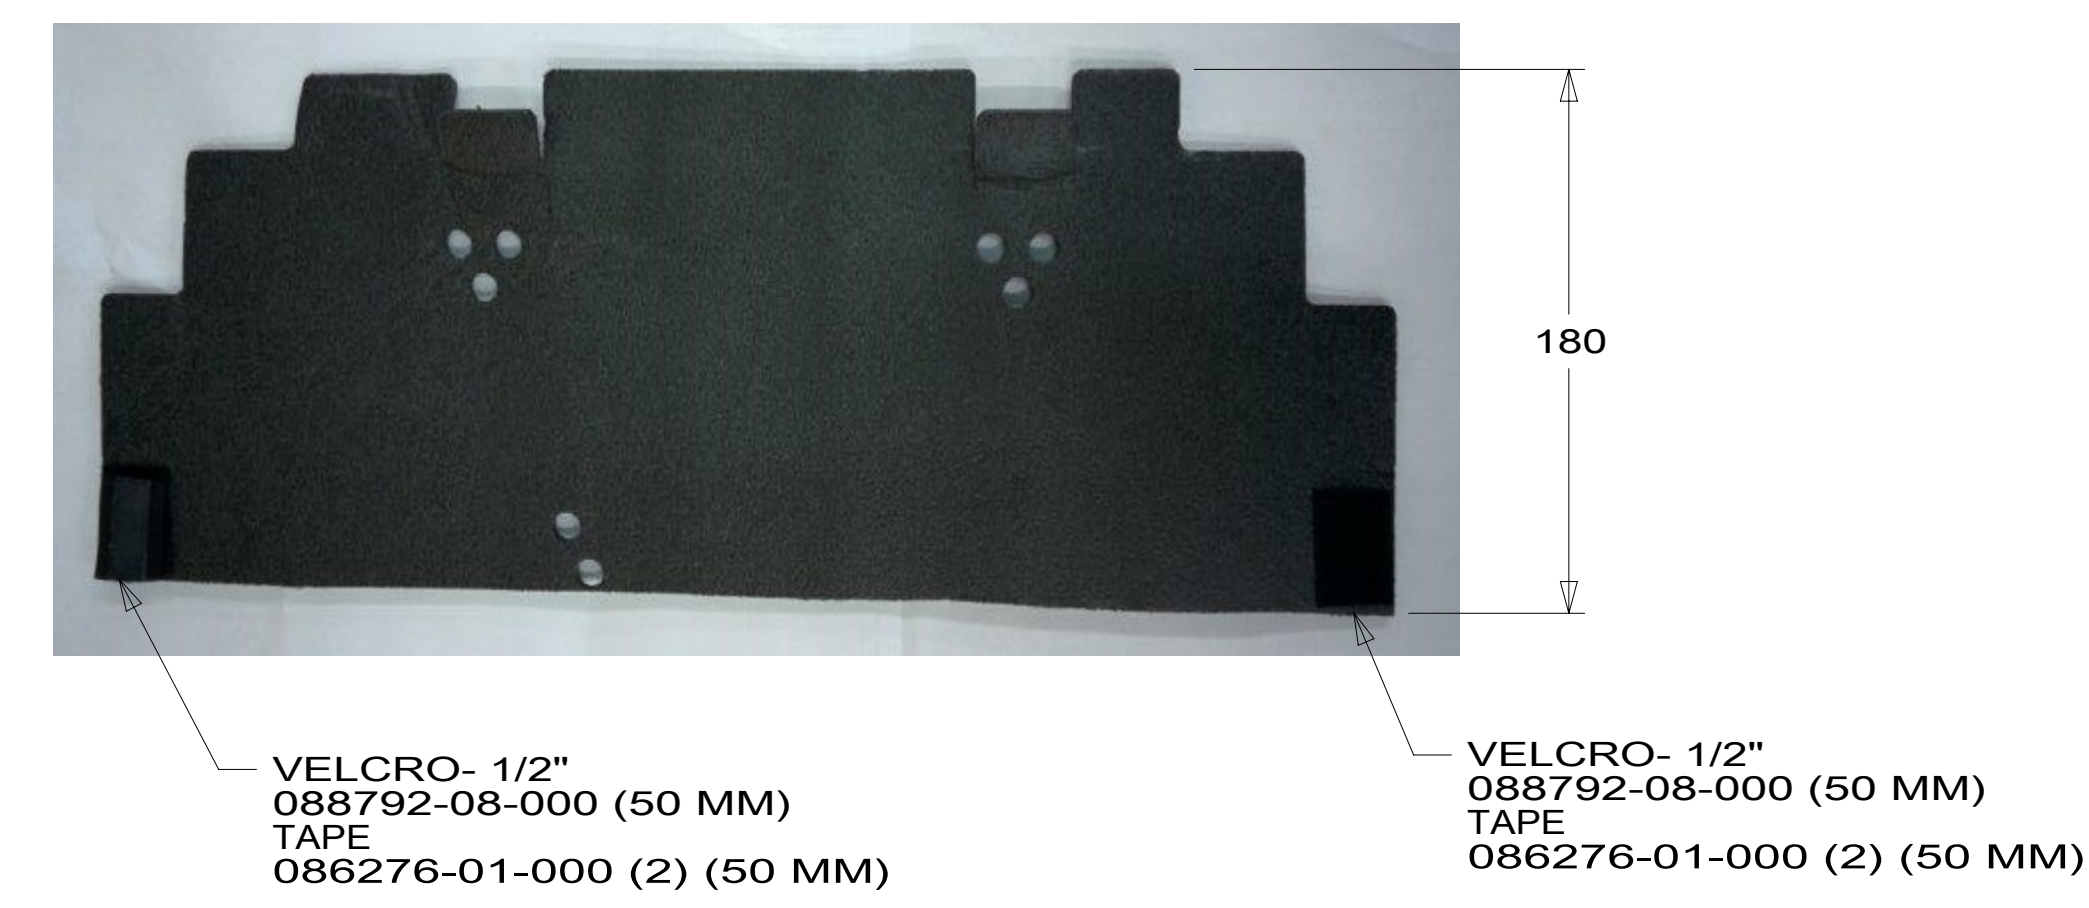

DETAIL GD 4

2  
SPEAKER-6.25",  
MIDRANGE,JBL  
194528-01-000  
SPACER-SPEAKER  
000025517 / 315320-01-000  
ADAPTER-SPEAKER,  
SPRINTER  
194530-01-000

WIRE ASM-CHASSIS  
(REFERENCE)

3  
WIRE ASM-AMP, INPUT  
194532-01-000  
WIRE ASM-AMP, OUTPUT  
194532-02-000

AMPLIFIER-PREMIUM AUDIO,100  
000031855 / 312664-02-000  
PANEL-AMPLIFIER  
195229-01-CHT  
RIVET  
165072-01-CHT (3)  
NUT  
0MD54F-06-000 (2)

2  
SPEAKER-6.25",  
MIDRANGE,JBL  
194528-01-000  
SPACER-SPEAKER  
000025517 / 315320-01-000  
ADAPTER-SPEAKER,  
SPRINTER  
194530-01-000

5  
SUBWOOFER ASM-SUB W/ BRACKET  
000025680 / 315383-01-XXX

COVER-SEAT  
DETAIL GD

- 5 RELOCATE 4WD MODULE TO SUBWOOFER BRACKET WHEN NEEDED.
- 4 CUT SEAT PEDESTAL COVER THAT IS SUPPLIED WITH CHASSIS. PLACE COVER SO THAT IT DOES NOT COVER SUBWOOFER. SECURE COVER IN PLACE WITH VELCRO.
- 3 WITH 57P CONNECT 15 PIN HSGS FROM WIRE ASM-CHASSIS TO WIRE ASM-AMP WITHOUT 57P CONNECT 15 PIN HSGS IN WIRE ASM-CHASSIS TOGETHER.
- 2 REPLACE FACTORY DOOR SPEAKER WITH SPEAKER CALLED OUT.
- 1 CENTER ON BOTTOM OF SPEAKER GRILL ON DOOR PANEL. CLEAN SURFACE WITH PROMOTER 087211-01-000.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 57P RADIO SPEAKERS-PREMIUM SOUND
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION: <b>WIRING INSTL-CHASSIS</b>		
SHEET: 7 OF 7	ITEM/PART NO: 000123713 / 32389201000	REV

8 7 6 5 4 3 2 1 27-Jul-2018