





- NOTES:**
- 9 COVER ALL WIRES AND CABLES WITH CONVOLUTED TUBING. SECURE TO TV BRACKET SO THAT WIRES AND CABLES DO NOT BECOME PINCHED.
 - 8 SEE WIRE ASM-SOLAR SYSTEM AND WIRE INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
 - 7 SEE STEP INSTALLATION FOR ADDITIONAL INFORMATION.
 - 6 6 & 8 PIN HOUSINGS SUPPLIED WITH STEP.
 - 5 WIRES ARE PART OF WIRE ASM-STEP.
 - 4 MOUNT ON EXTERIOR SURFACE OF VAN SIDEWALL.
 - 3 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
2. ROUTE TANK SENSOR WIRES SO THEY DO NOT PASSOVER SENSORS. USE WIRE TIE MOUNT 155366-01-000 AND WIRE TIE 8343-01-000 AS NEEDED. TANK SURFACE MUST BE CLEANED USING ISOPROPYL ALCOHOL AND PRIMED WITH PRIMER 94.
 1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

- 07B RUNNING BOARDS - ALUMINUM
- 1E2 ENTRANCE STEP-ELEC.
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


WINNEBAGO		COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.											
DSNR:		ALL DIMENSIONS ARE IN MILLIMETERS											
DFFR:		<table border="1"> <tr> <td>UNSPECIFIED TOLERANCES:</td> <td></td> </tr> <tr> <td>WHOLE DIM (X)</td> <td>3</td> </tr> <tr> <td>ONE-PLACE (X.X)</td> <td>1.5</td> </tr> <tr> <td>TWO-PLACE (X.XX)</td> <td>0.50</td> </tr> <tr> <td>ANGLE</td> <td>1°</td> </tr> </table>		UNSPECIFIED TOLERANCES:		WHOLE DIM (X)	3	ONE-PLACE (X.X)	1.5	TWO-PLACE (X.XX)	0.50	ANGLE	1°
UNSPECIFIED TOLERANCES:													
WHOLE DIM (X)	3												
ONE-PLACE (X.X)	1.5												
TWO-PLACE (X.XX)	0.50												
ANGLE	1°												
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES		WEIGHT: (LBS)	FIRST USED:										
			19 259KL										
DESCRIPTION:													
WIRING INSTL-BODY, 12V													
SHEET:	ITEM/PART NO.:	REV:											
1 OF 5	000124767 / 32400001000												

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

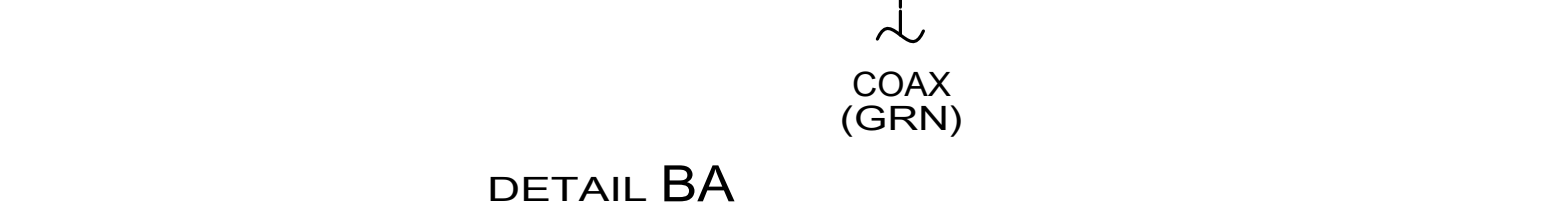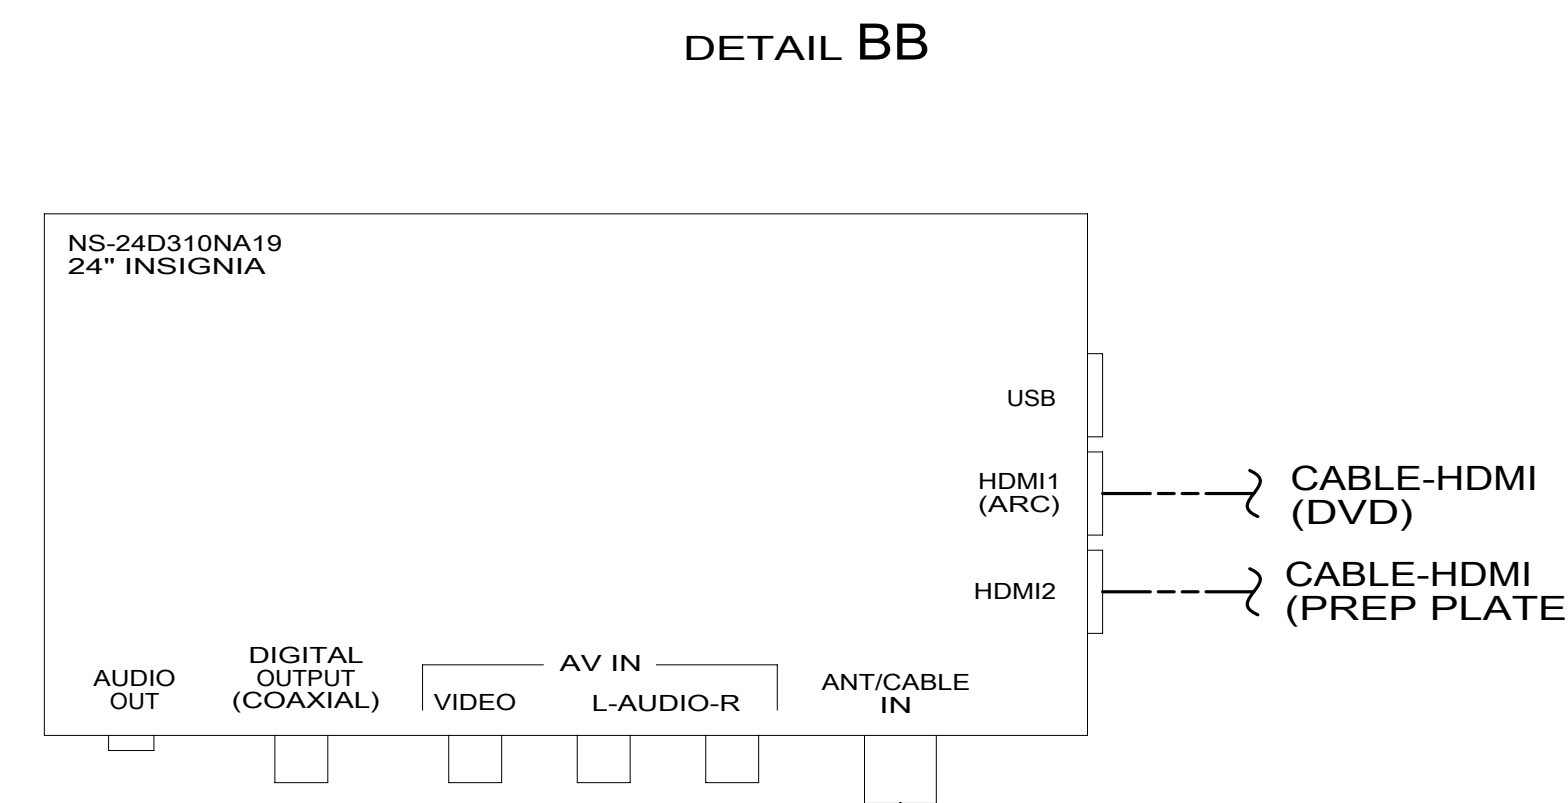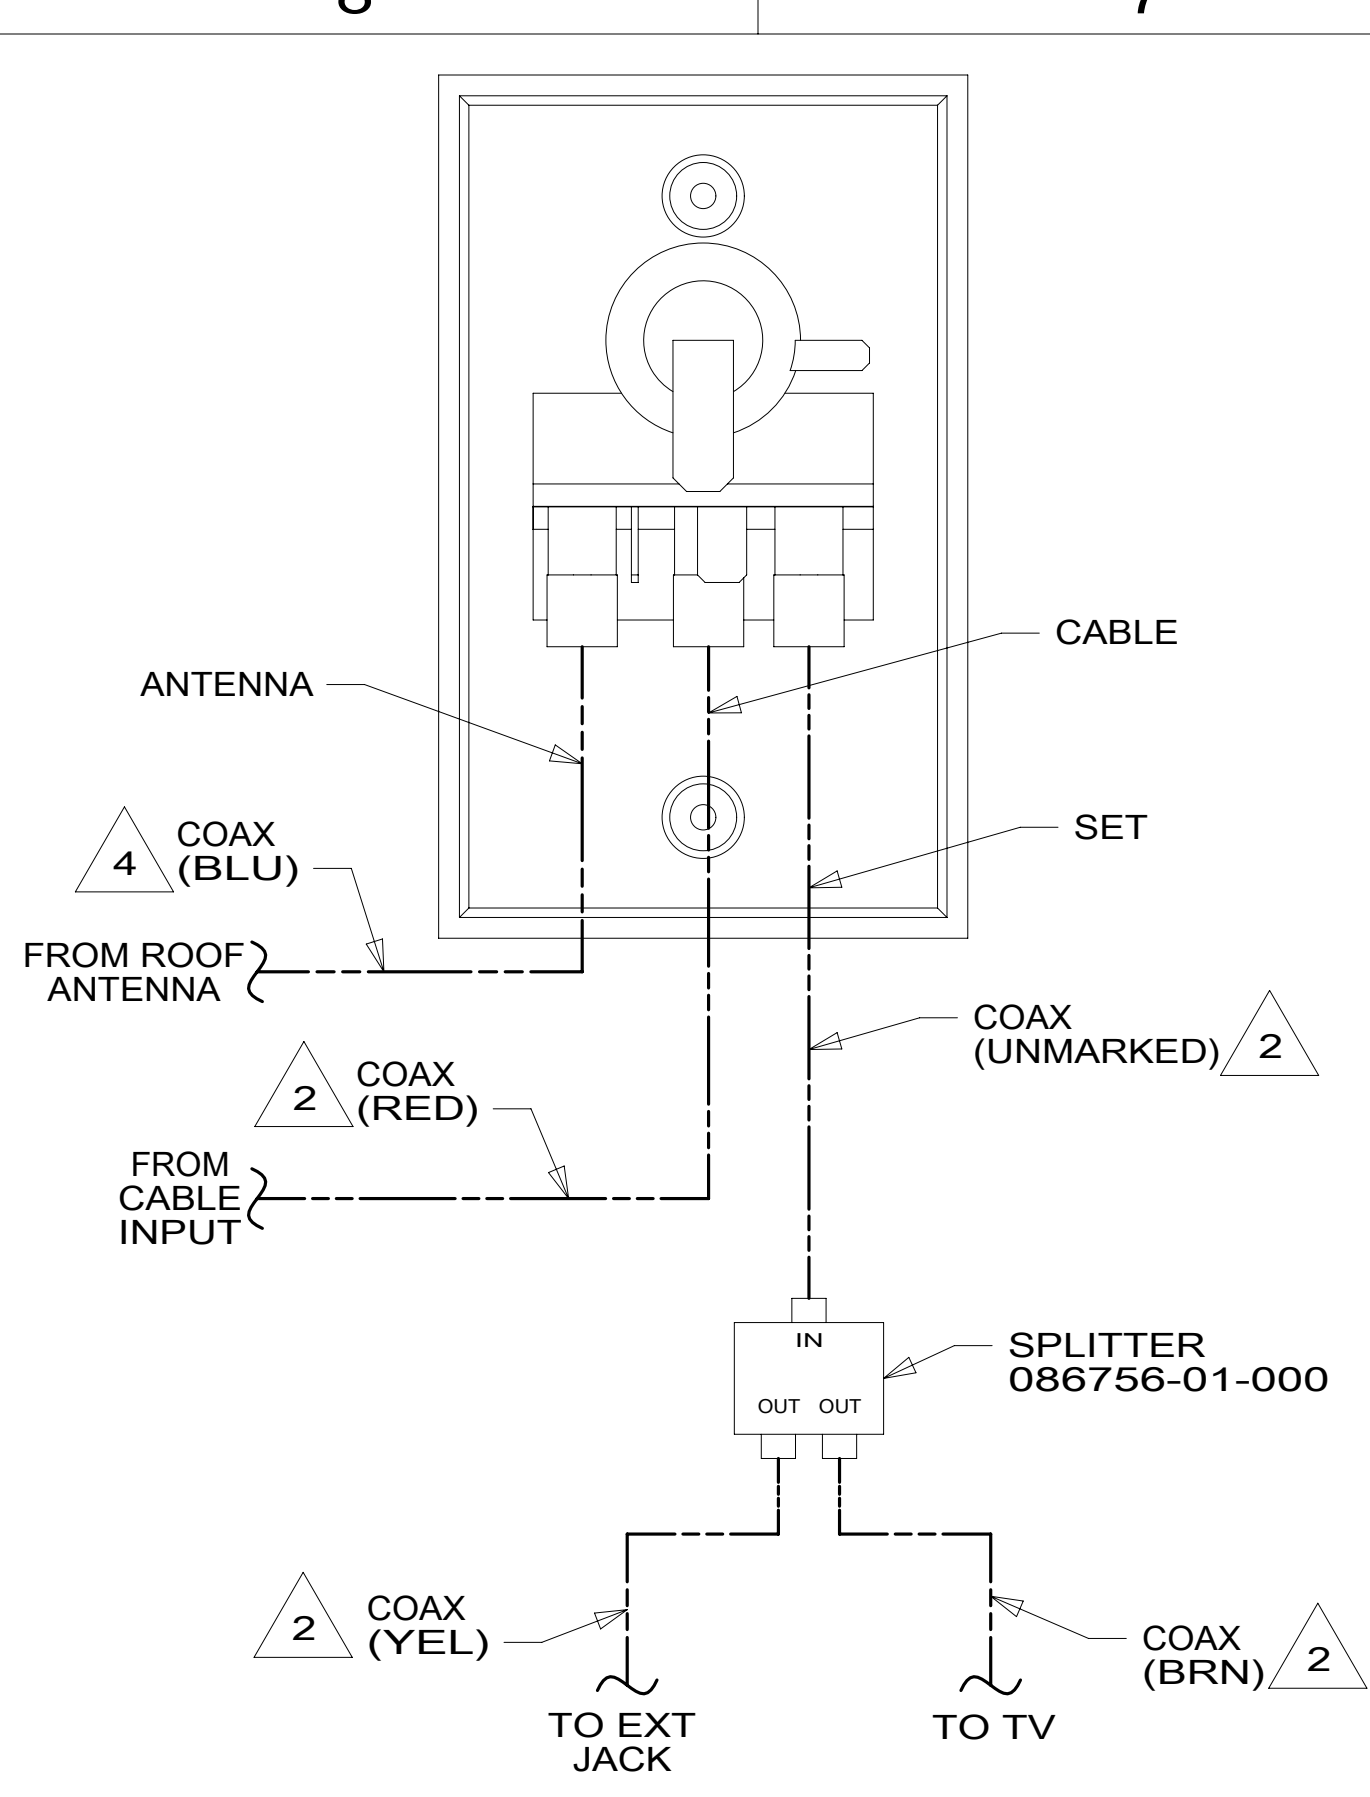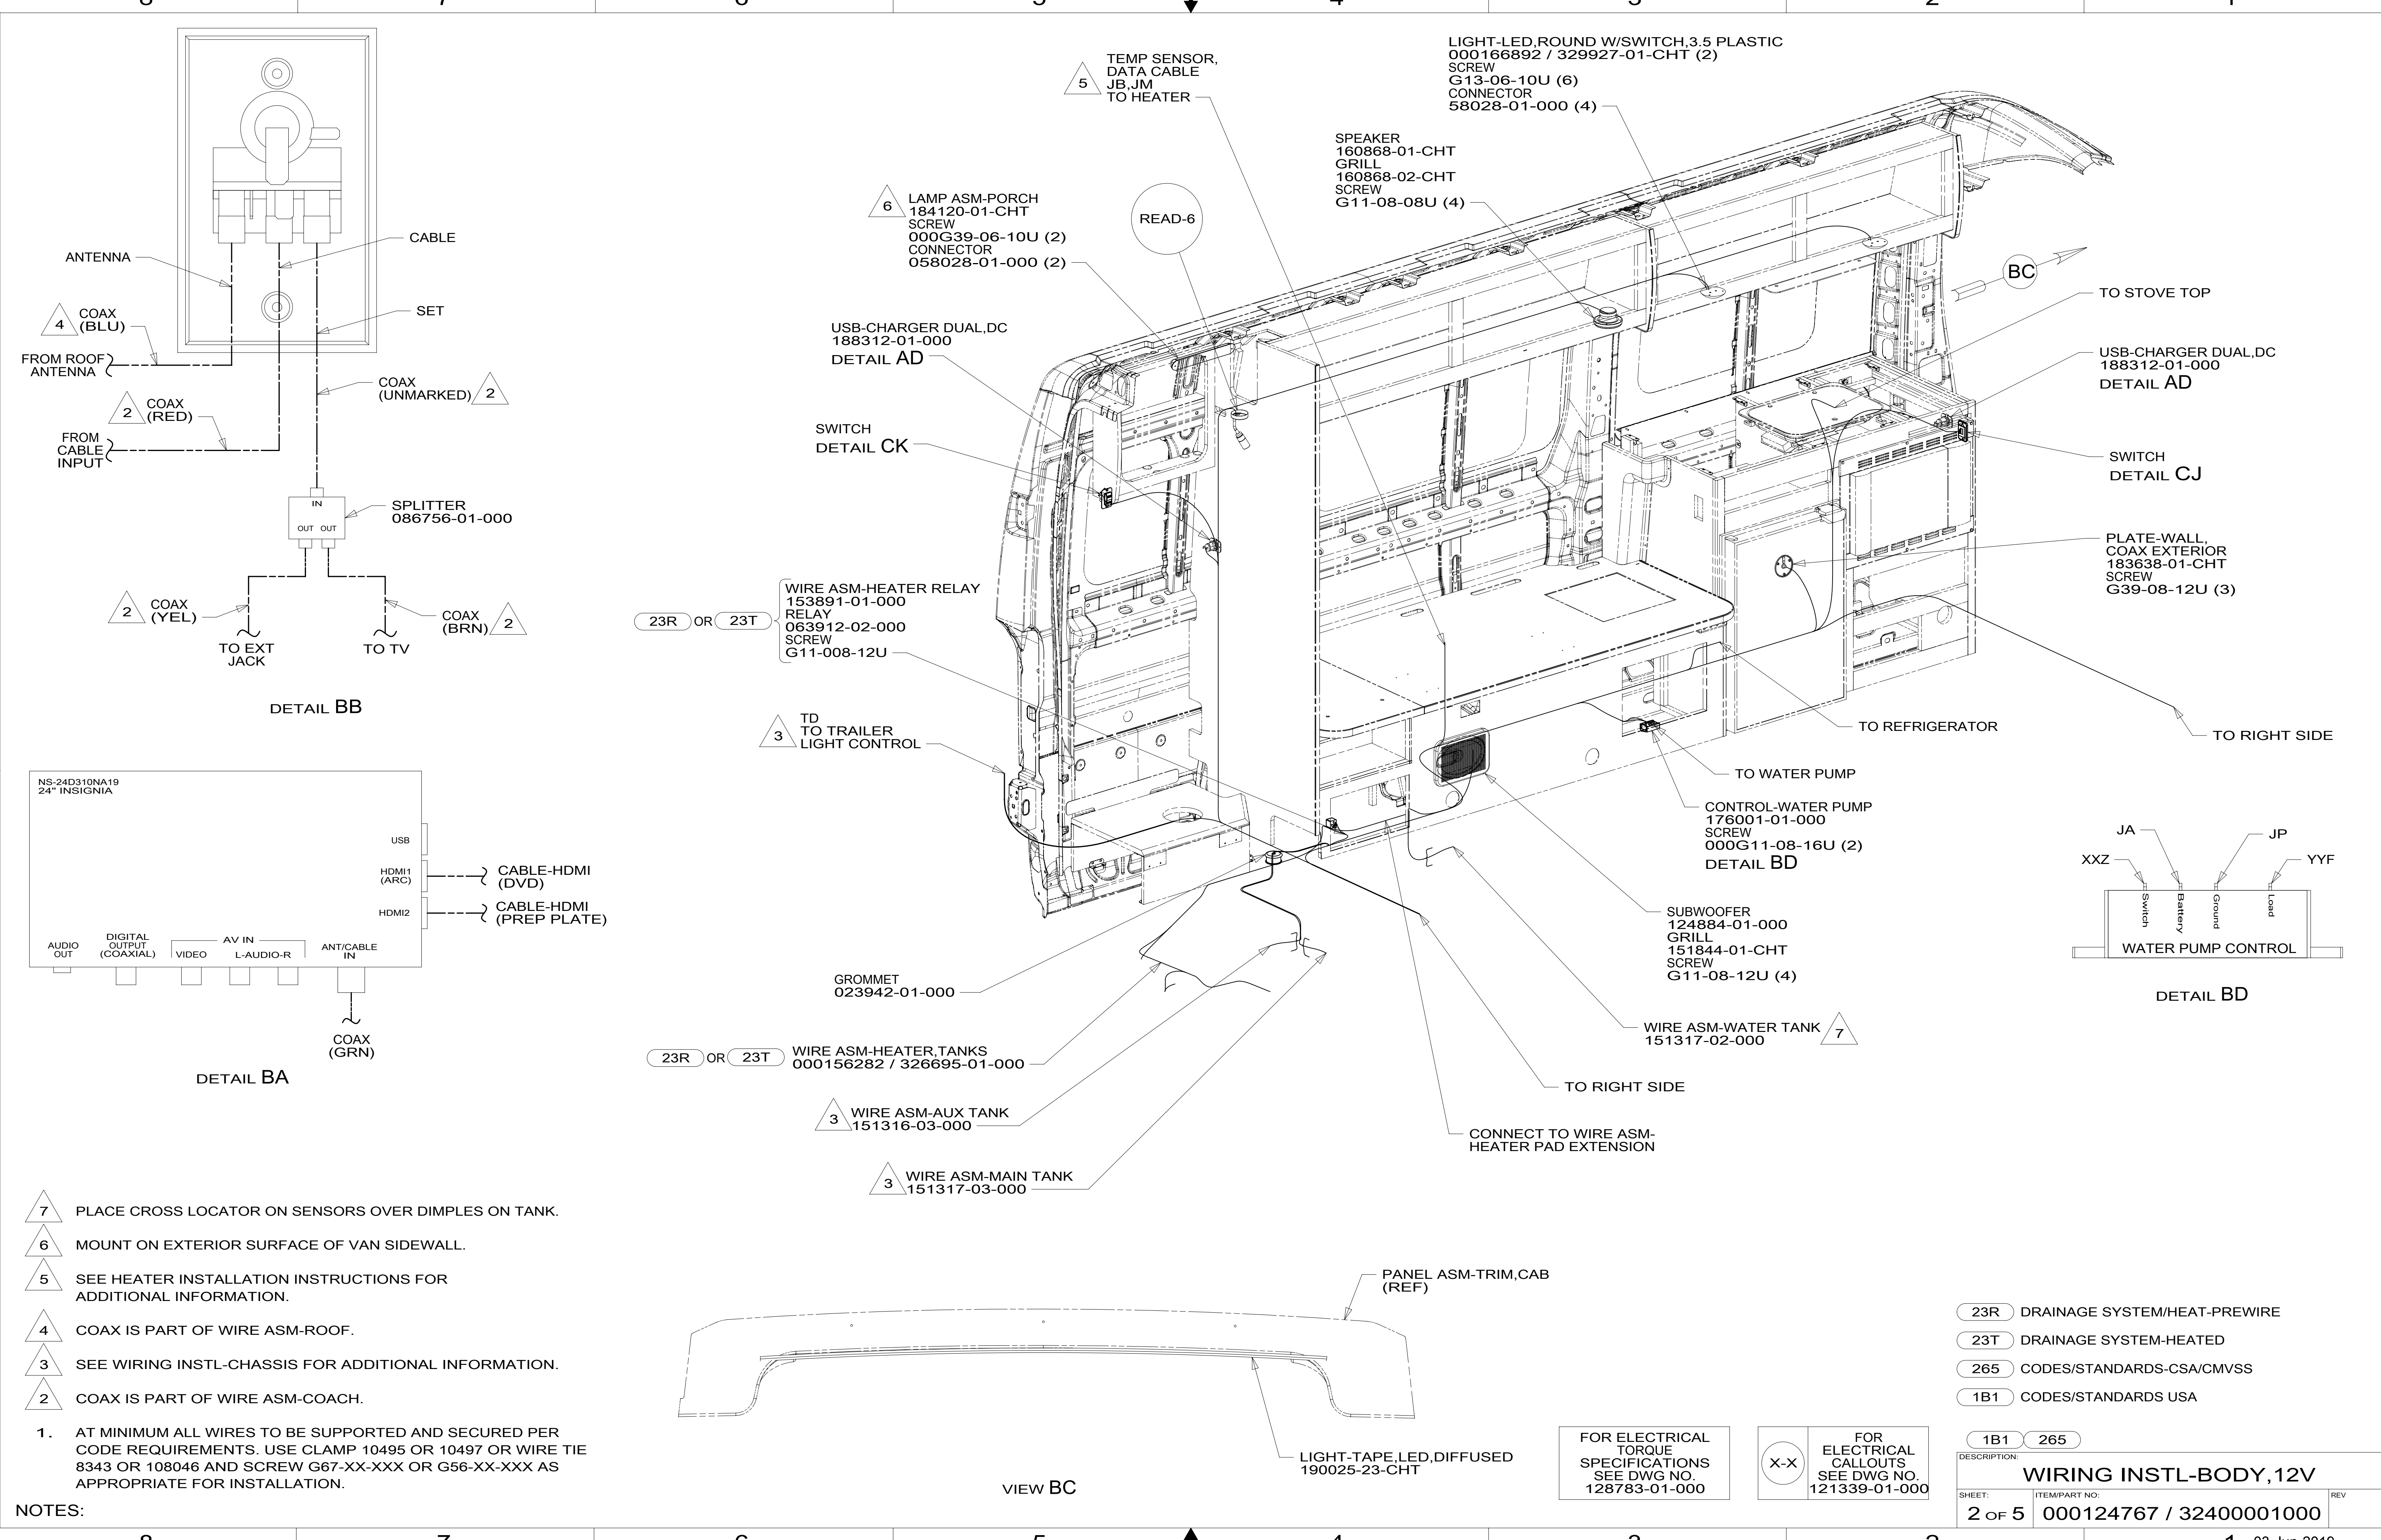

- NOTES:**
- 7 PLACE CROSS LOCATOR ON SENSORS OVER DIMPLES ON TANK.
 - 6 MOUNT ON EXTERIOR SURFACE OF VAN SIDEWALL.
 - 5 SEE HEATER INSTALLATION INSTRUCTIONS FOR ADDITIONAL INFORMATION.
 - 4 COAX IS PART OF WIRE ASM-ROOF.
 - 3 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.
 - 2 COAX IS PART OF WIRE ASM-COACH.
1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

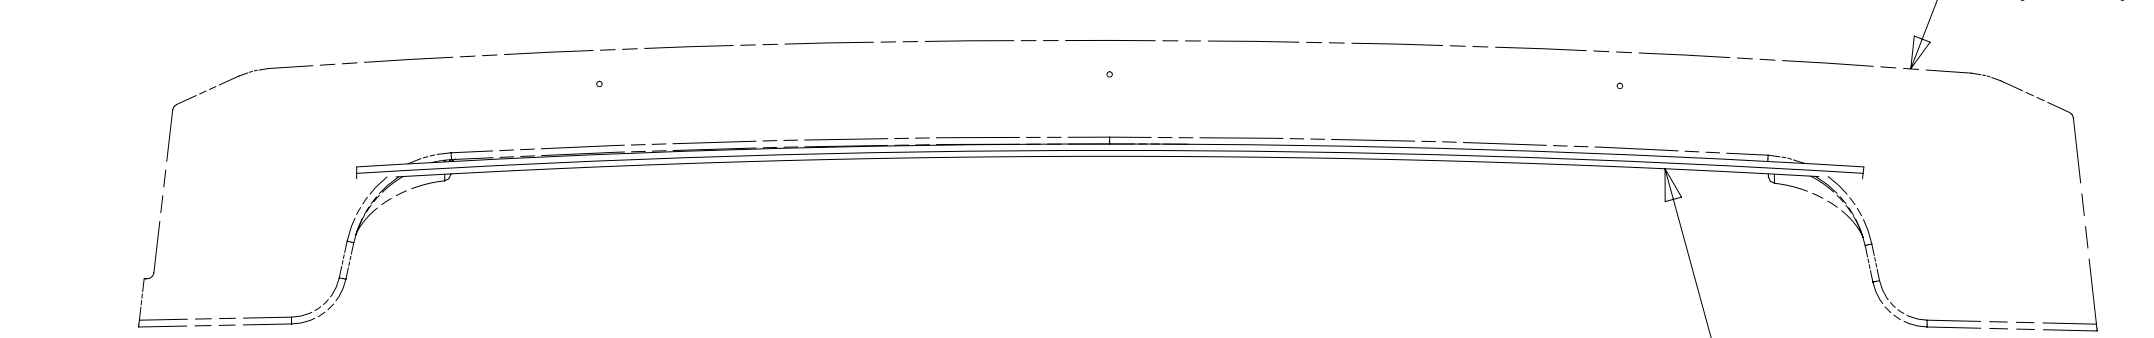

- 23R DRAINAGE SYSTEM/HEAT-PREWIRE
- 23T DRAINAGE SYSTEM-HEATED
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION: WIRING INSTL-BODY, 12V		
SHEET: 2 OF 5	ITEM/PART NO: 000124767 / 32400001000	REV:

D
C
B
A

D
C
B
A

8

7

6

5

4

3

2

1

8

7

6

5

4

3

2

1

03-Jun-2019

D

C

B


A

D

C


B

A

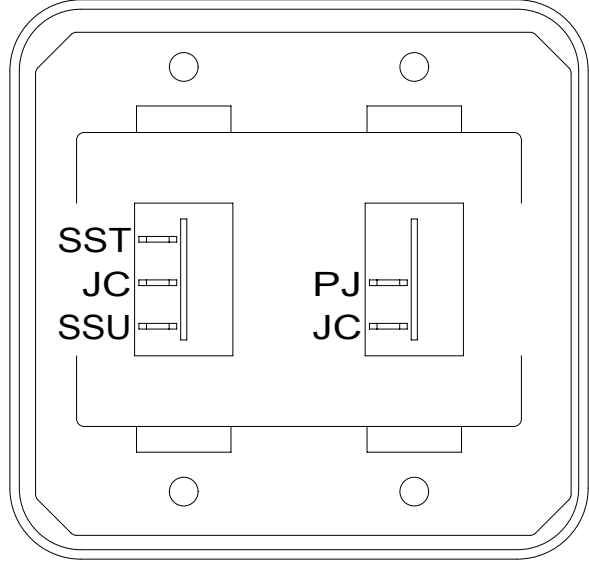


SWITCH-ROCKER
135740-01-CHT
135740-02-CHT
SWITCH-BASE
135741-02-CHT
SWITCH-BEZEL
135742-02-CHT
SCREW
G11-08-08U (4)

DETAIL CA

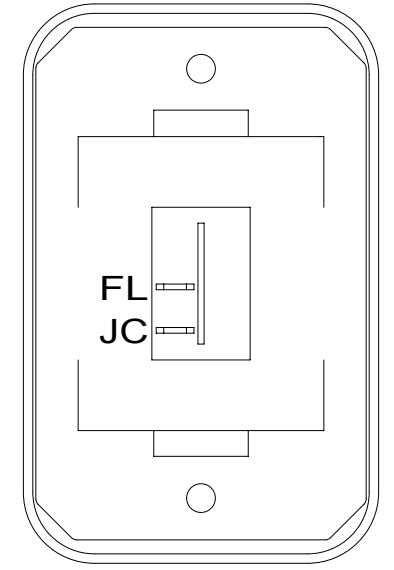


SWITCH-ROCKER
135740-01-CHT
SWITCH-BASE
135741-01-CHT
SWITCH-BEZEL
135742-01-CHT
SCREW
G11-08-08U (2)

DETAIL CB

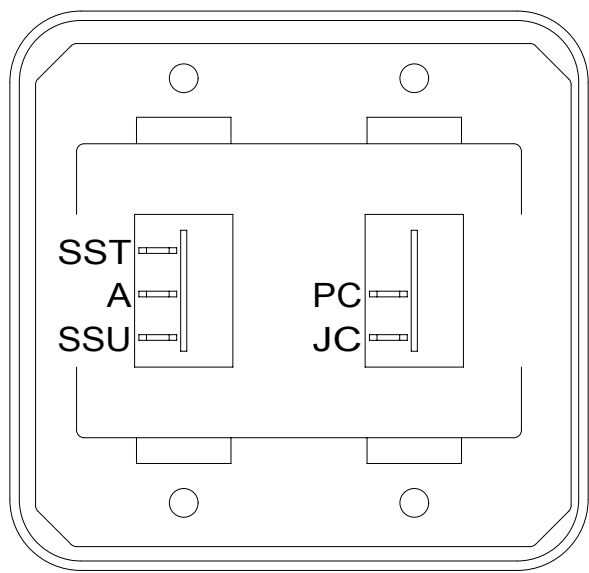


SWITCH-ROCKER
135740-01-CHT
135740-02-CHT
SWITCH-BASE
135741-02-CHT
SWITCH-BEZEL
135742-02-CHT
SCREW
G11-08-08U (4)

DETAIL CC

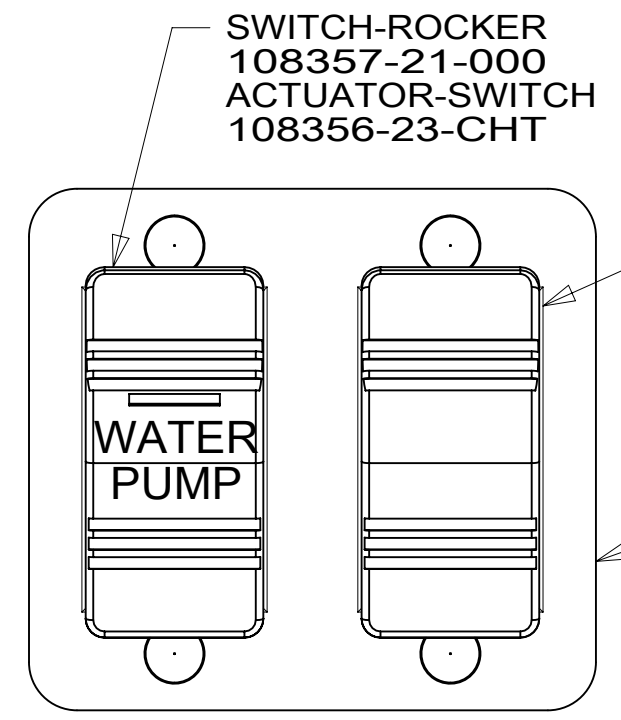


DETAIL CD

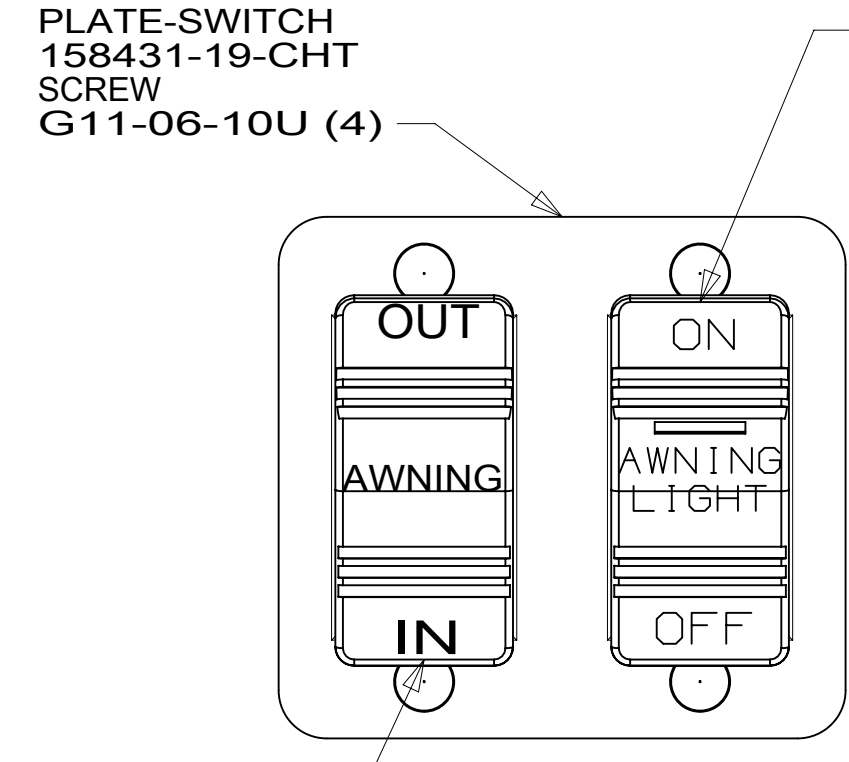


SWITCH-ROCKER
108357-07-000
ACTUATOR-SWITCH
108356-12-CHT


DETAIL CE

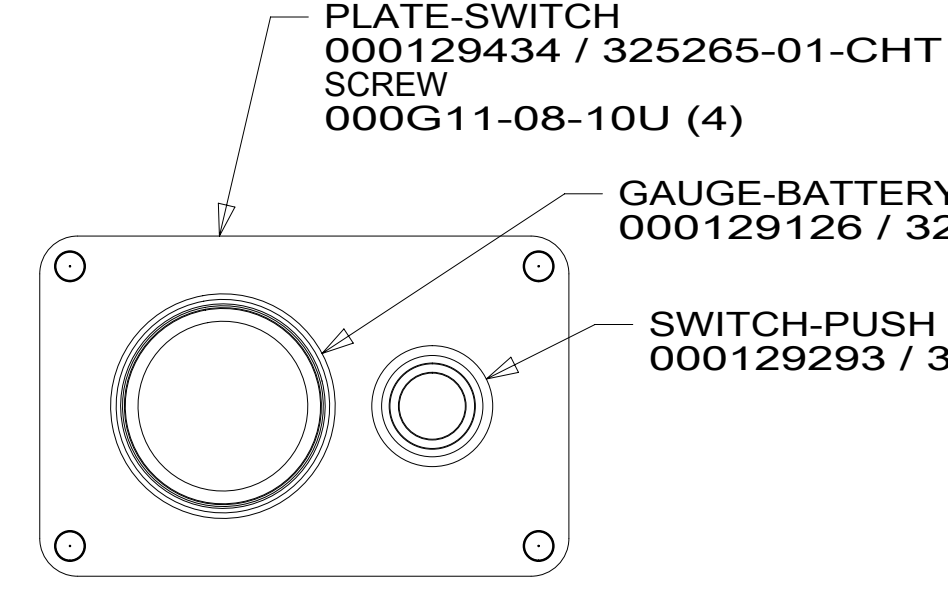


DETAIL CL

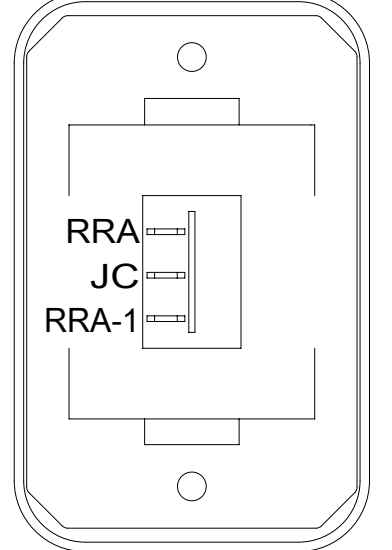

DETAIL CJ

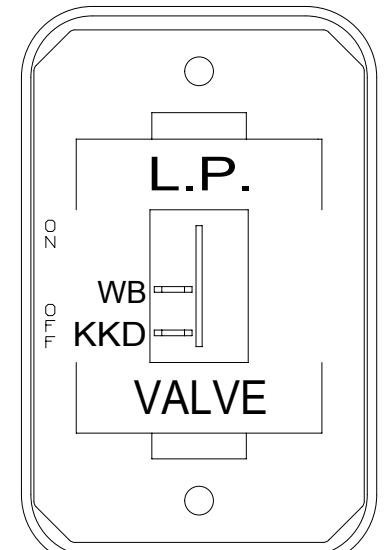


DETAIL CH

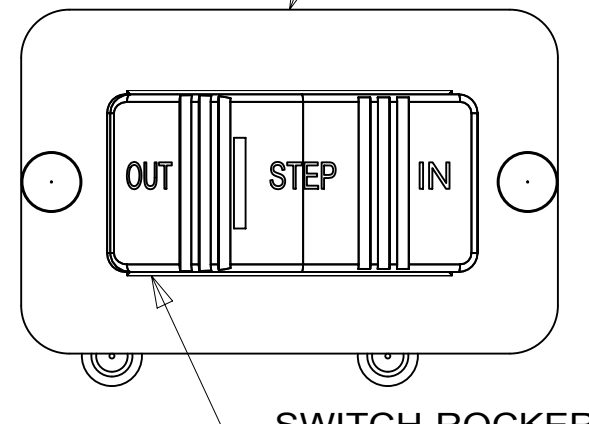


SWITCH-ROCKER
108357-14-000
ACTUATOR-SWITCH
108356-03-CHT
SWITCH-ROCKER
108357-07-000
ACTUATOR-SWITCH
108356-29-CHT

DETAIL CF

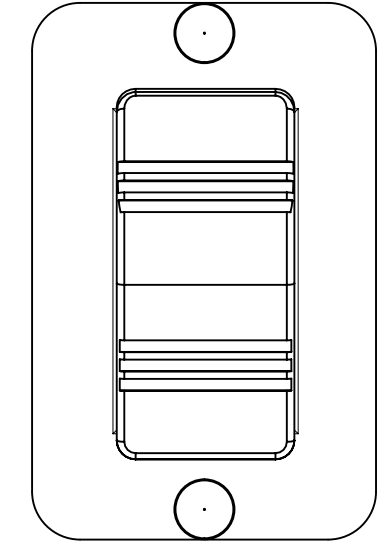

DETAIL CK

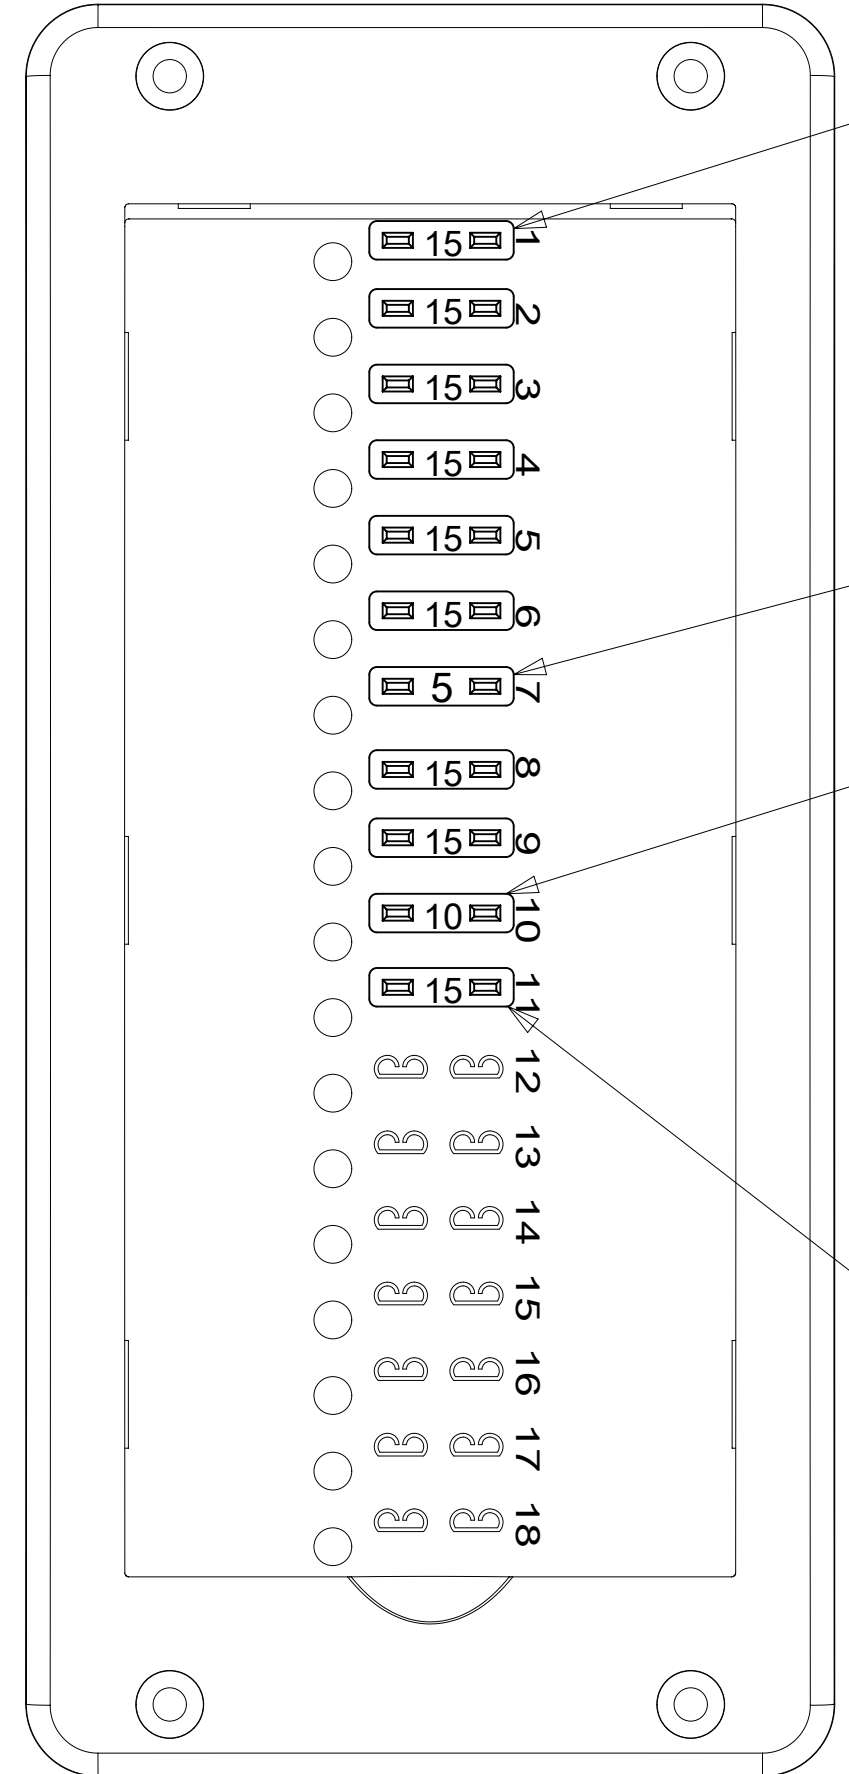


DETAIL CG
(COVER REMOVED)

HOLDING TANK HEATER
TURN OFF When Not In Use
SEE OPERATORS MANUAL

LABEL-SWITCH
134563-01-CHT 23R OR 23T

SWITCH-BLANK
138253-01-CHT
SWITCH-ROCKER
135740-06-CHT
SWITCH-BASE
135741-01-CHT
SWITCH-BEZEL
135742-01-CHT
SCREW
G11-08-08U (2)

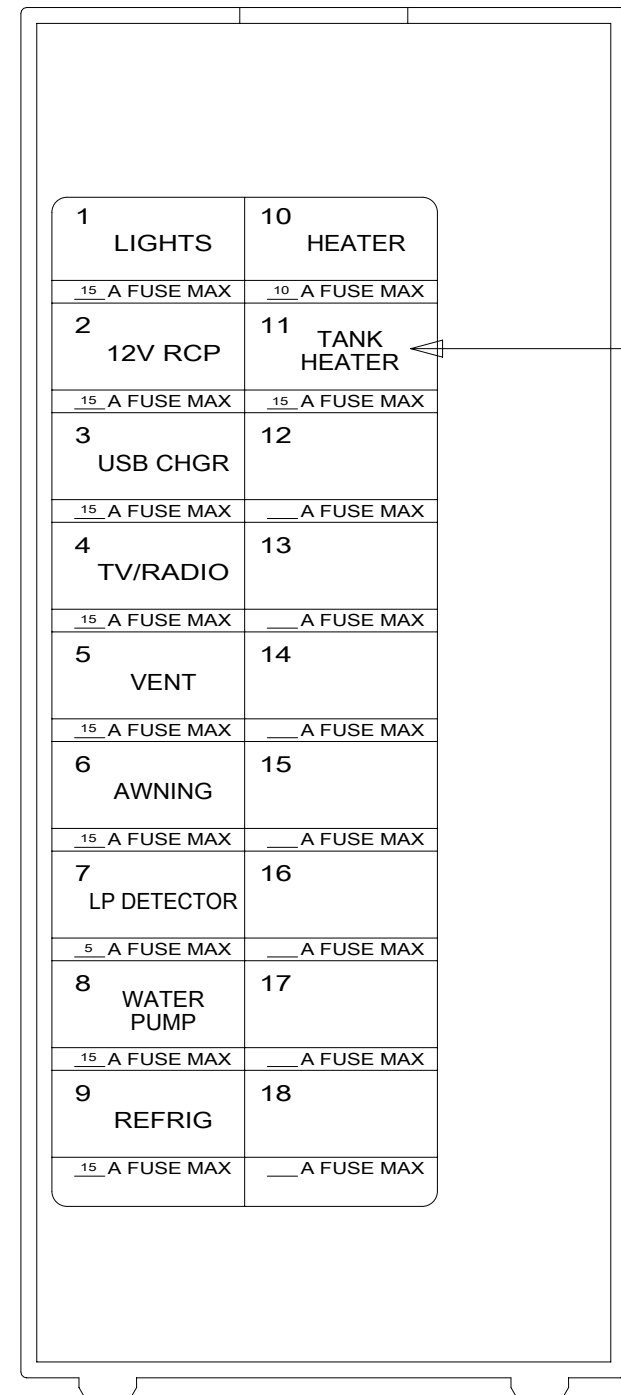

DETAIL CG
(BACK SIDE
OF COVER)

1	LIGHTS	10	HEATER
15	A FUSE MAX	15	A FUSE MAX
2	12V RCP	11	TANK HEATER
3	USB CHGR	12	
4	TV/RADIO	13	
5	VENT	14	
6	AWNING	15	
7	LP DETECTOR	16	
8	WATER PUMP	17	
9	REFRIG	18	

- JC 14 Y (LIGHTS)
- JD 14 Y (12V RCP)
- JE 14 Y (USB CHARGER)
- JF 14 Y (TV/RADIO)
- JG 14 Y (VENT)
- NM 12 Y (AWNING)
- WB 16 Y (LP DETECTOR)
- JA 12 Y (WATER PUMP)
- ET 10 Y (REFRIG)
- JB 10 Y (HEATER)
- FFZ 12 Y (TANK HTR) 23R OR 23T

DETAIL CG
(BACK SIDE)

- 1JD DRAINAGE SYSTEM-HEATED-W/O
- 23R DRAINAGE SYSTEM/HEAT-PREWIRE
- 07B RUNNING BOARDS - ALUMINUM
- 1E2 ENTRANCE STEP-ELEC.
- 23T DRAINAGE SYSTEM-HEATED
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1 SEE BATTERY INSTL FOR MORE INFORMATION.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION: **WIRING INSTL-BODY, 12V**

SHEET: 3 OF 5 ITEM/PART NO.: 000124767 / 32400001000 REV

1B1 265

03-Jun-2019

PANEL-SOLAR 45 WATT
000169899 / 318635-02-CHT
MOUNTING FEET-SOLAR, QTY 4
000037645 / 318636-01-000
SCREW
G39-10-10U (12)
BRACKET-MOUNTING,
SOLAR PANEL, ROOF RACK
000031343 / 316954-01-CHT (4)
NUT
000D39-05-00U (4)
BOLT
000C27-05-16U (4)
WASHER-FLAT NYLON
058716-07-000 (4)

WIRE ASM-CEILING
000126796 / 32452301000

WIRE ASM-SOLAR EXT
195056-01-000
CLAMP
10495-02-000 (6)

TO WIRE ASM-COACH
WIRE ASM-ROOF
000126784 / 324518-01-000

TO SPEAKER
TO AWNING
DETAIL ED

GROMMET
114208-04-000

PORT-SOLAR, 3 POSITION
000170803 / 331218-01-CHT
SPACER
000041695 / 319875-01-CHT (2)
SCREW
G39-10-16U (4)
GROMMET
114208-05-000
CLAMP
10495-02-000
DETAIL DD

TO REAR
PORCH LIGHT



TO BATH VENT

LSH-2



PANEL-SOLAR 170 WATT
000041411 / 318634-02-CHT
MOUNTING FEET-SOLAR, QTY 4
000037645 / 318636-01-000
SCREW
G39-10-10U (12)
BRACKET-MOUNTING,
SOLAR PANEL, ROOF RACK
000031343 / 316954-01-CHT (4)
NUT
000D39-05-00U (4)
BOLT
000C27-05-16U (4)
WASHER-FLAT NYLON
058716-07-000 (4)

PANEL-SUPPORT, ANTENNA
000167998 / 330247-01-CHT
SCREW
G39-10-16U (12)
GROMMET
114208-04-000 (2)

LIGHT-LED, ROUND 3.5 PLASTIC
000166893 / 329928-01-CHT (4)
SCREW
G13-06-08U (12)
CONNECTOR
58028-01-000 (8)

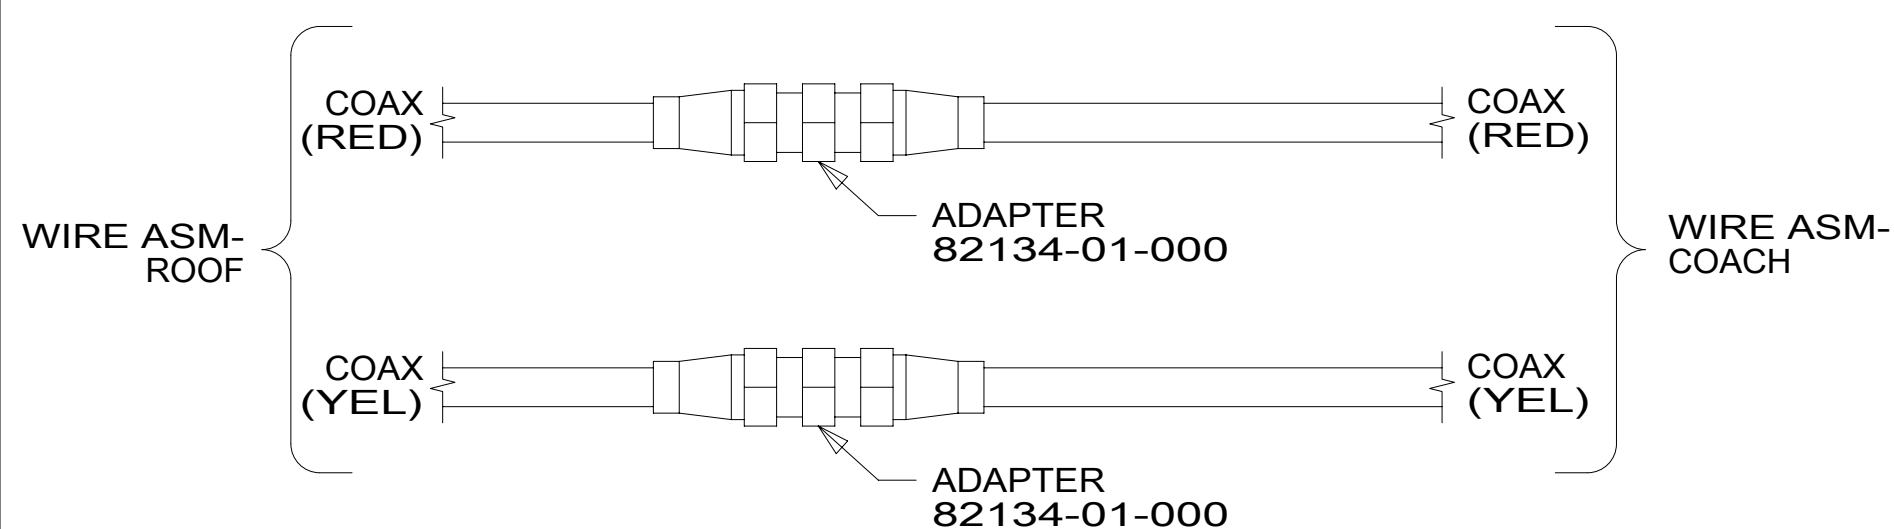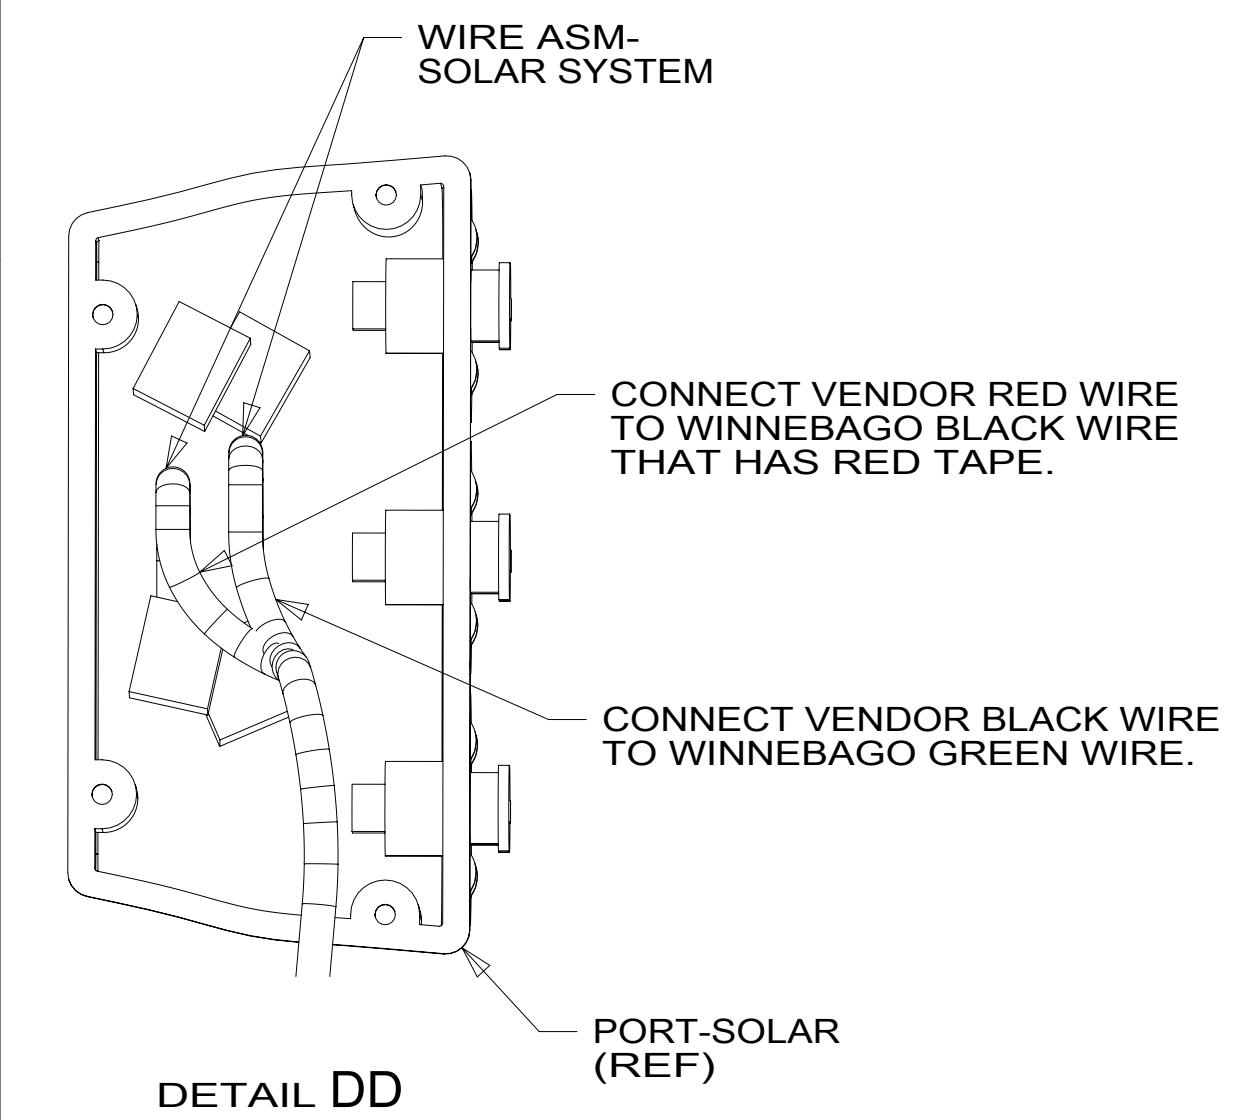

BRACKET-TV SWING MOUNT
179241-02-CHT
PAD-FELT 3/8
023320-01-000 (3)
(ADHERE TO RUBBER
BUMPER ON BRACKET)
NUT-SERT
39715-01-000 (4)
BOLT
C26-04-12U (4)
WASHER
000E13-04-00U (6)
SEAL-FOAM TAPE
154585-07-CHT
(370 MM)

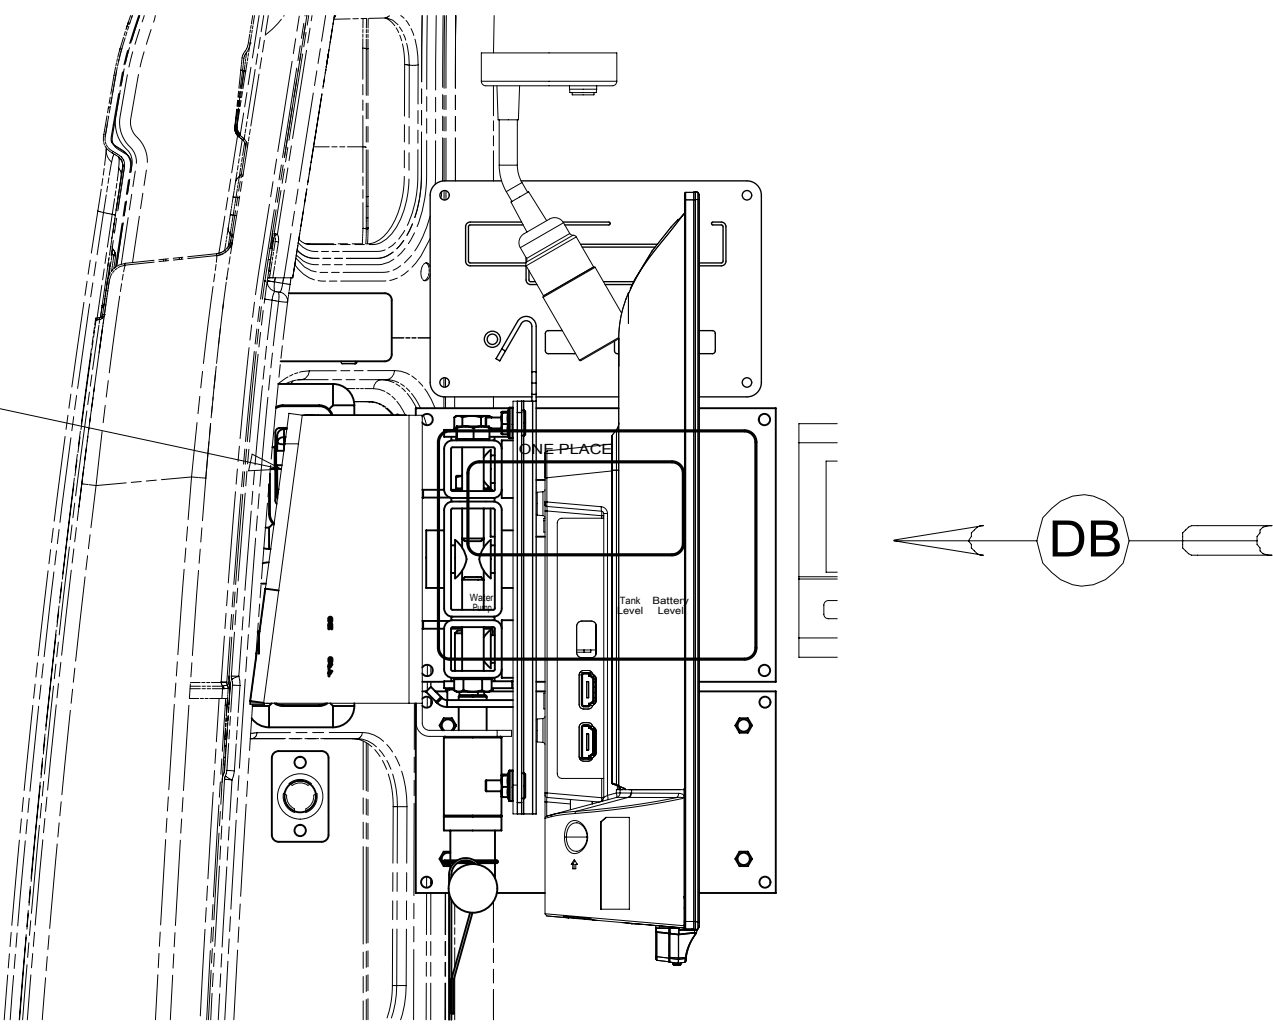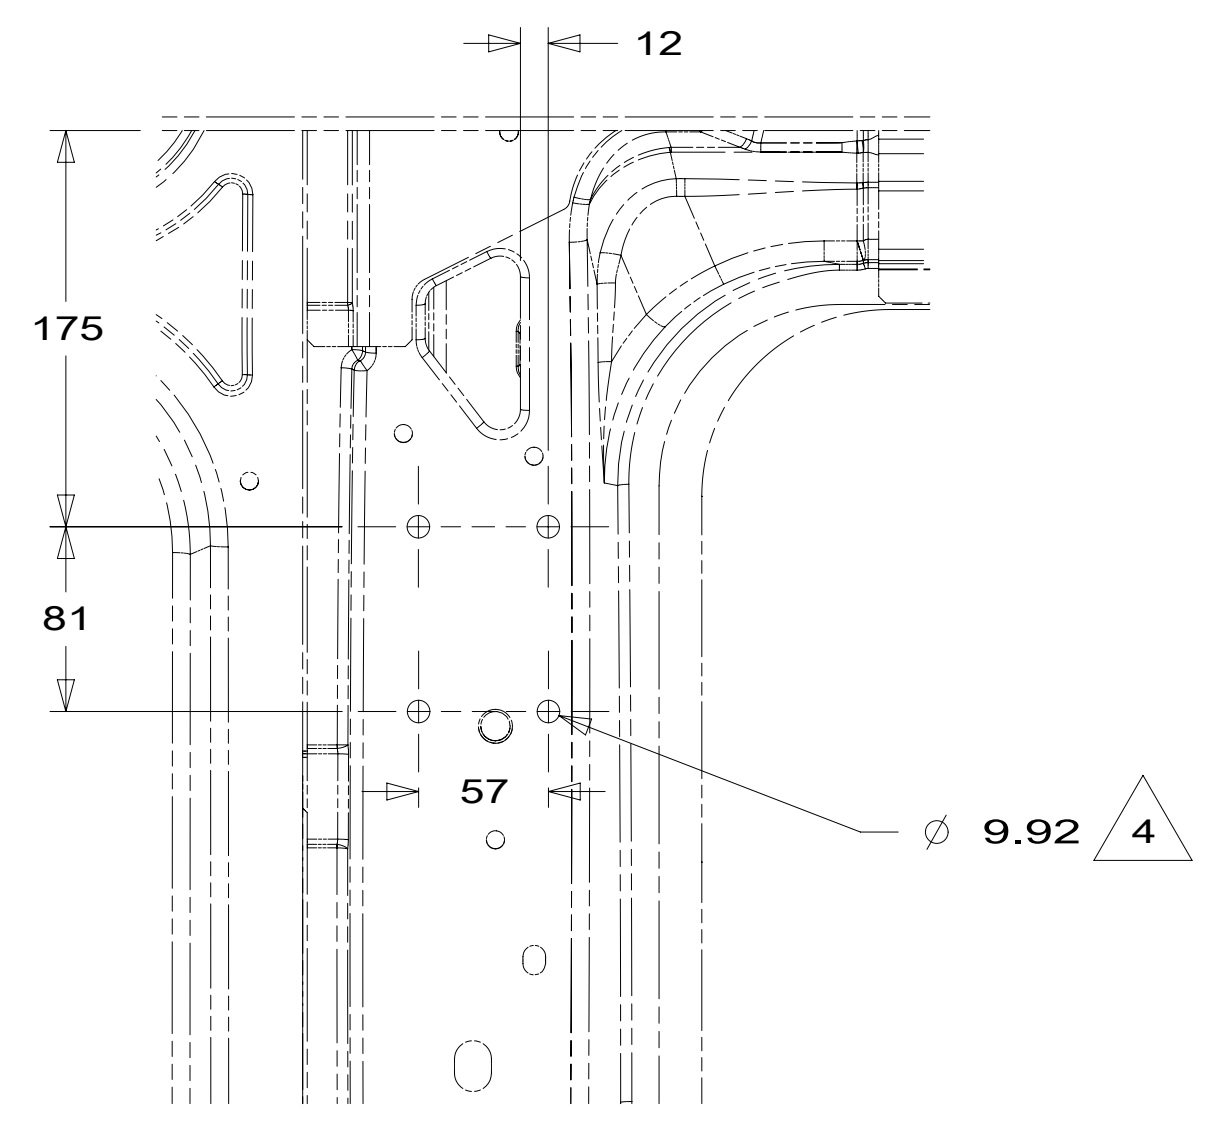

- 6 ATTACH CLAMP WHEN MOUNTING PORT-SOLAR, 3 POS
- 5 ATTACH CLAMPS WHEN MOUNTING A/C PANEL. SEE A/C SYSTEM INSTL FOR ADDITIONAL INFORMATION.
- 4 LOCATE HOLES TO MATCH PANEL-REAR, RH.
- 3 USE NUTS AND BOLTS SUPPLIED WITH MOUNTING FEET TO ATTACH BRACKET TO SOLAR PANEL WITH 35B
- 2 MOUNTED ON EXTERIOR SURFACE OF ROOF.


1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

- 35B LUGGAGE RACK
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


DESCRIPTION: WIRING INSTL-BODY, 12V		
SHEET: 4 OF 5	ITEM/PART NO.: 000124767 / 32400001000	REV

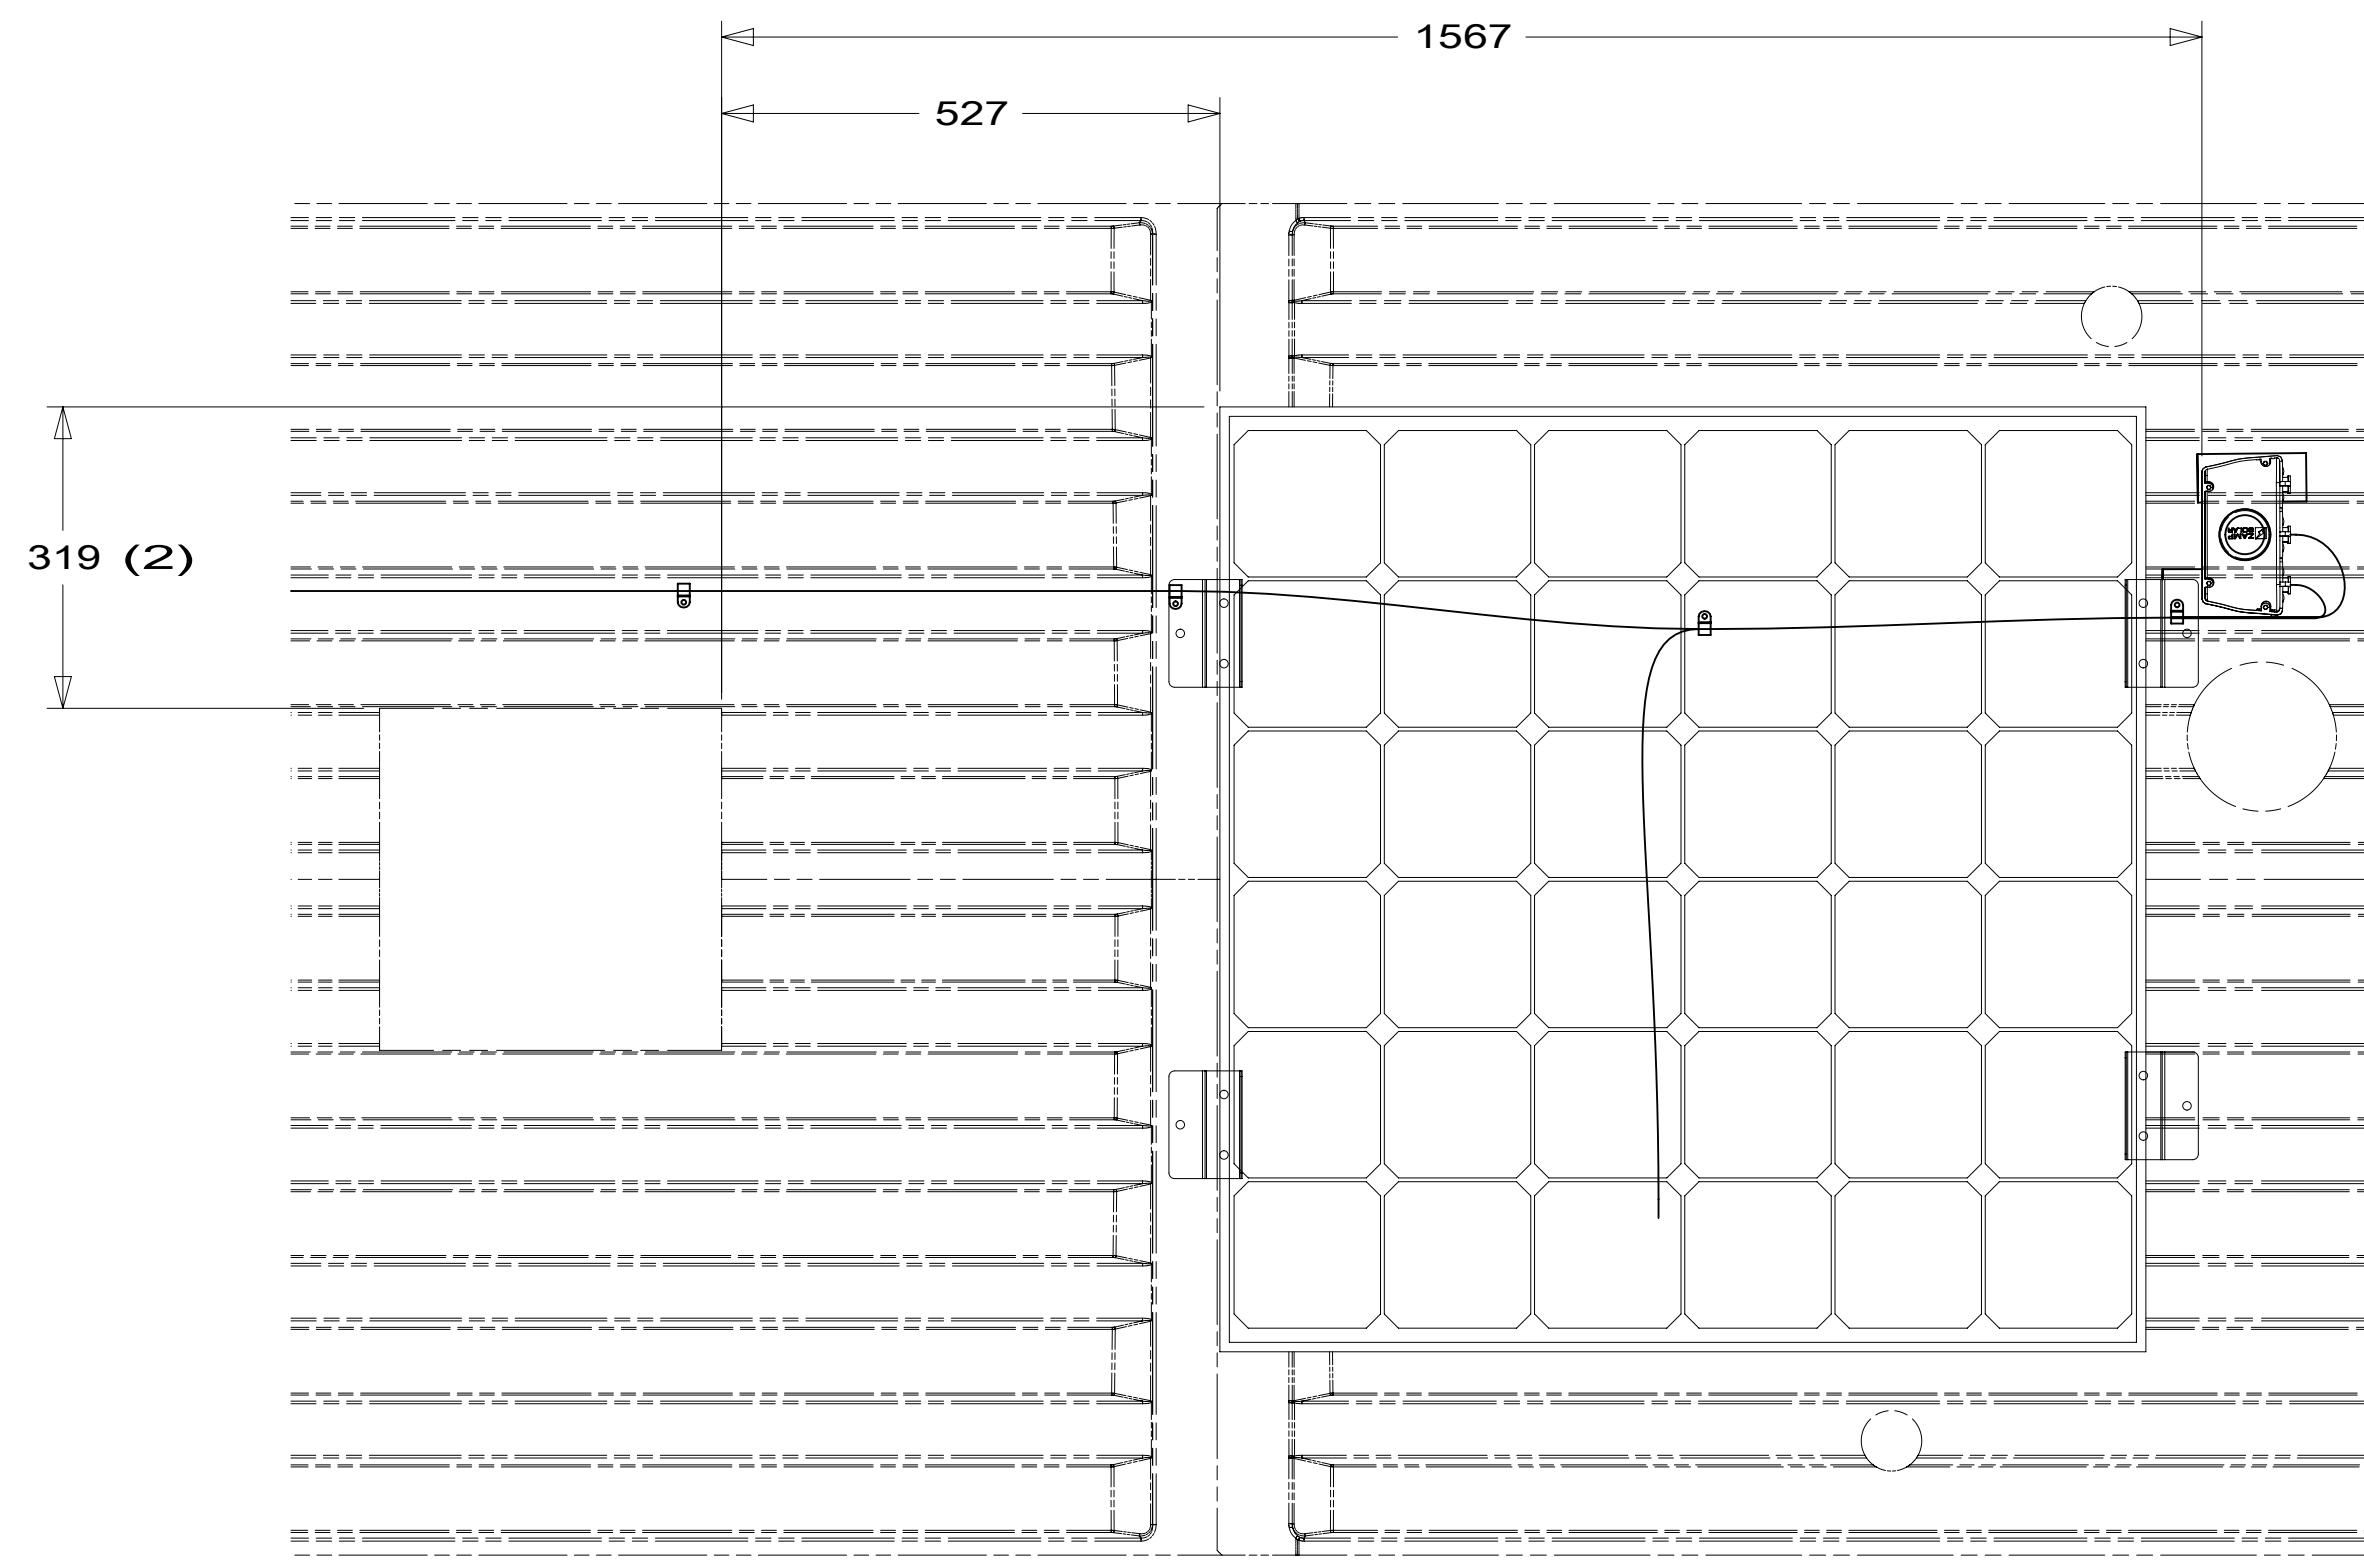


DETAIL EA

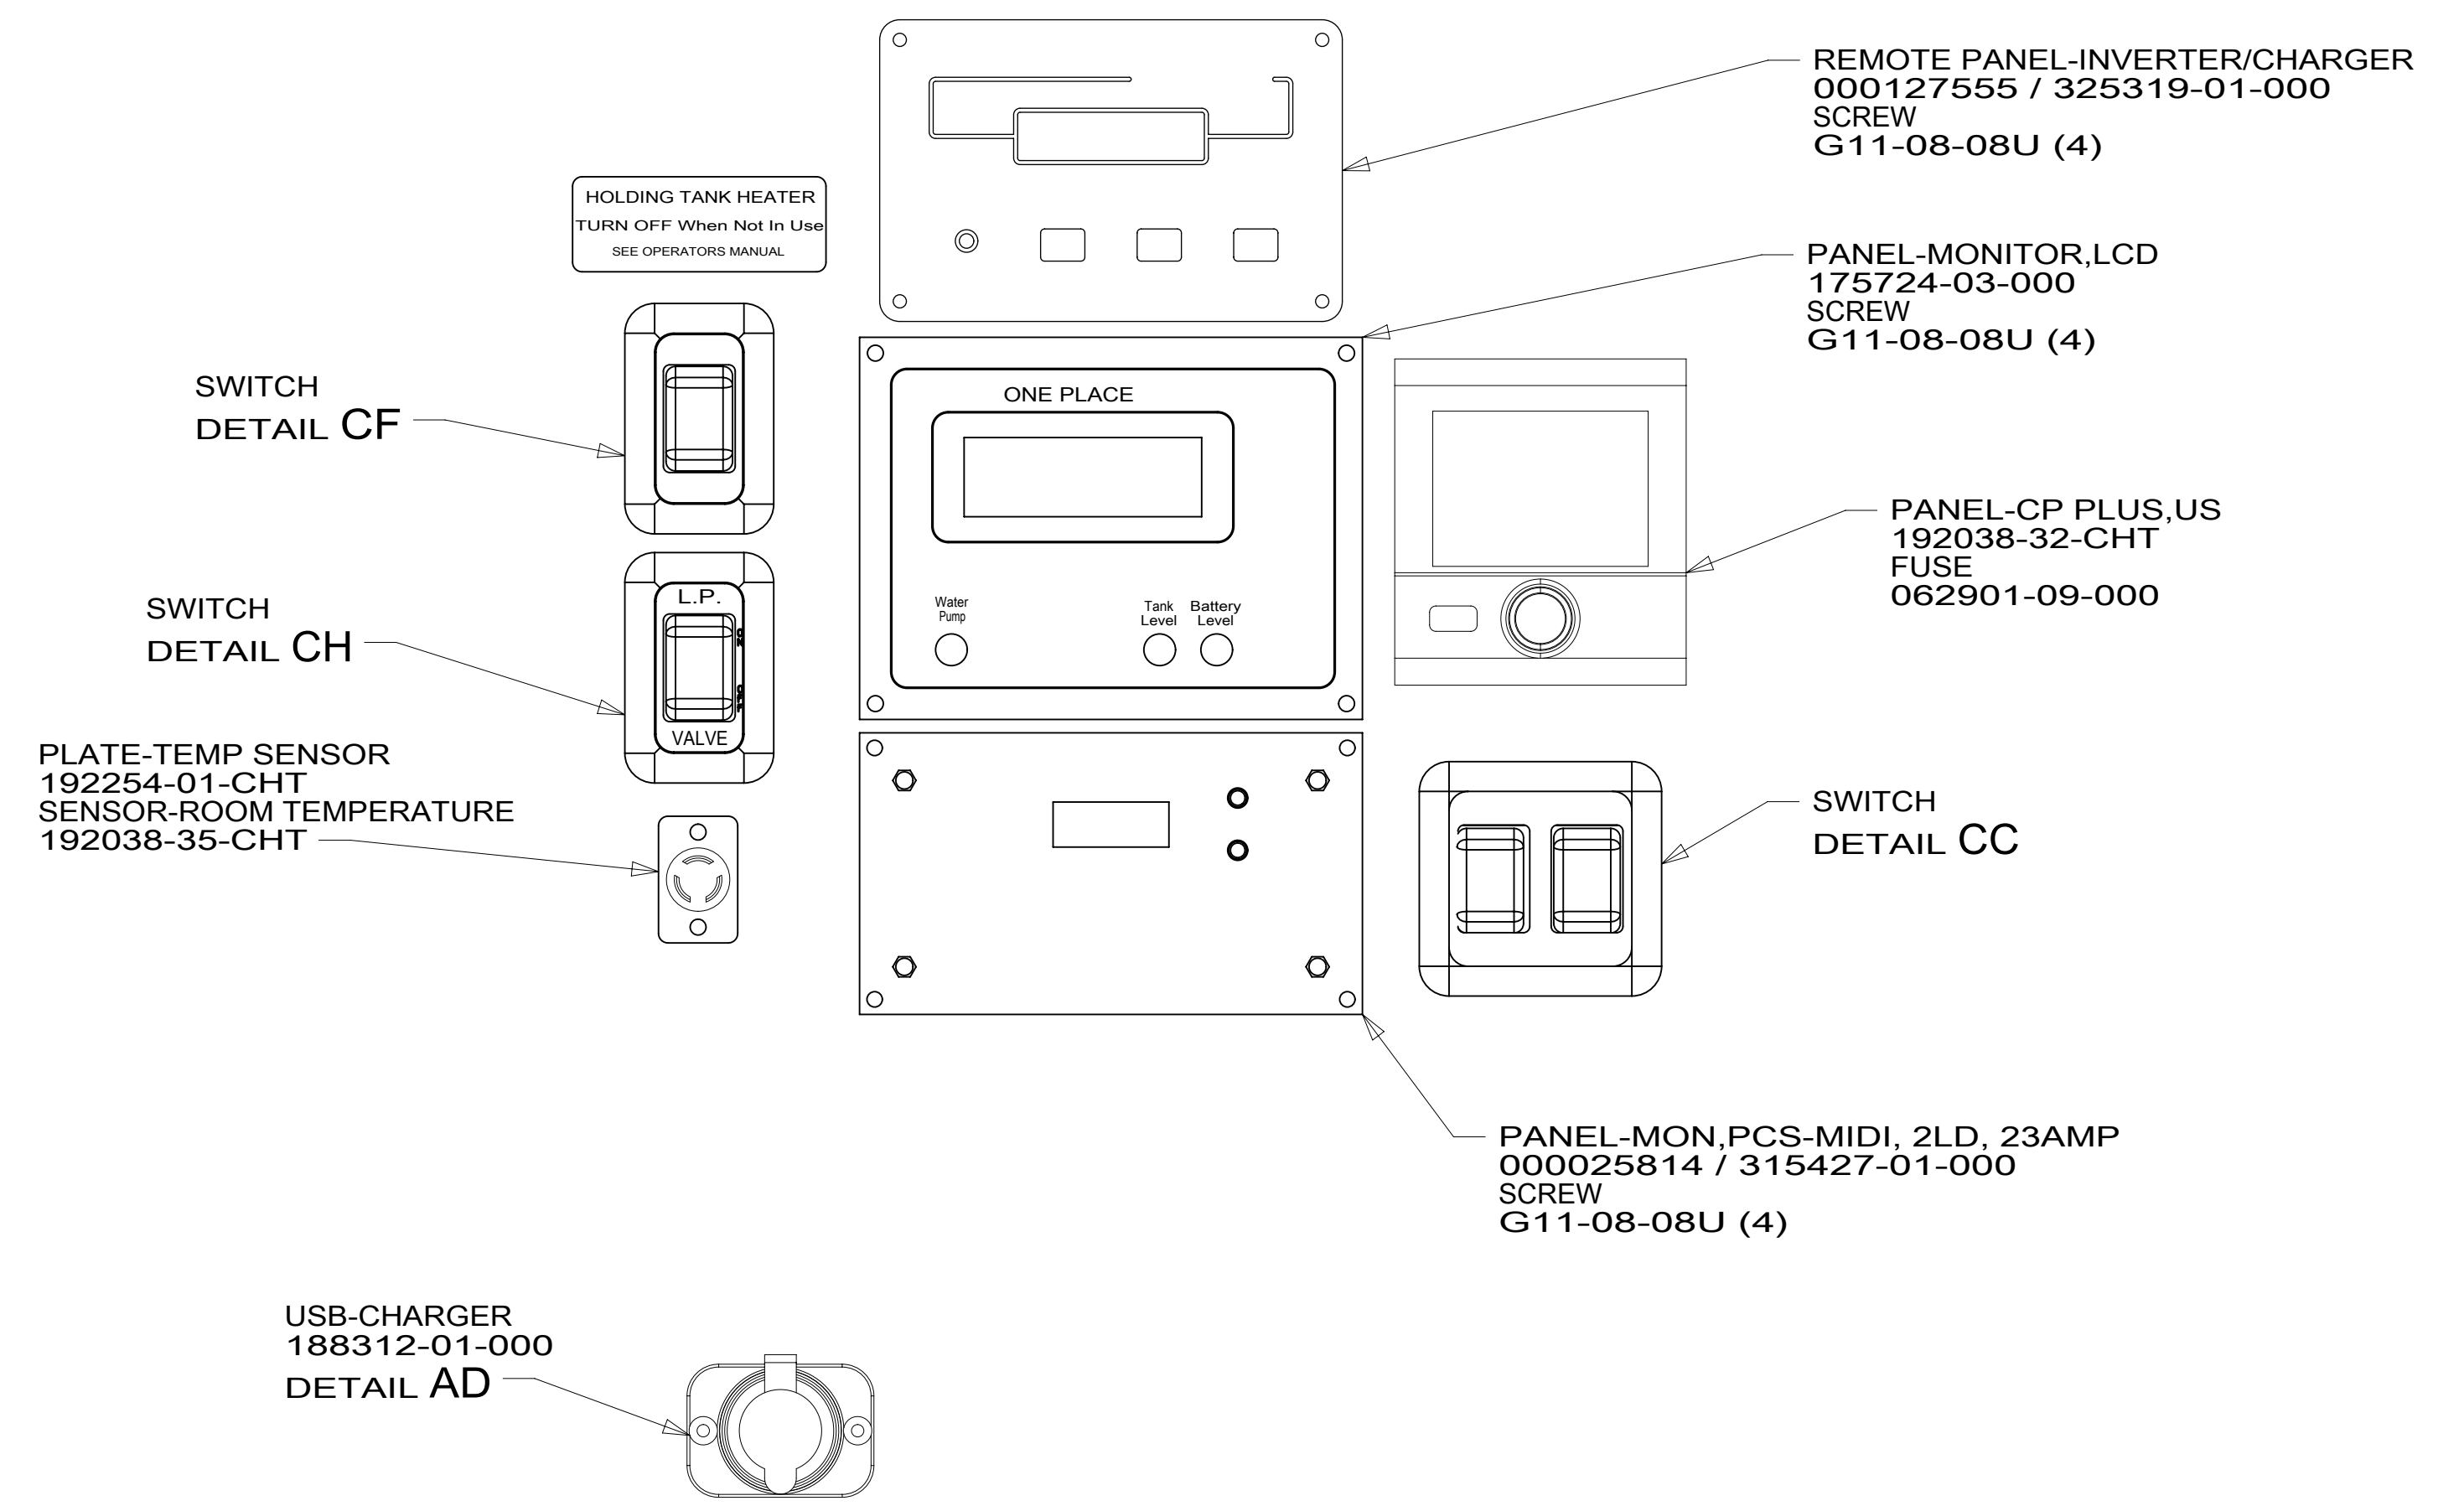


VIEW EC

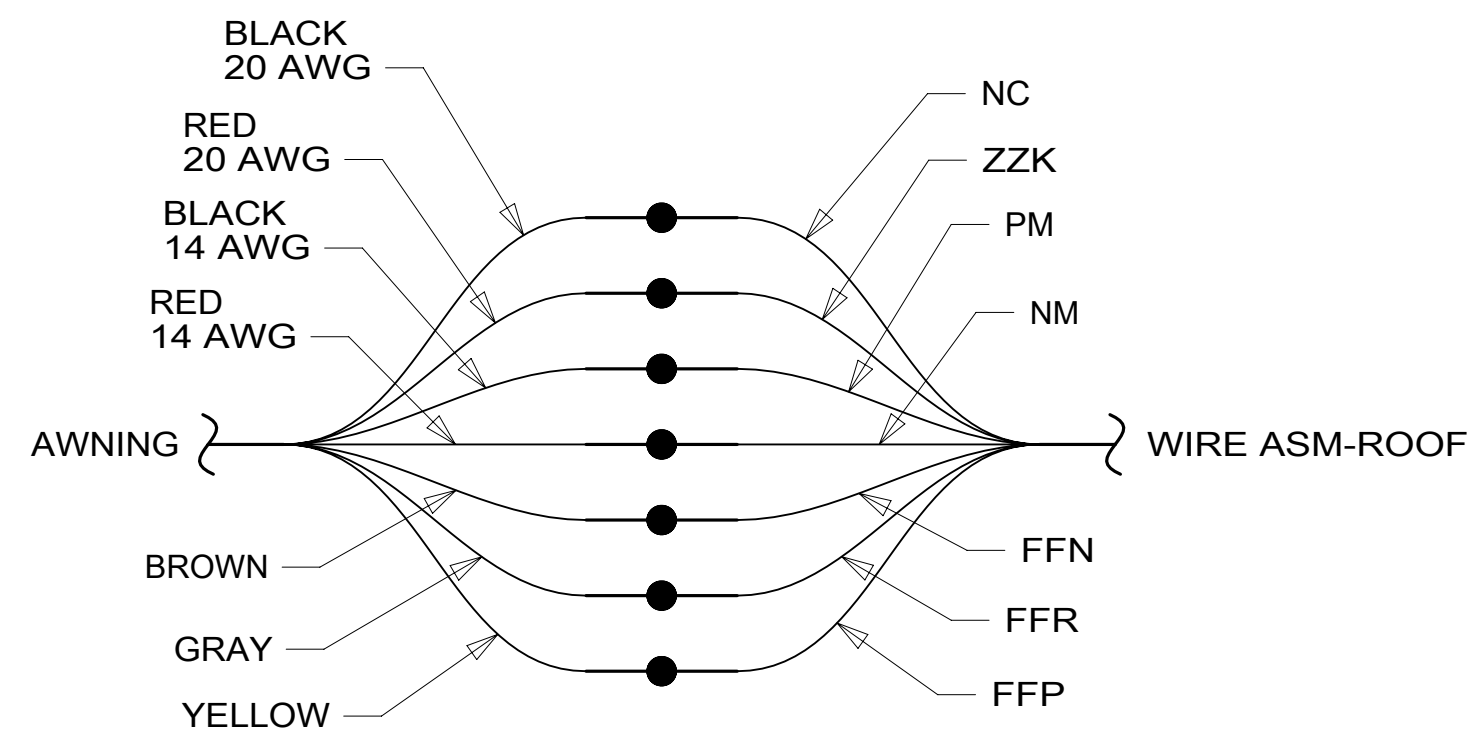

DETAIL ED

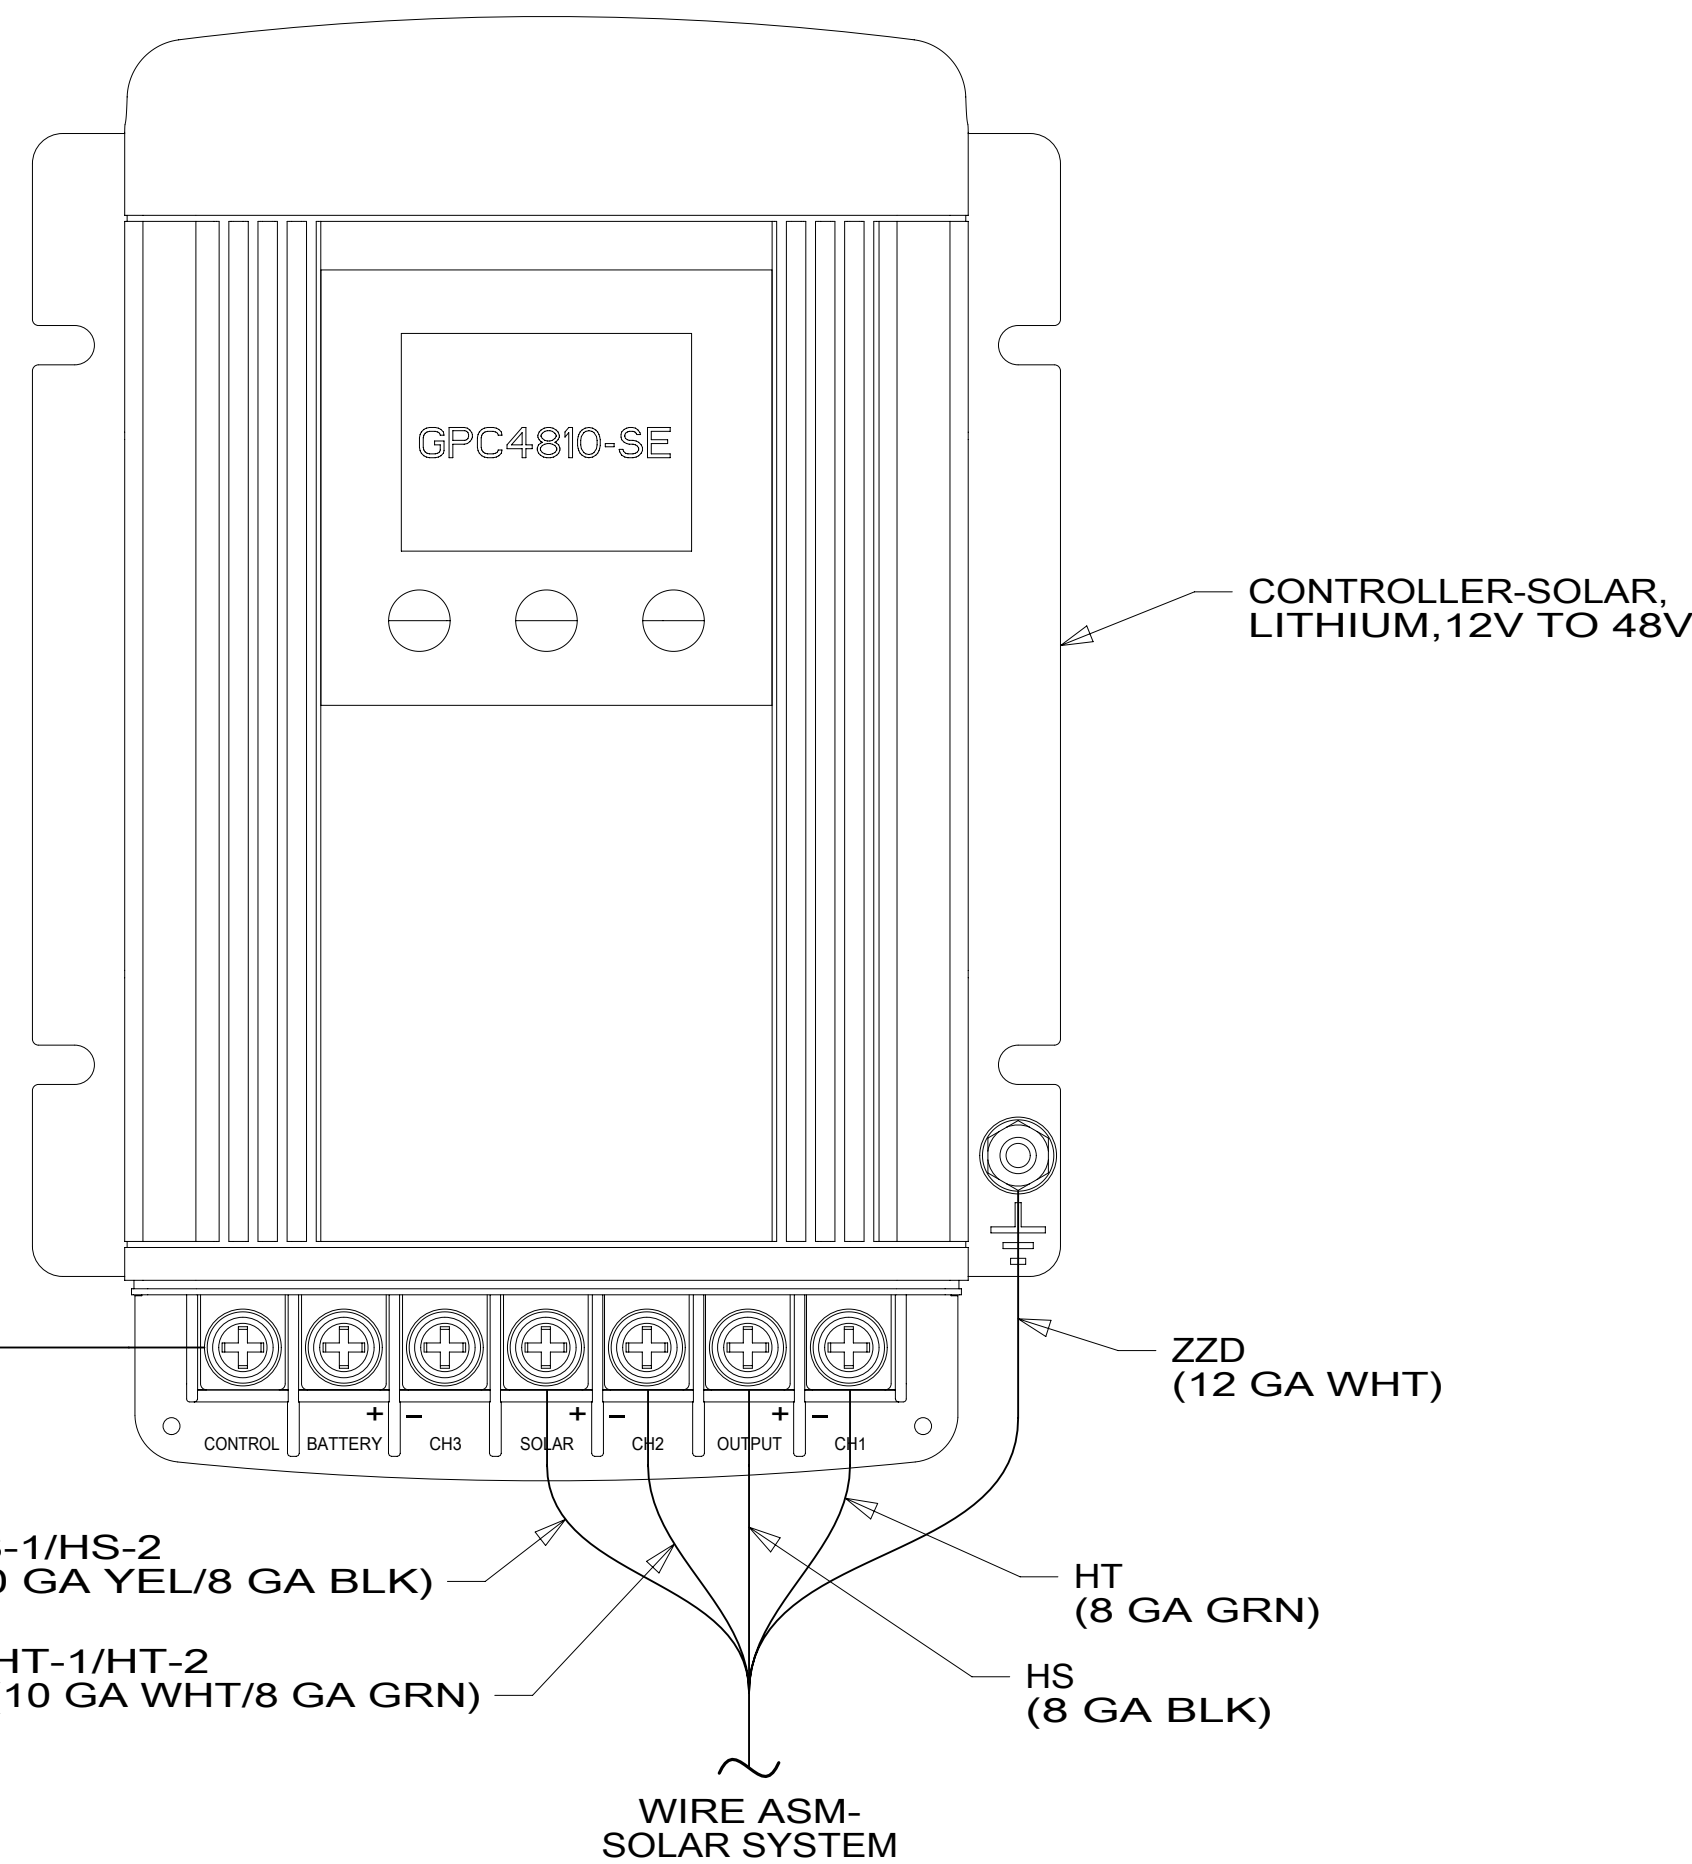

DETAIL EB 2

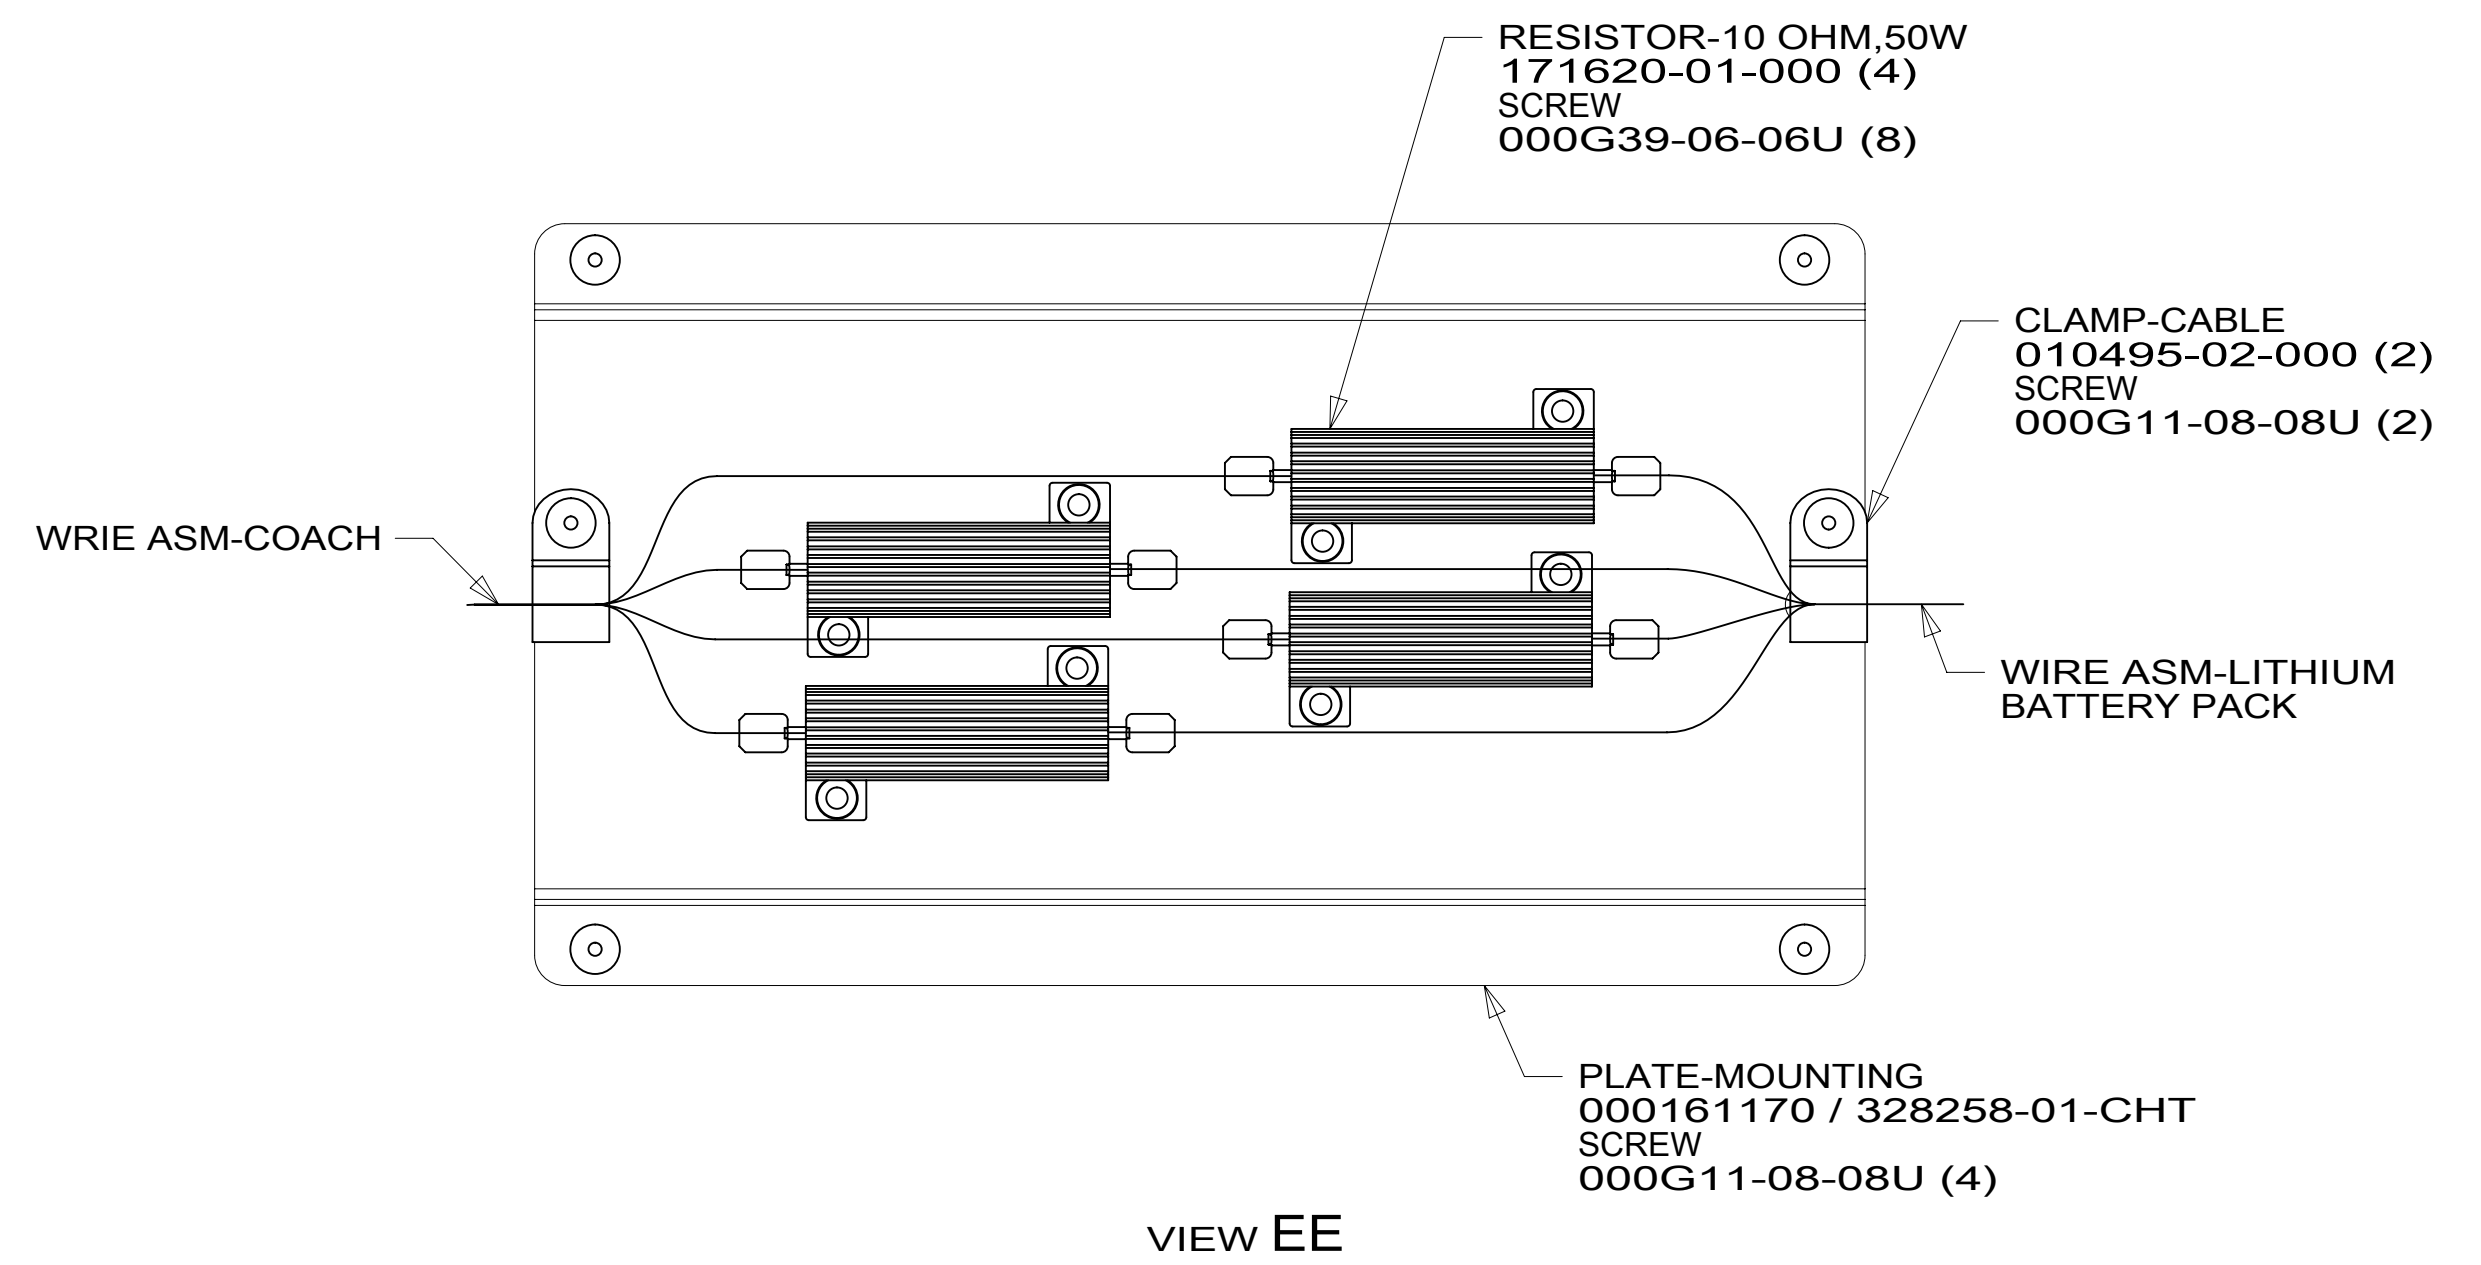

VIEW EE

2 SEE WIRE ASM-SOLAR SYSTEM AND WIRE INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

1B1 265

DESCRIPTION: WIRING INSTL-BODY, 12V

SHEET: 5 OF 5 ITEM/PART NO.: 000124767 / 32400001000 REV