

5 CABLE ASM-STARTER (RED) (TO STARTER SOLENOID)

TO DASH RADIO AND BATTERY BOOST SWITCH

2 PIN & 8 PIN HSGS TO BATTERY DISCONNECT SWITCH

GROUNDS TO GROUND BAR

TO INVERTER

TO WIRE ASM-RIGHT 12,15 PIN HSGS

WIRE ASM-FUEL EXTENSION 172924-01-000

J TO LOAD CENTER

PLUGS TO FORD WIRE ASM (3)

MM,MS TO SIDEMARKER LAMP

MONITOR CABLE TO CAMERA

TO TRAILER PLUG ASM

8-PIN HSG TO BACKWALL

MM,MS TO SIDEMARKER LAMP

TO WIRE ASM-LEFT 9,12 PIN HSGS

MS, RRJ, S & T TO GROUND BOLT NUT C39-05-00U

900 DROP 8 PIN HSG TO GENERATOR


CABLE ASM-GENERATOR (GRN) TO GENERATOR

CABLE ASM-GENERATOR GND (BLK) NUT D39-05-00B


1473 DATUM  
FRONT AXLE

PLATE-SWITCH MOUNTING 152419-03-CHT  
PLATE SWITCH 144363-16-CHT  
SCREW G11-06-08U (2)


APPLIQUE-SWITCH, BOOST/RADIO 132954-15-CHT

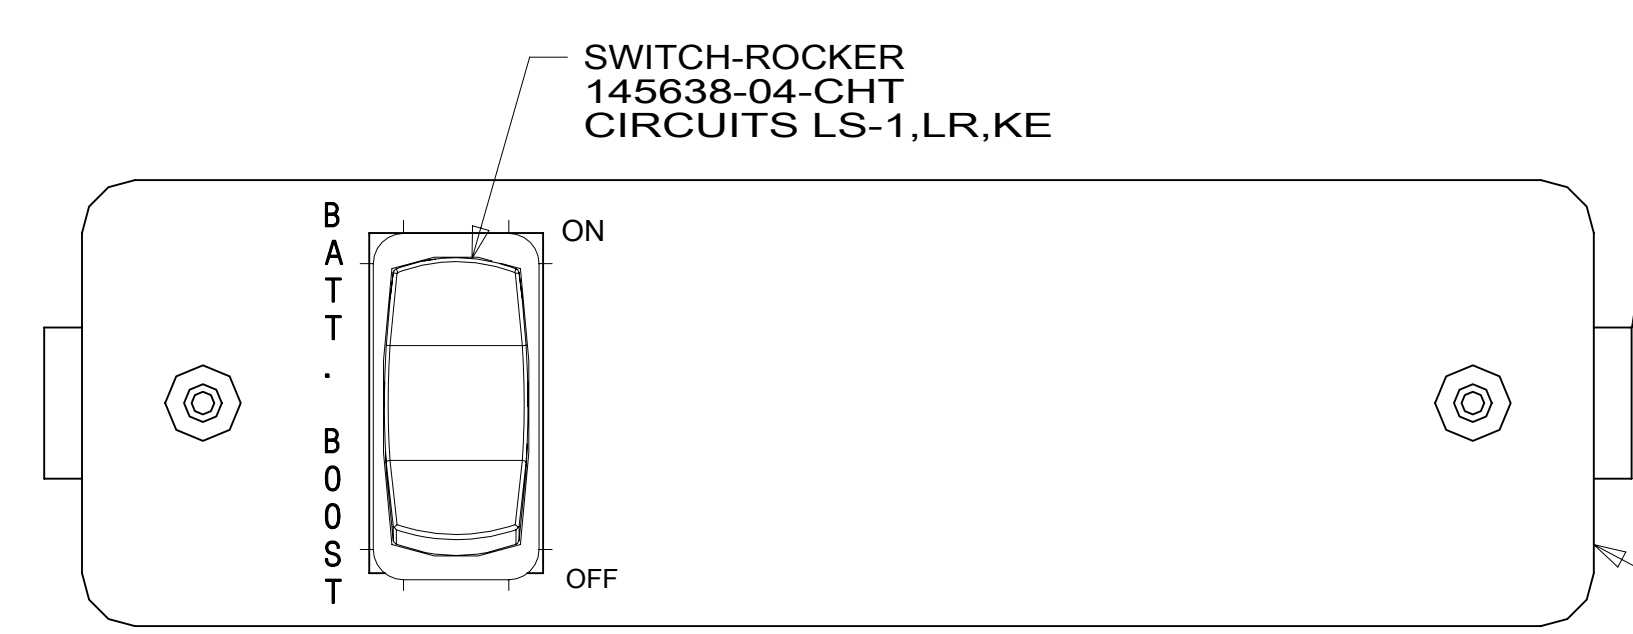


VIEW BD

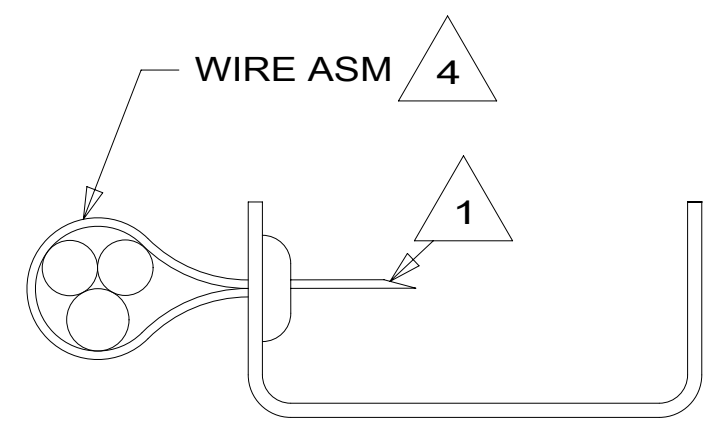

SECTION BA-BA (OPPOSITE FOR RIGHT SIDE)

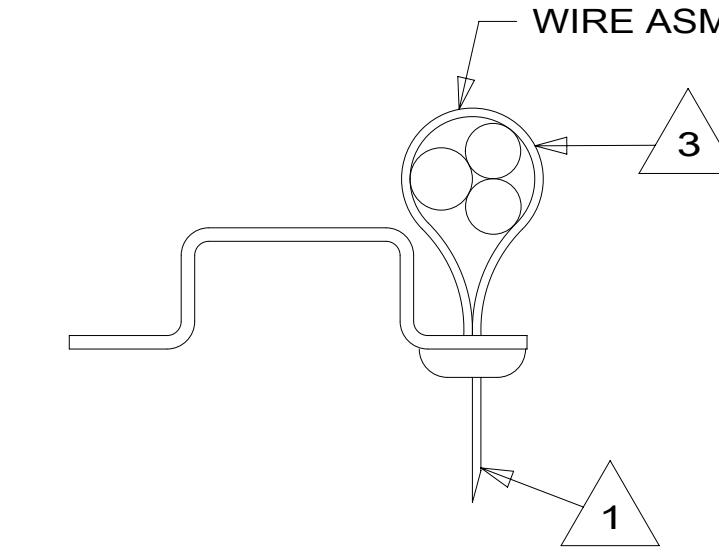

SECTION BB-BB

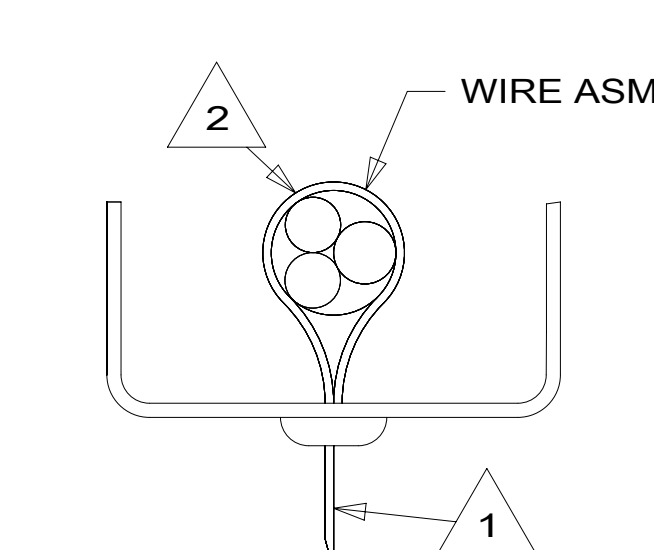

SECTION BC-BC

- NOTES:
- 5 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.
  - 4 WIRES TO BE TIED TO CROSS MEMBER USING EXISTING HOLES.
  - 3 WIRES TO BE TIED TO TOP OF RAIL USING EXISTING HOLES.
  - 2 WIRES TO BE TIED TO INSIDE OF RAIL USING EXISTING HOLES.
  - 1 CUT OFF EXCESS END OF WIRE TIE.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS  
1B1 CODES/STANDARDS USA

DESCRIPTION: <b>WIRING INSTL-CHASSIS</b>	
SHEET: 2 OF 2	ITEM/PART NO: 000125551 / 32458501000
REV 1 22-Jun-2018	