

- 9 CONNECTS TO WIRE DROP MARKED WITH RED TAPE.
 - 8 CONNECT 90° COAX CONNECTOR TO RED COAX.
 - 7 CONNECTS TO WIRE DROP MARKED WITH ORG TAPE.
 - 6 SEE DETAIL BB FOR WIRING AND CONNECTION TO SENSOR PROBES.
 - 5 TYPICAL WIRE ATTACHMENT AT ALL LEVEL PROBES (4 EACH) FOR WATER, MAIN, AND AUX HOLDING TANKS.
 - 4 USING WIRE TIE MOUNTS AND WIRE TIE, SECURE WIRE TO TANK UP AND OUT OF HARMS WAY.
 - 3 DATA CABLE IS PART OF WIRE ASM-RIGHT.
2. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.
- 1 SEE WIRING INSTL-A/V, FRONT FOR ADDITIONAL INFORMATION.


NOTES:

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:		WIRING INSTL-BODY, 12V	
SHEET:	ITEM/PART NO.:	REV:	
2 OF 4	000129826 / 32536101000		

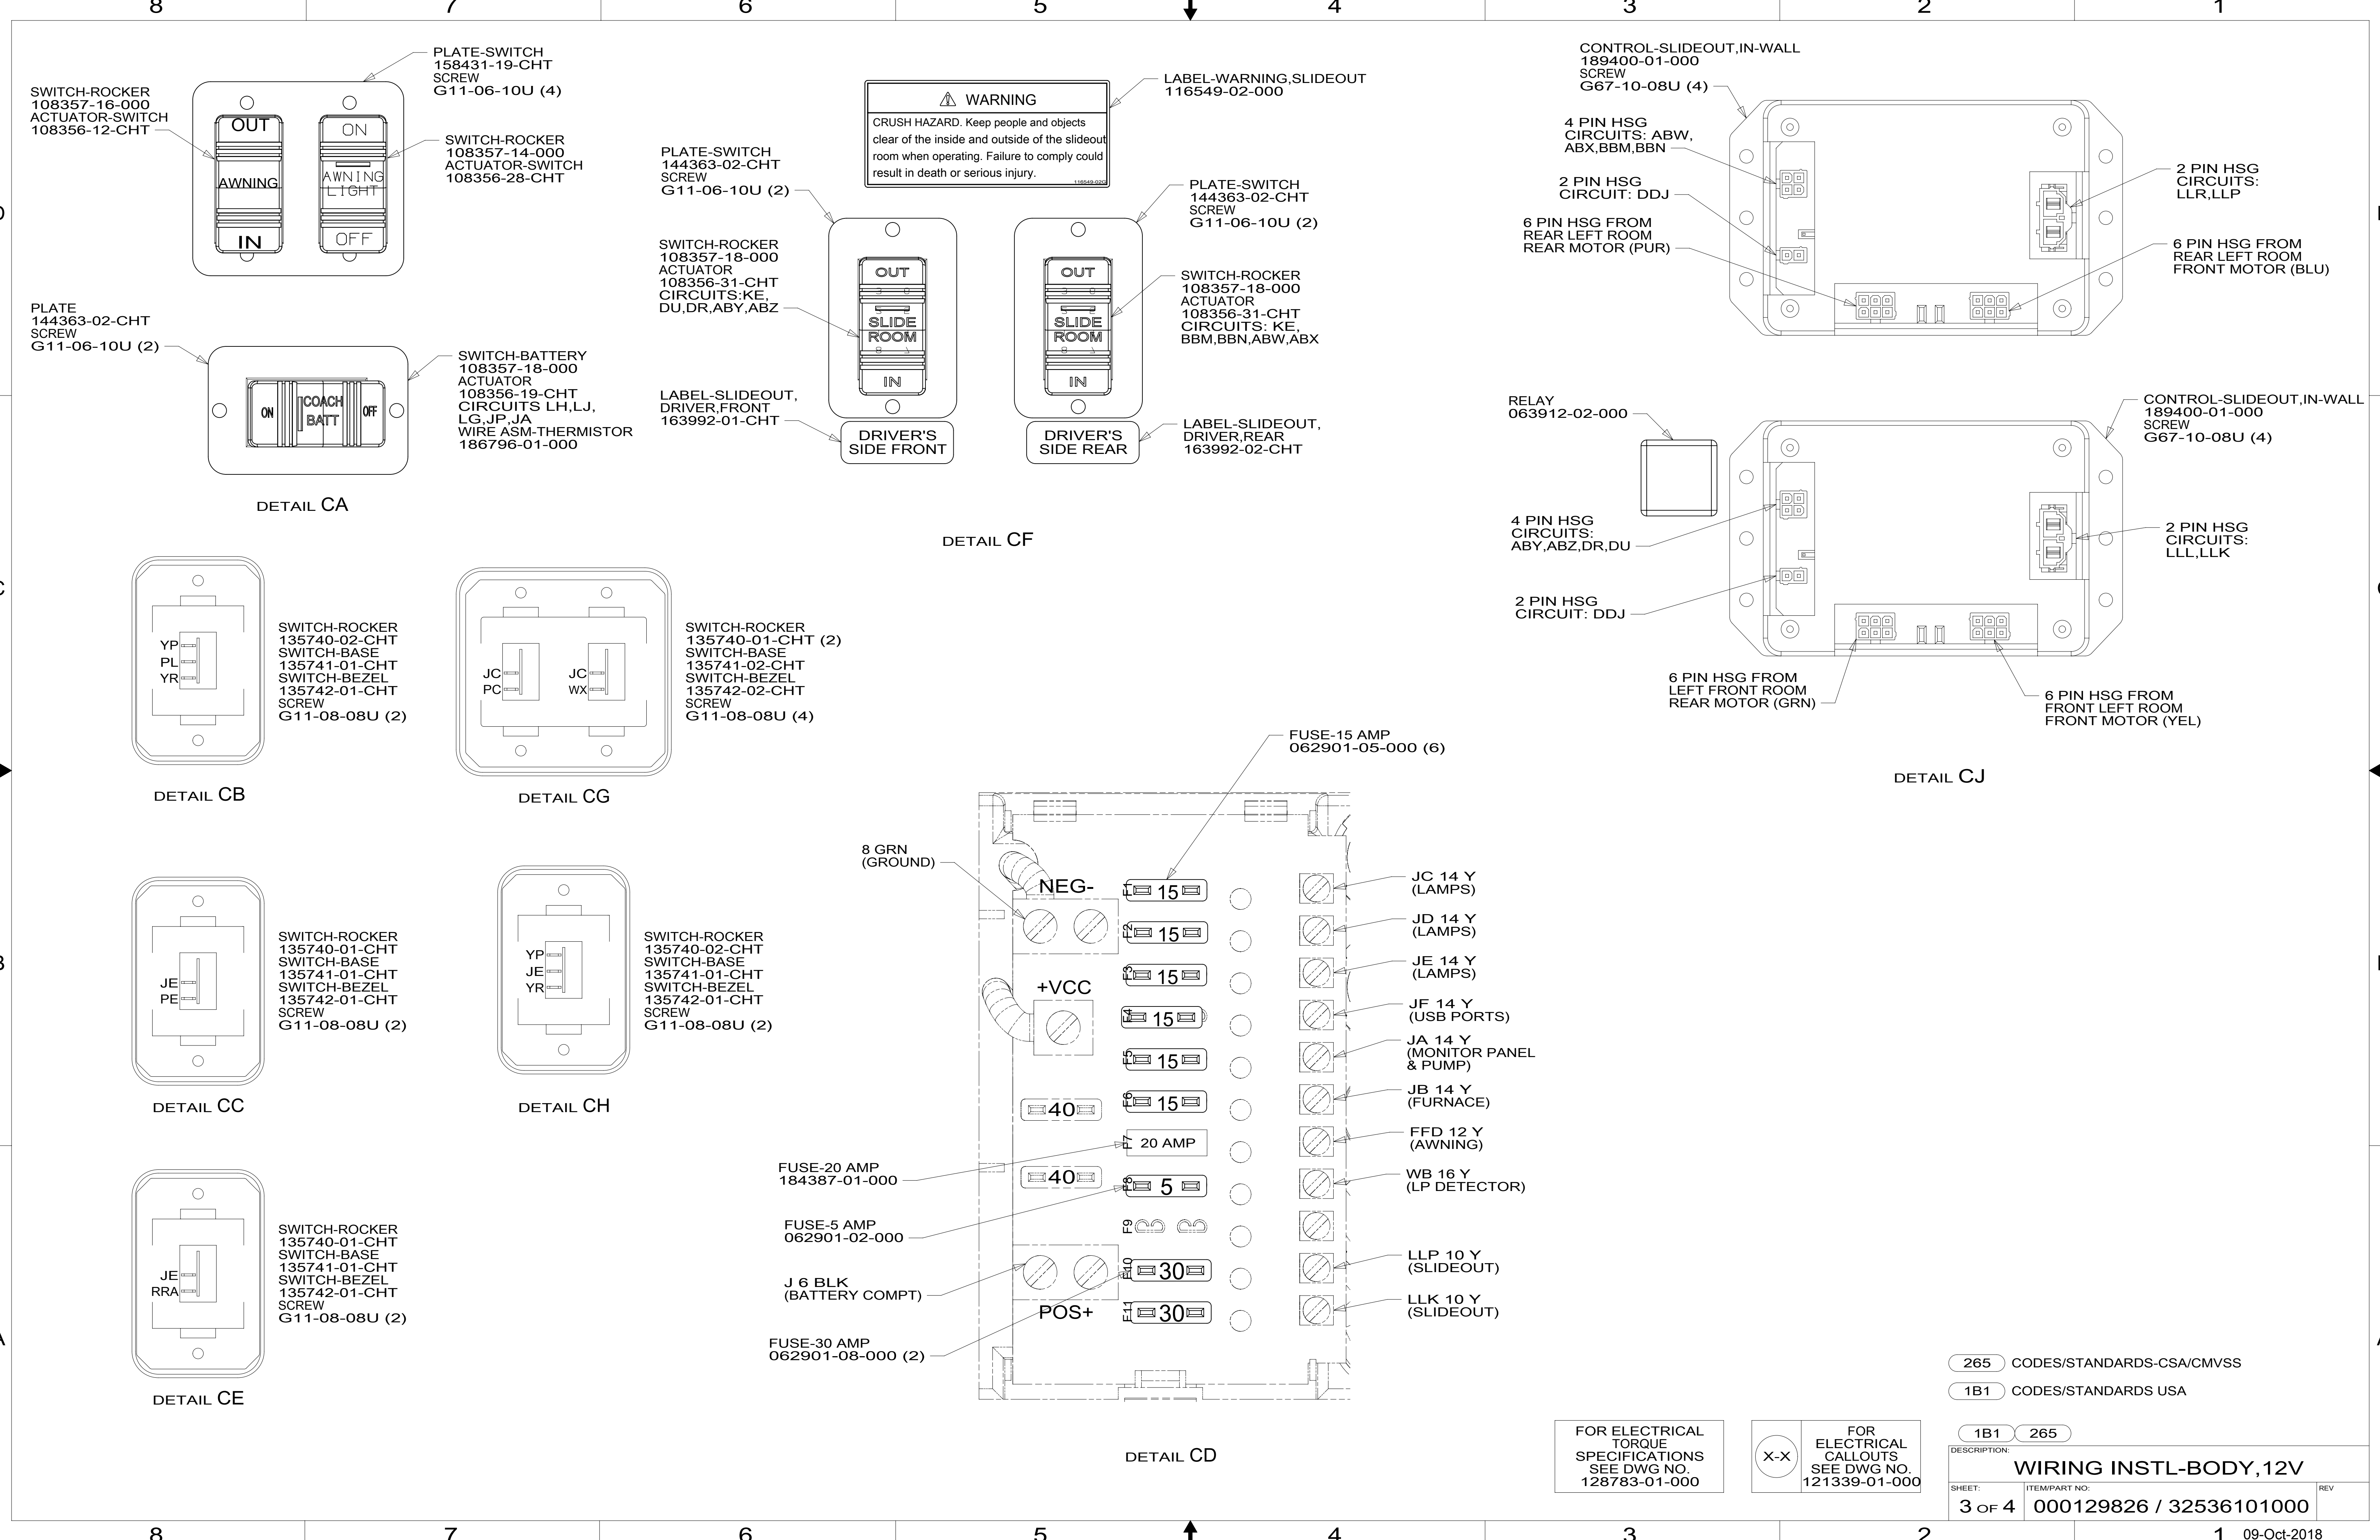

8

7

6

5

4

3

2

1

LIGHT-LED,ROUND 4.5 PLASTIC
 000166889 / 329926-01-CHT (9)
 SCREW
 G13-06-16U (27)
 CONNECTOR
 58028-01-000 (18)

LIGHT-LED,ROUND W/SWITCH,3.5 PLASTIC
 000166892 / 329927-01-CHT
 SCREW
 G13-06-16U (3)
 CONNECTOR
 58028-01-000 (2)

ANTENNA-TV, OMNIDIRECTIONAL
 000171487 / 331386-01-CHT
 SCREW
 G67-10-16U (4)

1J8

1

1J8 TV ANTENNA-OMNI DIRECTIONAL

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

DESCRIPTION: **WIRING INSTL-BODY, 12V**

SHEET:	ITEM/PART NO:	REV
4 OF 4	000129826 / 32536101000	

FOR ELECTRICAL
 TORQUE
 SPECIFICATIONS
 SEE DWG NO.
 128783-01-000

FOR ELECTRICAL
 CALLOUTS
 SEE DWG NO.
 121339-01-000

1 SEE ANTENNA INSTALLATION MANUAL FOR
 CORRECT INSTALLATION PROCEDURE.

NOTES:

8

7

6

5

4

3

2

1

1 09-Oct-2018