
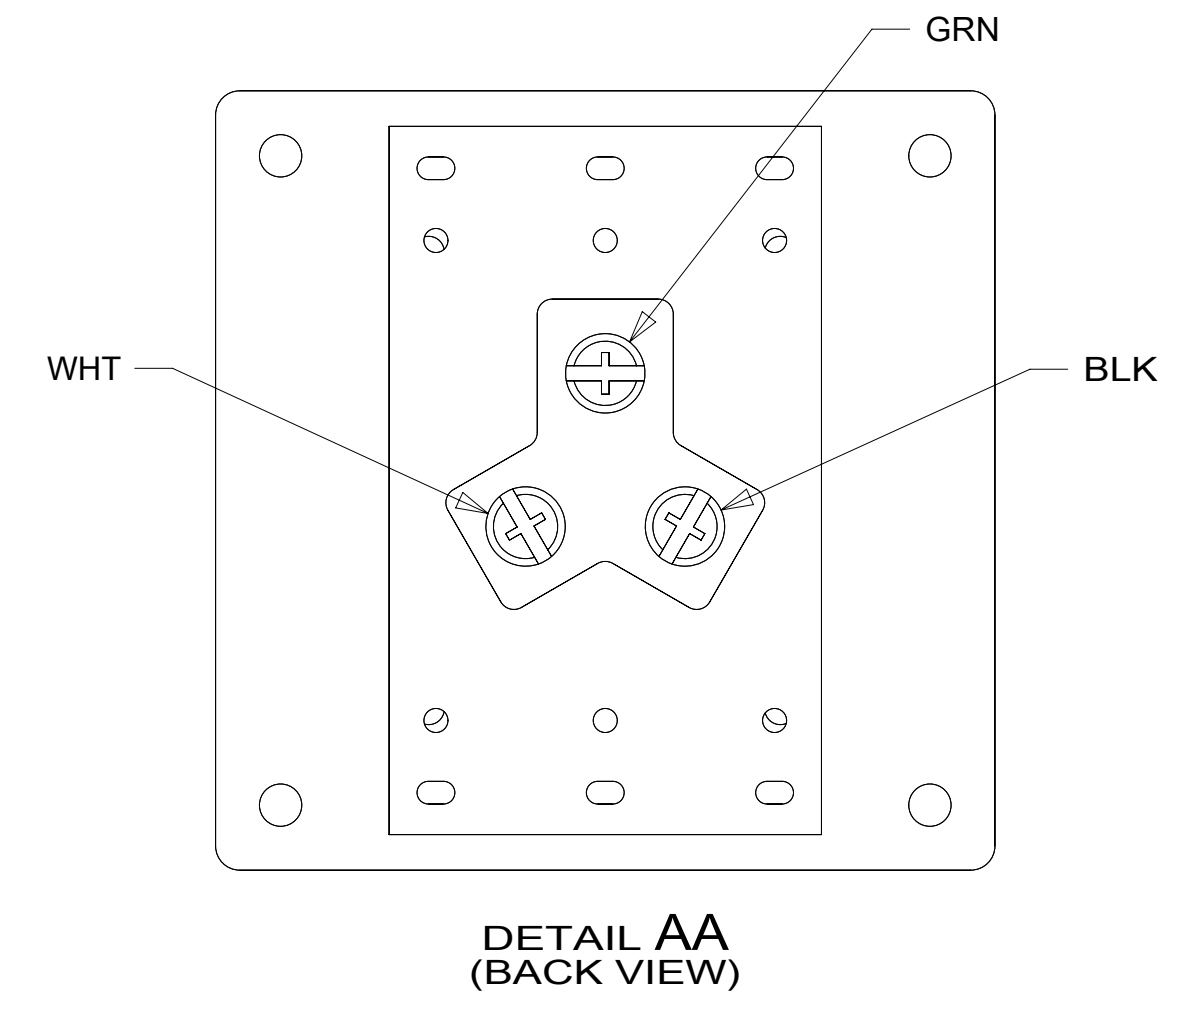


8 7 6 5 4 3 2 1

D
C
B
A

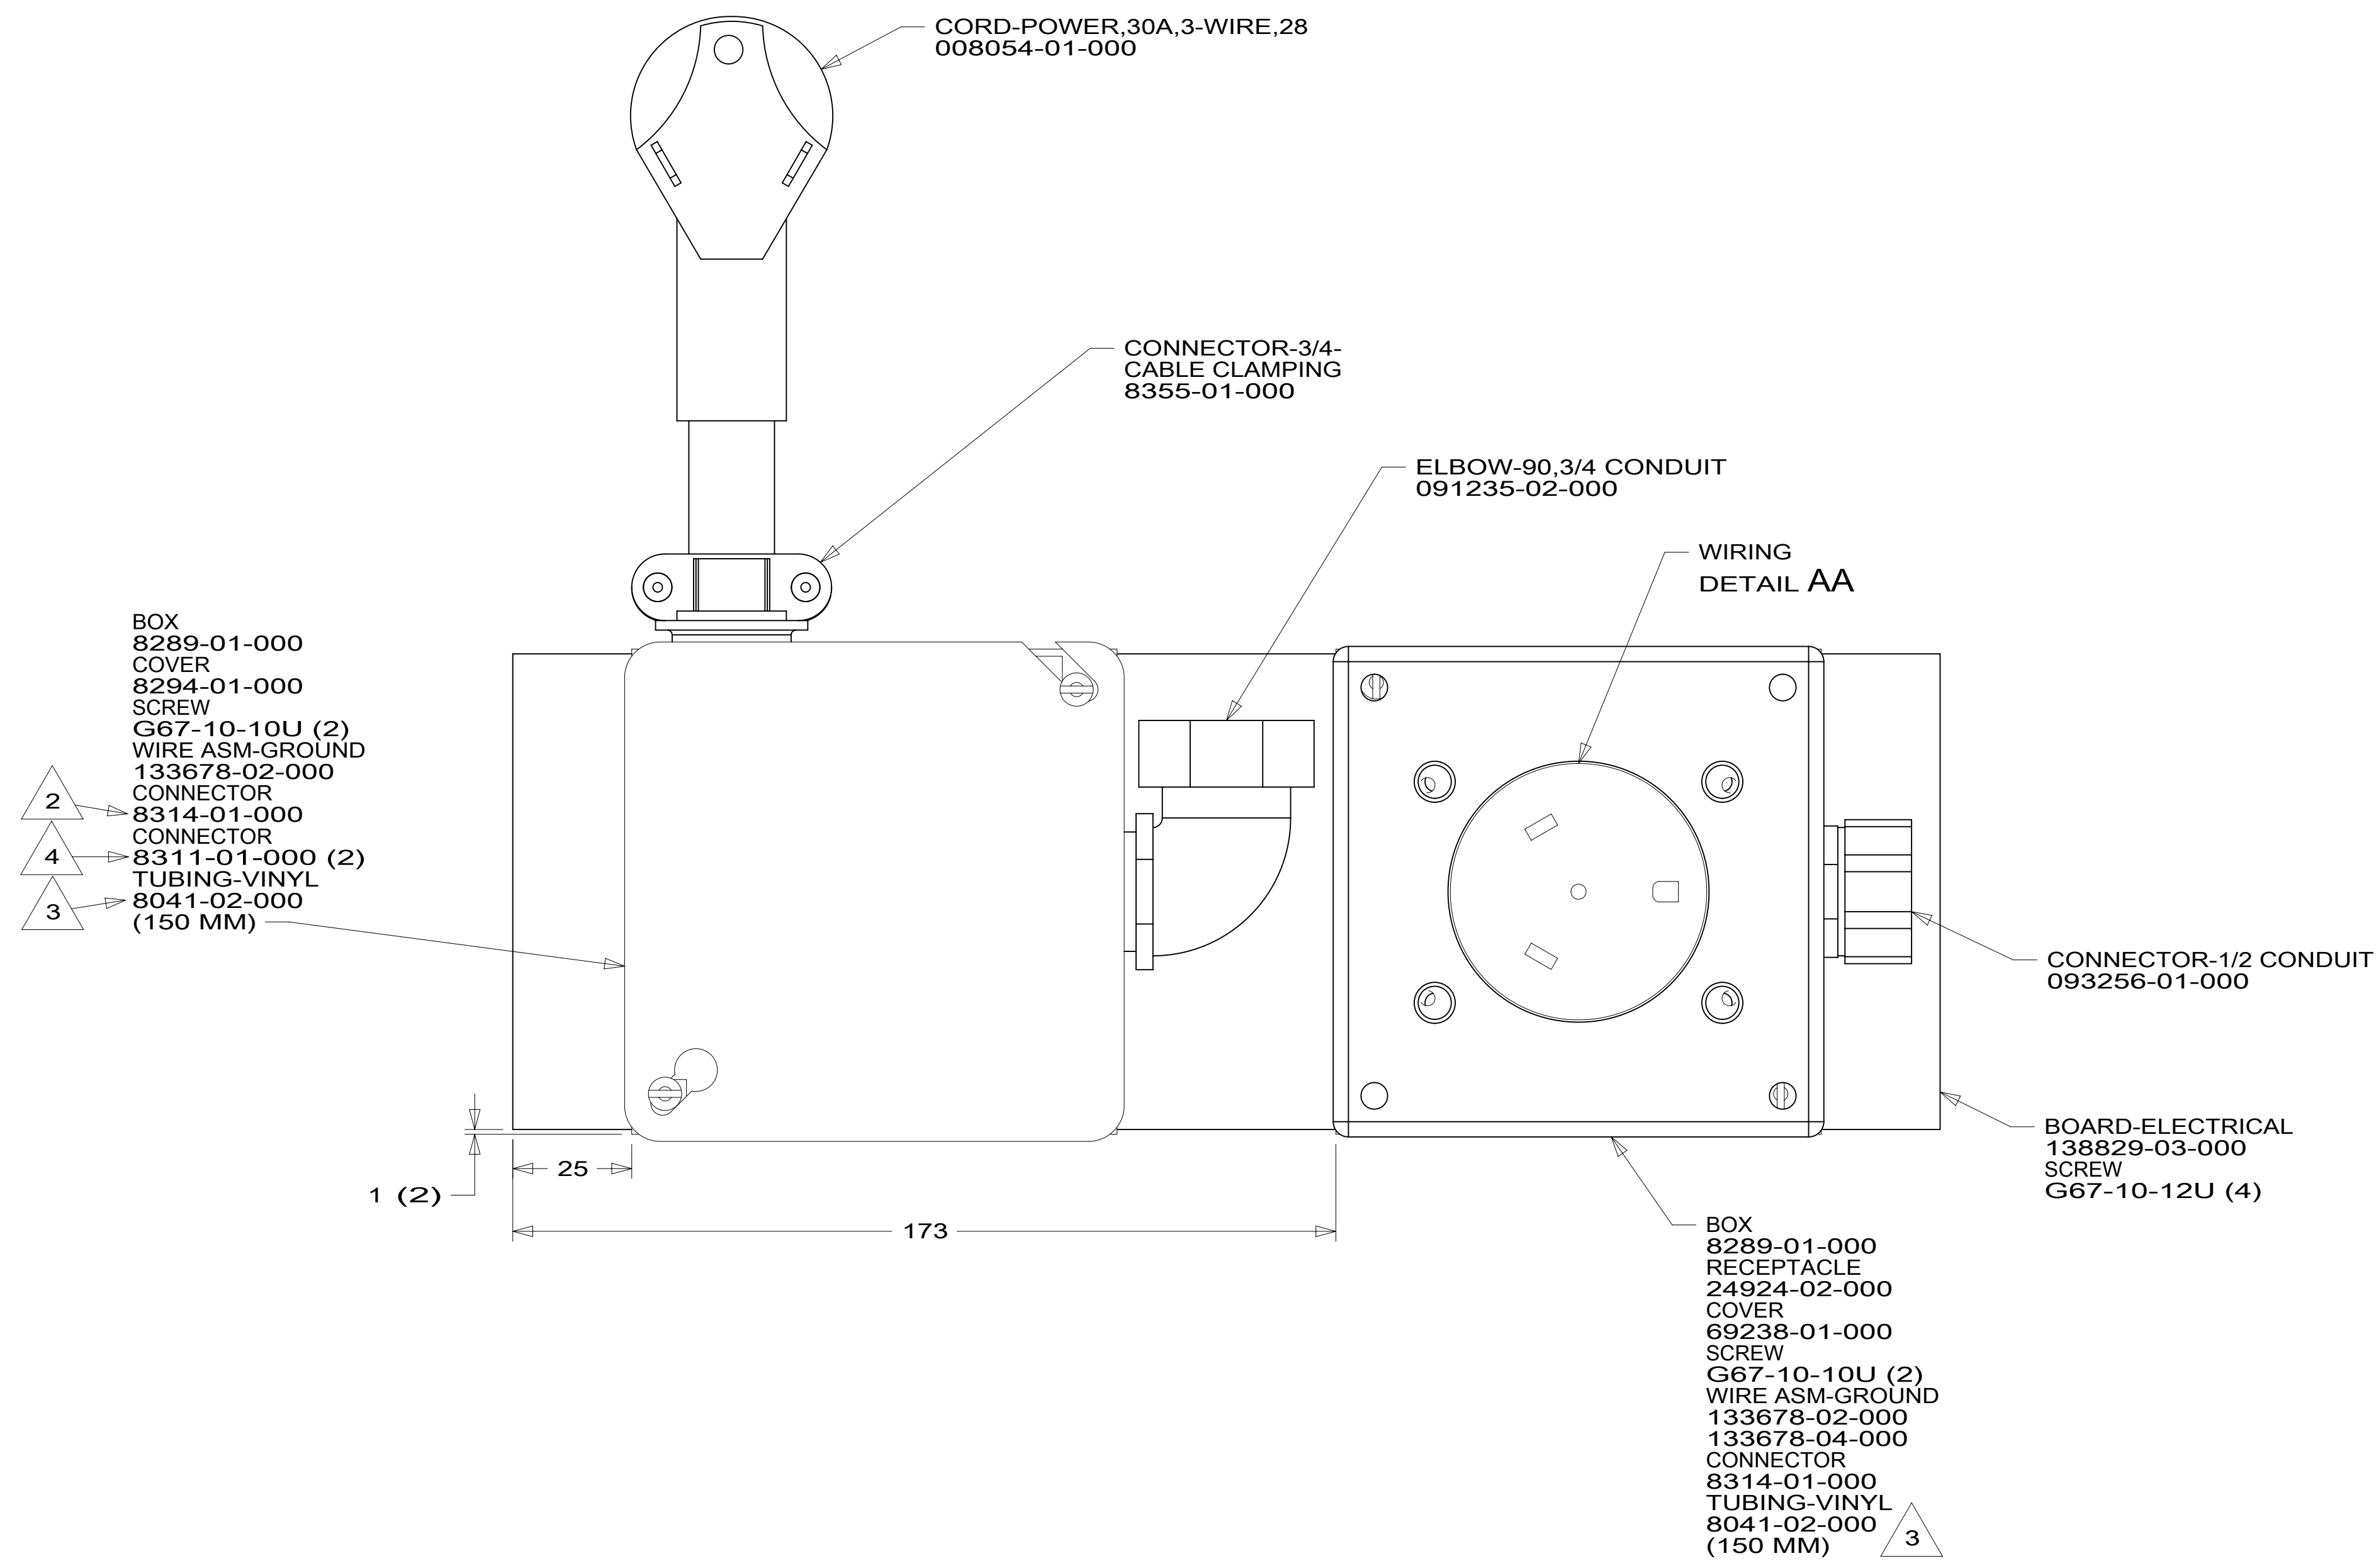

- 4 CONNECT BLK TO BLK, WHT TO WHT.
 - 3 APPLY TUBING TO BARE GROUND WIRES.
 - 2 CONNECT GRNDS TO GRNDS.
1. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265



DSNR:		ALL DIMENSIONS ARE IN MILLIMETERS	
DIFFR:		MATERIAL:	
UNSPECIFIED TOLERANCES:			
WHOLE DIM (X)	: 3		
ONE-PLACE (X.X)	: 1.5		
TWO-PLACE (X.XX)	: 0.50		
ANGLE	: 1°		
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES		WEIGHT: (LBS)	FIRST USED:
			18 E32YE
DESCRIPTION: POWER CORD BOX ASM			
SHEET: 1 OF 1	ITEM/PART NO: 000140643 / 32582601000	REV:	
REF:		1 25-Jun-2019	

8 7 6 5 4 3 2 1