


- 2 USE THE LONGER SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.
- 1 REPLACE EXISTING SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265

| | |
|---|--|
| WINNEBAGO COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC. | |
| DSNR: | ALL DIMENSIONS ARE IN MILLIMETERS |
| DFFR: | |
| UNSPECIFIED TOLERANCES: | MATERIAL: |
| WHOLE DIM (X) : 3 | |
| ONE-PLACE (X.X) : 1.5 | |
| TWO-PLACE (X.XX) : 0.50 | |
| ANGLE : 1° | |
| REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES | WEIGHT: (LBS) FIRST USED: 19 F33C |
| CHASSIS ELECTRICAL BOX ASM | |
| SHEET: 1 OF 3 | ITEM/PART NO: 000155492 / 32639001000 |
| REF: | REV: 1 24-Jan-2019 |

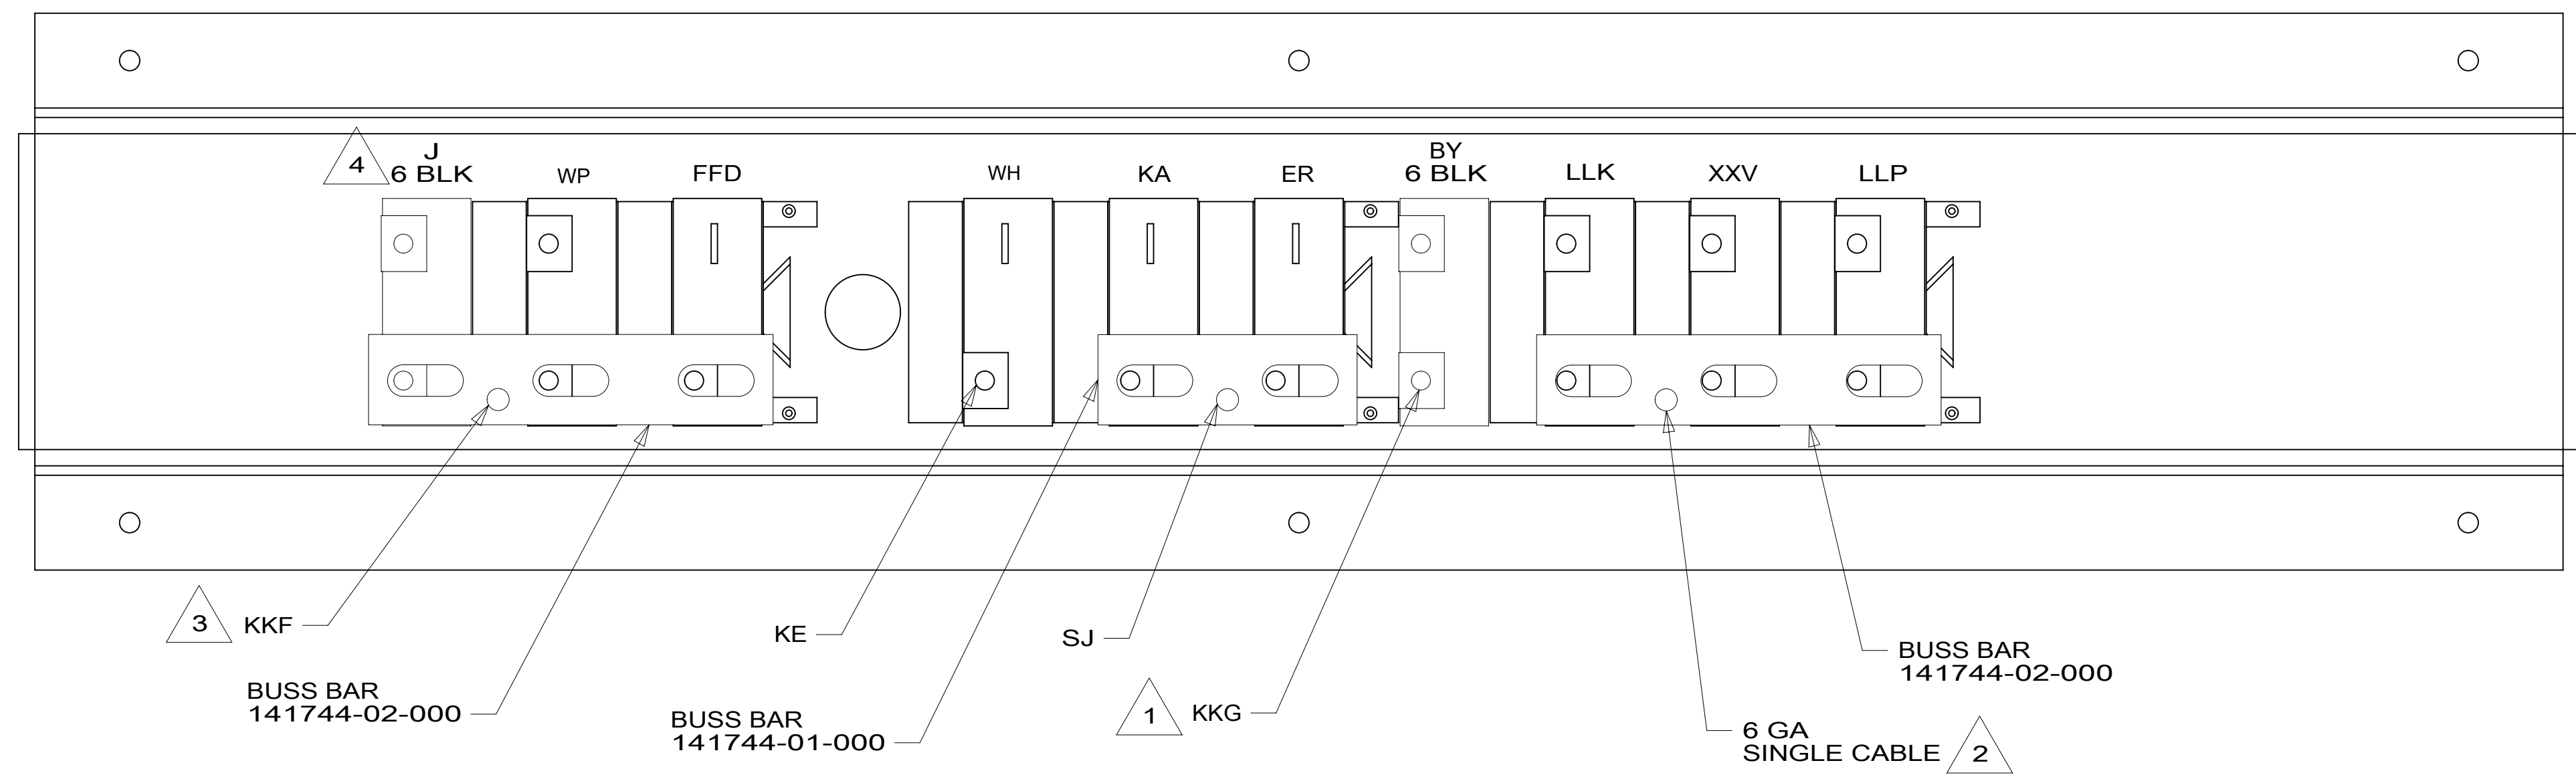

DETAIL BA

- NOTES:
- 4 WIRE MARKED WITH YELLOW TAPE.
 - 3 WIRE MARKED WITH 2 WRAPS OF YELLOW TAPE.
 - 2 WIRE MARKED WITH RED TAPE.
 - 1 WIRE MARKED WITH PURPLE TAPE.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

| | |
|----------------------------|-------------------------|
| DESCRIPTION: | |
| 1B1 265 | |
| CHASSIS ELECTRICAL BOX ASM | |
| SHEET: | ITEM/PART NO. REV |
| 2 OF 3 | 000155492 / 32639001000 |

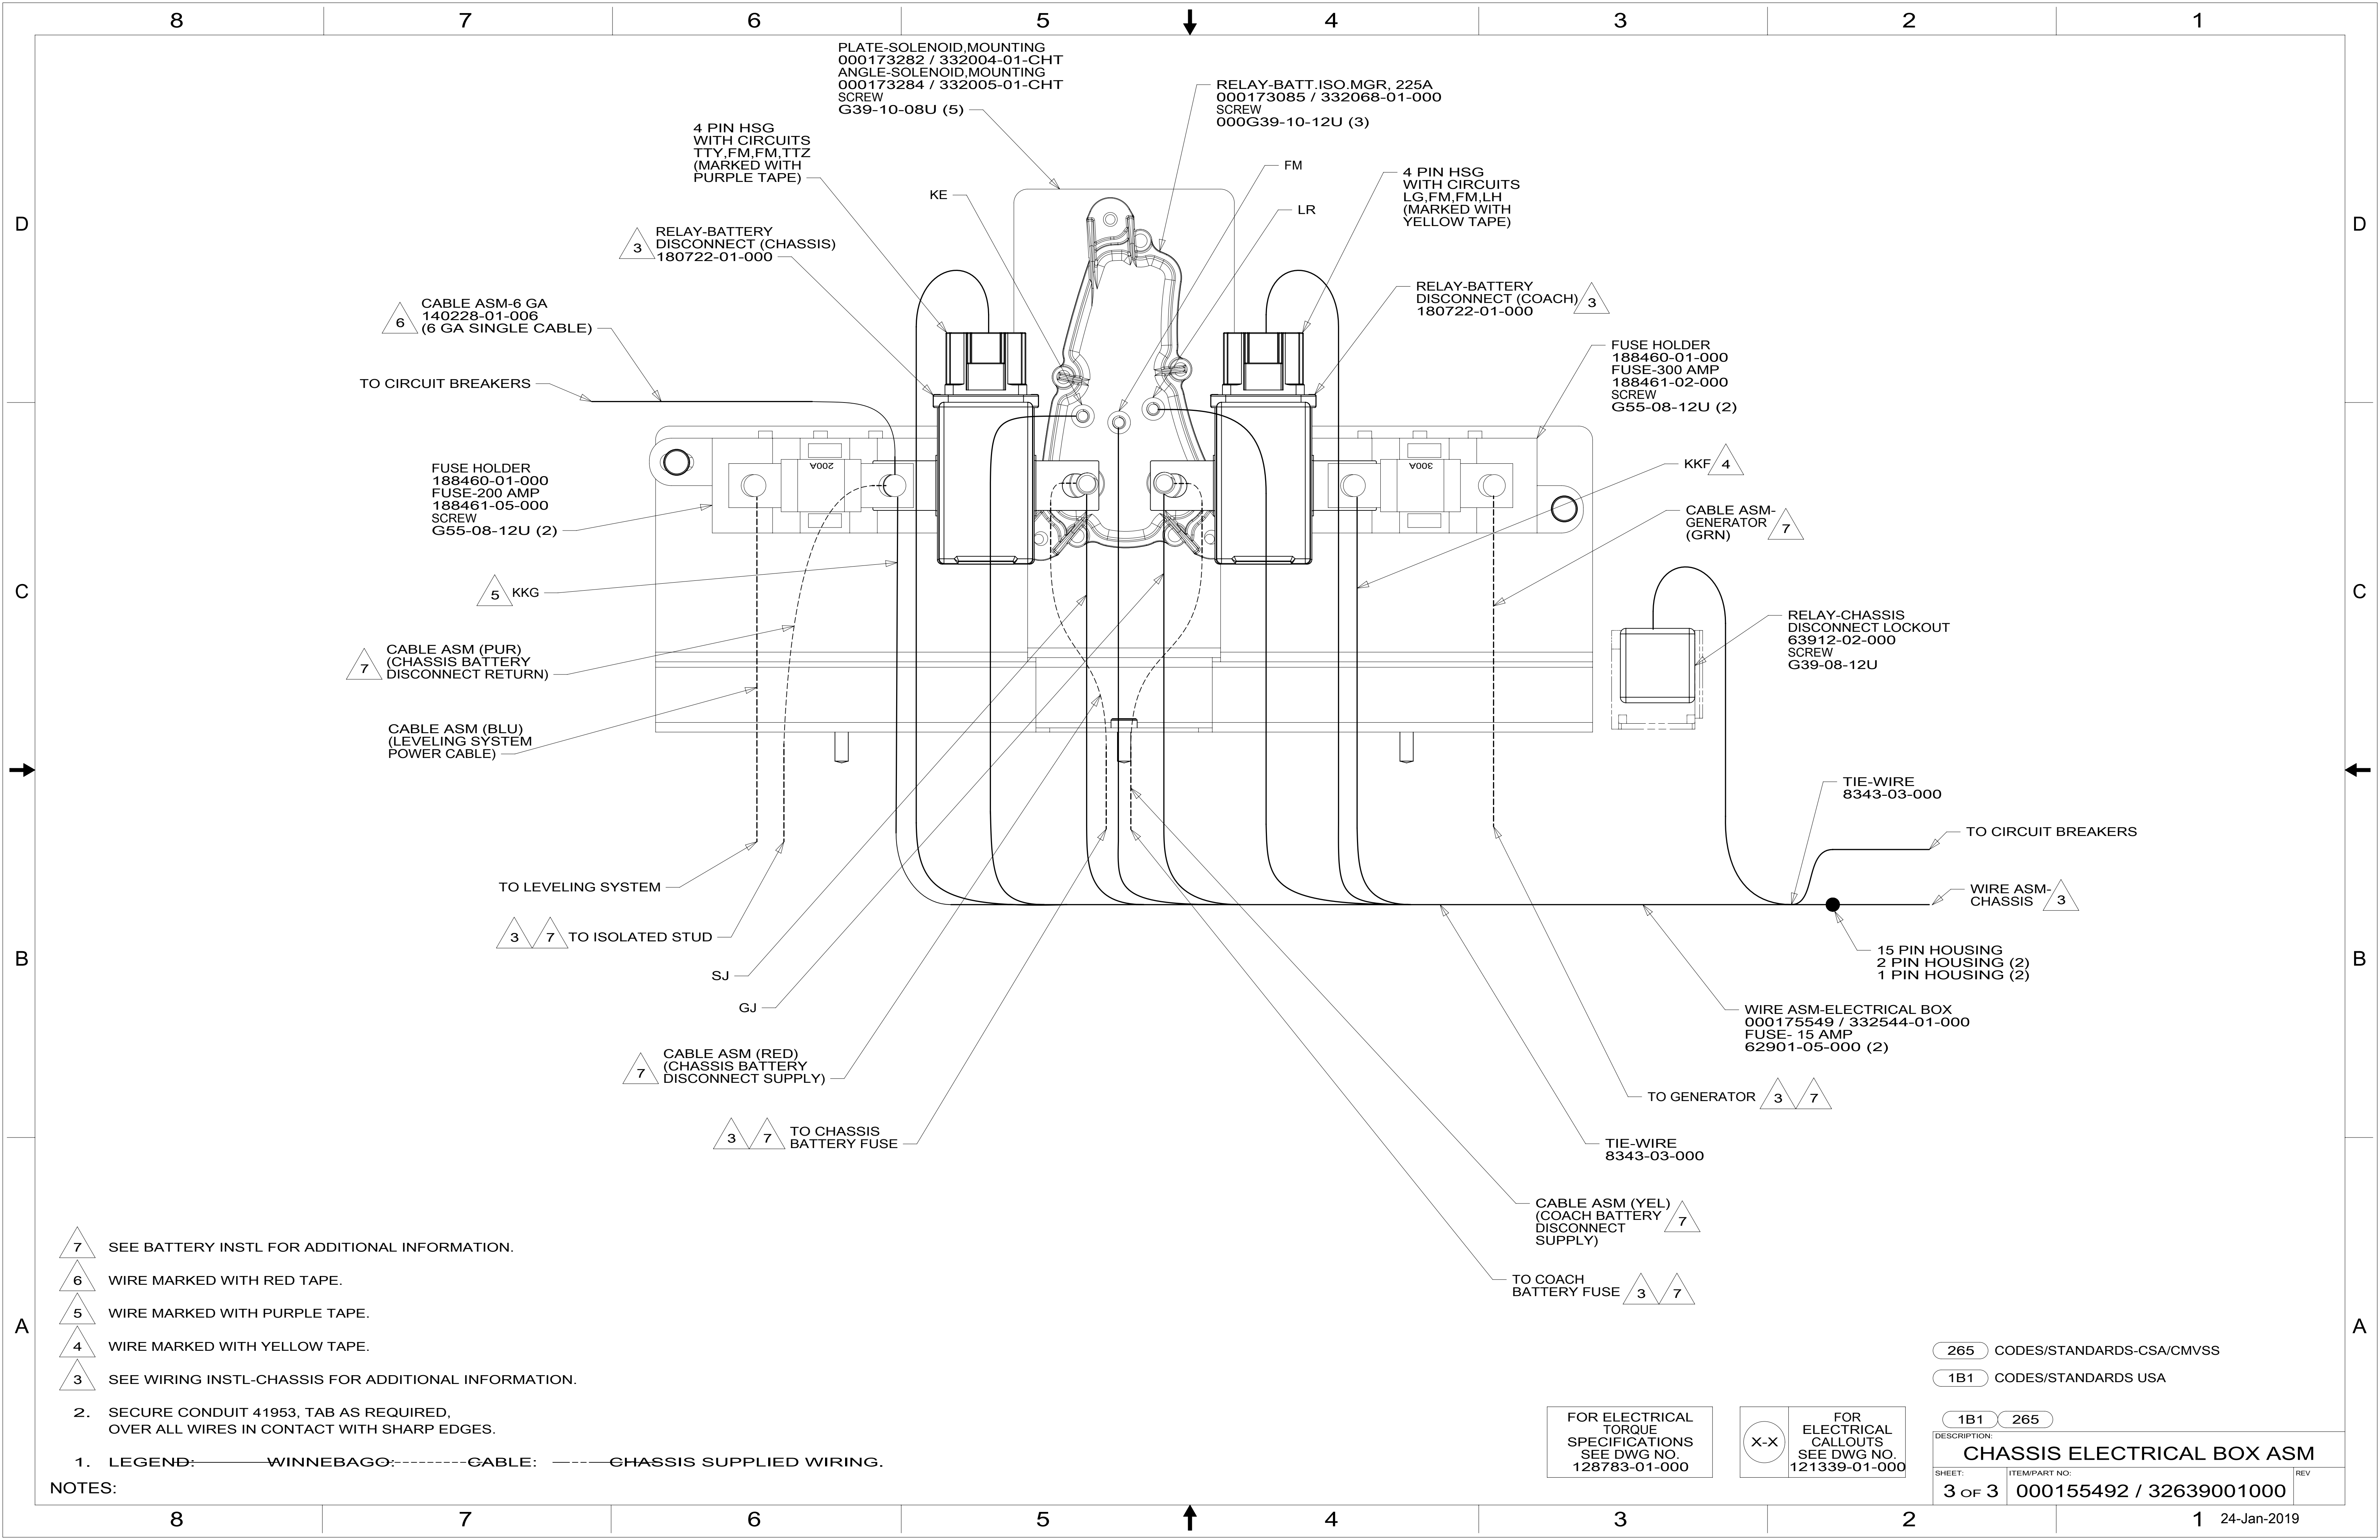


PLATE-SOLENOID MOUNTING
000173282 / 332004-01-CHT
ANGLE-SOLENOID MOUNTING
000173284 / 332005-01-CHT
SCREW
G39-10-08U (5)

RELAY-BATT.ISO.MGR. 225A
000173085 / 332068-01-000
SCREW
000G39-10-12U (3)

4 PIN HSG
WITH CIRCUITS
TTY,FM,FM,TTZ
(MARKED WITH
PURPLE TAPE)

4 PIN HSG
WITH CIRCUITS
LG,FM,FM,LH
(MARKED WITH
YELLOW TAPE)

RELAY-BATTERY
DISCONNECT (CHASSIS)
180722-01-000

RELAY-BATTERY
DISCONNECT (COACH)
180722-01-000

CABLE ASM-6 GA
140228-01-006
(6 GA SINGLE CABLE)

FUSE HOLDER
188460-01-000
FUSE-300 AMP
188461-02-000
SCREW
G55-08-12U (2)

TO CIRCUIT BREAKERS

FUSE HOLDER
188460-01-000
FUSE-200 AMP
188461-05-000
SCREW
G55-08-12U (2)

KKF 4

CABLE ASM-
GENERATOR
(GRN) 7

5 KKG

CABLE ASM (PUR)
(CHASSIS BATTERY
DISCONNECT RETURN) 7

RELAY-CHASSIS
DISCONNECT LOCKOUT
63912-02-000
SCREW
G39-08-12U

CABLE ASM (BLU)
(LEVELING SYSTEM
POWER CABLE)

TIE-WIRE
8343-03-000

TO LEVELING SYSTEM

TO CIRCUIT BREAKERS

3 7 TO ISOLATED STUD

WIRE ASM-
CHASSIS 3

SJ

15 PIN HOUSING
2 PIN HOUSING (2)
1 PIN HOUSING (2)

GJ

WIRE ASM-ELECTRICAL BOX
000175549 / 332544-01-000
FUSE- 15 AMP
62901-05-000 (2)

CABLE ASM (RED)
(CHASSIS BATTERY
DISCONNECT SUPPLY) 7

TO GENERATOR 3 7

3 7 TO CHASSIS
BATTERY FUSE

TIE-WIRE
8343-03-000

CABLE ASM (YEL)
(COACH BATTERY
DISCONNECT
SUPPLY) 7

TO COACH
BATTERY FUSE 3 7

7 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.

6 WIRE MARKED WITH RED TAPE.

5 WIRE MARKED WITH PURPLE TAPE.

4 WIRE MARKED WITH YELLOW TAPE.

3 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

2. SECURE CONDUIT 41953, TAB AS REQUIRED,
OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

1. LEGEND: — WINNEBAGO: - - - - - CABLE: - - - - - CHASSIS SUPPLIED WIRING.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

| | |
|-----------------------------------|-------------------------|
| DESCRIPTION: | 1B1 265 |
| CHASSIS ELECTRICAL BOX ASM | |
| SHEET: | ITEM/PART NO: |
| 3 OF 3 | 000155492 / 32639001000 |
| REV | |