
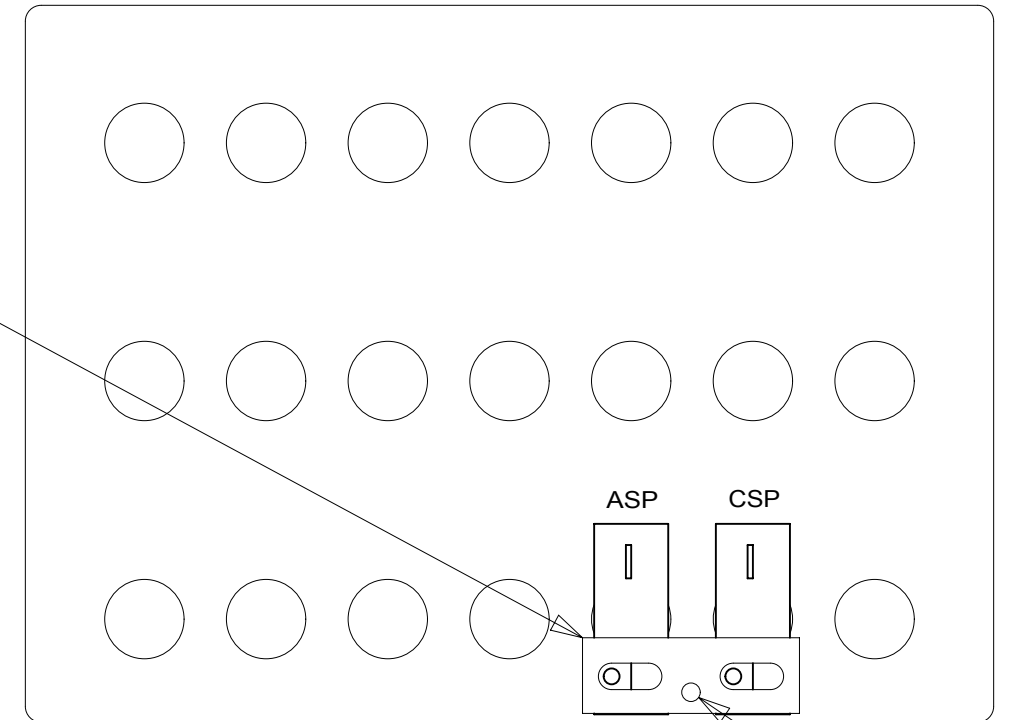


CONTROLLER-BLUE TOOTH, RGB  
 000037768 / 318662-01-000  
 SCREW  
 000G67-08-12U (4)  
 AMPLIFIER-SIGNAL, RGB LED  
 000037767 / 318661-01-000  
 SCREW  
 000G67-08-12U (4)  
 RELAY-CANISTER, SPDT W/RESIST  
 063912-02-000 (2)  
 SCREW  
 000G67-08-12U

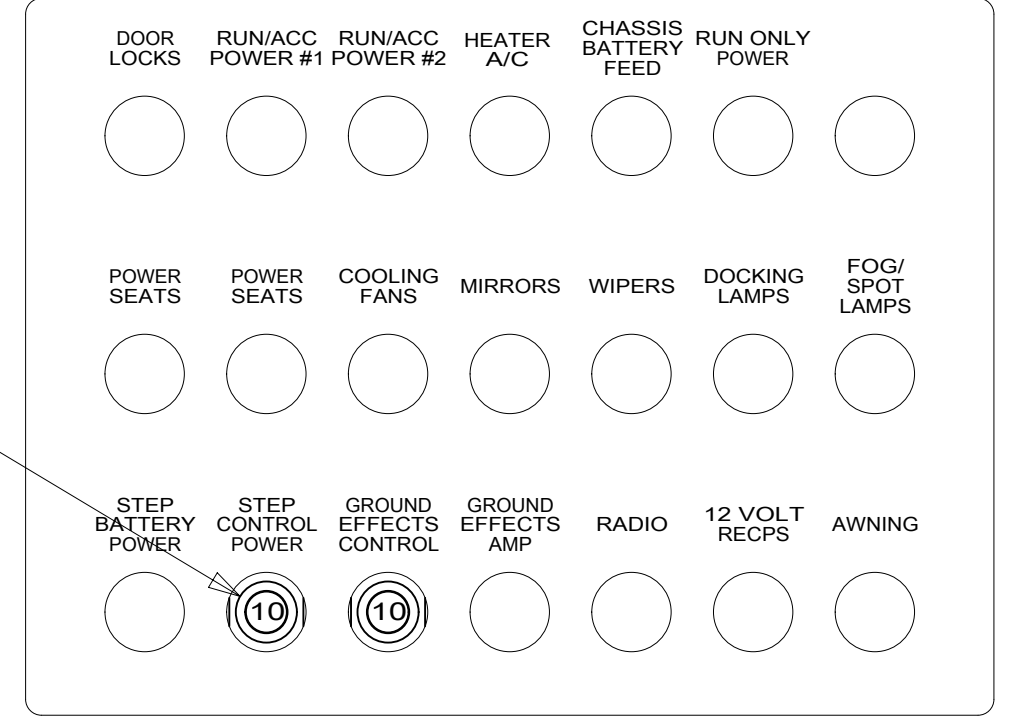

- NOTES:**
- 4 CLIPS TO BE EQUALLY SPACED ALONG LED STRIP. CENTER CLIPS BETWEEN INDIVIDUAL LEDES.
  - 3 PLUG AMP INPUT INTO ZONE 2 OUTPUT FROM CONTROLLER.
  - 2. CLAMP WIRE ASM-GROUND EFFECT LIGHTING ALONG WITH WIRE ASM-CHASSIS WHERE APPLICABLE. USE TIE-WIRE 8343-04-000 TO SECURE WIRES TO FLOOR SUPPORT FRAME AT LEAST ONCE EVERY 600MM ALL OTHER PLACES.
  - 1 REST WIRE IN FRAME RAIL WHEN APPLICABLE.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS  
 1B1 CODES/STANDARDS USA  
 1B1 265

**WINNEBAGO**  
 COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.

DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS	
DIFFR:		
UNSPECIFIED TOLERANCES:	MATERIAL:	
WHOLE DIM (X) : 3		
ONE-PLACE (X.X) : 1.5		
TWO-PLACE (X.XX) : 0.50		
ANGLE : 1°		
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS)	FIRST USED: <b>19 L36G</b>
DESCRIPTION: <b>WIRING INSTL-LIGHTING,GROUND EFFECTS</b>		
SHEET: <b>1 OF 3</b>	ITEM/PART NO: <b>000166705 / 32983201000</b>	REV:

D

D

C

C


B

B

A

A

3 CHANNEL-ALUMINUM, RGB LIGHT  
000036378 / 318315-01-CHT  
(REF LENGTH 690)  
LIGHT-TAPE, LED  
1 000044842 / 320802-10-CHT  
CLIP-CHANNEL ALUMINUM  
000036549 / 318319-01-CHT (3)  
SCREW  
000G39-08-12U (5)

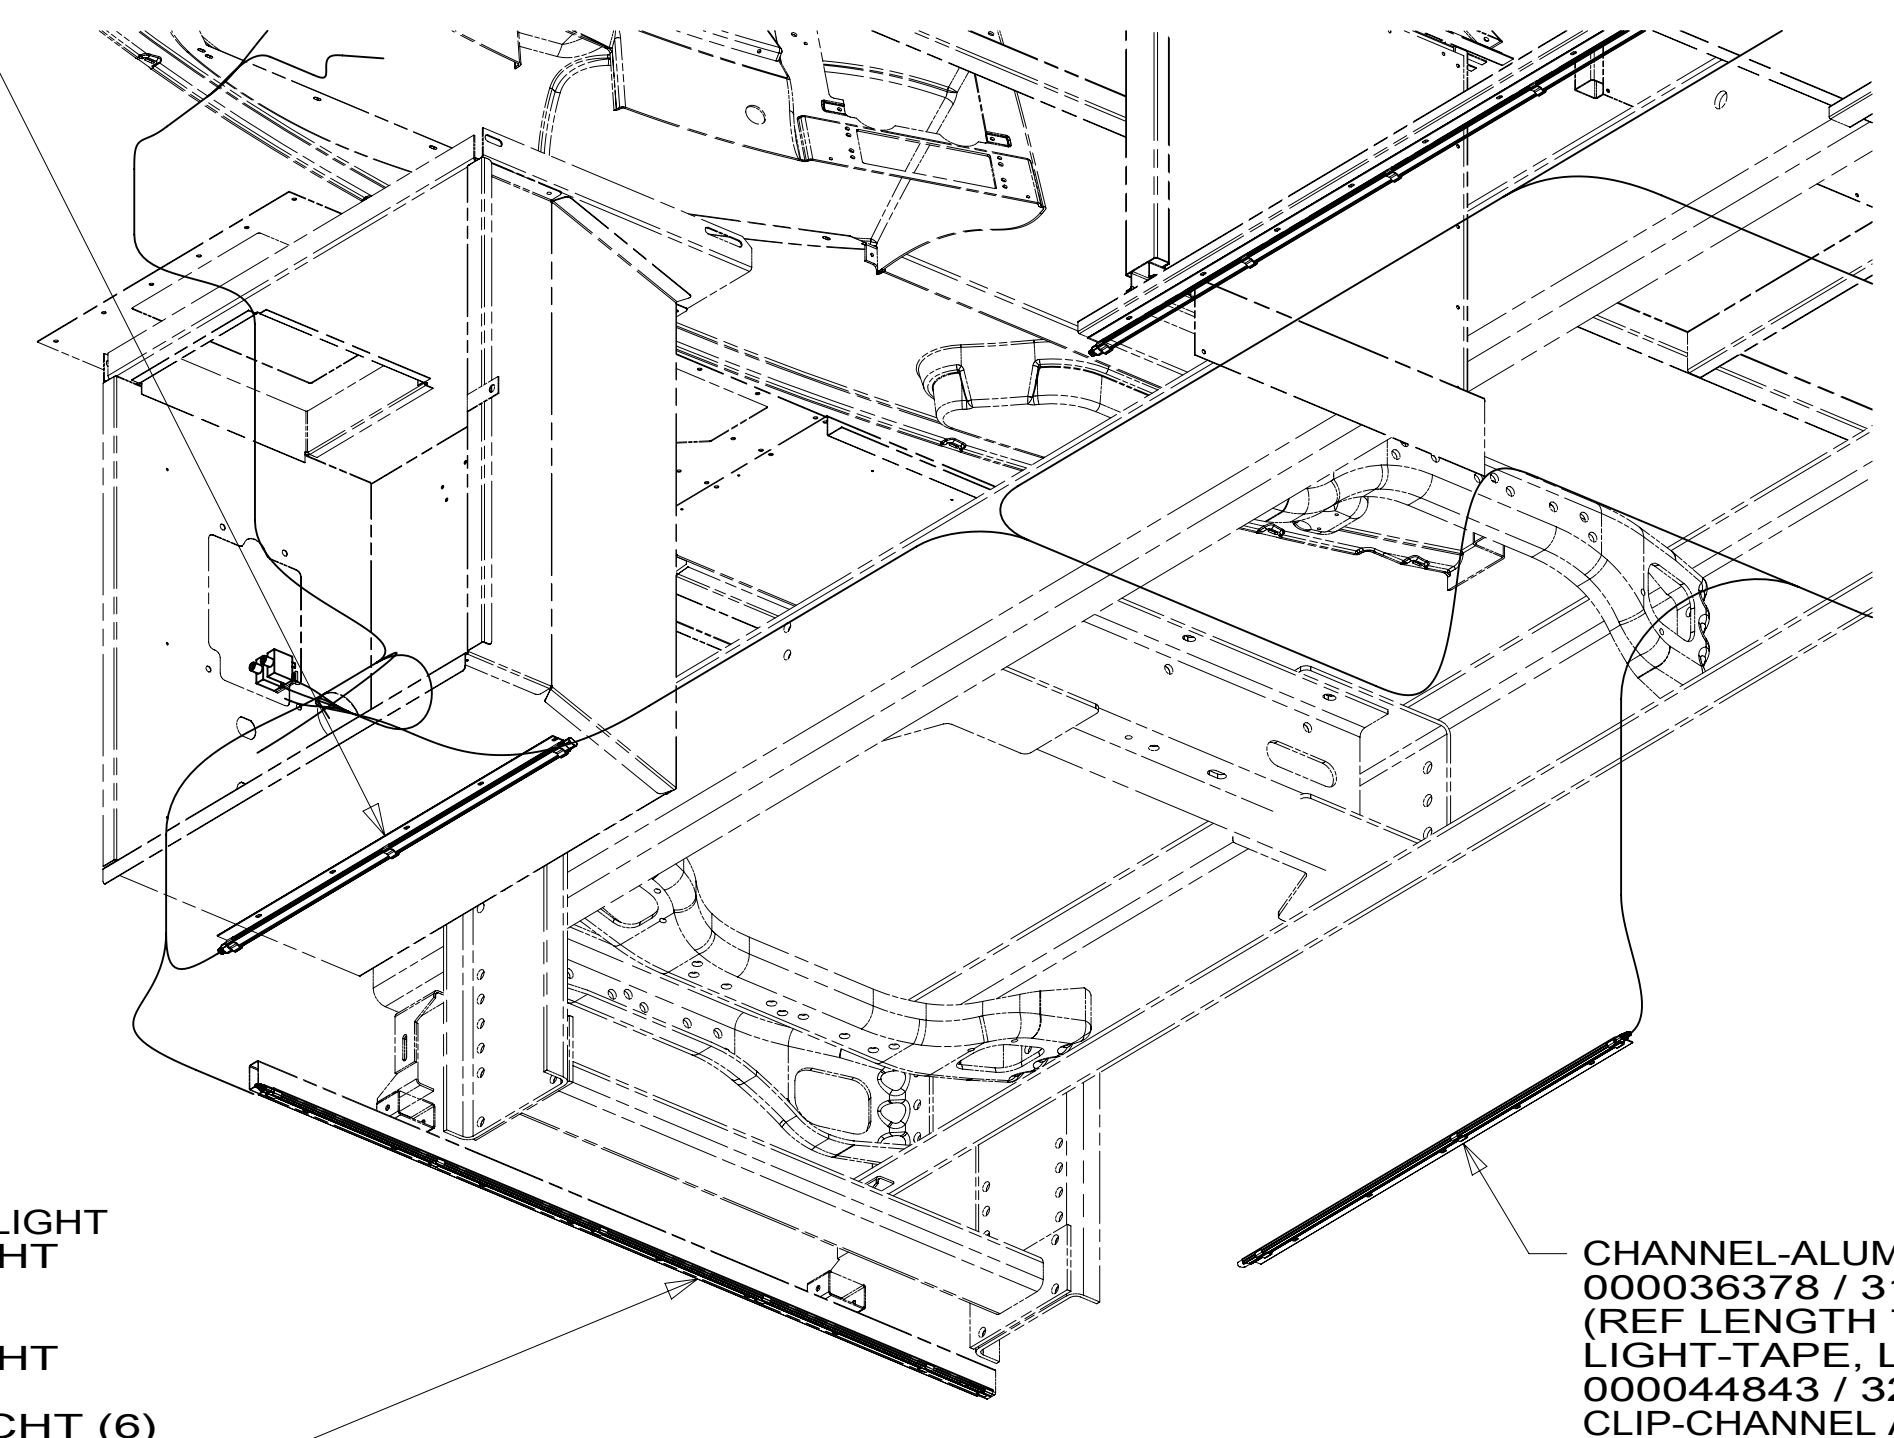

VIEW BA


2 CHANNEL-ALUMINUM, RGB LIGHT  
000036378 / 318315-01-CHT  
(REF LENGTH 1242)  
LIGHT-TAPE, LED  
1 000044849 / 320802-17-CHT  
CLIP-CHANNEL ALUMINUM  
000036549 / 318319-01-CHT (6)  
SCREW  
000G39-08-12U (8)

3 CHANNEL-ALUMINUM, RGB LIGHT  
000036378 / 318315-01-CHT  
(REF LENGTH 765)  
LIGHT-TAPE, LED  
1 000044843 / 320802-11-CHT  
CLIP-CHANNEL ALUMINUM  
000036549 / 318319-01-CHT (3)  
SCREW  
000G39-08-12U (5)

2 CHANNEL-ALUMINUM, RGB LIGHT  
000036378 / 318315-01-CHT  
(REF LENGTH 554)  
LIGHT-TAPE, LED  
1 000044840 / 320802-08-CHT  
CLIP-CHANNEL ALUMINUM  
000036549 / 318319-01-CHT (3)  
SCREW  
000G39-08-12U (4)

2 CHANNEL-ALUMINUM, RGB LIGHT  
000036378 / 318315-01-CHT  
(REF LENGTH 1400)  
LIGHT-TAPE, LED  
1 000044851 / 320802-19-CHT  
CLIP-CHANNEL ALUMINUM  
000036549 / 318319-01-CHT (6)  
SCREW  
000G39-08-12U (9)

2 CHANNEL-ALUMINUM, RGB LIGHT  
000036378 / 318315-01-CHT  
(REF LENGTH 1188)  
LIGHT-TAPE, LED  
1 000044848 / 320802-16-CHT  
CLIP-CHANNEL ALUMINUM  
000036549 / 318319-01-CHT (6)  
SCREW  
000G39-08-12U (9)

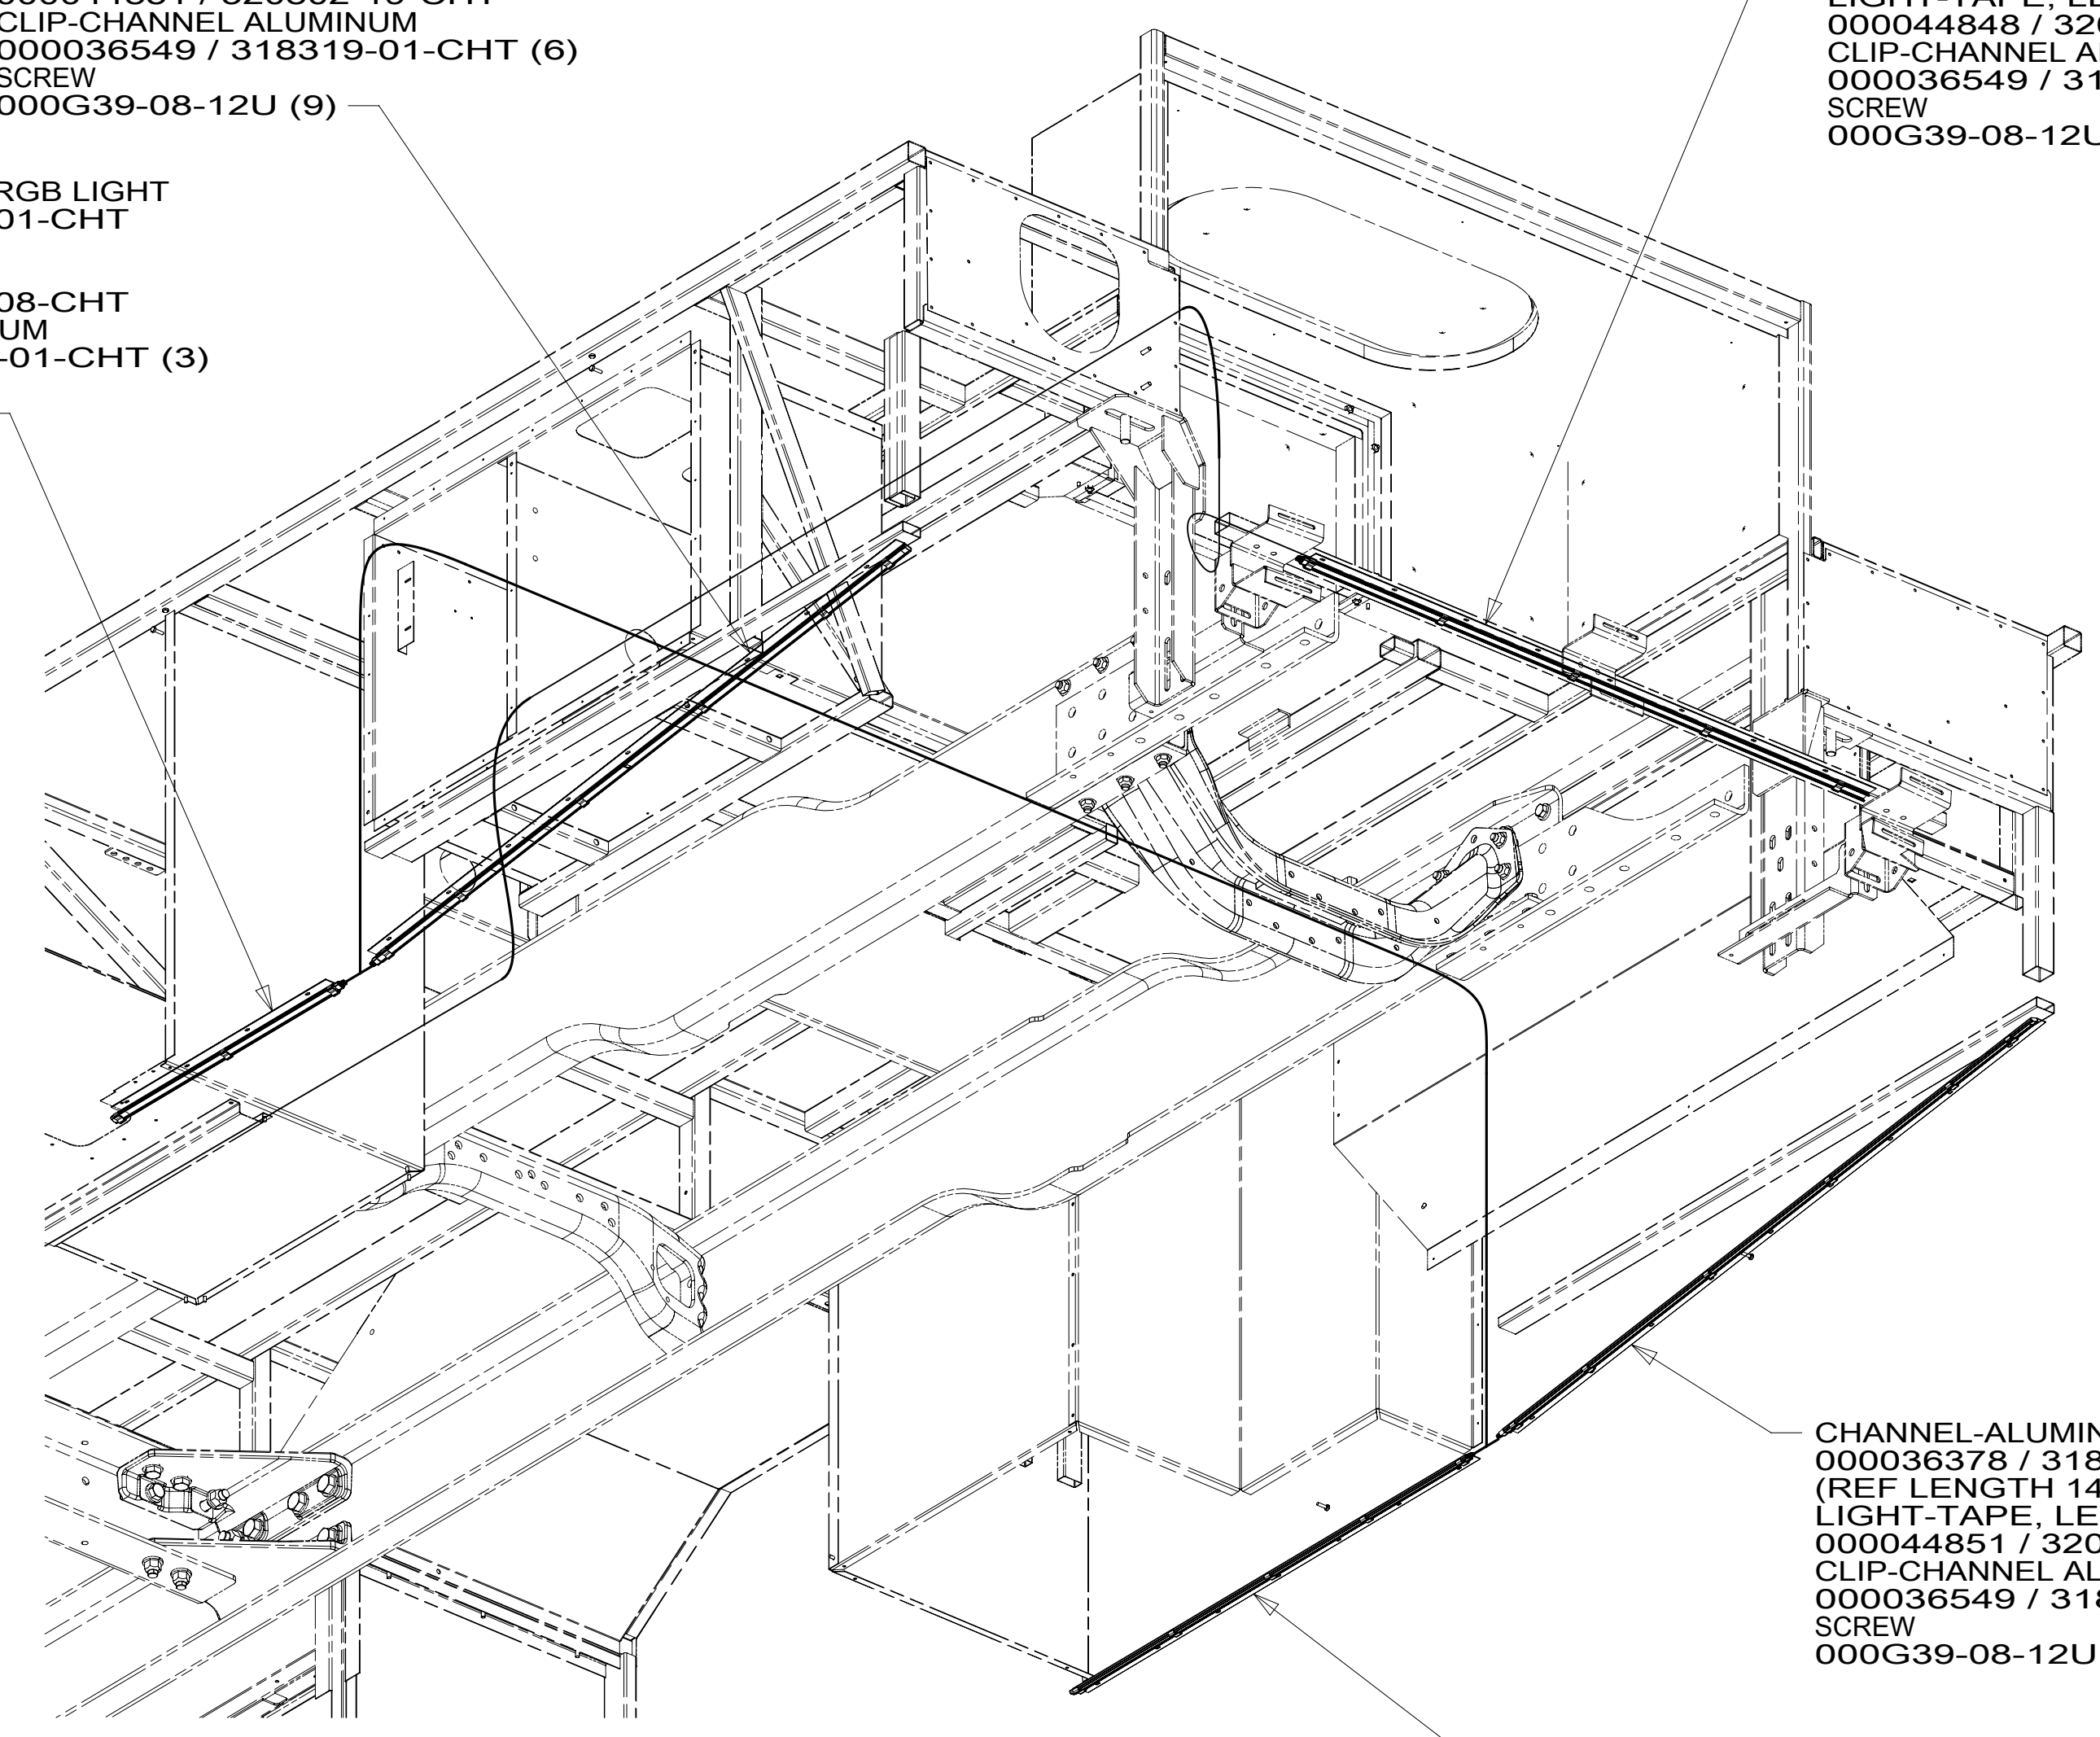

VIEW BB

2 CHANNEL-ALUMINUM, RGB LIGHT  
000036378 / 318315-01-CHT  
(REF LENGTH 1400)  
LIGHT-TAPE, LED  
1 000044851 / 320802-19-CHT  
CLIP-CHANNEL ALUMINUM  
000036549 / 318319-01-CHT (6)  
SCREW  
000G39-08-12U (9)

2 CHANNEL-ALUMINUM, RGB LIGHT  
000036378 / 318315-01-CHT  
(REF LENGTH 984)  
LIGHT-TAPE, LED  
1 000044846 / 320802-14-CHT  
CLIP-CHANNEL ALUMINUM  
000036549 / 318319-01-CHT (5)  
SCREW  
000G39-08-12U (7)

- NOTES:
- 4. CUT MOUNTING CHANNELS TO LEAVE 3-7MM GAPS AT BOTH ENDS.
  - 3. ALIGN WITH REAR FACE OF MOUNTING SURFACE.
  - 2. CENTER ALUMINUM CHANNEL(S) ON MOUNTING SURFACE.
  - 1. CLIPS TO BE EQUALLY SPACED ALONG LED STRIP.  
CENTER CLIPS BETWEEN INDIVIDUAL LEDS.

265 CODES/STANDARDS-CSA/CMVSS  
1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION: <b>WIRING INSTL-LIGHTING,GROUND EFFECTS</b>	
SHEET: 2 OF 3	ITEM/PART NO: 000166705 / 32983201000
REV	



8 7 6 5 4 3 2 1

D  
C  
B  
A

3 CHANNEL-ALUMINUM, RGB LIGHT  
000036378 / 318315-01-CHT  
(REF LENGTH 1126)  
LIGHT-TAPE, LED  
000044848 / 320802-16-CHT


1 CLIP-CHANNEL ALUMINUM  
000036549 / 318319-01-CHT (5)  
SCREW  
000G39-08-12U (5)

2 CHANNEL-ALUMINUM, RGB LIGHT  
000036378 / 318315-01-CHT (3)  
(REF LENGTH 3436)  
LIGHT-TAPE, LED  
000044880 / 320802-48-CHT

1 CLIP-CHANNEL ALUMINUM  
000036549 / 318319-01-CHT (12)  
SCREW  
000G39-08-12U (23)

CHANNEL-ALUMINUM, RGB LIGHT  
000036378 / 318315-01-CHT (3) 2  
LIGHT-TAPE, LED  
000045006 / 320802-66-CHT

1 CLIP-CHANNEL ALUMINUM  
000036549 / 318319-01-CHT (17)  
SCREW  
000G39-08-12U (31)

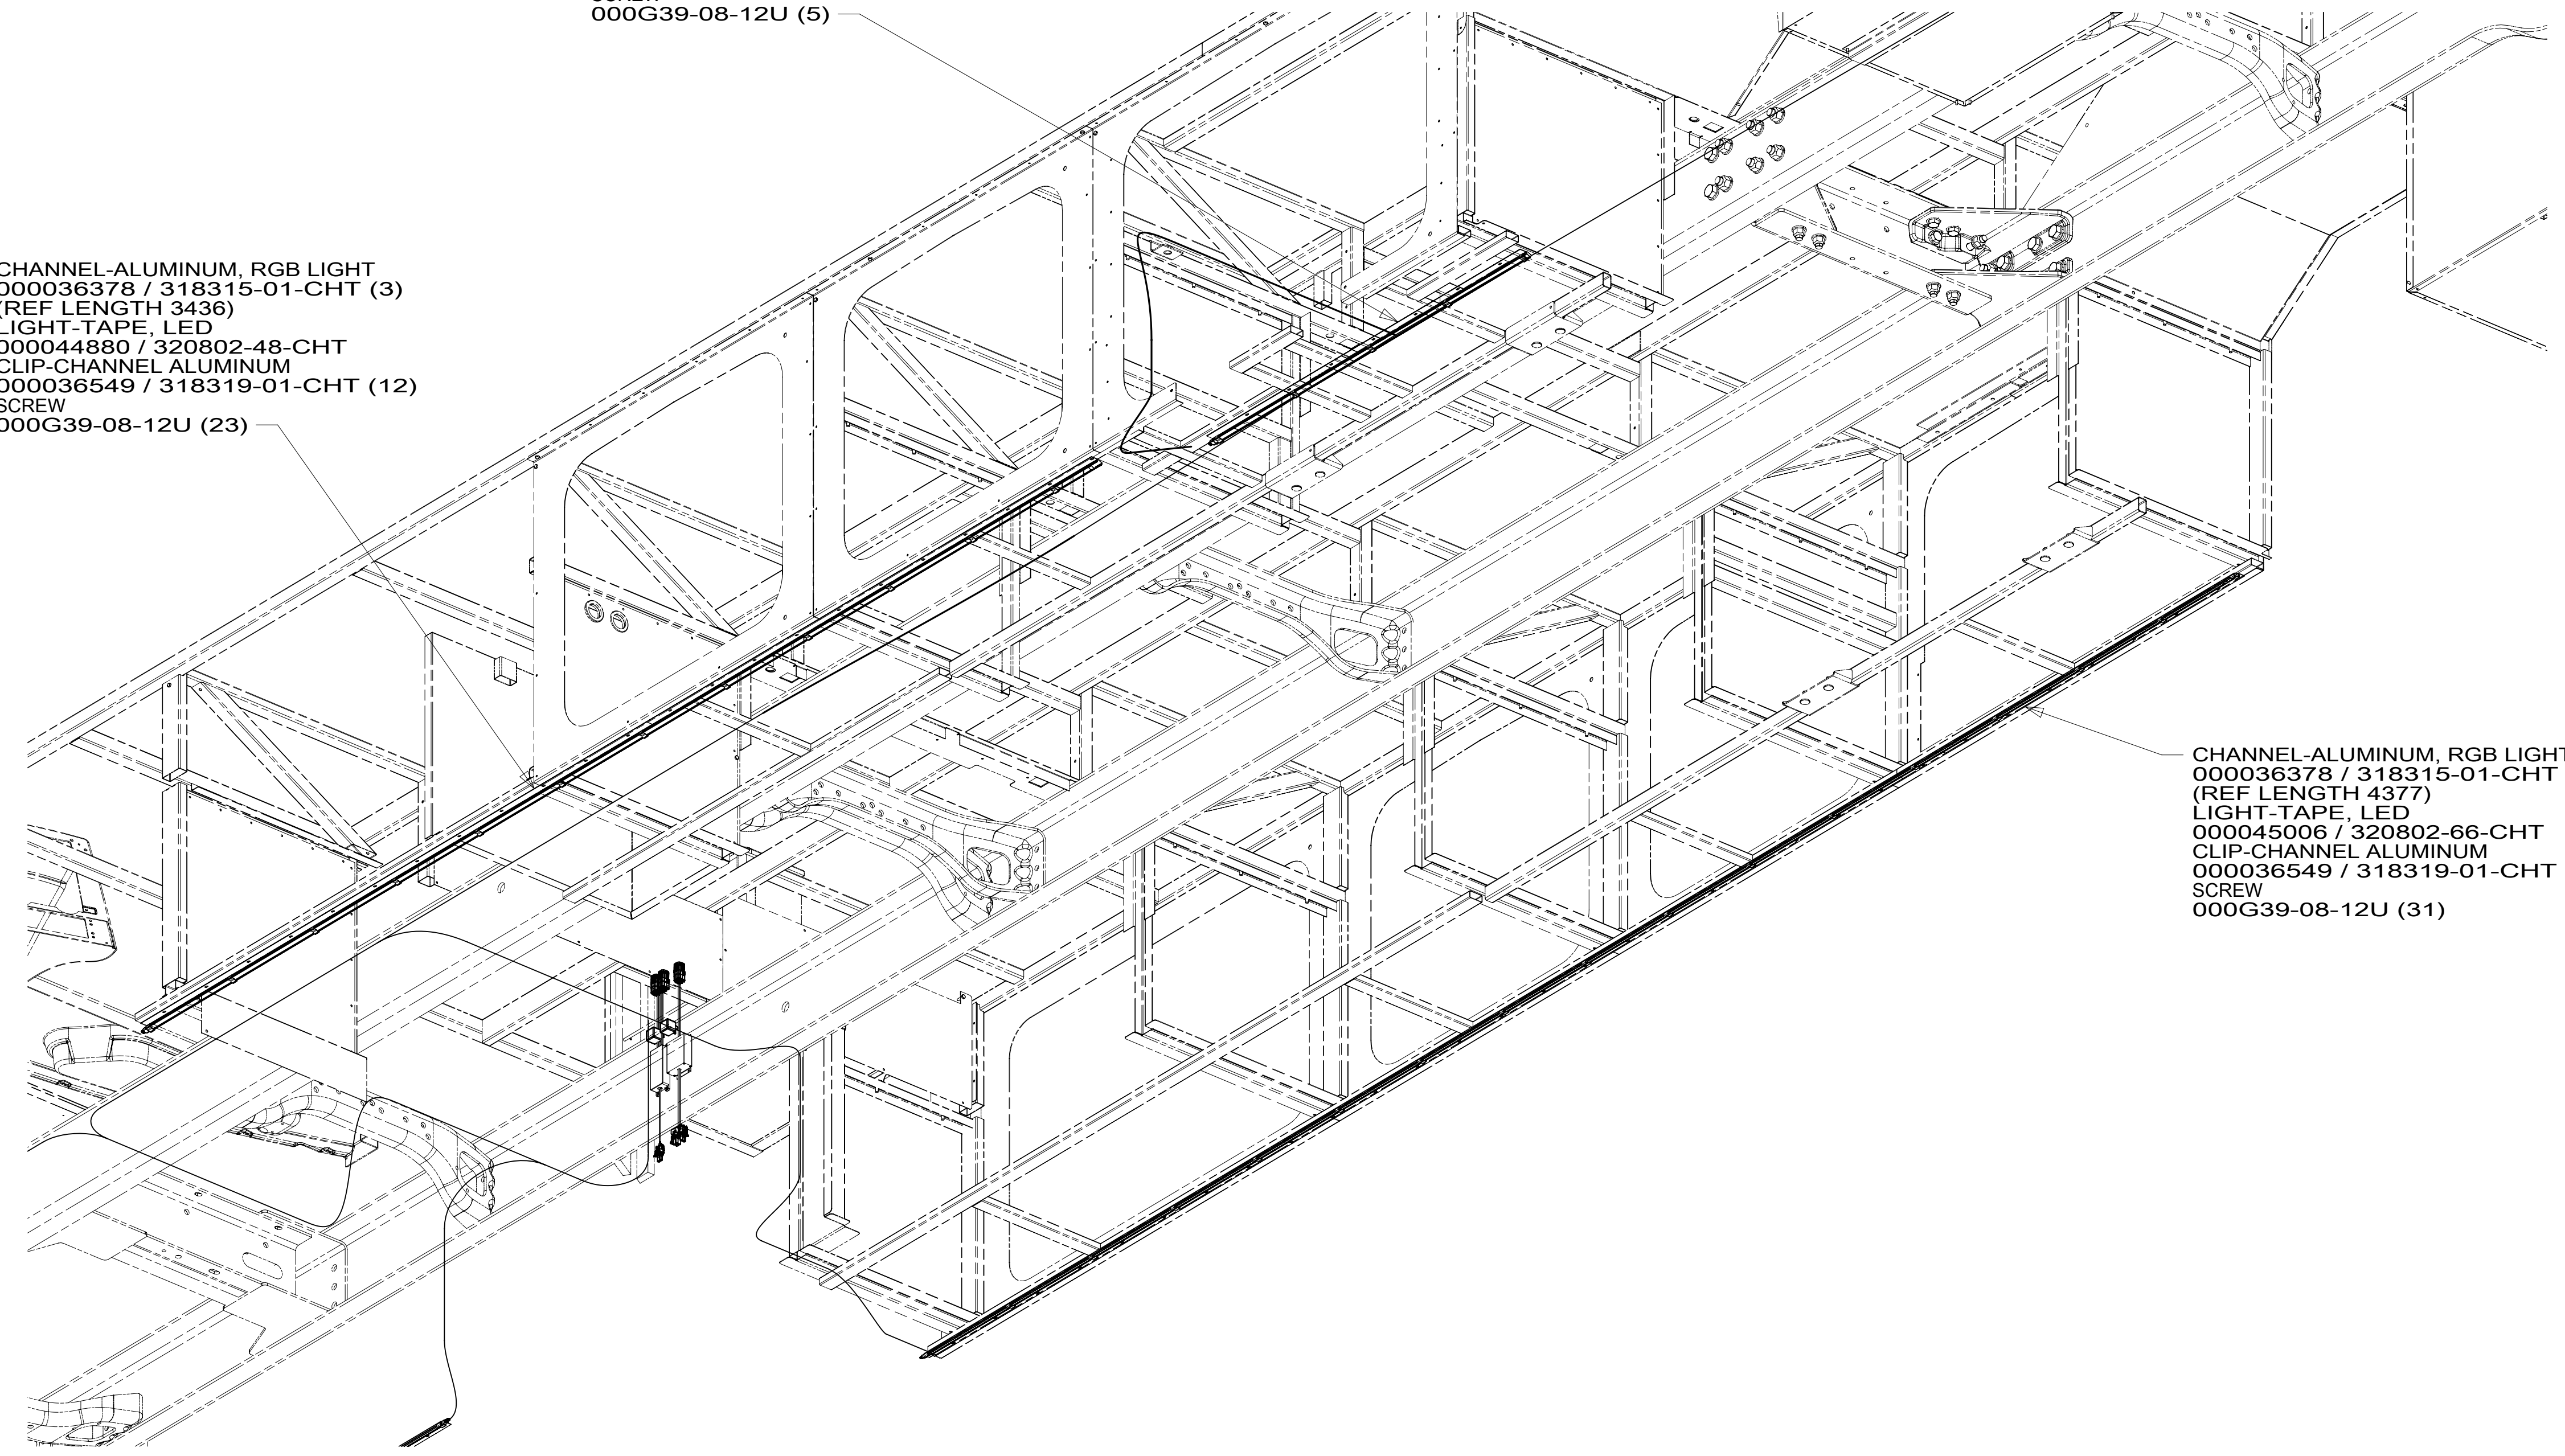

VIEW CA

- NOTES:
- 4. CUT MOUNTING CHANNELS TO LEAVE 3-7MM GAPS AT ENDS.
  - 3 ALIGN WITH REAR FACE OF MOUNTING SURFACE.
  - 2 CENTER ALUMINUM CHANNELS ON MOUNTING SURFACE.
  - 1 CLIPS TO BE EQUALLY SPACED ALONG LED STRIP.  
CENTER CLIPS BETWEEN INDIVIDUAL LEDS.

265 CODES/STANDARDS-CSA/CMVSS  
1B1 CODES/STANDARDS USA

FOR ELECTRICAL  
TORQUE  
SPECIFICATIONS  
SEE DWG NO.  
128783-01-000

FOR  
ELECTRICAL  
CALLOUTS  
SEE DWG NO.  
121339-01-000

DESCRIPTION: <b>WIRING INSTL-LIGHTING,GROUND EFFECTS</b>	
SHEET: <b>3 OF 3</b>	ITEM/PART NO.: <b>000166705 / 32983201000</b>
REV	

8 7 6 5 4 3 2 1 05-Aug-2019