



8 7 6 5 4 3 2 1

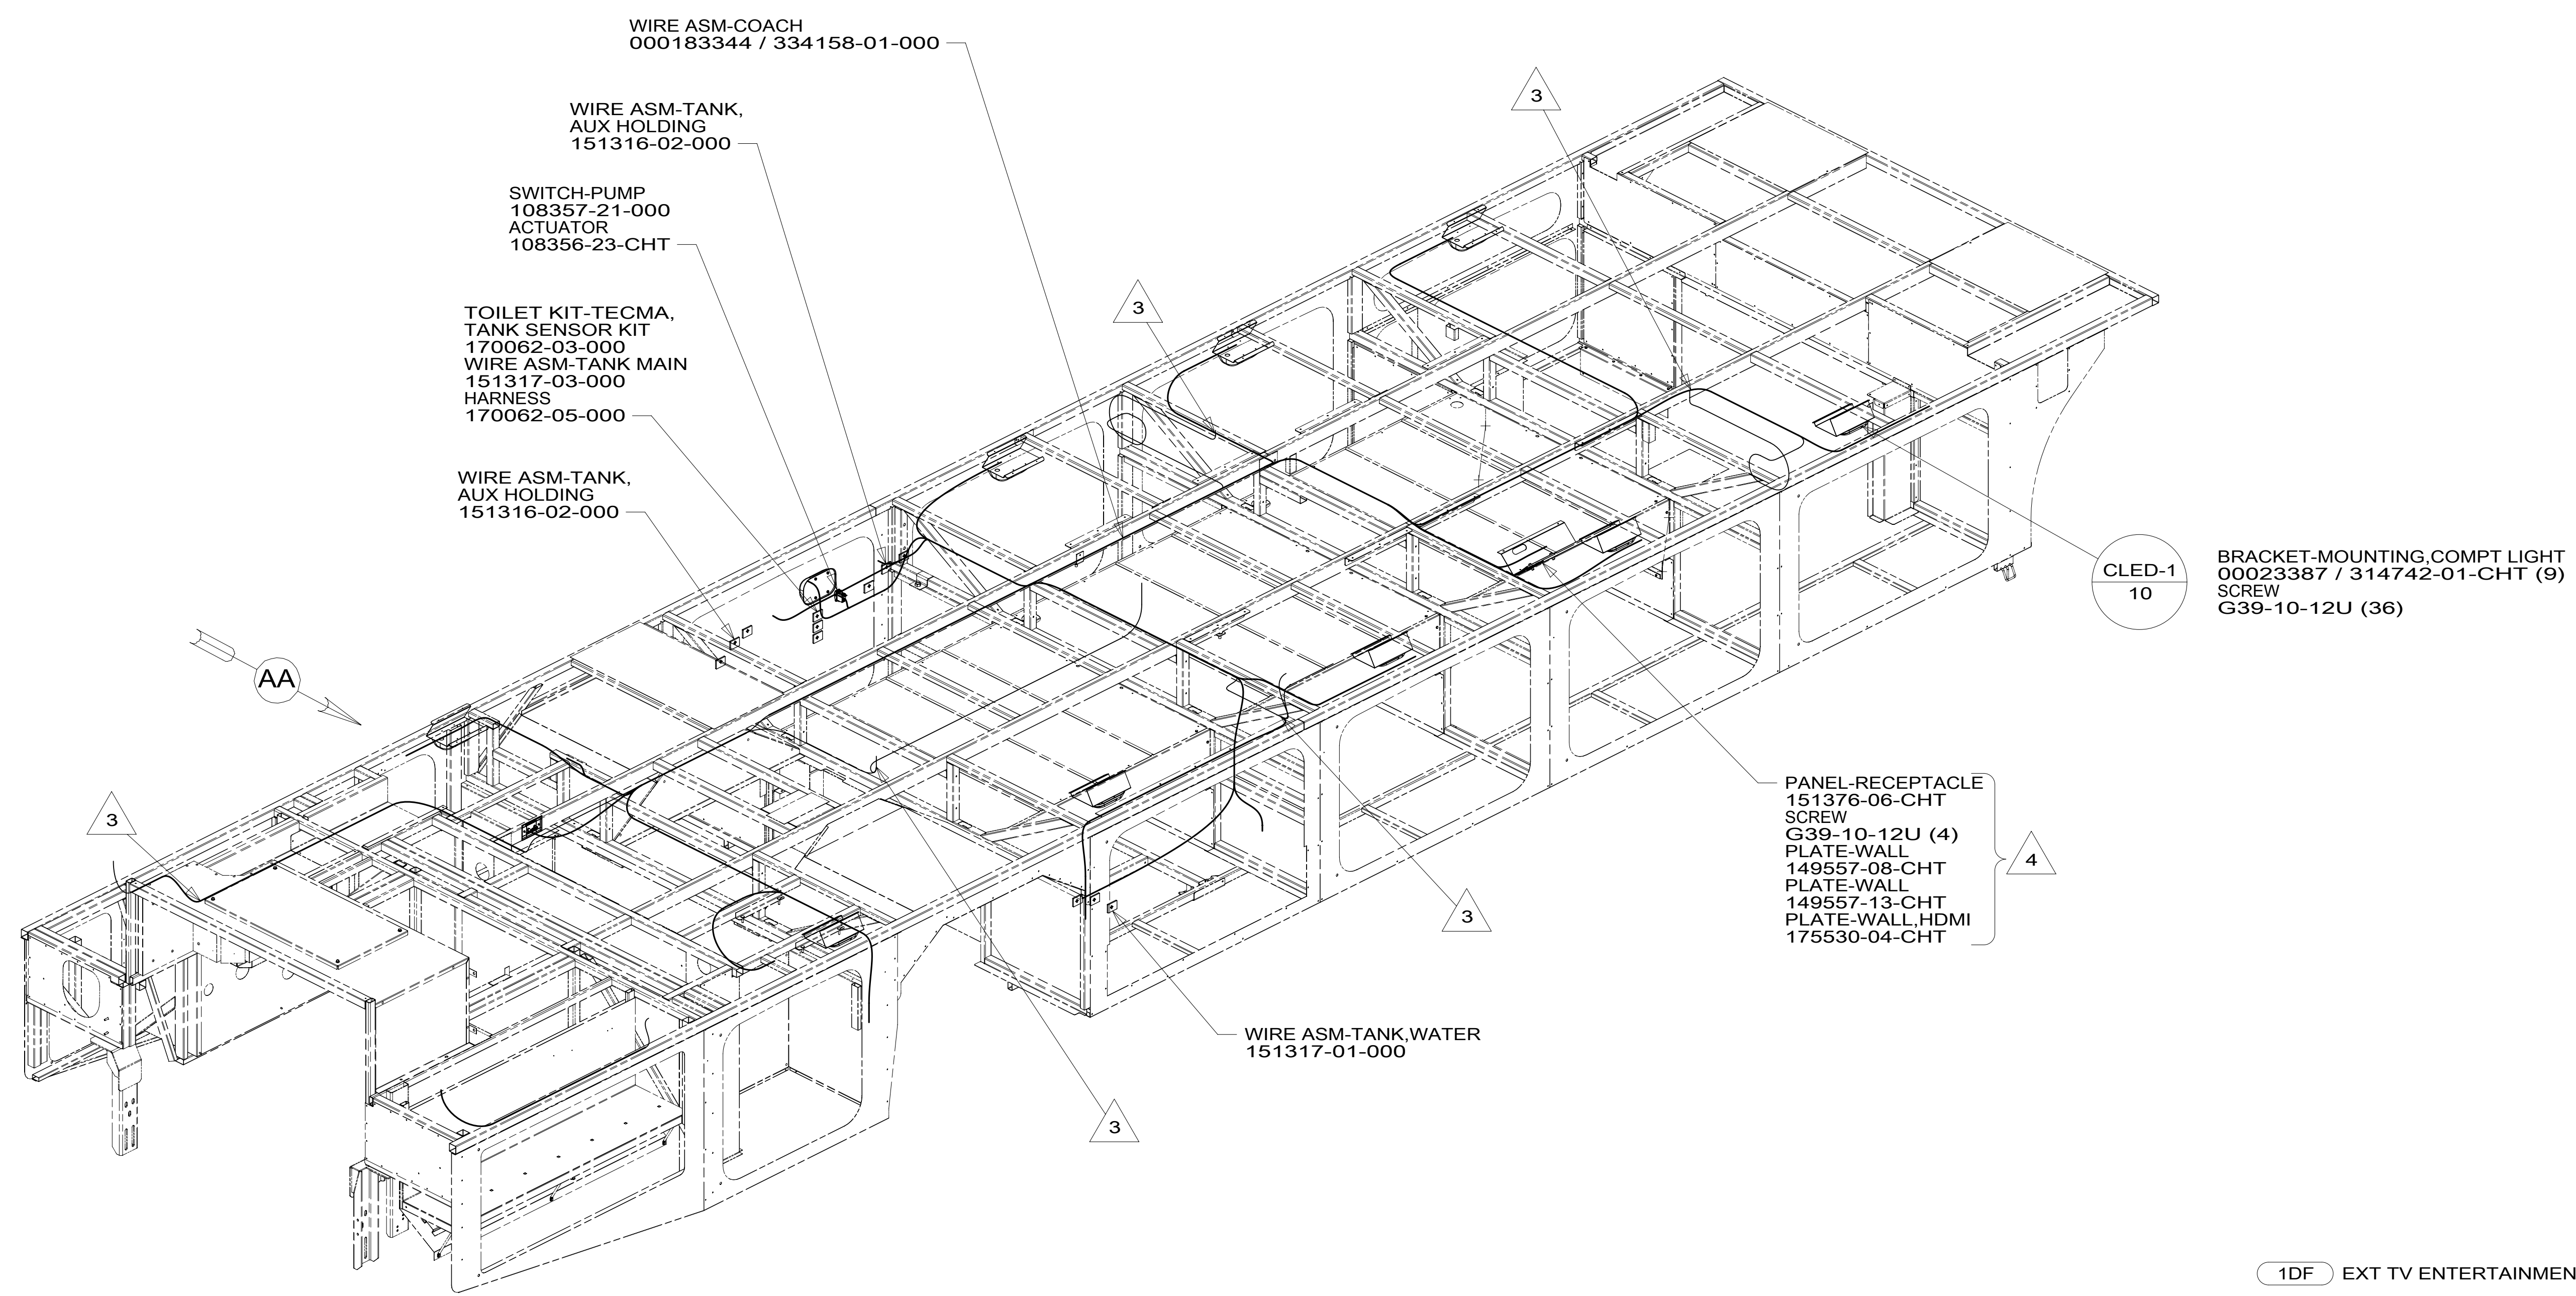

- 4 NOT USED WITH 1DF
ROUTE WIRES INTO SLIDEROOM FOR IN-WALL EXTERIOR TV.
- 3 WIRE PASSES THROUGH FLOOR IN THIS AREA.

2. ROUTE TANK SENSOR WIRES SO THEY DO NOT PASS OVER SENSORS. USE WIRE TIE MOUNT 155366-01-000 AND WIRE TIE 8343-01-000 AS NEEDED. TANK SURFACE MUST BE CLEANED USING ISOPROPYL ALCOHOL AND PRIMED WITH PRIMER 94.
1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:

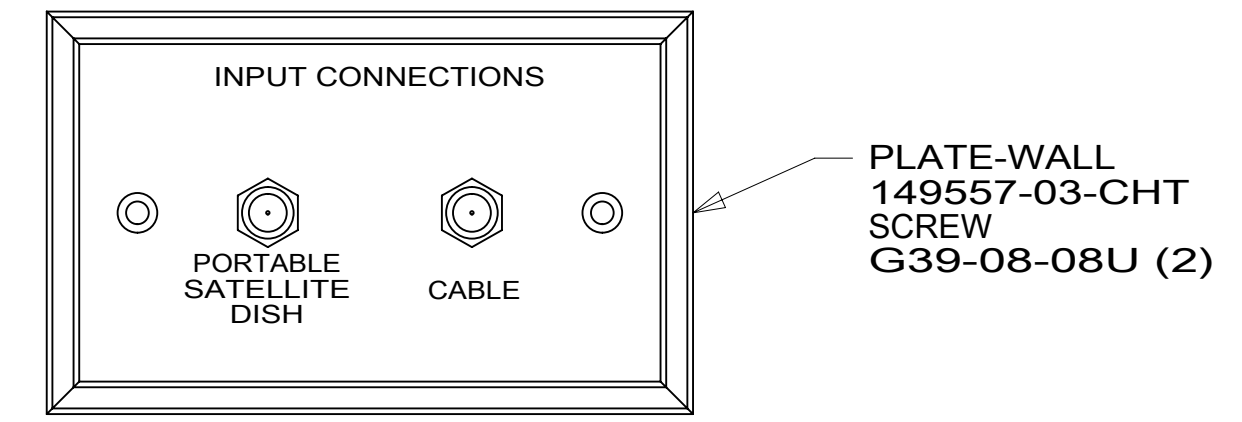

VIEW AA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 1DF EXT TV ENTERTAINMENT CENTER
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

1B1 265



| | | | |
|--|---------------|-----------------------------------|---------|
| DSNR: | | ALL DIMENSIONS ARE IN MILLIMETERS | |
| DFFR: | | MATERIAL: | |
| UNSPECIFIED TOLERANCES: | | | |
| WHOLE DIM (X) | : 3 | | |
| ONE-PLACE (X.X) | : 1.5 | | |
| TWO-PLACE (X.XX) | : 0.50 | | |
| ANGLE | : 1° | | |
| REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES | WEIGHT: (LBS) | FIRST USED: | |
| | | | 19 L38F |


WIRING INSTL-BODY, 12V

| | | |
|--------|-------------------------|------|
| SHEET: | ITEM/PART NO.: | REV: |
| 1 OF 8 | 000183341 / 33415701000 | |

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

D
C
B
A

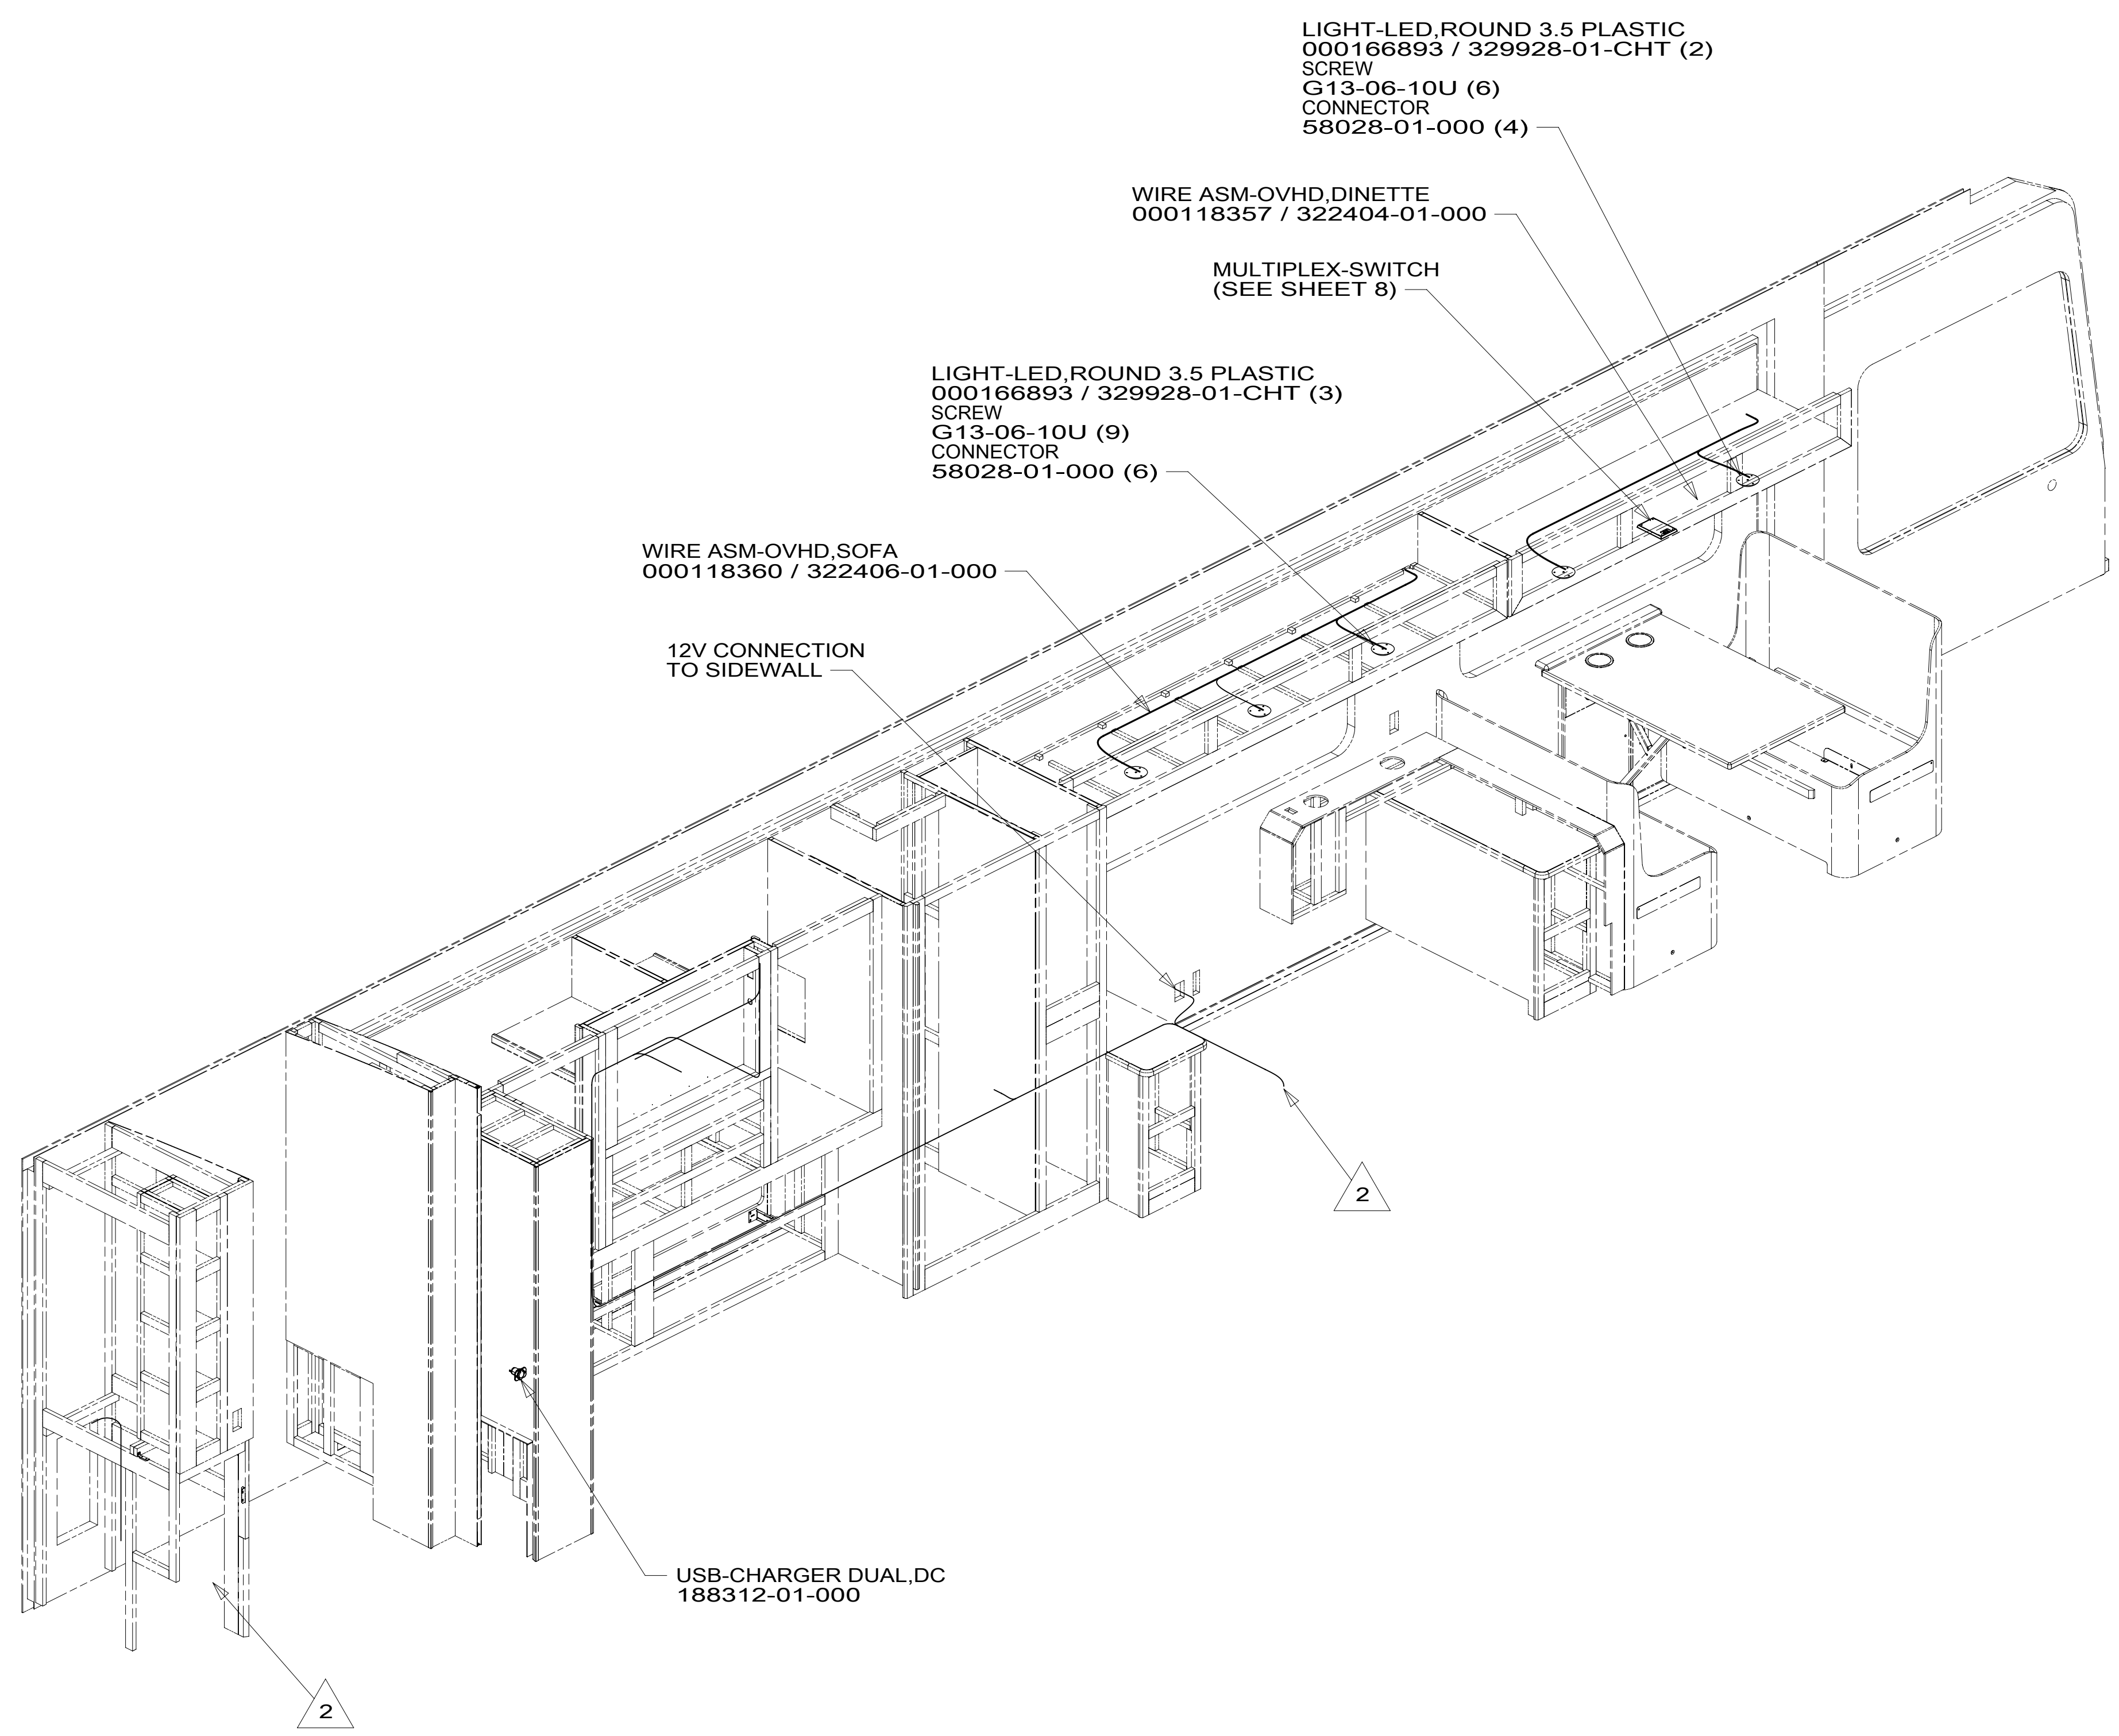

LIGHT-LED, ROUND 3.5 PLASTIC
000166893 / 329928-01-CHT (2)
SCREW
G13-06-10U (6)
CONNECTOR
58028-01-000 (4)

WIRE ASM-OVHD, DINETTE
000118357 / 322404-01-000

MULTIPLEX-SWITCH
(SEE SHEET 8)

LIGHT-LED, ROUND 3.5 PLASTIC
000166893 / 329928-01-CHT (3)
SCREW
G13-06-10U (9)
CONNECTOR
58028-01-000 (6)

WIRE ASM-OVHD, SOFA
000118360 / 322406-01-000

12V CONNECTION
TO SIDEWALL

USB-CHARGER DUAL, DC
188312-01-000

2 WIRE PASSES THROUGH FLOOR IN THIS AREA.

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

| | | | |
|-------------------------------|-------------------------|-----|-----|
| DESCRIPTION: | | 1B1 | 265 |
| WIRING INSTL-BODY, 12V | | | |
| SHEET: | ITEM/PART NO.: | REV | |
| 2 OF 8 | 000183341 / 33415701000 | | |


8 7 6 5 4 3 2 1 06-Jun-2019

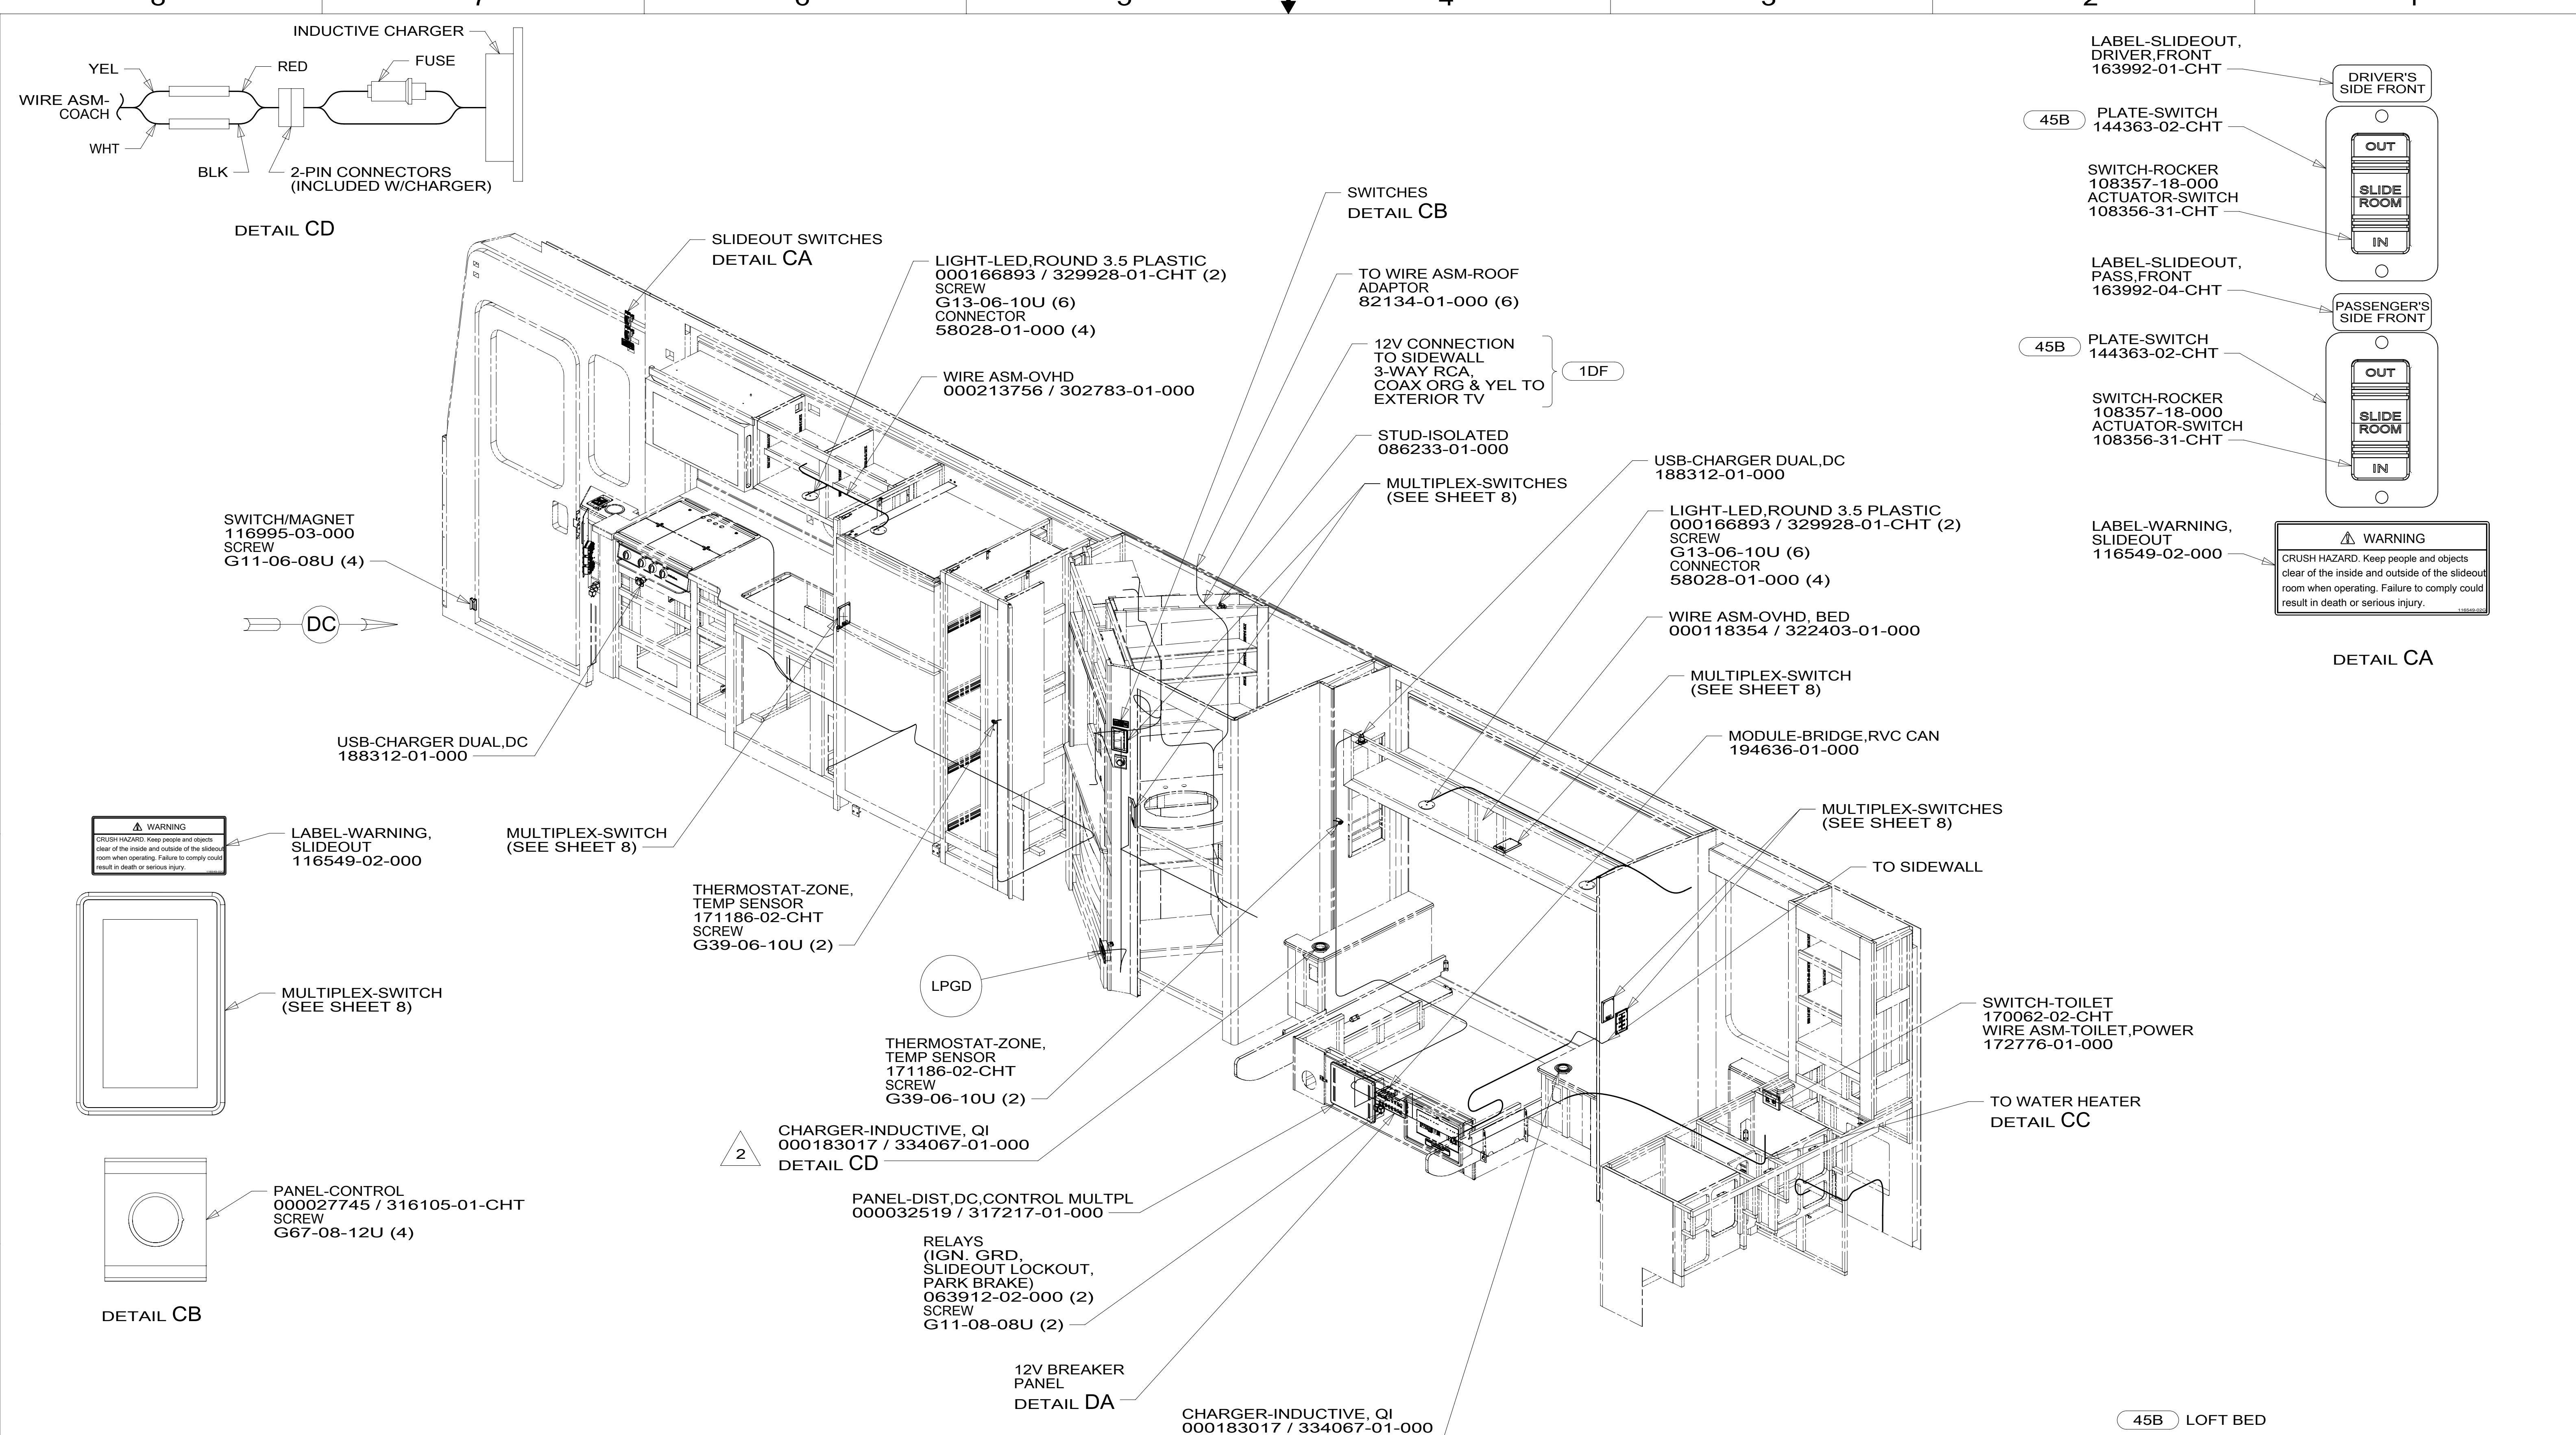


2 TO INSTALL CHARGER: SCRAP THE VENDOR SUPPLIED BRACKET AND SCREW. ADD TAPE-DOUBLE SIDED 1" 123816-01-000 (290MM) BETWEEN COUNTERTOP AND CHARGER.

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.


NOTES:

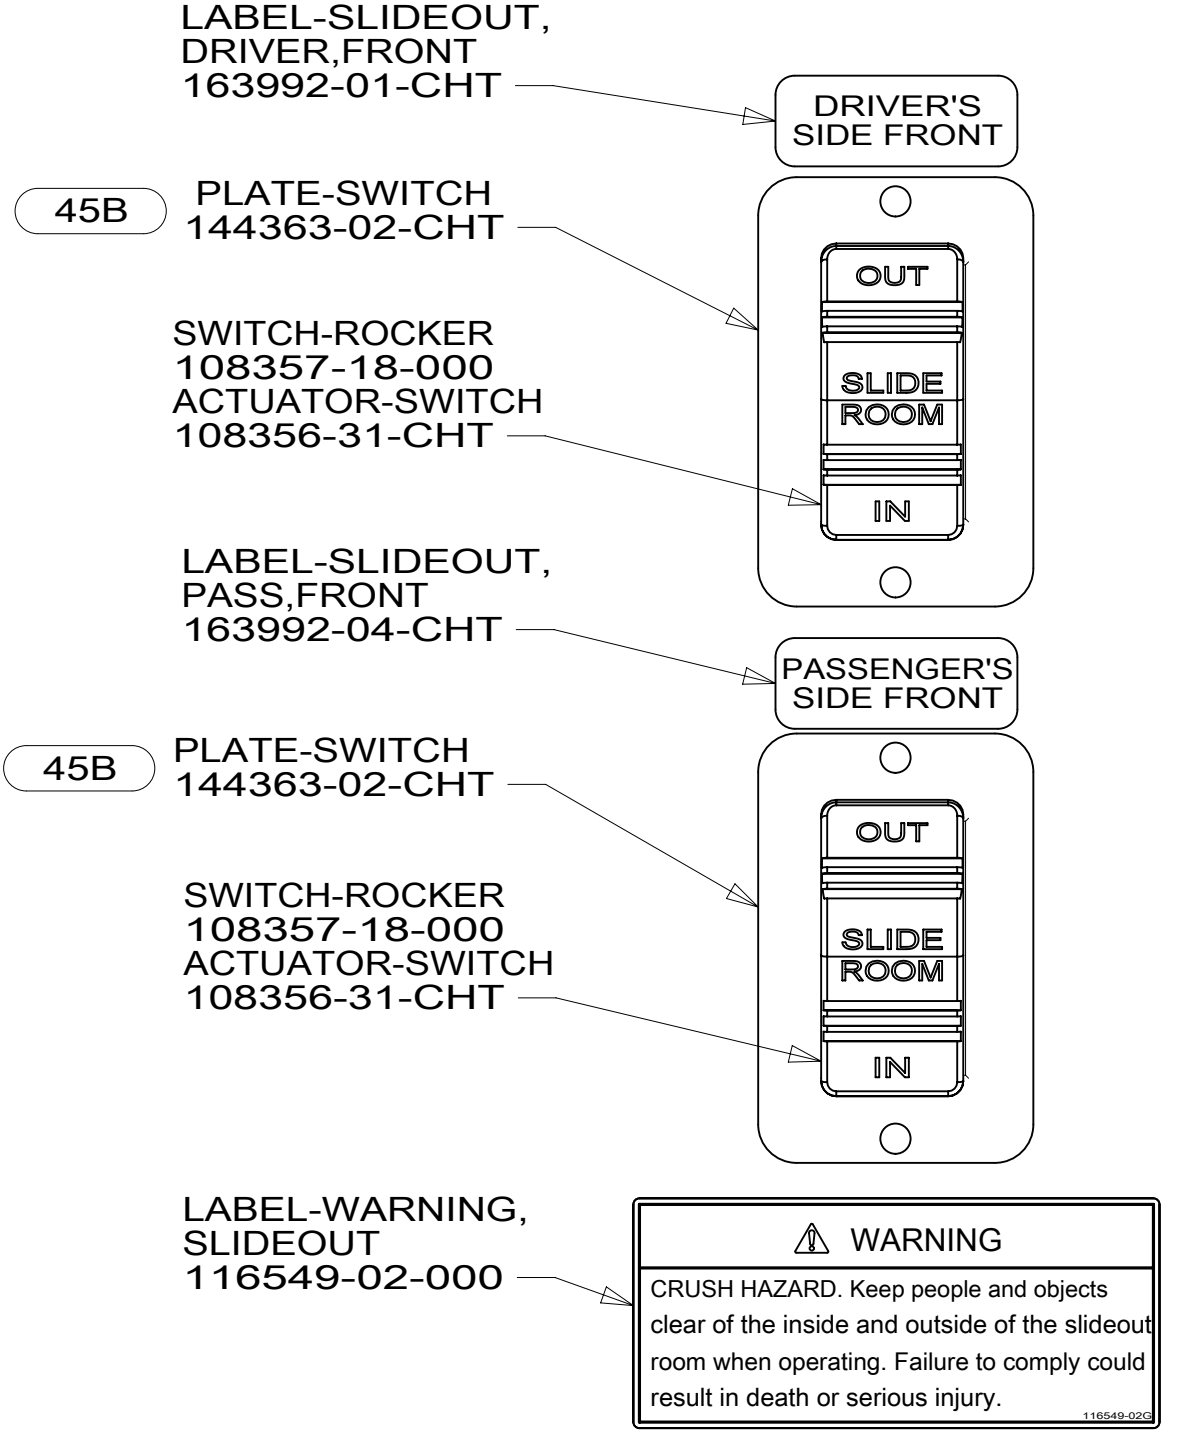

DETAIL CA

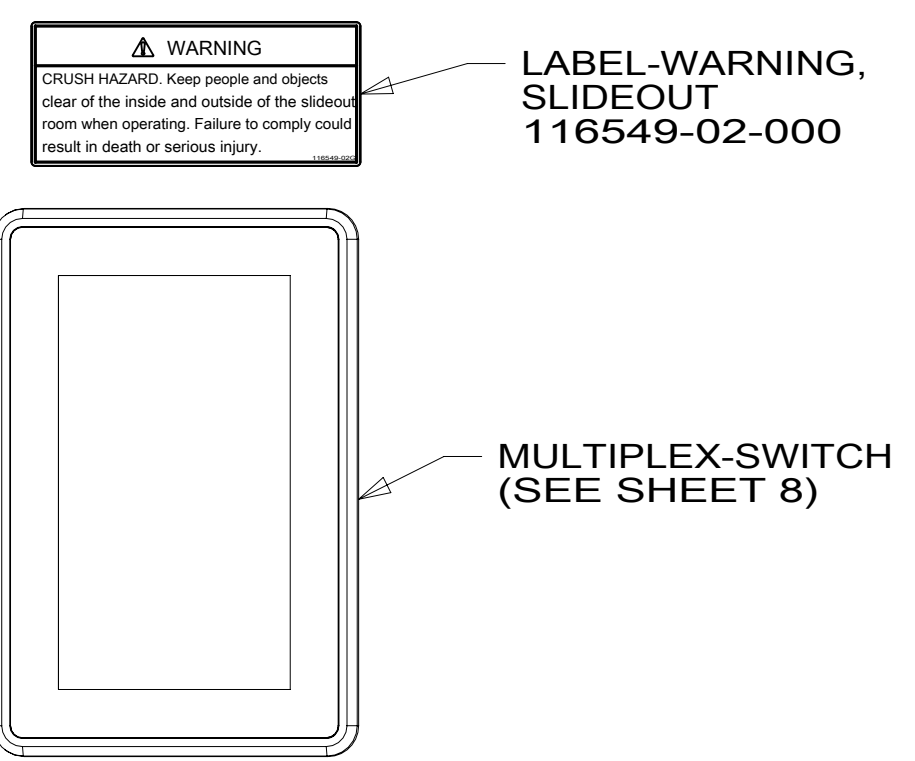

DETAIL CB

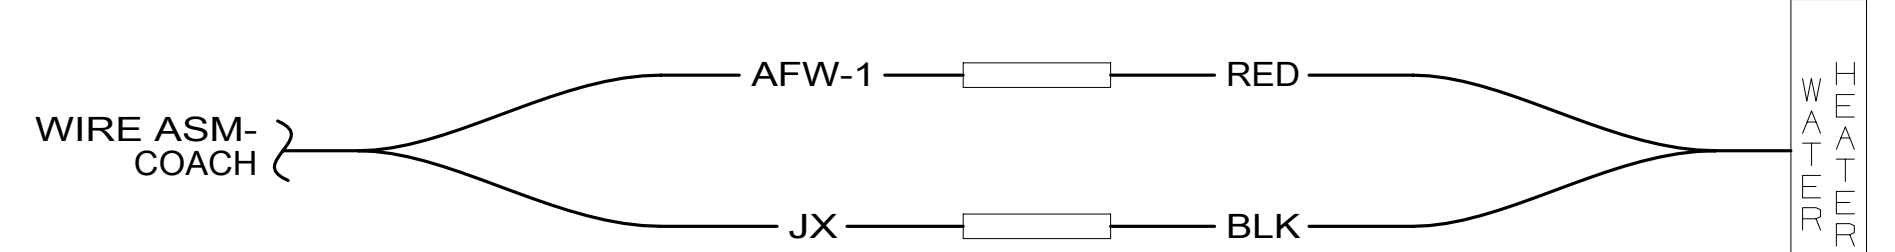

DETAIL CC

- 45B LOFT BED
- 1DF EXT TV ENTERTAINMENT CENTER
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

| | | |
|--|---------------------------------------|------|
| DESCRIPTION: WIRING INSTL-BODY, 12V | | |
| SHEET: 3 OF 8 | ITEM/PART NO: 000183341 / 33415701000 | REV: |

8 7 6 5 4 3 2 1

D

C

B


A

D


C

B




A

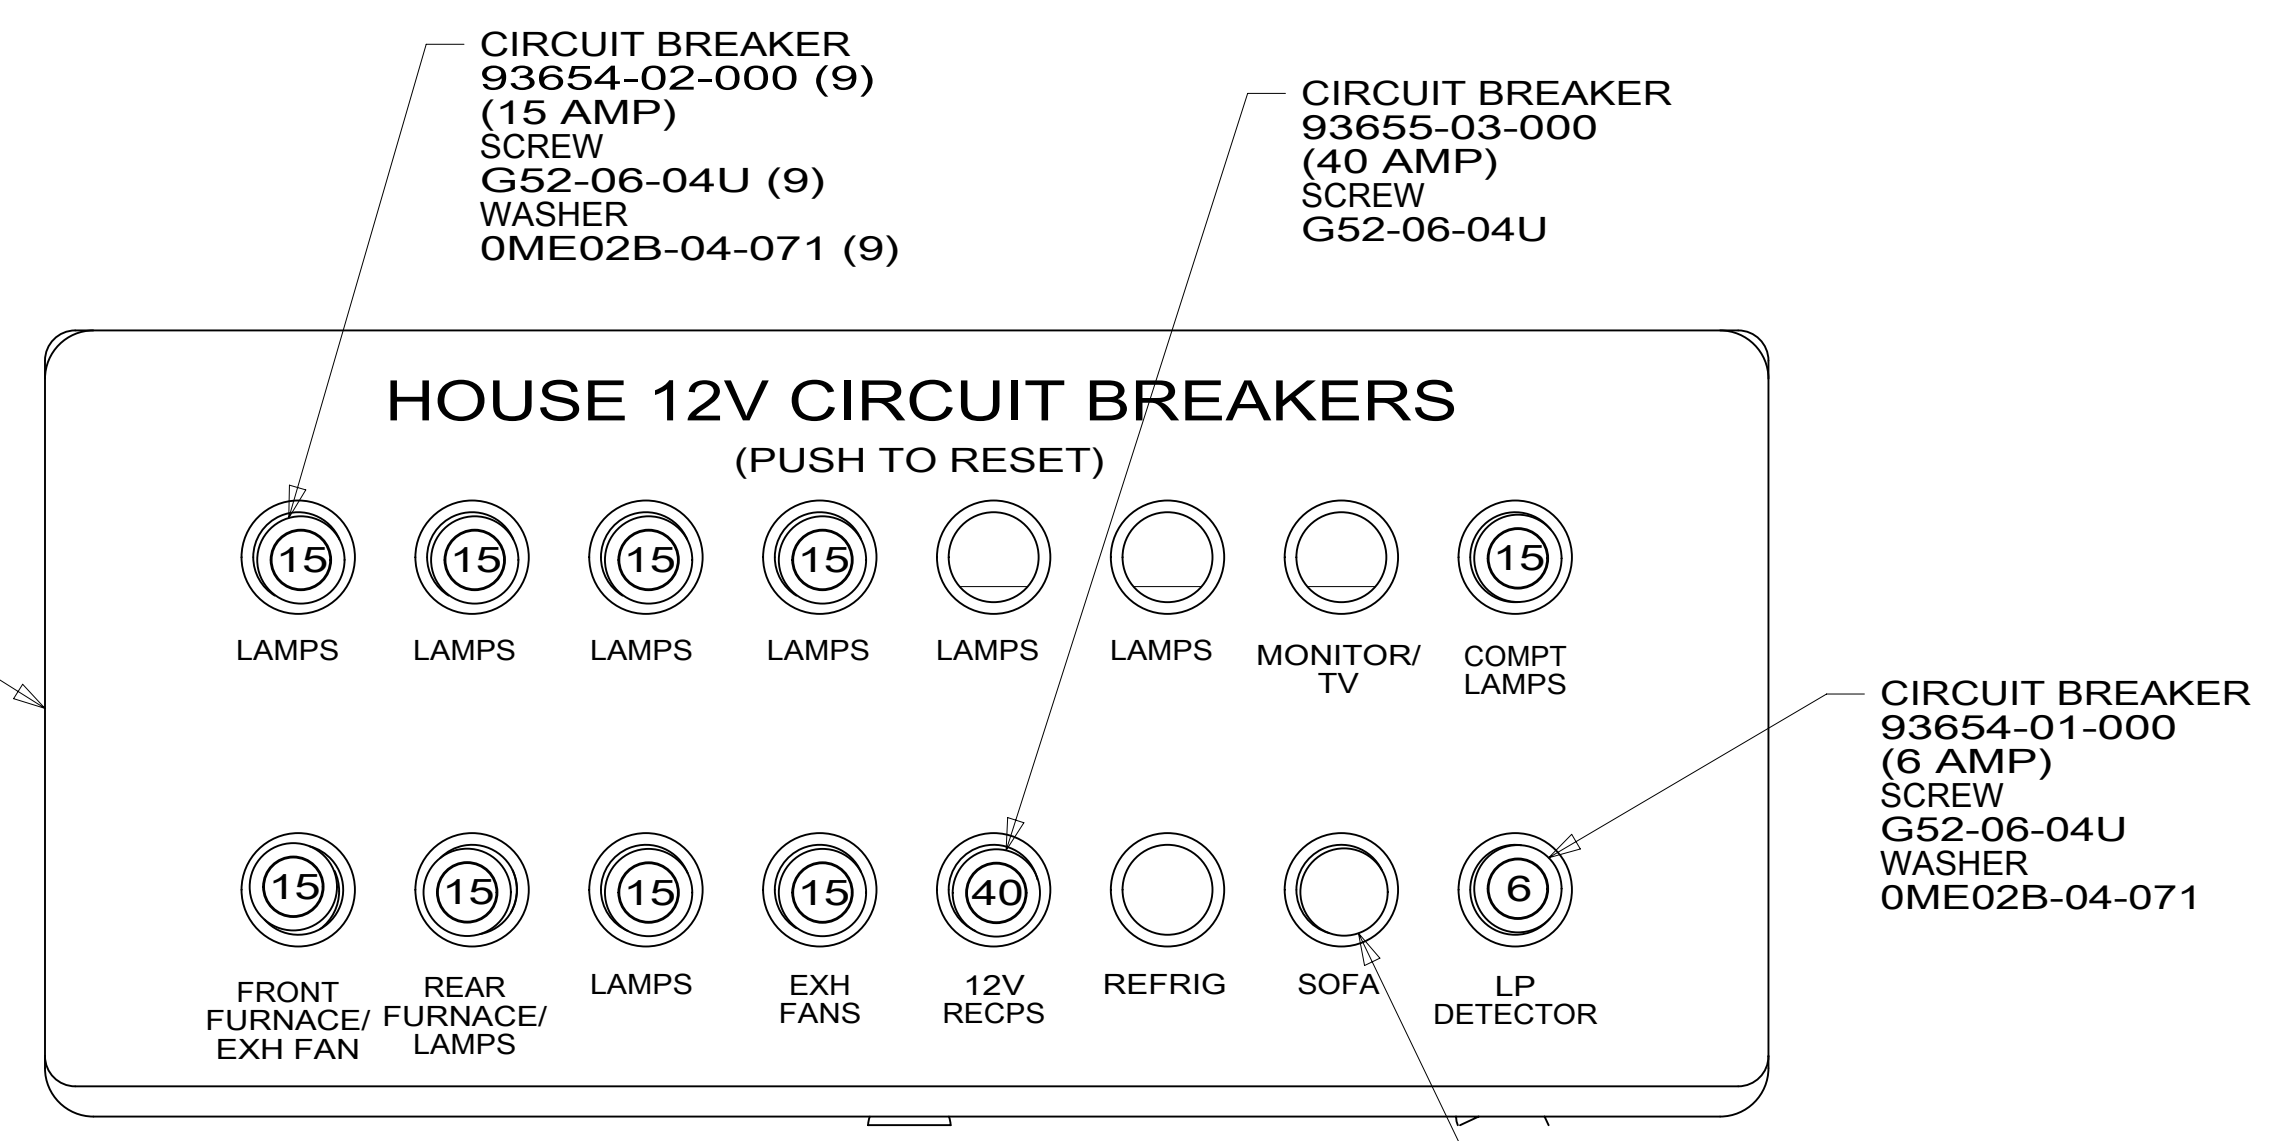

DETAIL DA (FRONT VIEW)

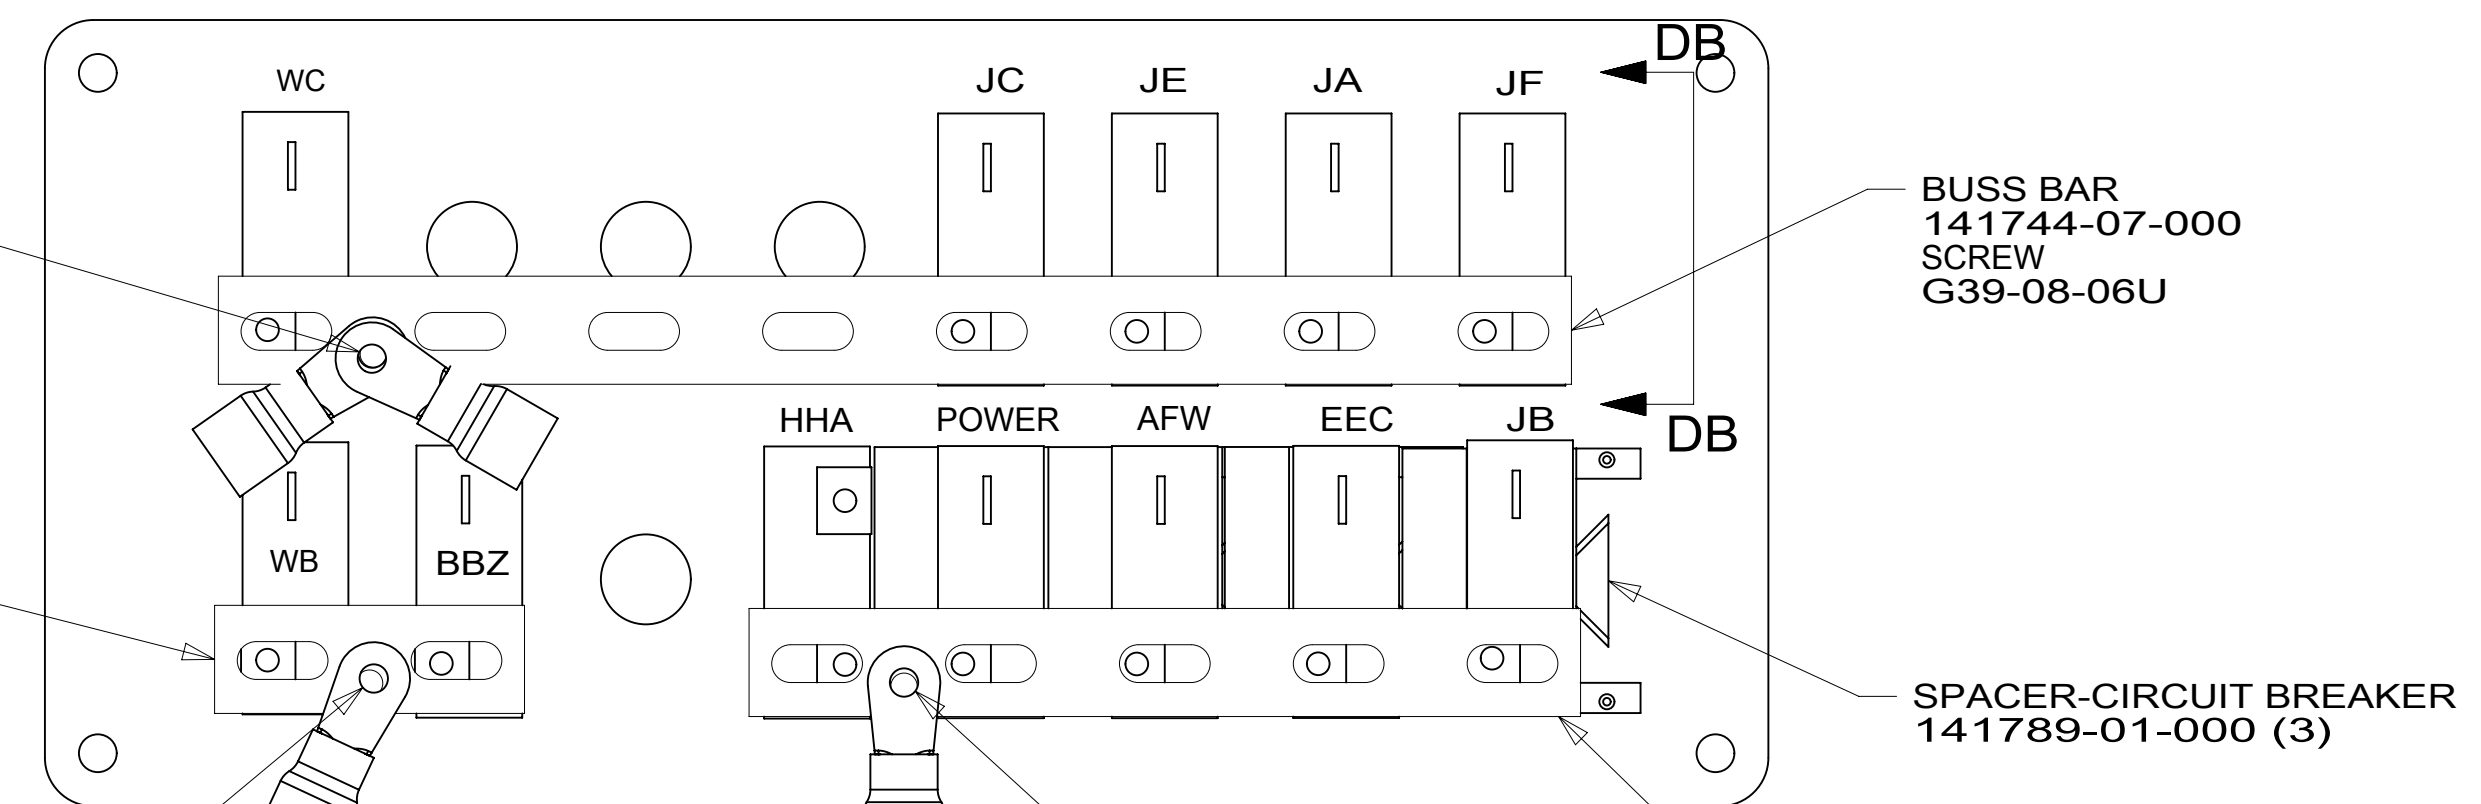

DETAIL DA (BACK VIEW)

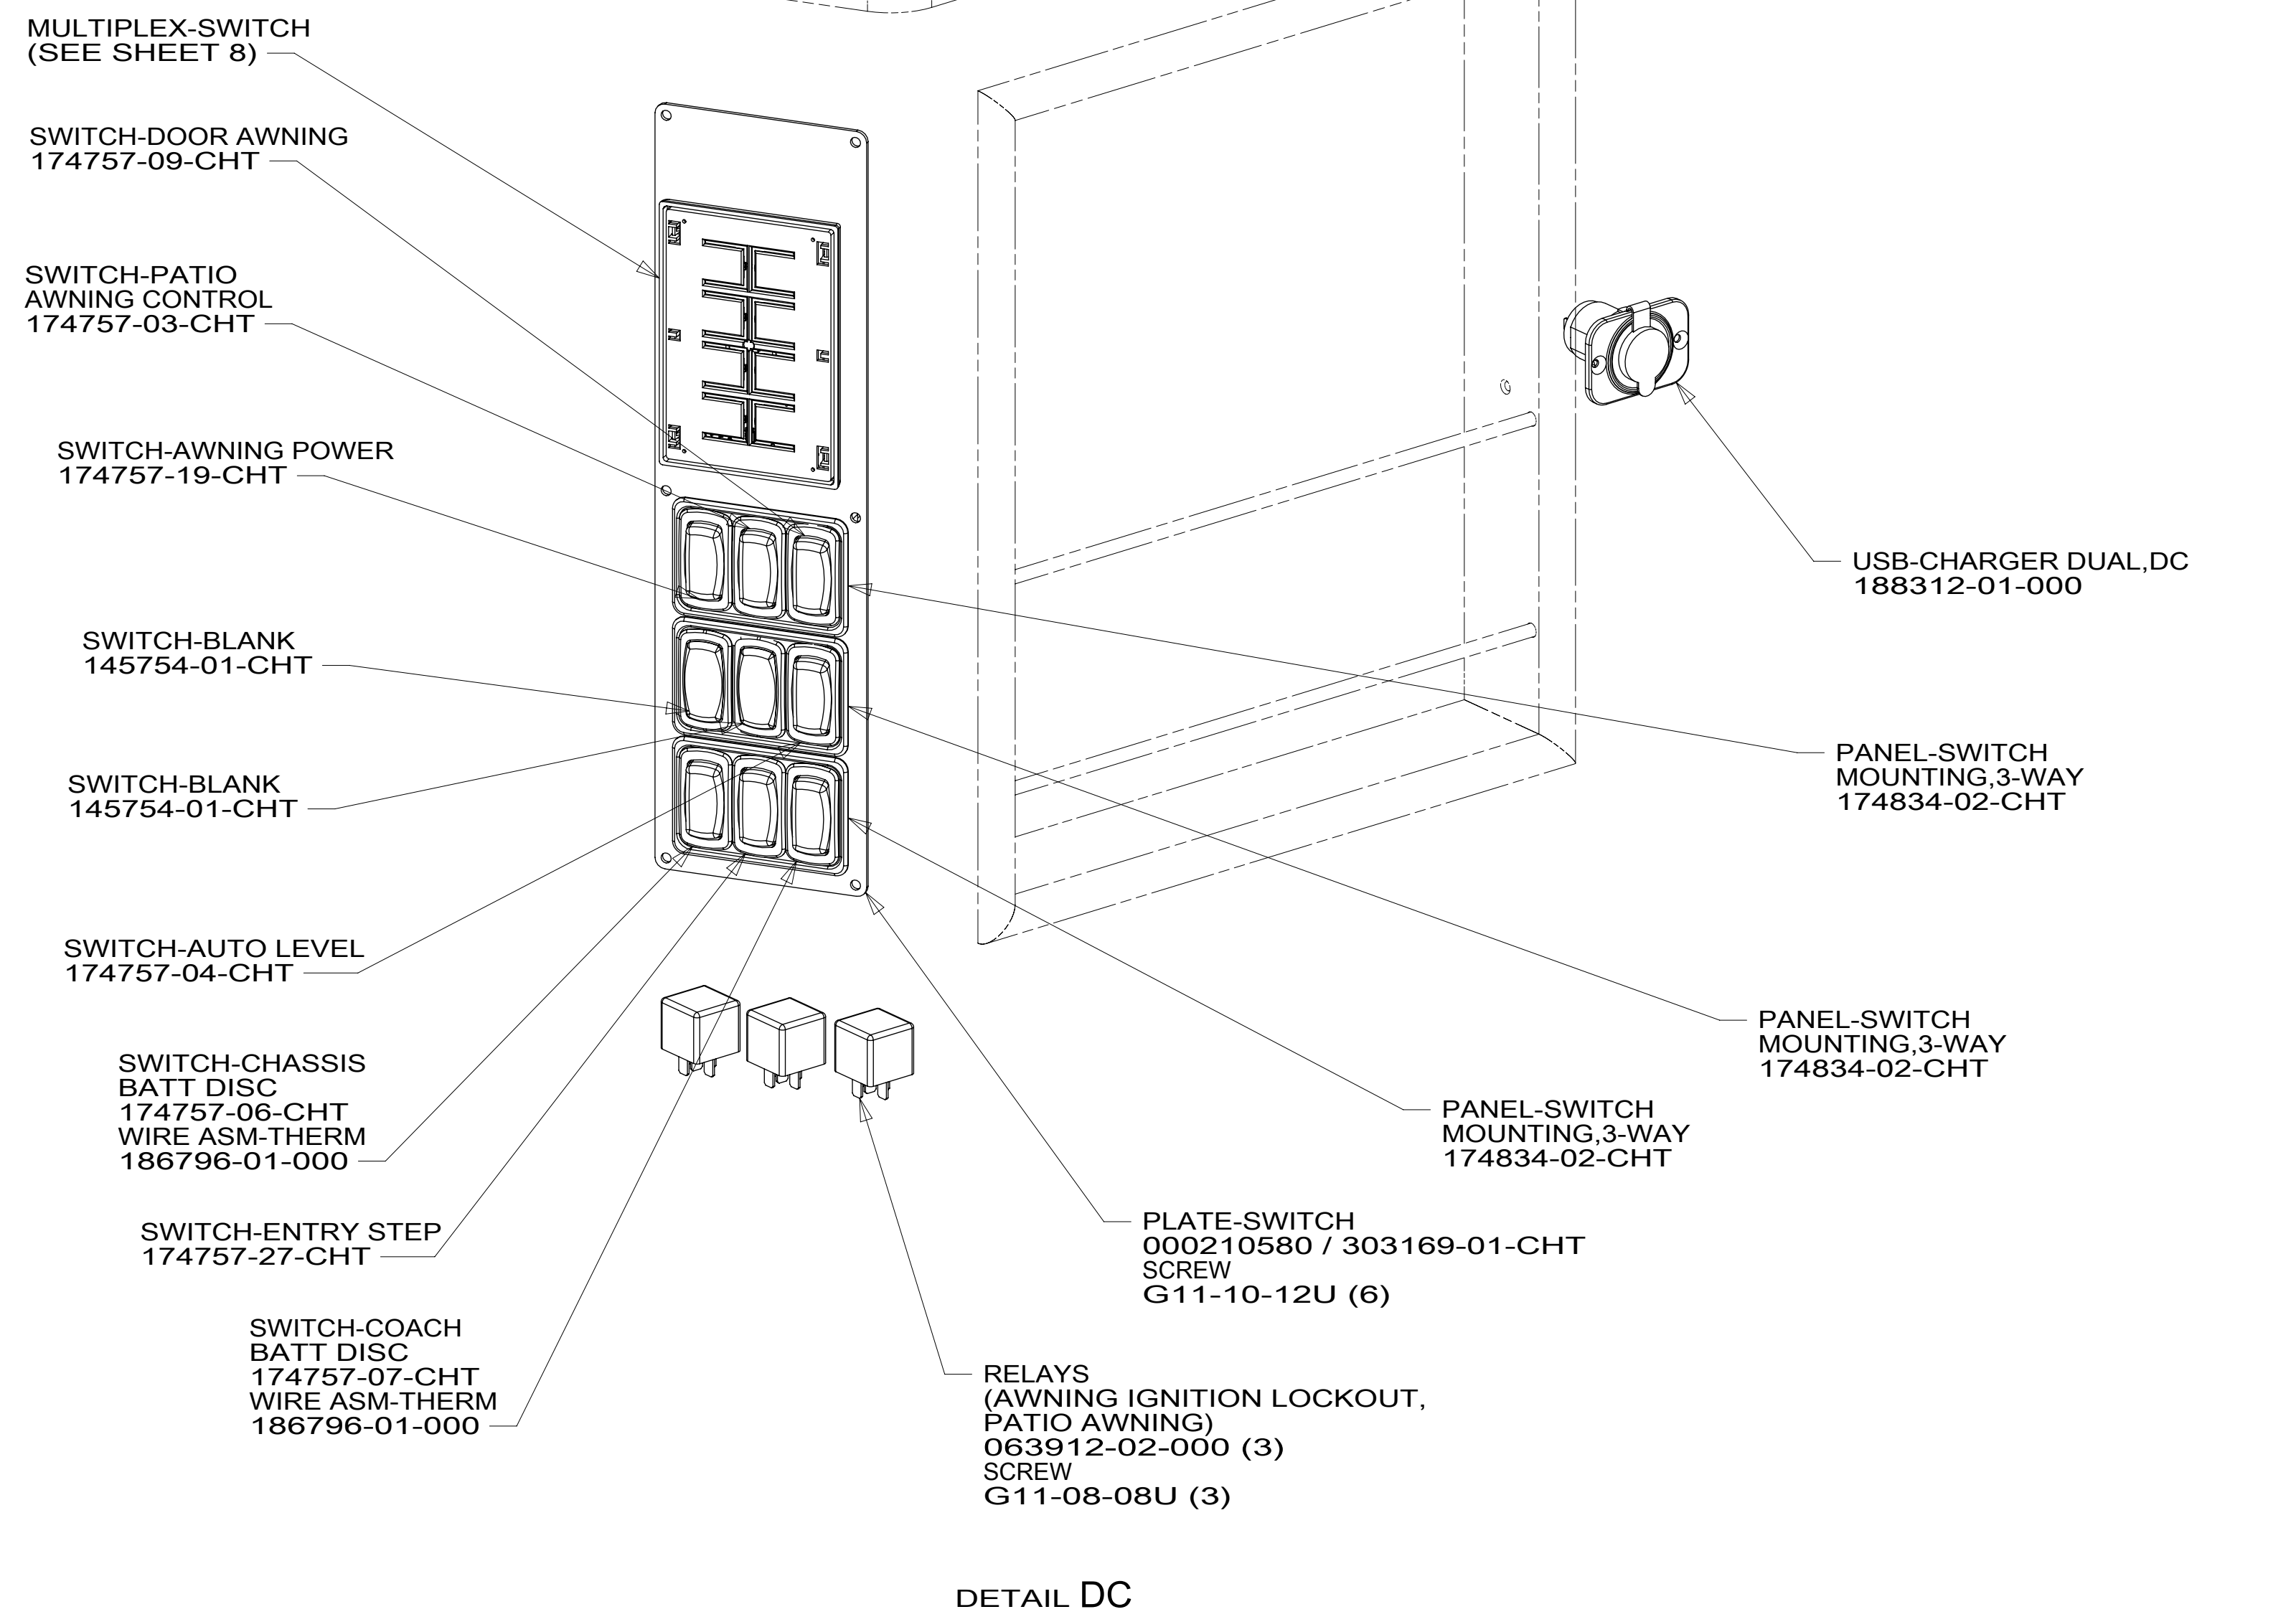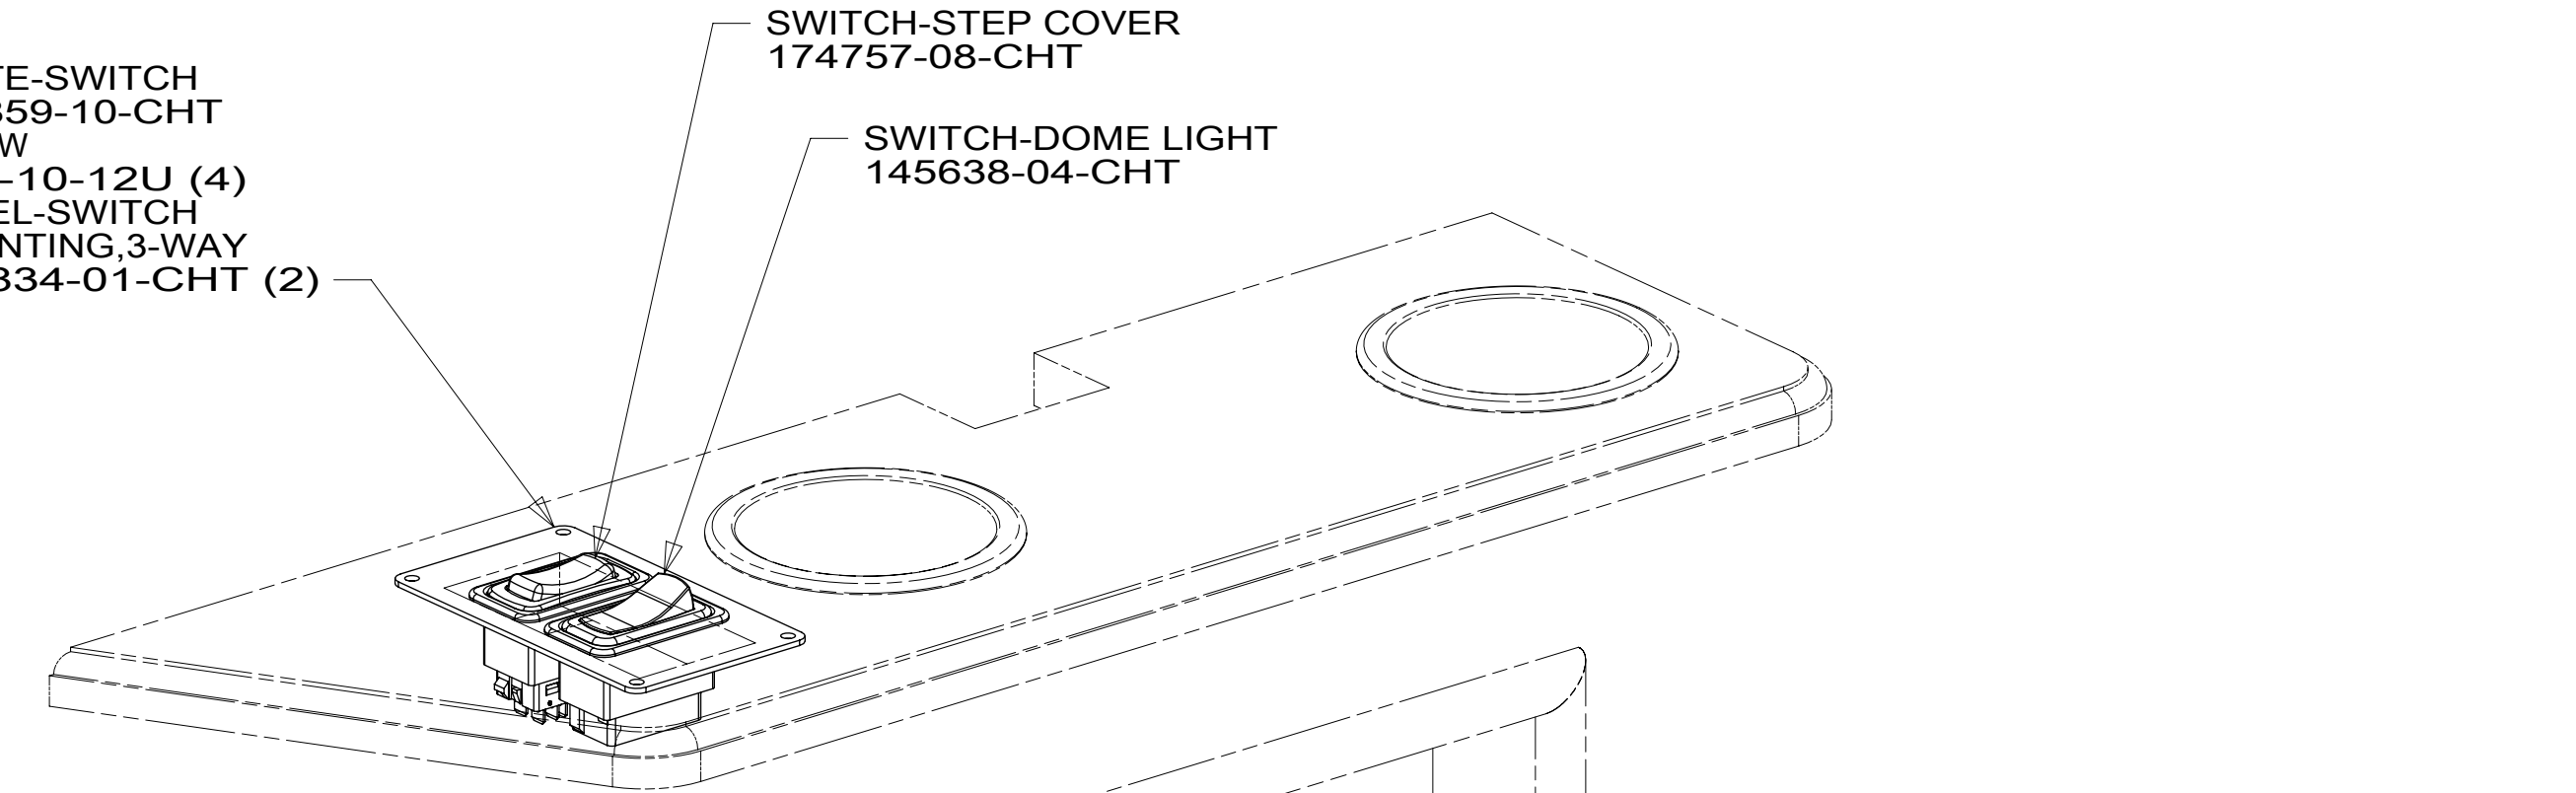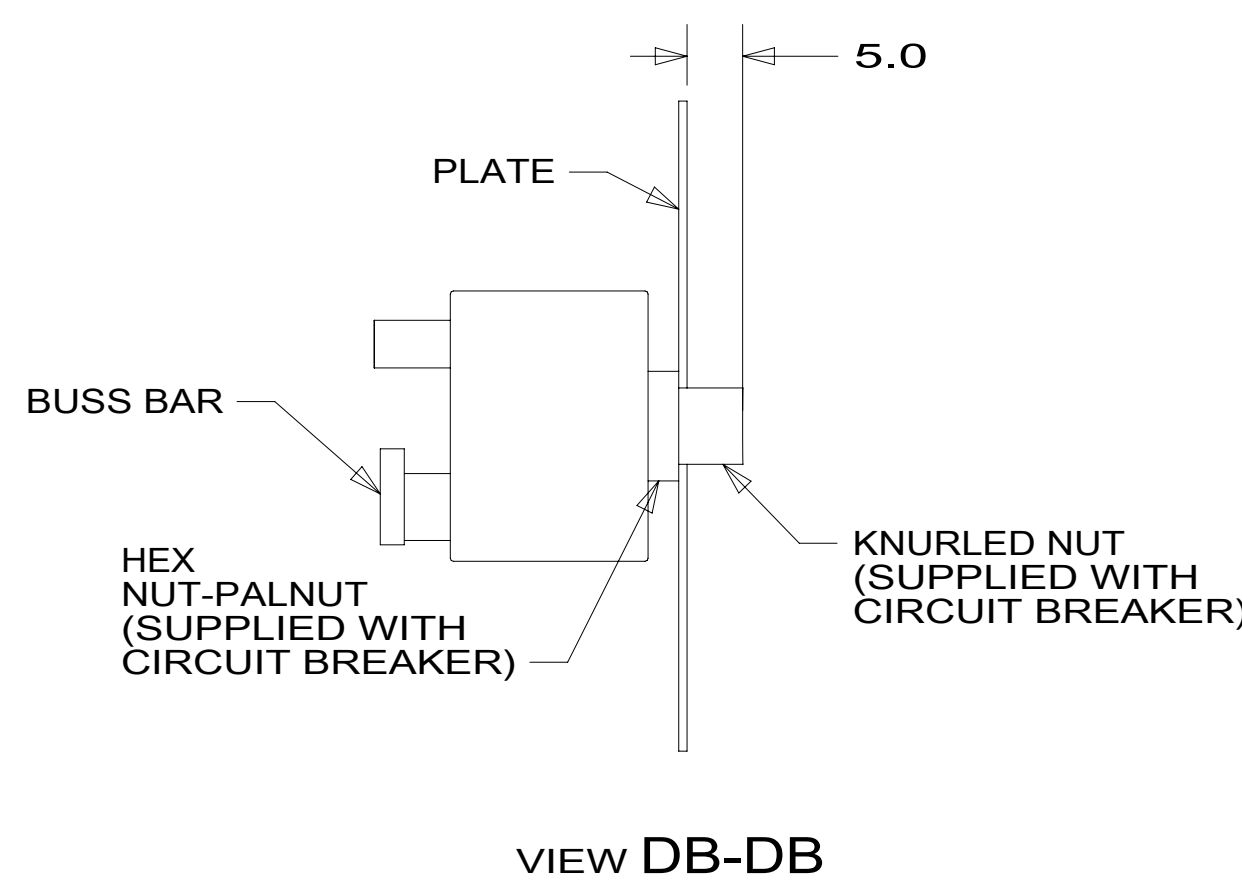

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000


- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

| | | | |
|-------------------------------|-------------------------|---------|--|
| DESCRIPTION: | | 1B1 265 | |
| WIRING INSTL-BODY, 12V | | | |
| SHEET: | ITEM/PART NO.: | REV: | |
| 4 OF 8 | 000183341 / 33415701000 | | |

8 7 6 5 4 3 2 1 06-Jun-2019

8 7 6 5 4 3 2 1

D
C
B
A

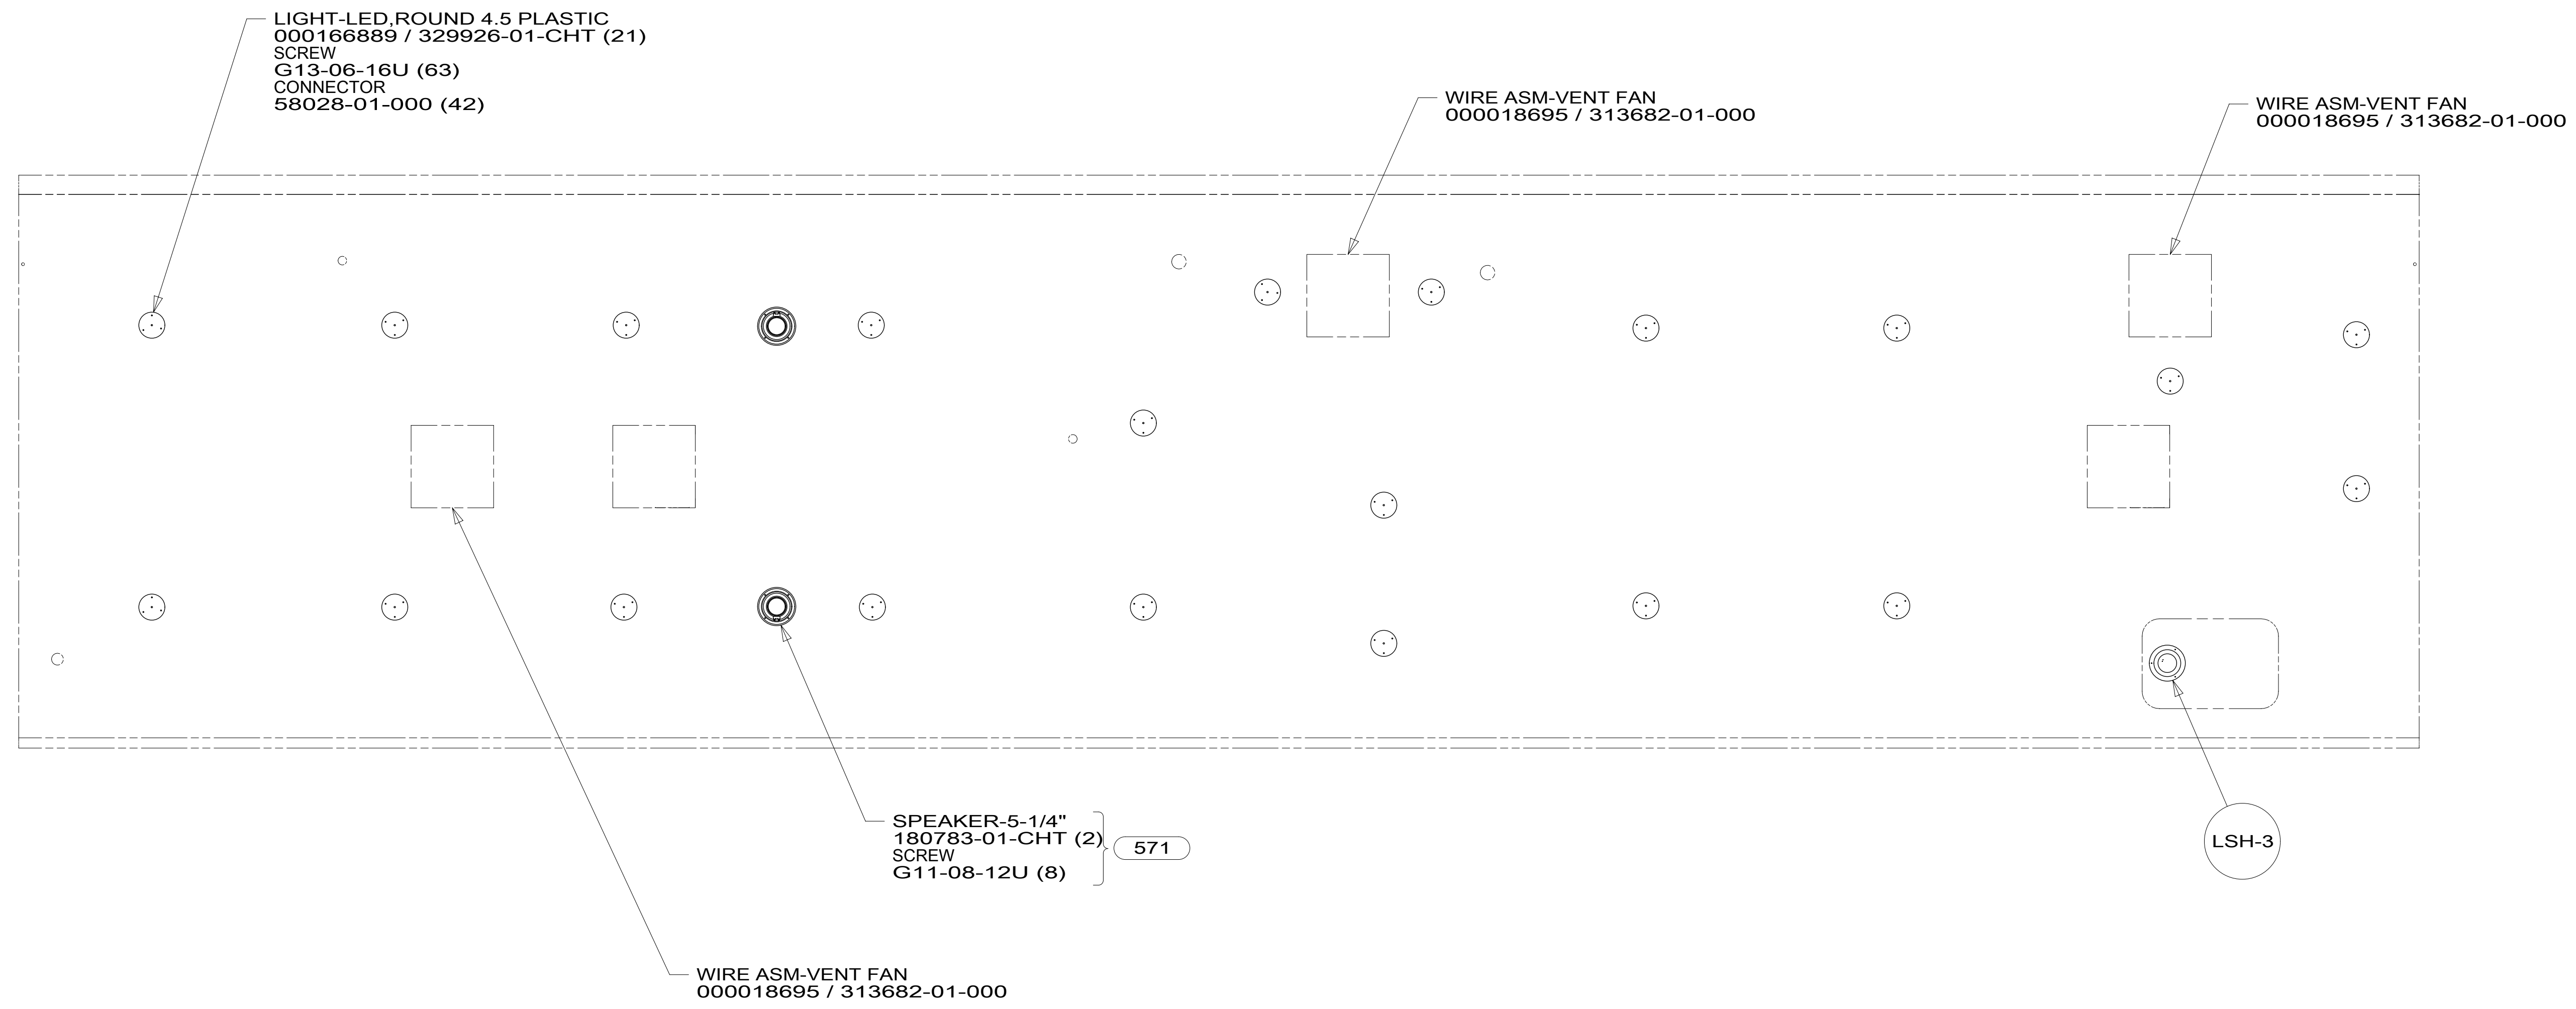

- 571 RADIO SPEAKERS
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

| | |
|-------------------------------|-------------------------|
| DESCRIPTION: | |
| WIRING INSTL-BODY, 12V | |
| SHEET: | ITEM/PART NO. REV |
| 5 OF 8 | 000183341 / 33415701000 |

8 7 6 5 4 3 2 1 06-Jun-2019

8

7

6


5

4

3

2

1

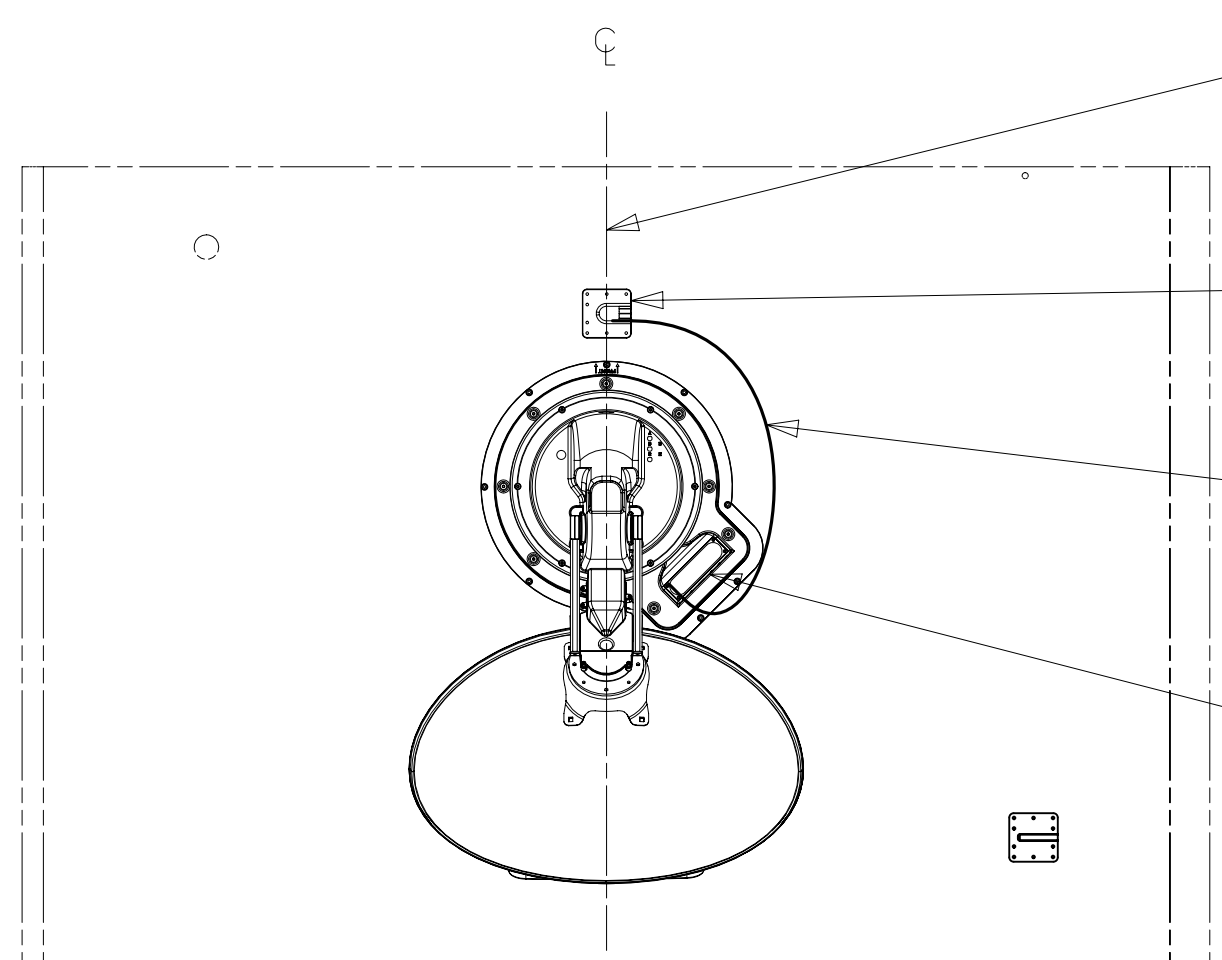

THE SATELLITE DISH AND WIRE CONNECTIONS ARE TO BE PLACED ON THE CENTERLINE OF THE MOTORHOME FACING FORWARD.

SEPARATE CABLES AND INSTALL WIRE COVER OVER HOLE IN ROOF ASM WITH CABLES EXITING ON PASSENGERS SIDE.

WHEN APPLYING ROOF SEALANT TO SATELLITE DISH, PLACE ROOF SEALANT HERE (APPROX. 75MM WIDE) AND PUSH THE CABLES INTO THE SEALANT TO STABILIZE THEM.

CONNECT CABLE ASM-COAX FROM ROOF ASM TO COAX CABLES ON SATELLITE DISH AND CONNECT 10' CABLE-DATA FROM ROOF ASM TO DATA CABLE FROM SATELLITE DISH AND PLACE ALL CONNECTIONS BACK INTO ROOF ASM.

DETAIL FA

ANTENNA-SATELLITE
000169776 / 330860-01-000
SCREW
G39-08-12U (9)
(FOR SATELLITE DISH)
G67-10-12U (8)
(FOR ENTRY PLATE SUPPLIED WITH DISH)

1 787 DA-4
DETAIL FA

RED-GR
BLK-HHB

PLATE-ROOF, CABLE ENTRY
146488-01-000
SCREW
G13-10-12U (10)

ANTENNA-TV, OMNIDIRECTIONAL
000171487 / 331386-01-CHT
SCREW
000G67-10-16U (4)

RED-KJ
BLK-HHB

RED-GGB
BLK-HHB

1 SEE MANUFACTURER'S INSTALLATION FOR ADDITIONAL INFORMATION.






NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 789 SAT ANT, AUTO DISH NETWORK
- 787 SAT TV ANT, AUTO DIRECTV
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

| | |
|---|---|
| DESCRIPTION: WIRING INSTL-BODY, 12V | |
| SHEET: 6 OF 8 | ITEM/PART NO: 000183341 / 33415701000 |
| REV | |

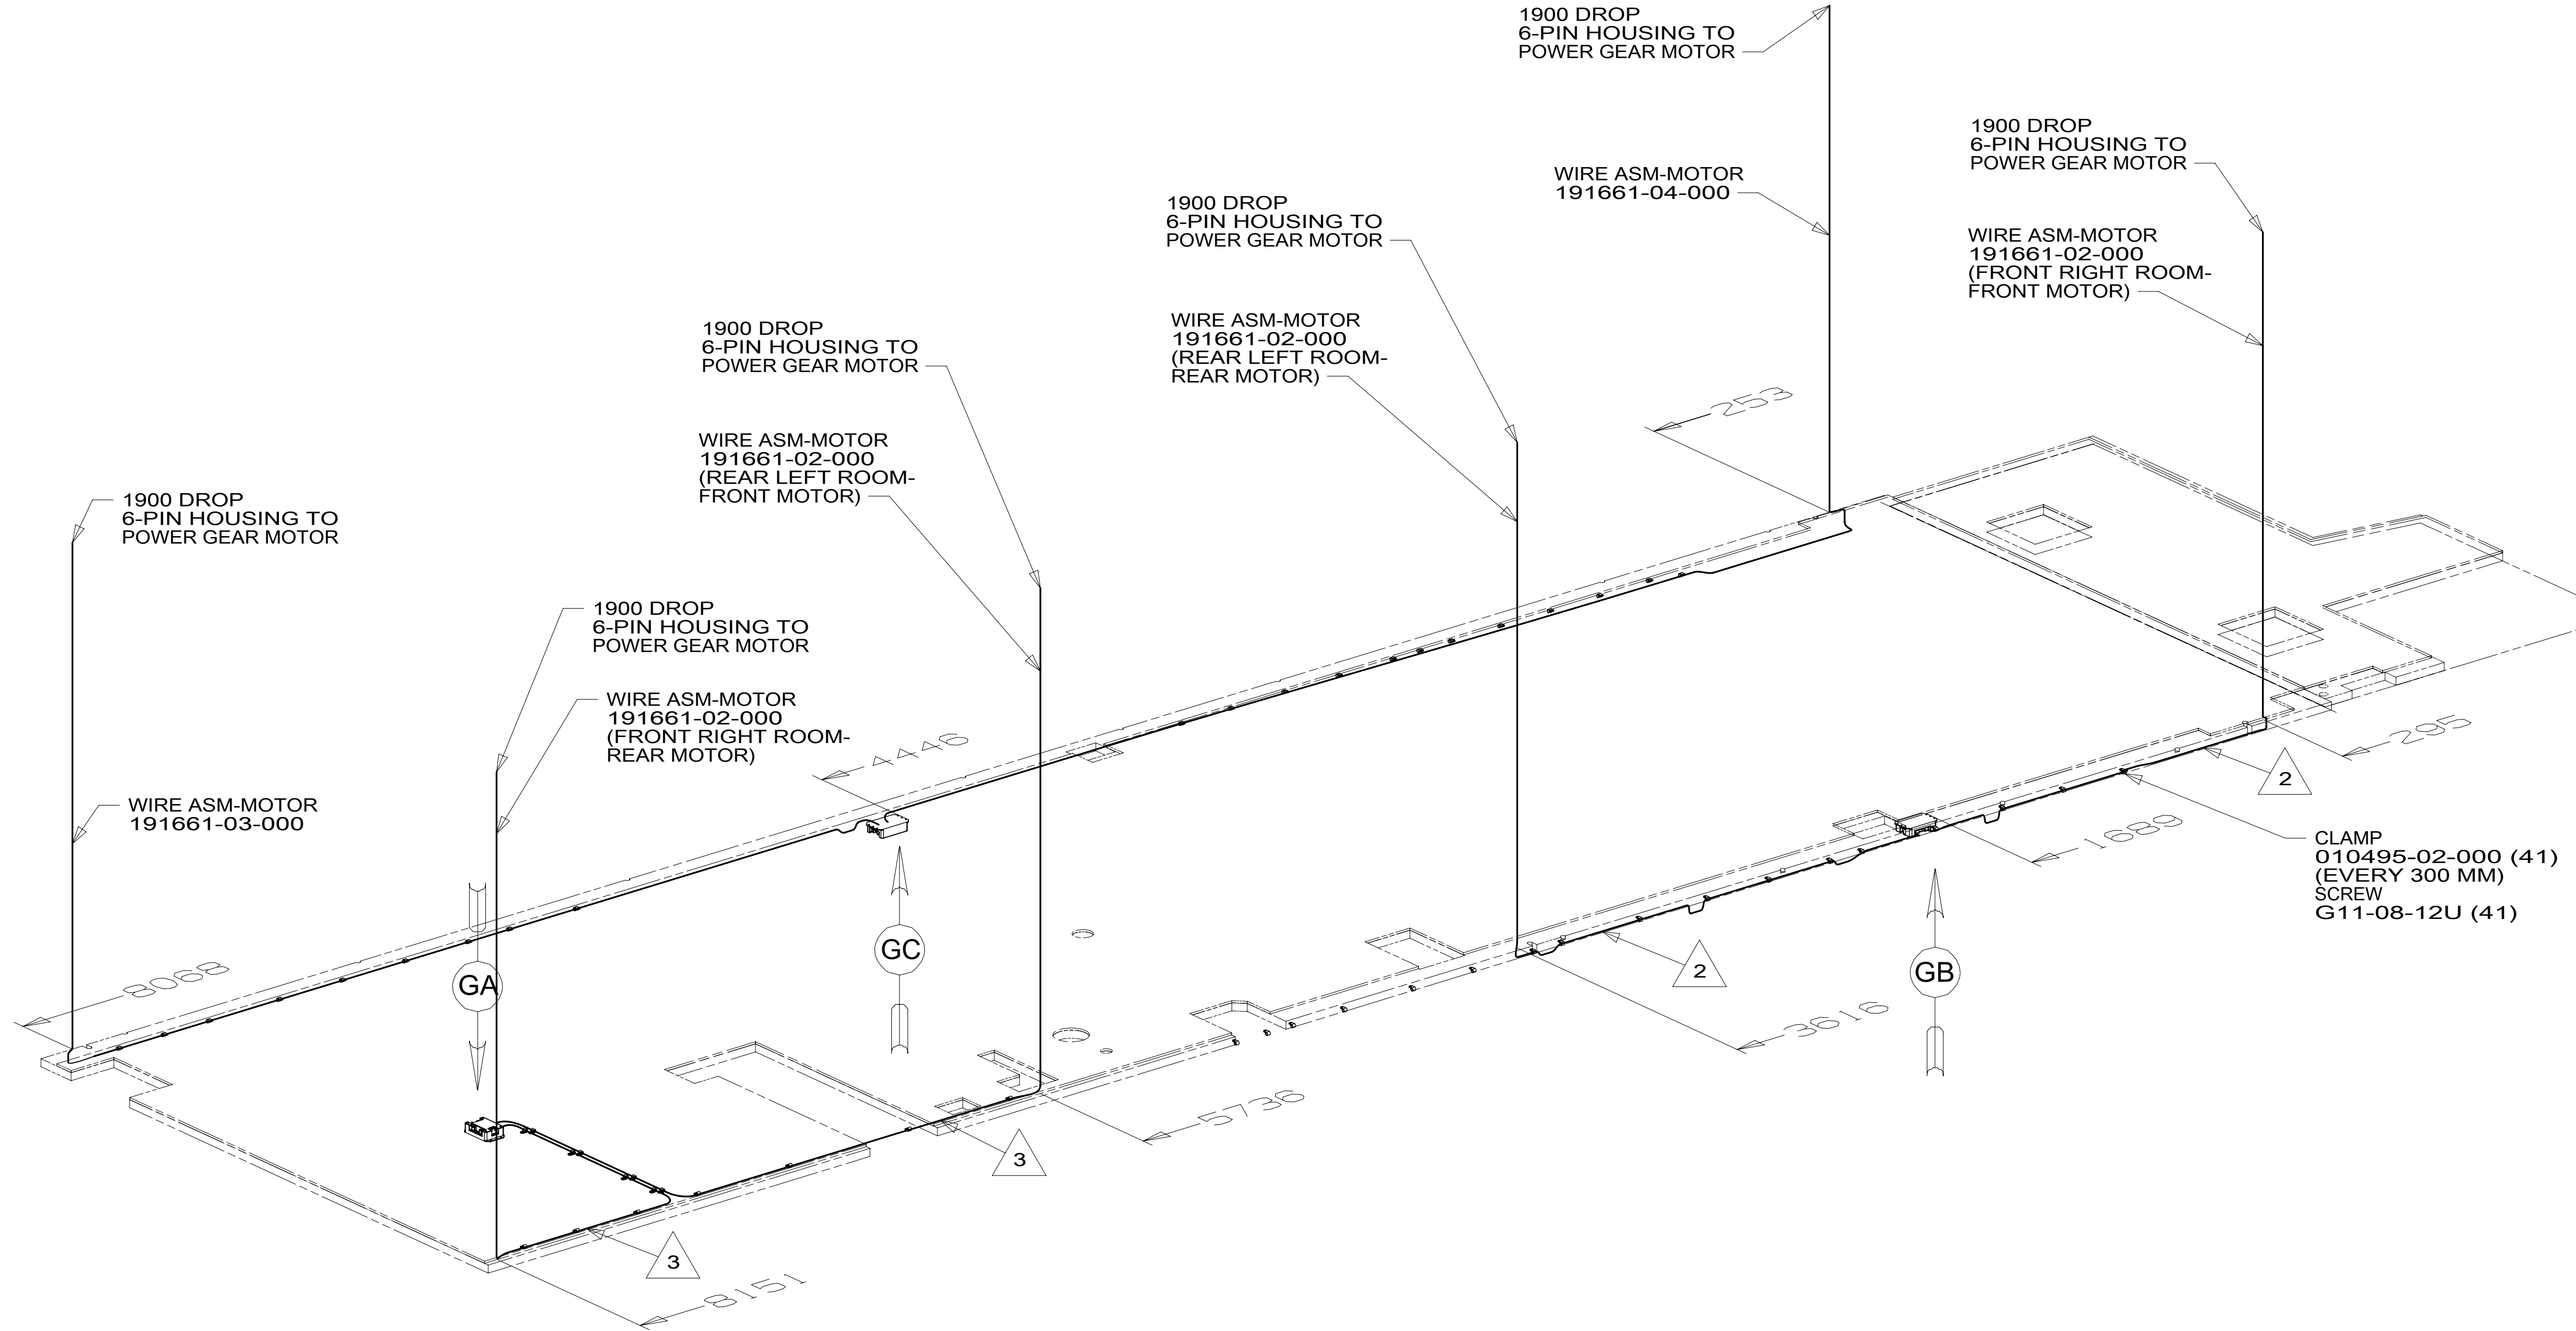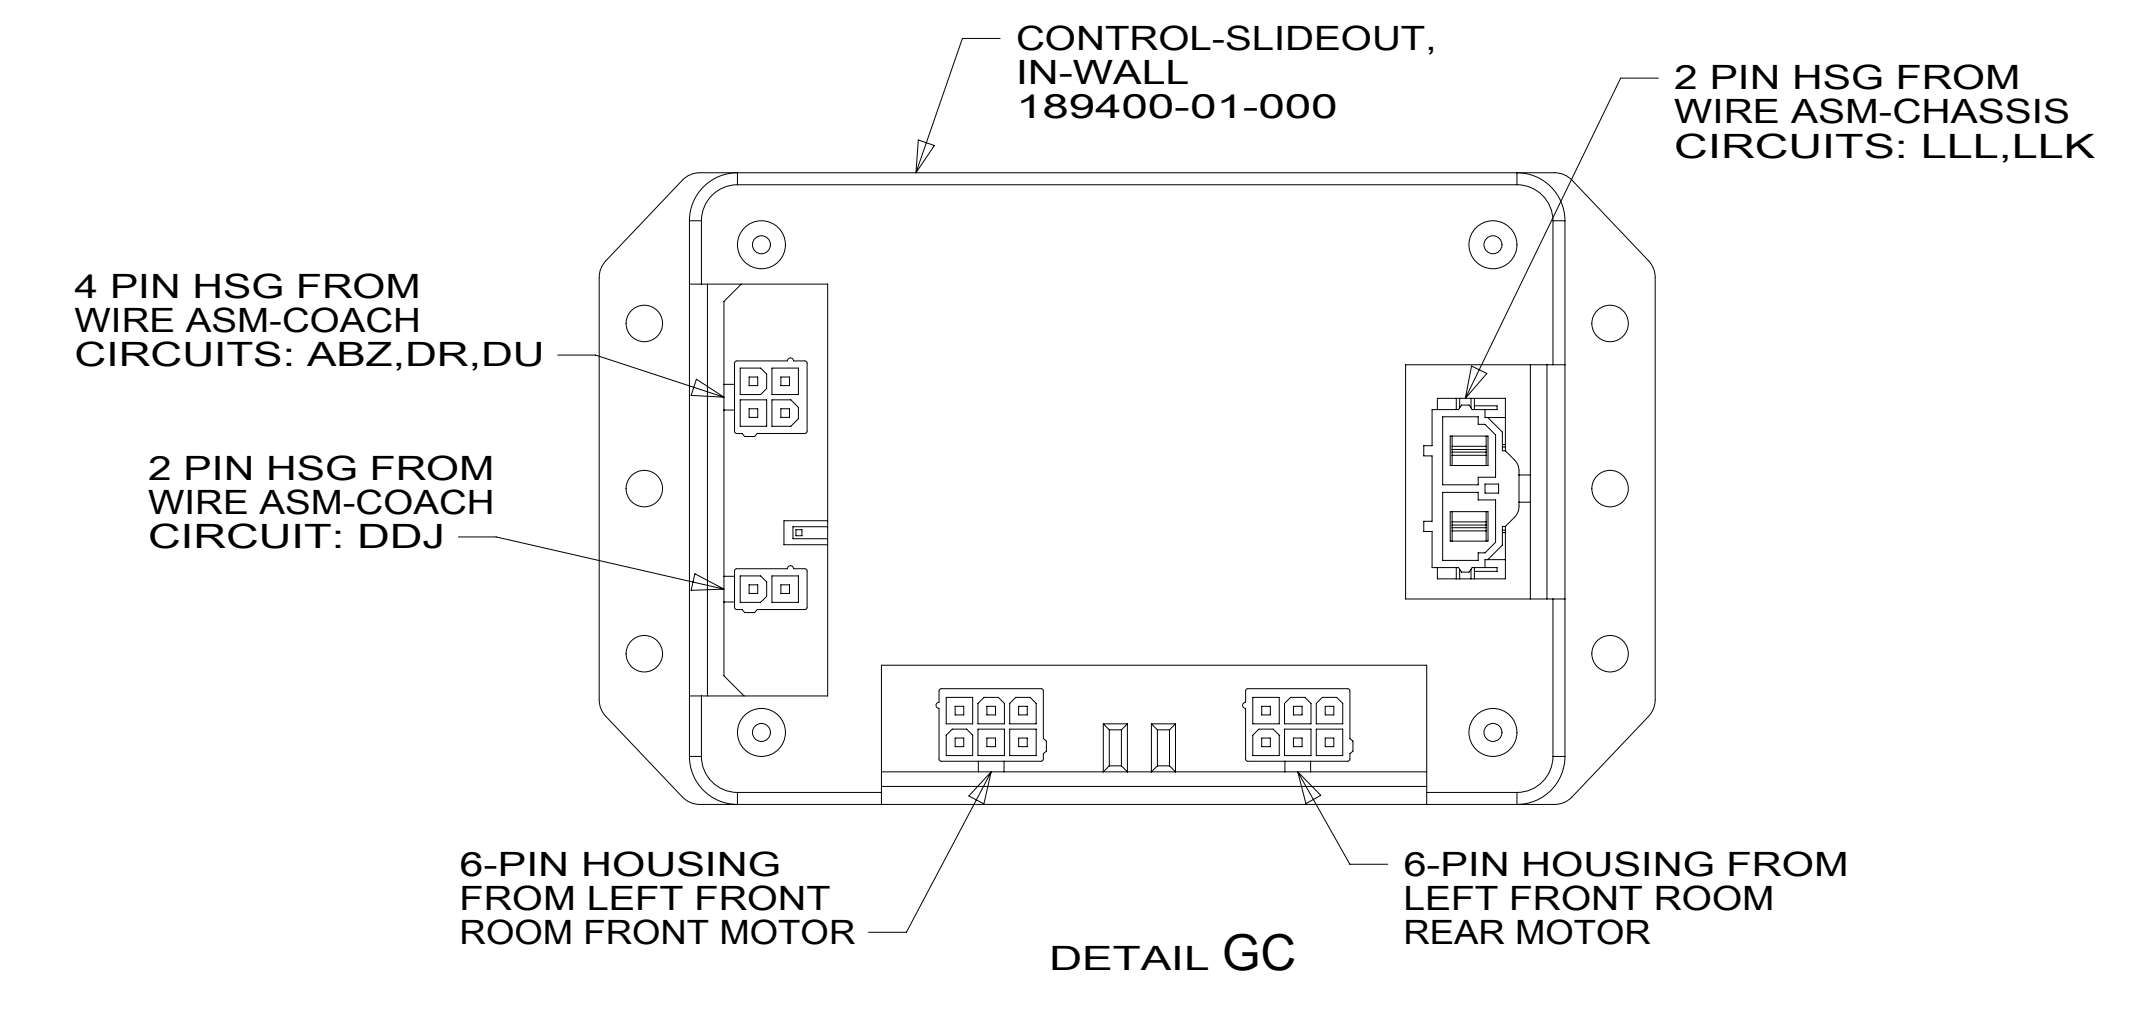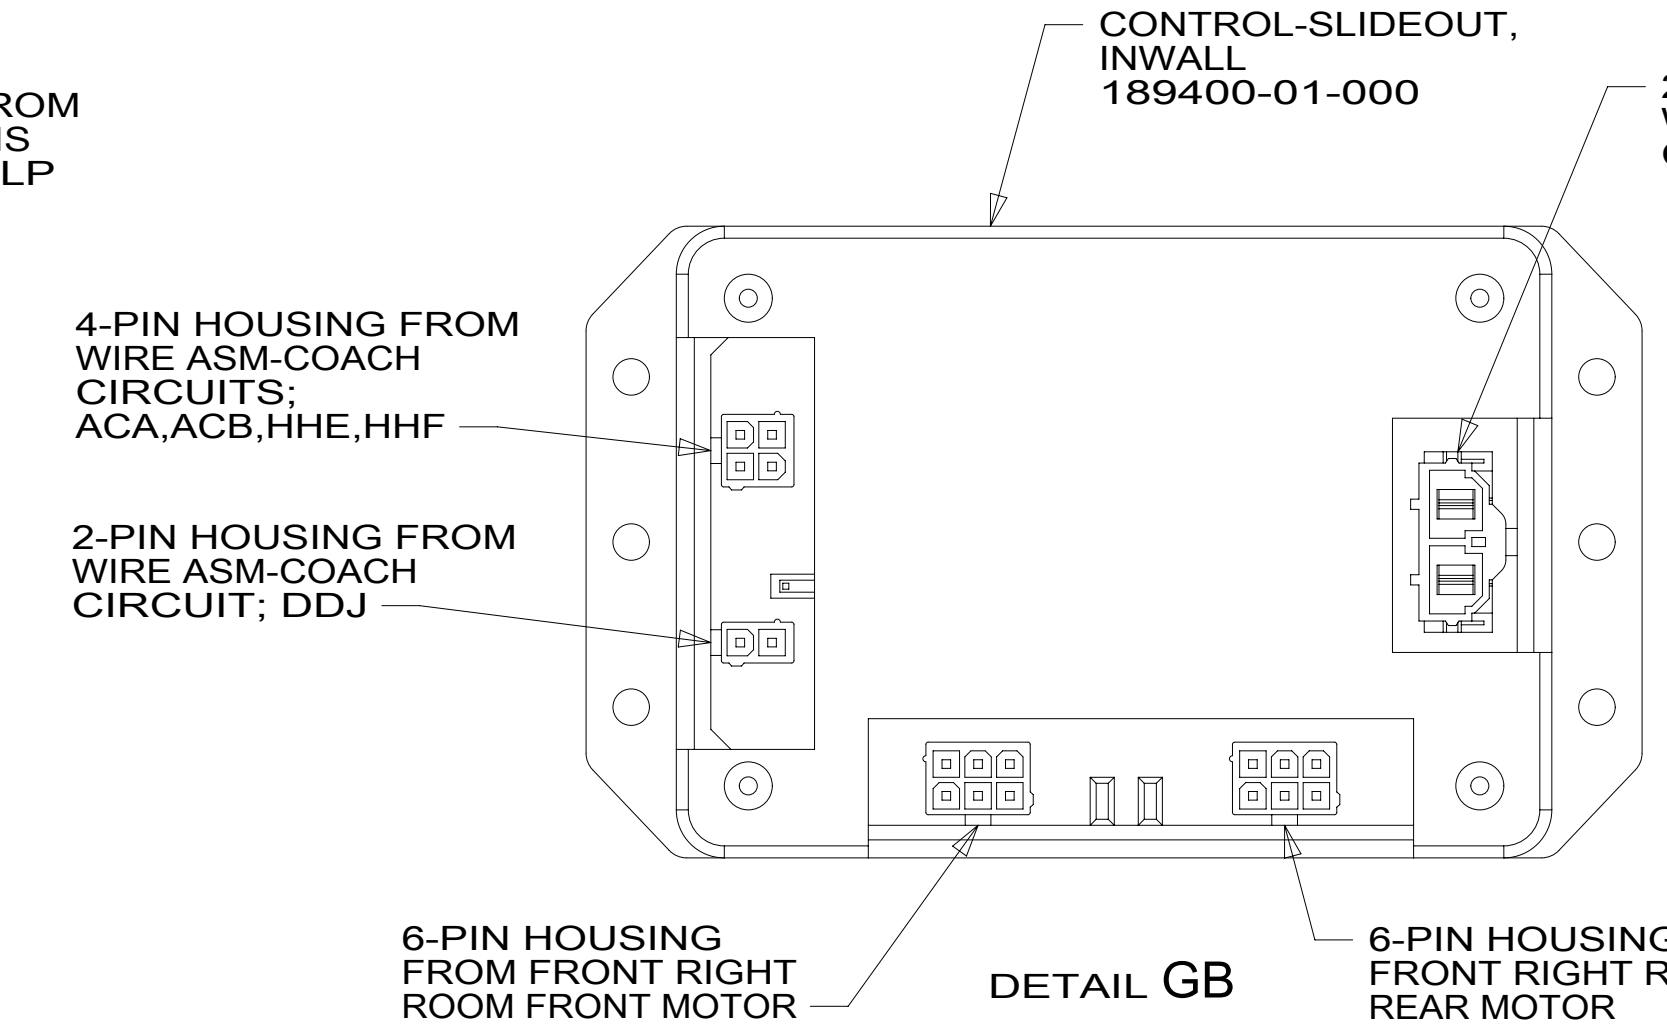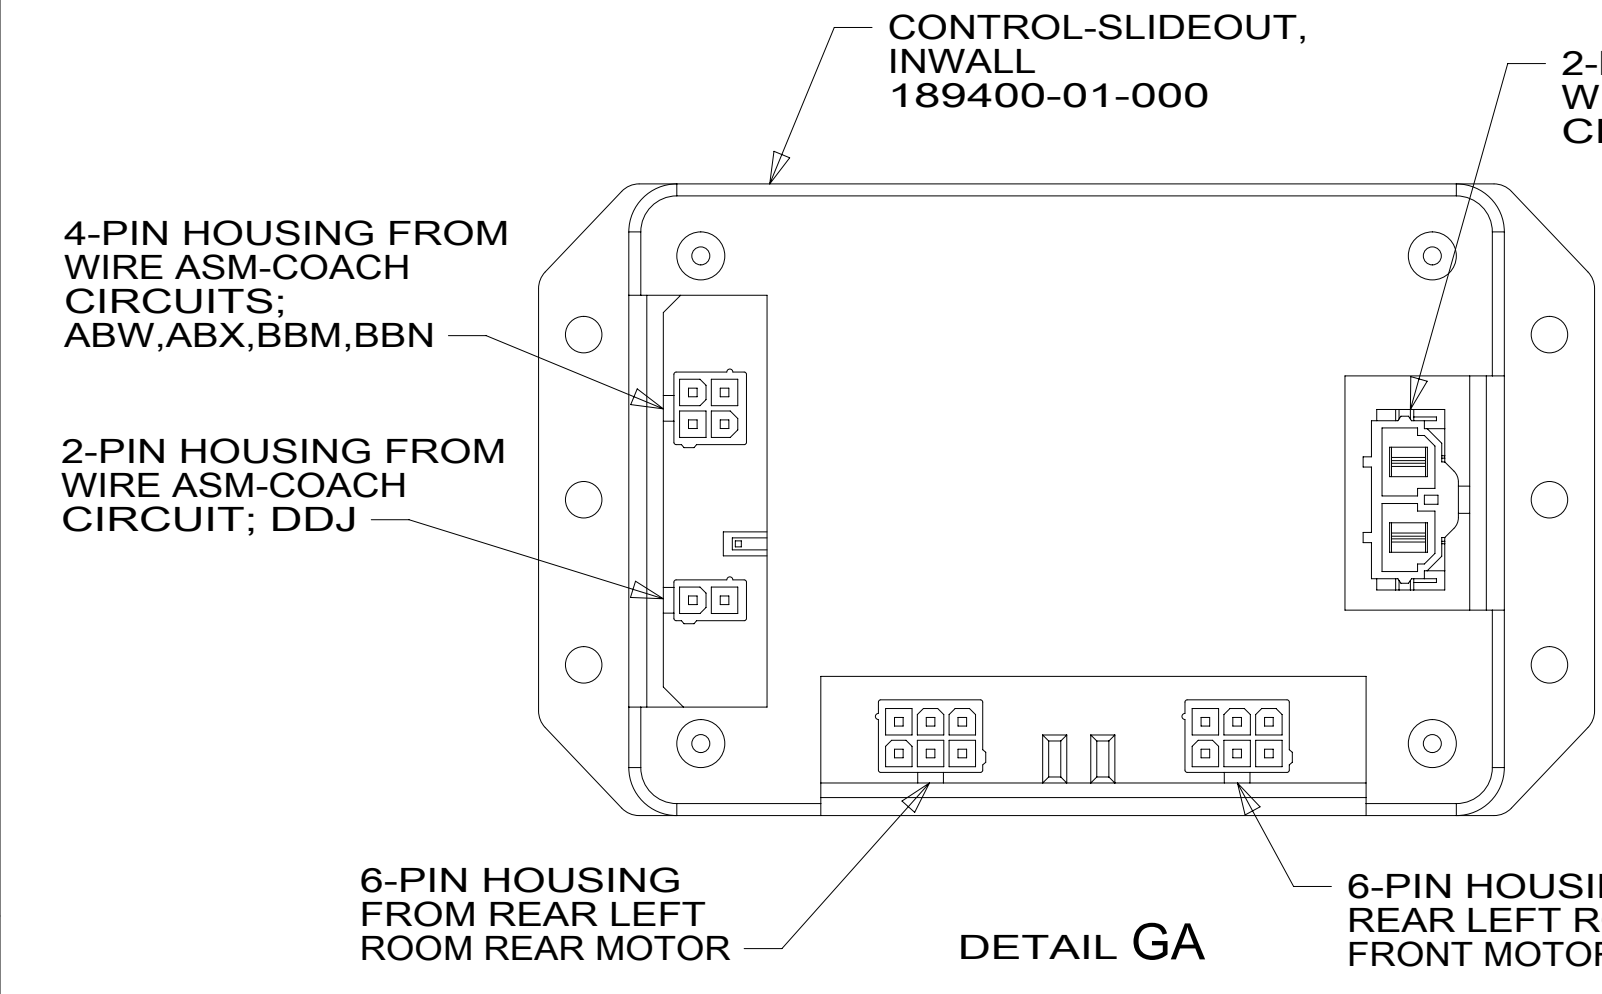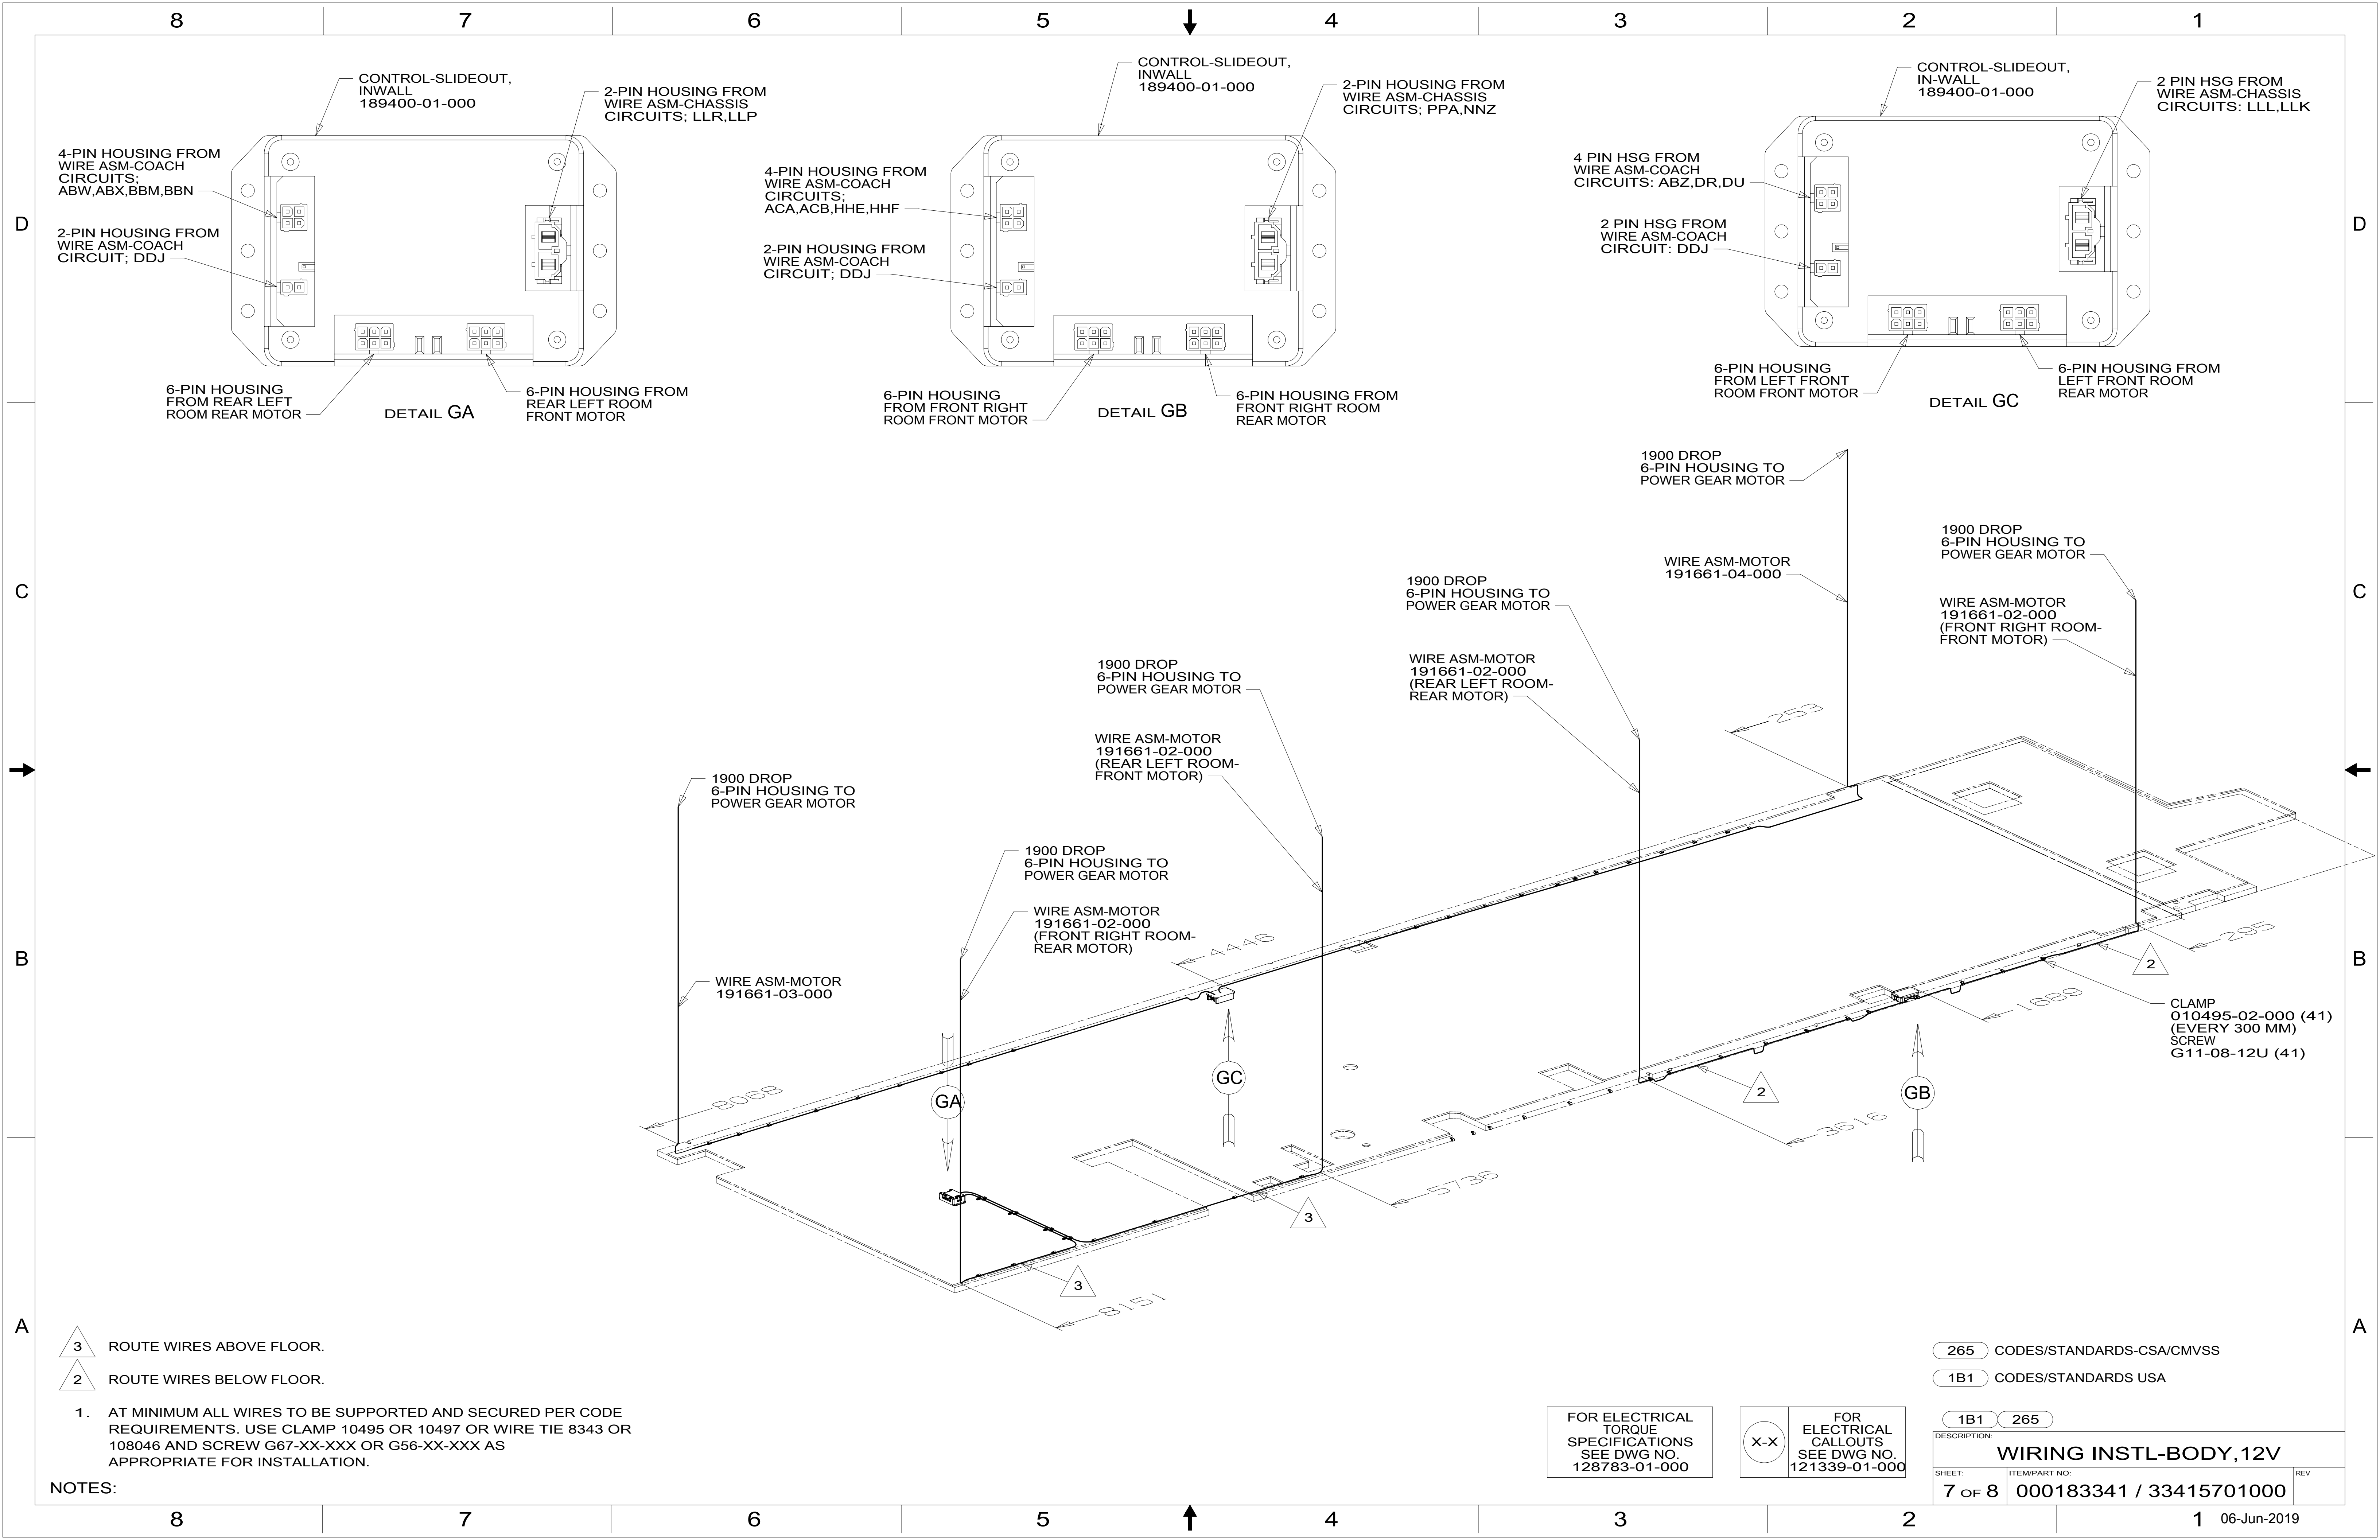

- 3 ROUTE WIRES ABOVE FLOOR.
- 2 ROUTE WIRES BELOW FLOOR.

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.



NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

| | | | |
|-------------------------------|-------------------------|---------|--|
| DESCRIPTION: | | 1B1 265 | |
| WIRING INSTL-BODY, 12V | | | |
| SHEET: | ITEM/PART NO.: | REV: | |
| 7 OF 8 | 000183341 / 33415701000 | | |

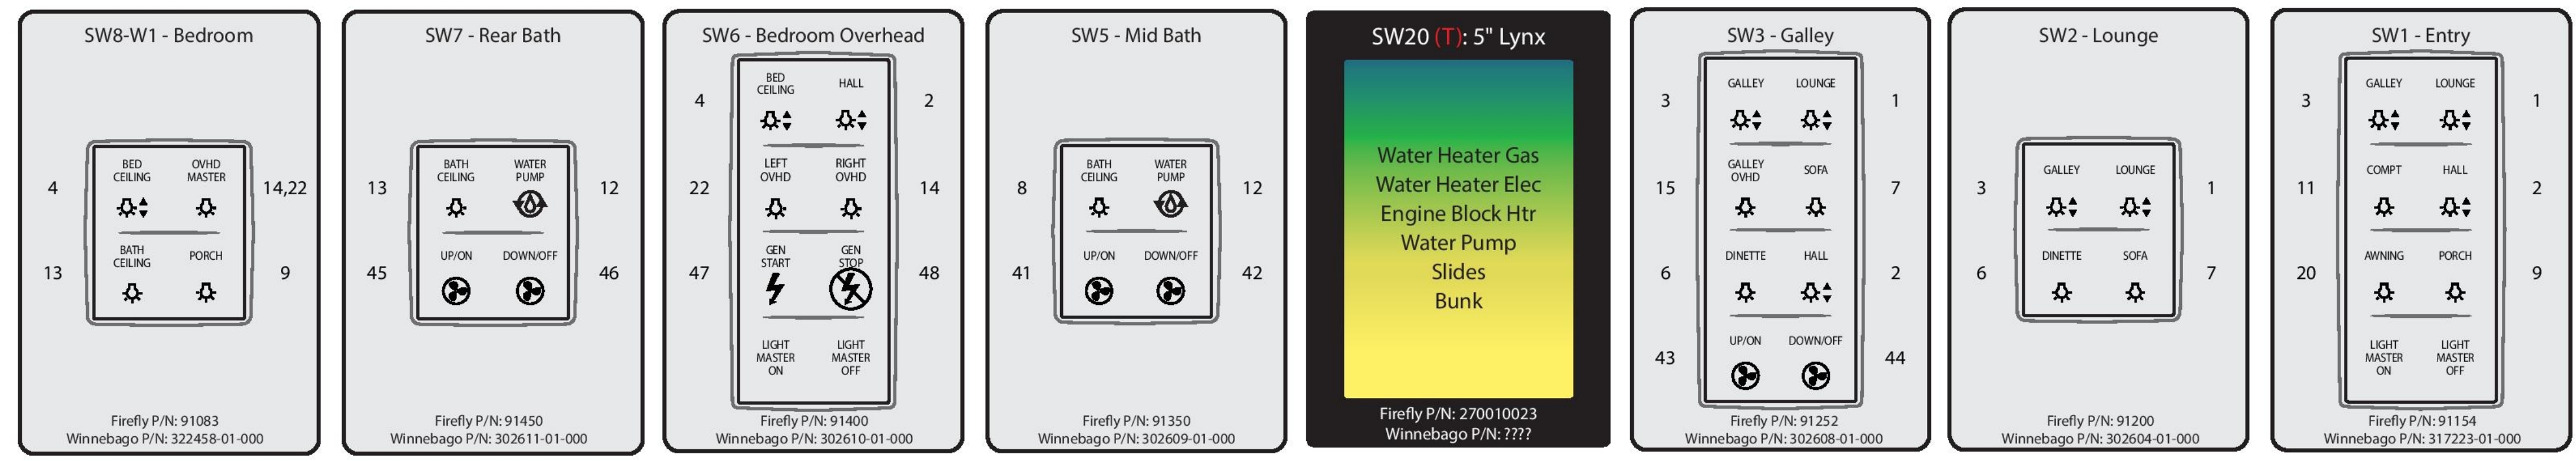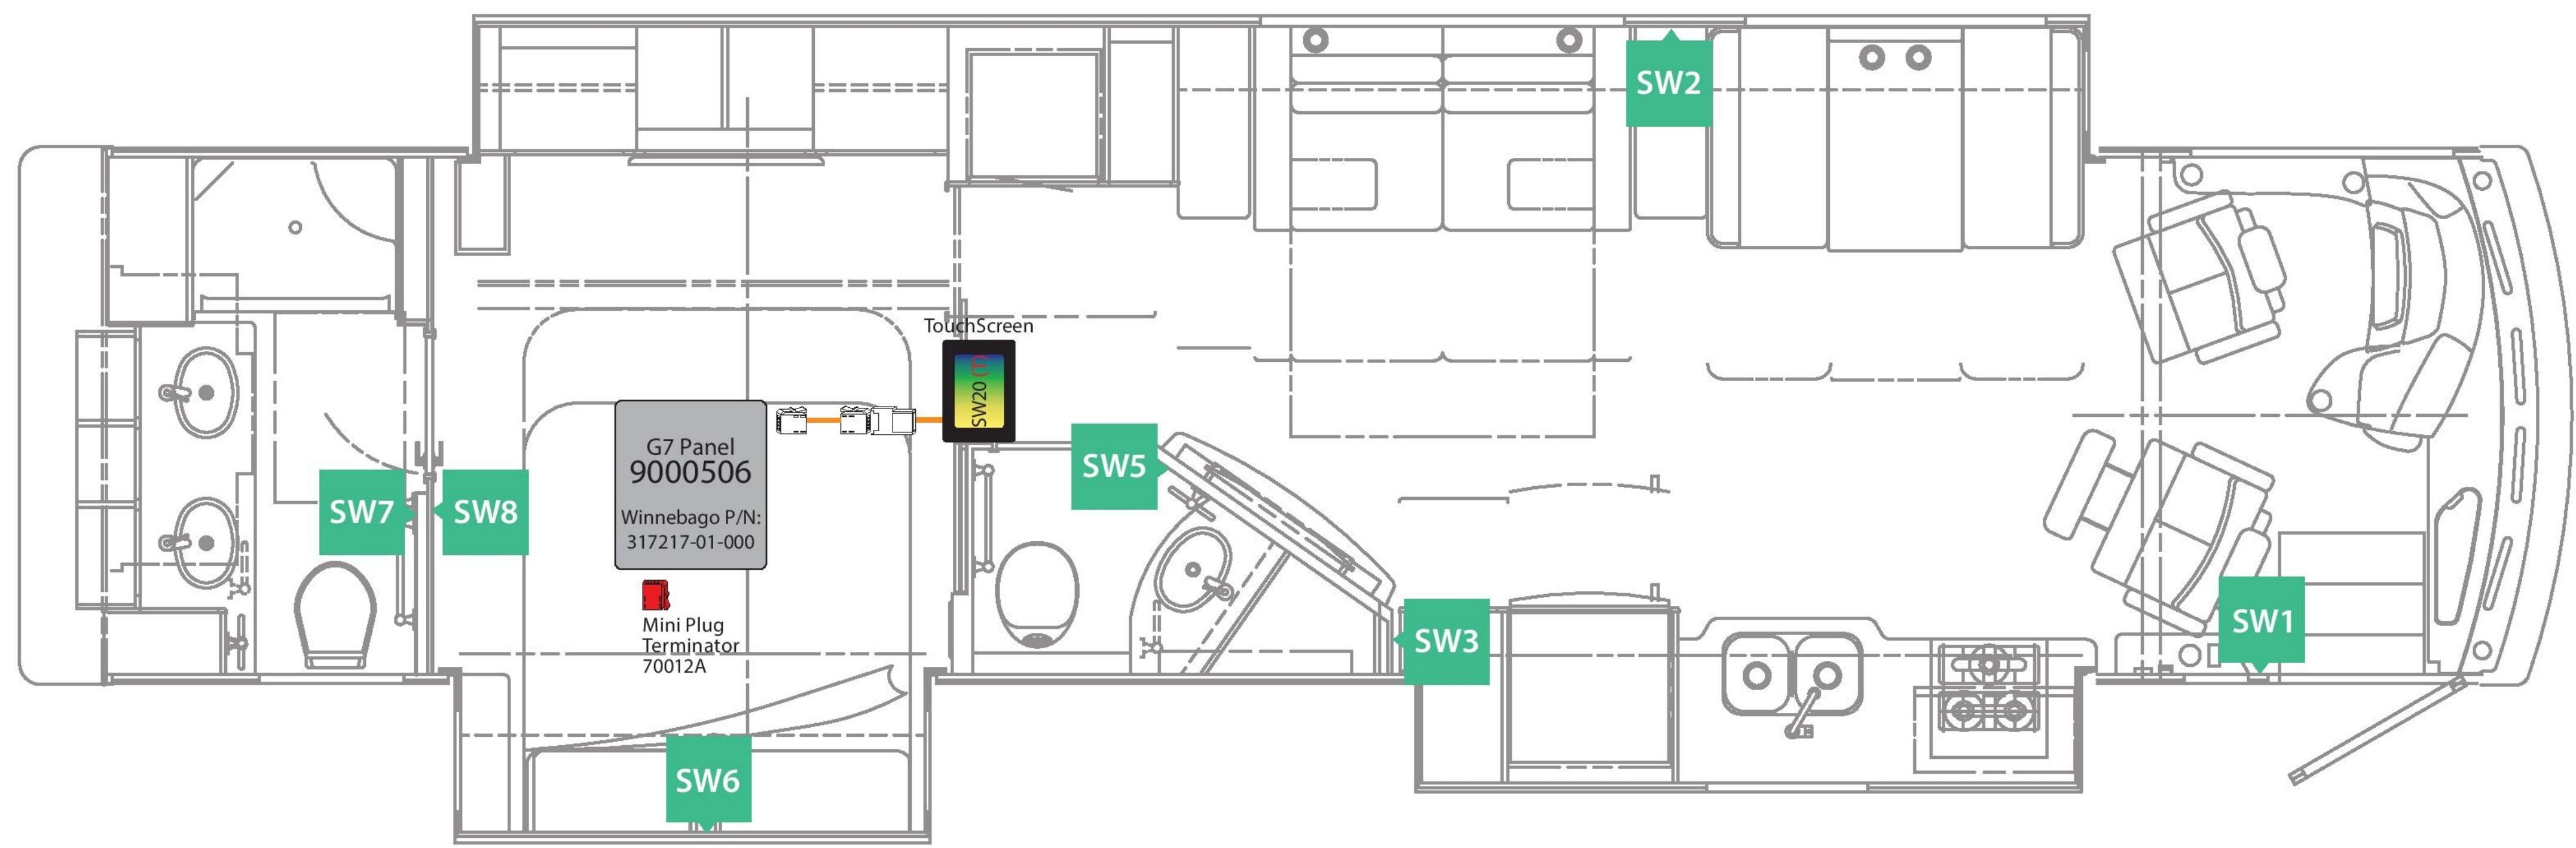

KIT*: Firefly P/N: 270000010A
 Winnebago P/N: 335073-01-000
 * Kits may not include all components shown on print

| | | | | | |
|--|-------------|----------|--------|-----------------------|------------------------|
| WINNEBAGO - L38F - V4 | | | DI: MD | Network Legend | Drop Cable Connections |
| Network Wiring Diagram and Switch Panel Layout | | | PI: TB | | |
| SSP-17 RF / Lynx | NWD REV 4v1 | 04/19/19 | | | |

NOTES:
 1. ALL SWITCH PANELS ARE PART OF KIT # 000186545 / 335073-01-000.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

| | |
|---|--|
| 265 | CODES/STANDARDS-CSA/CMVSS |
| 1B1 | CODES/STANDARDS USA |
| 1B1 | 265 |
| DESCRIPTION: WIRING INSTL-BODY, 12V | |
| SHEET: 8 OF 8 | ITEM/PART NO: 000183341 / 33415701000 |
| REV | |