

CORD-POWER,30A,3-WIRE,28  
008054-01-000

CONNECTOR-3/4-  
CABLE CLAMPING  
8355-01-000

CONNECTOR-3/4 CONDUIT  
093256-02-000


WIRING  
DETAIL AA

BOX  
8289-01-000  
RECEPTACLE  
24924-02-000  
COVER  
69238-01-000  
SCREW  
G67-10-10U (2)  
WIRE ASM-GROUND  
133678-02-000  
133678-04-000  
CONNECTOR  
8314-01-000  
TUBING-VINYL  
8041-02-000  
(150MM)

CONNECTOR-1/2 CONDUIT  
093256-01-000

BOARD-ELECTRICAL  
138829-05-000  
SCREW  
G67-10-12U (4)

BOX  
8289-01-000  
COVER  
8294-01-000  
SCREW  
G67-10-10U (2)  
WIRE ASM-GROUND  
133678-02-000  
CONNECTOR  
8314-01-000  
CONNECTOR  
8311-01-000 (2)  
TUBING-VINYL  
8041-02-000  
(150 MM)

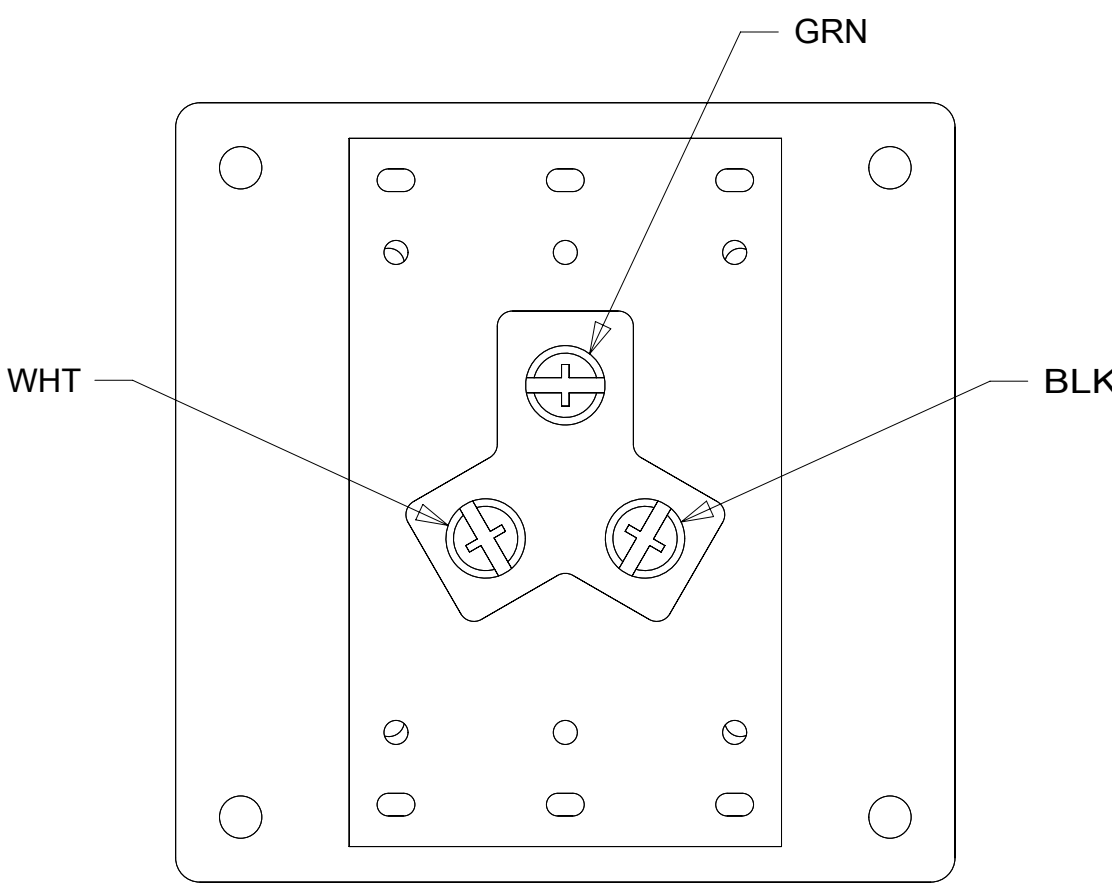

DETAIL AA  
(BACK VIEW)

265 CODES/STANDARDS-CSA/CMVSS  
1B1 CODES/STANDARDS USA  
1B1 265



DSNR:		ALL DIMENSIONS ARE IN MILLIMETERS	
DIFFR:		MATERIAL:	
UNSPECIFIED TOLERANCES:			
WHOLE DIM (X)	: 3		
ONE-PLACE (X.X)	: 1.5		
TWO-PLACE (X.XX)	: 0.50		
ANGLE	: 1°		

REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES

WEIGHT: (LBS)		FIRST USED:	
		18 V30R	
DESCRIPTION: <b>POWER CORD BOX ASM</b>			
SHEET:	ITEM/PART NO.:	REV	
1 OF 1	000040479 / 31942501000		

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

- NOTES:
- 5 CONNECT BLK TO BLK, WHT TO WHT.
  - 4 INSTALL CONNECTOR INTO BOX. MAIN CABLE ASSEMBLY TO BE INSTALLED ON LINE.
  - 3 APPLY TUBING TO BARE GROUND WIRES.
  - 2 CONNECT GRNDS TO GRNDS.
1. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.