

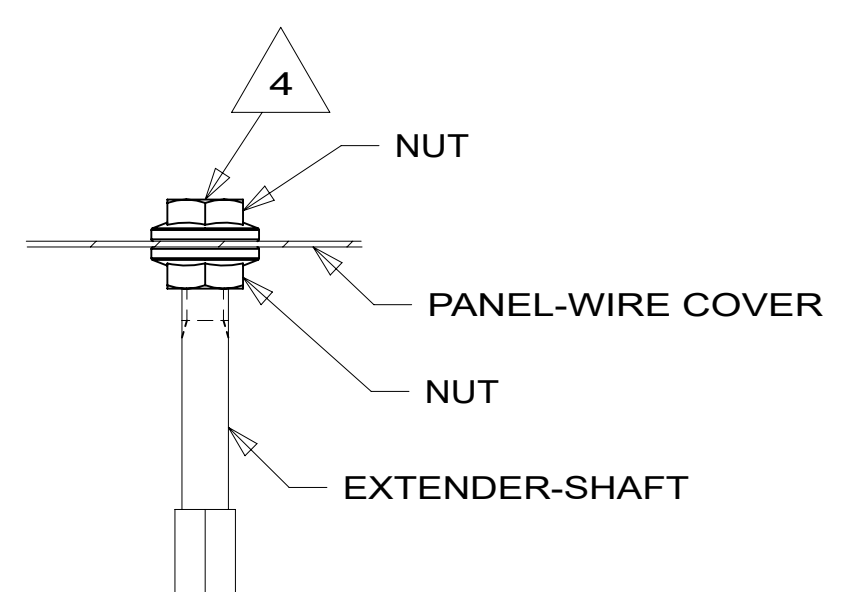
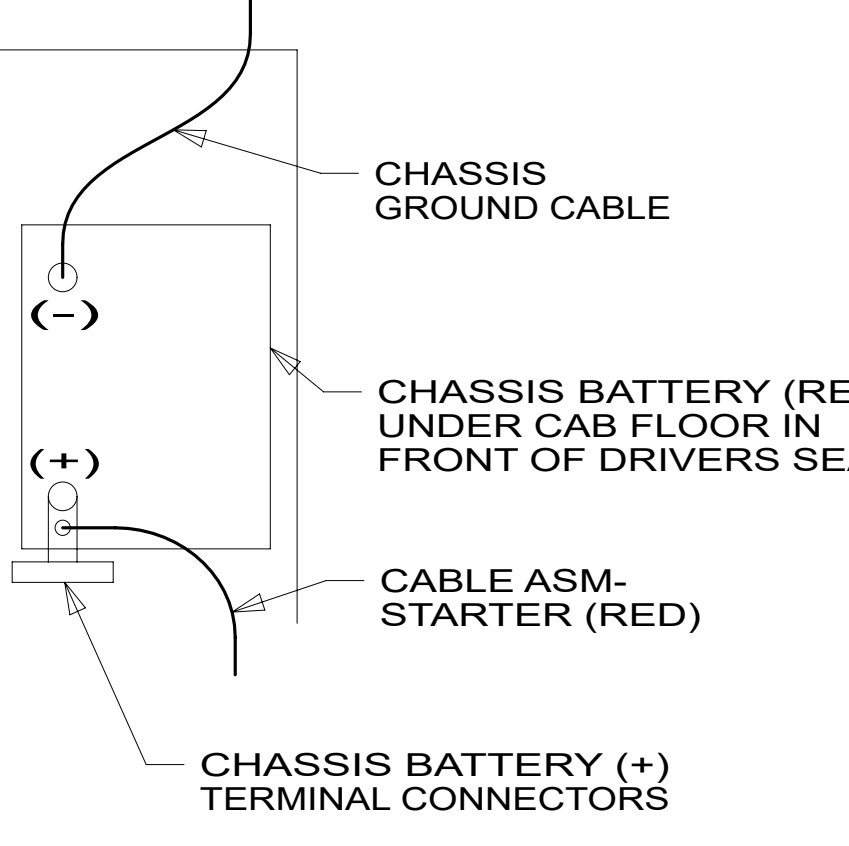
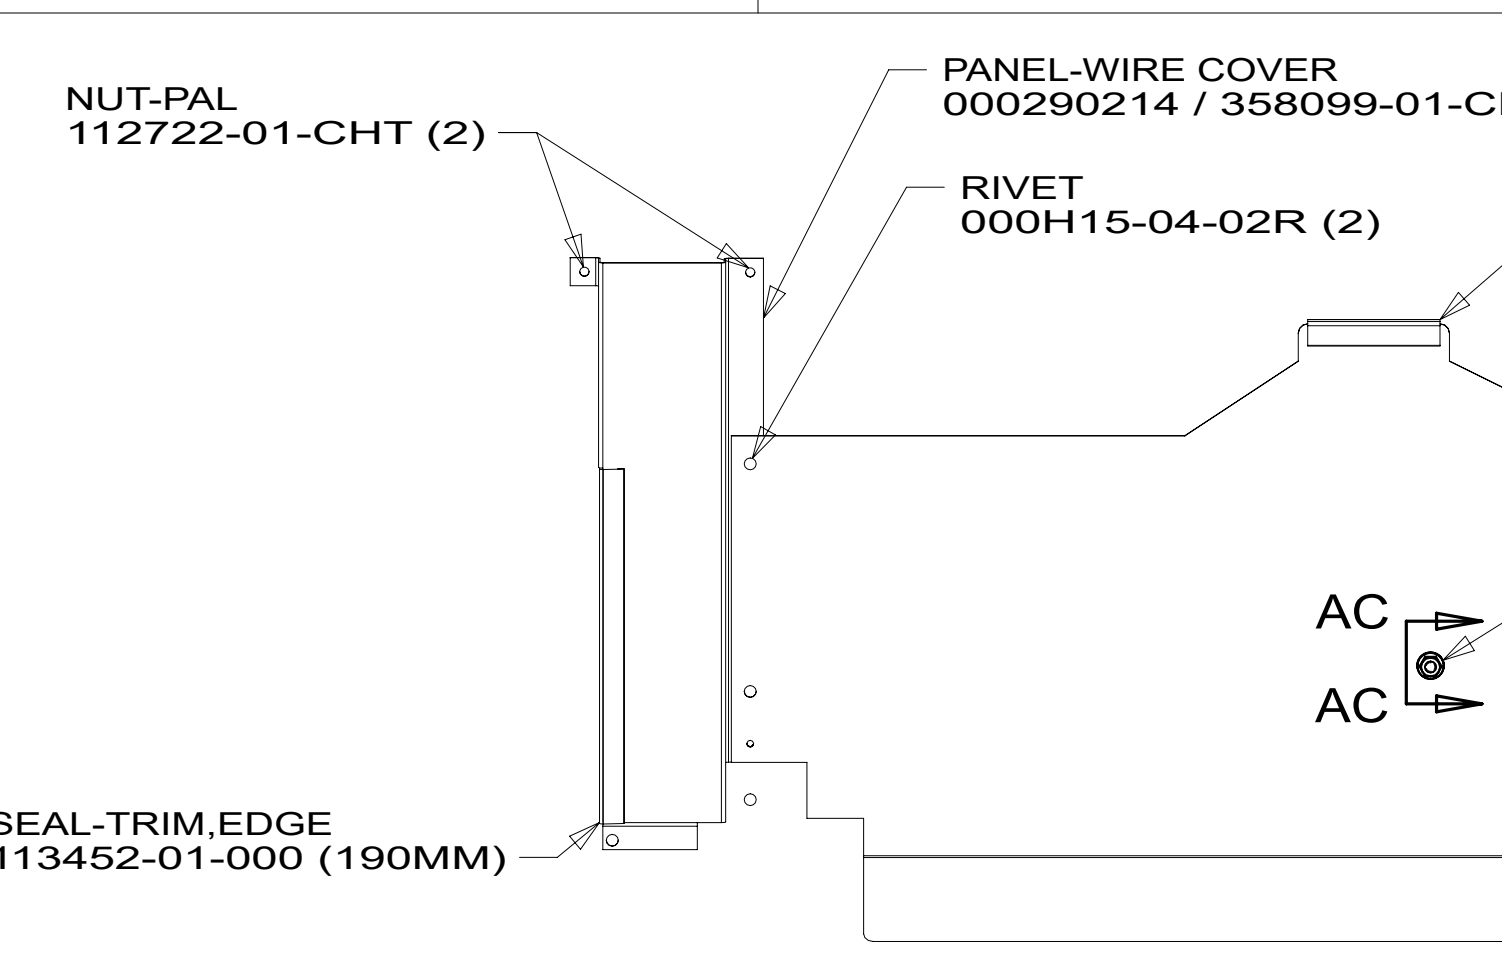


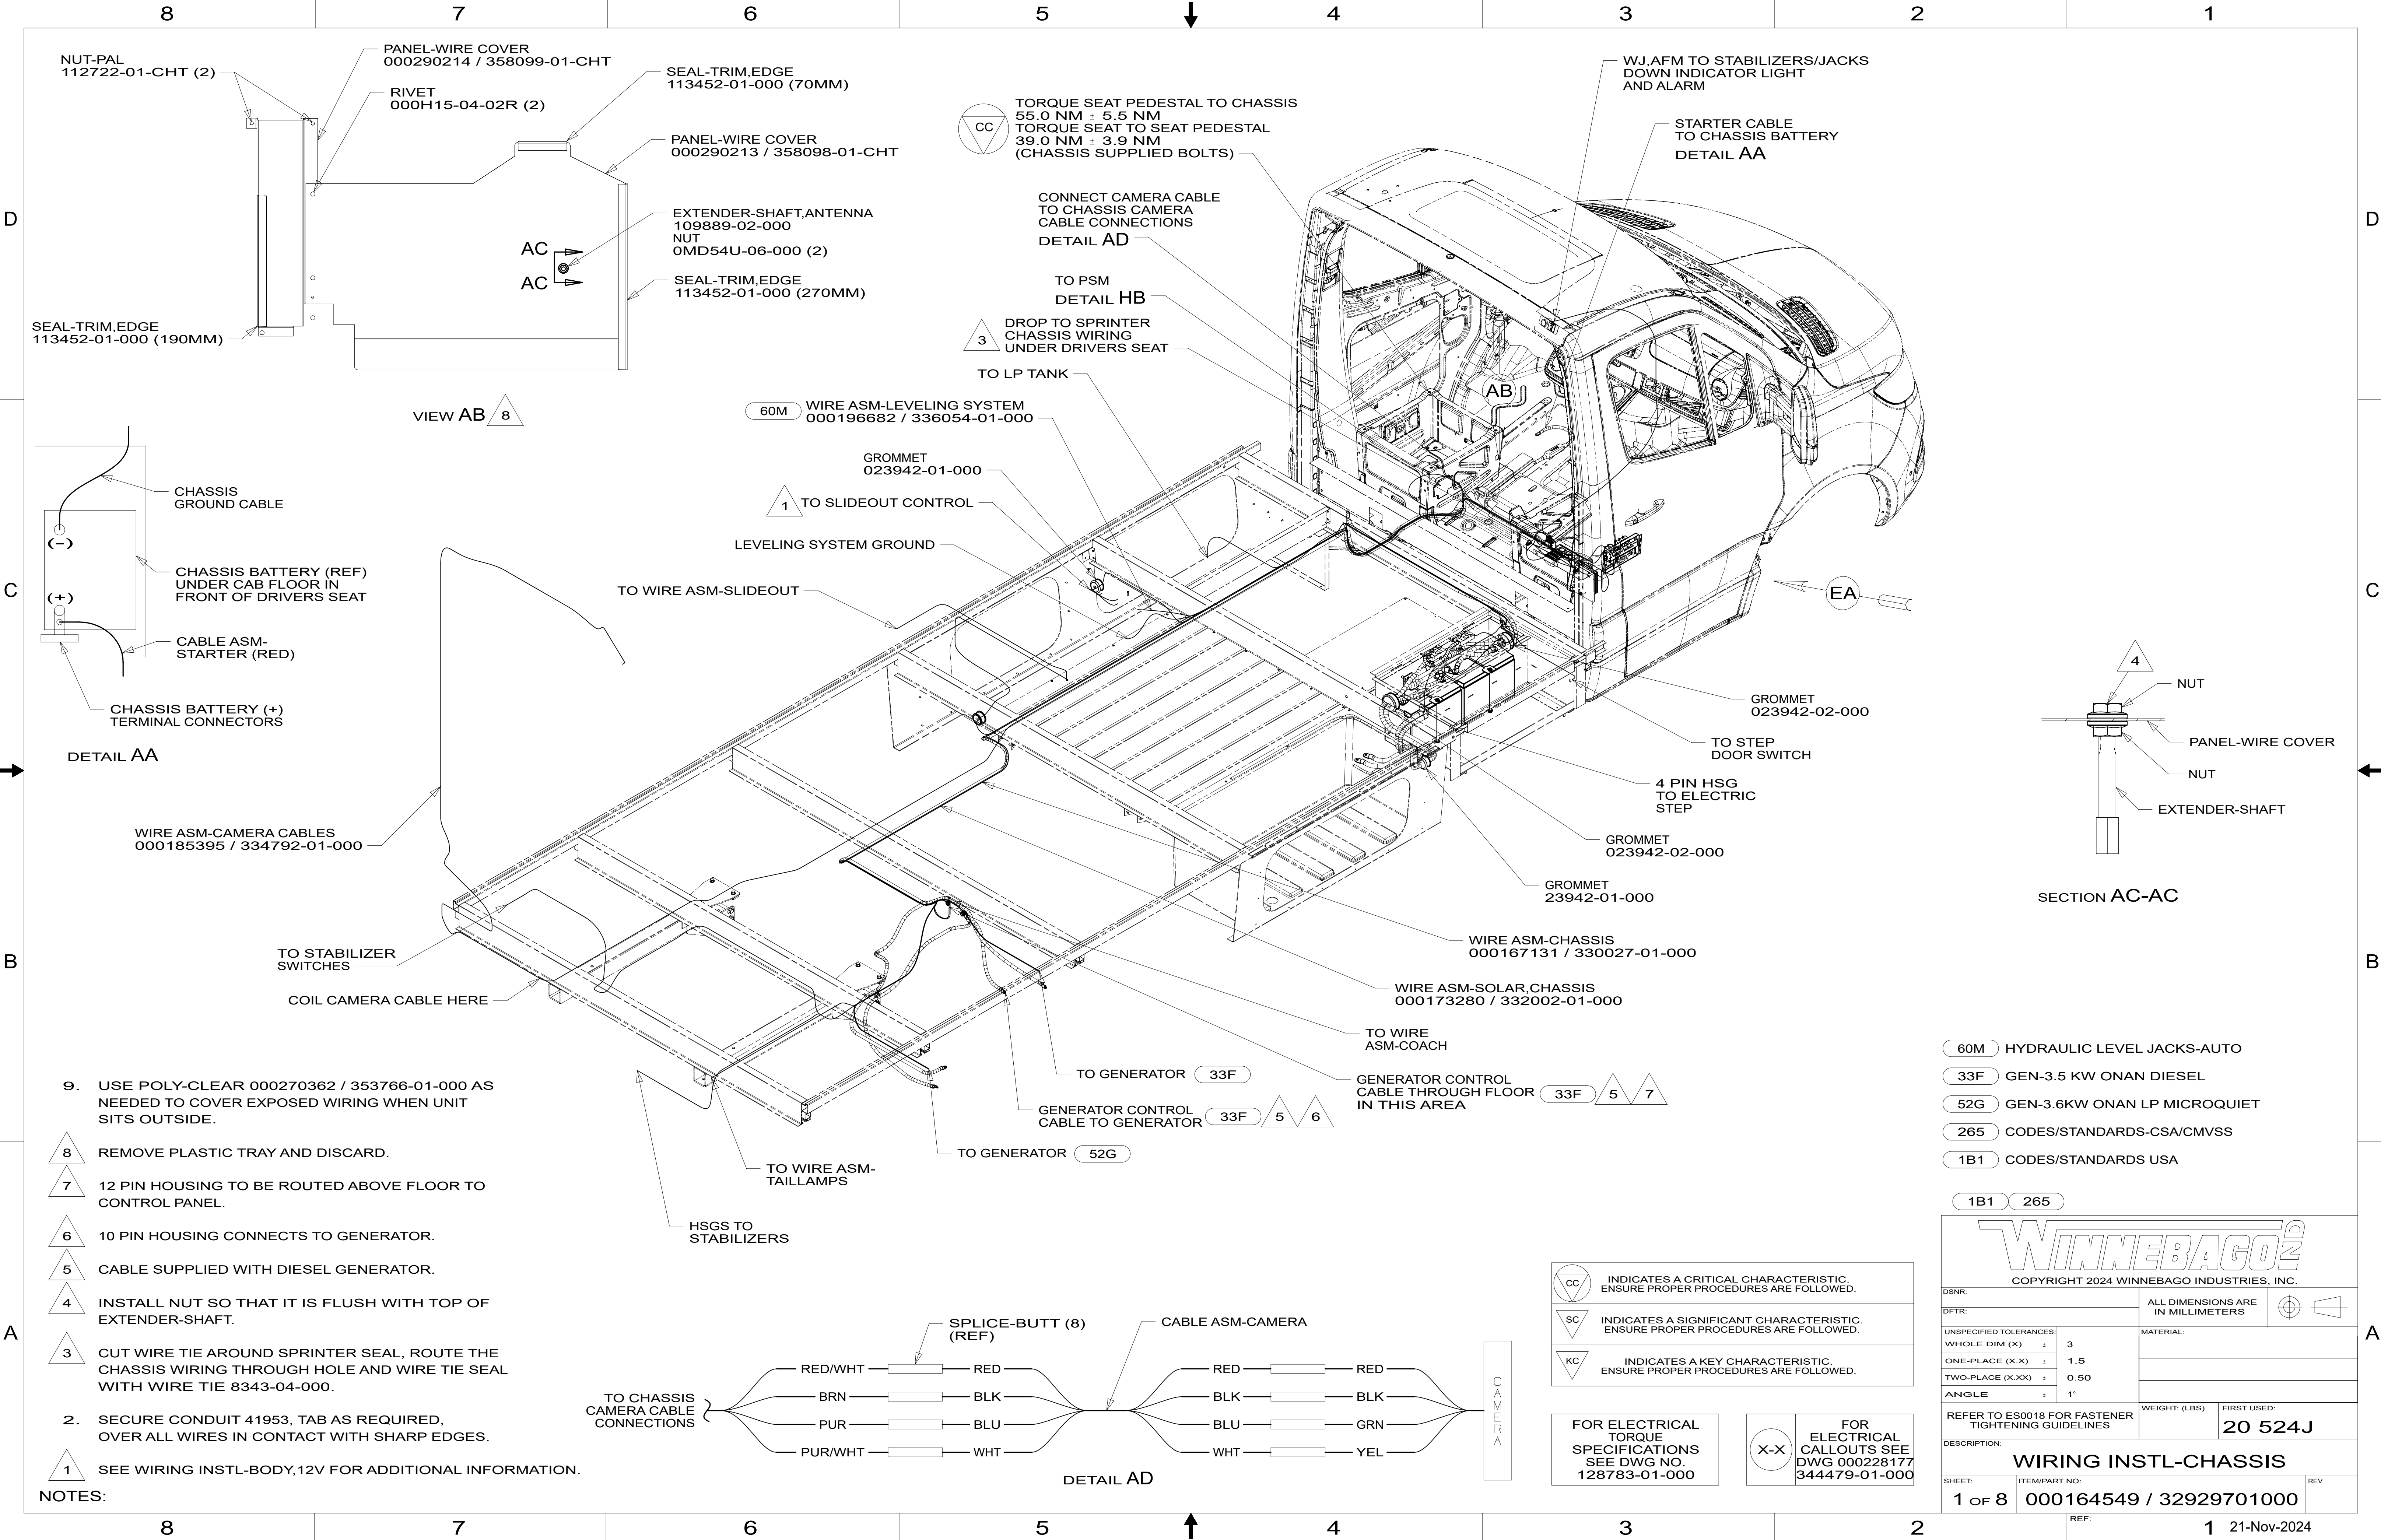

9. USE POLY-CLEAR 000270362 / 353766-01-000 AS NEEDED TO COVER EXPOSED WIRING WHEN UNIT SITS OUTSIDE.
- 8 REMOVE PLASTIC TRAY AND DISCARD.
- 7 12 PIN HOUSING TO BE ROUTED ABOVE FLOOR TO CONTROL PANEL.
- 6 10 PIN HOUSING CONNECTS TO GENERATOR.
- 5 CABLE SUPPLIED WITH DIESEL GENERATOR.
- 4 INSTALL NUT SO THAT IT IS FLUSH WITH TOP OF EXTENDER-SHAFT.
- 3 CUT WIRE TIE AROUND SPRINTER SEAL, ROUTE THE CHASSIS WIRING THROUGH HOLE AND WIRE TIE SEAL WITH WIRE TIE 8343-04-000.
2. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.
- 1 SEE WIRING INSTL-BODY,12V FOR ADDITIONAL INFORMATION.

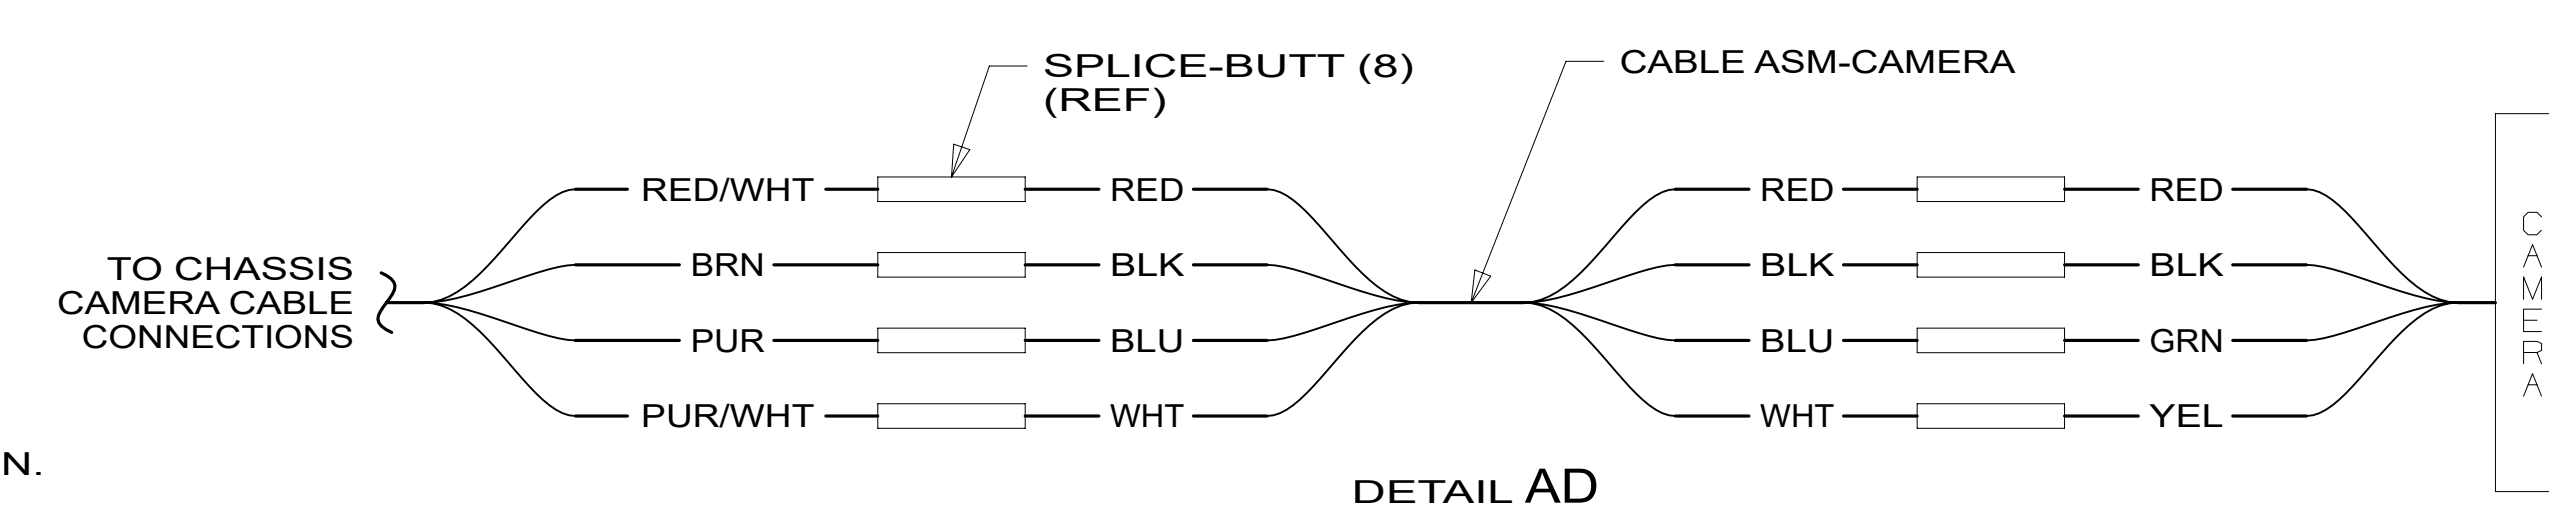

CC

INDICATES A CRITICAL CHARACTERISTIC. ENSURE PROPER PROCEDURES ARE FOLLOWED.

SC

INDICATES A SIGNIFICANT CHARACTERISTIC. ENSURE PROPER PROCEDURES ARE FOLLOWED.

KC

INDICATES A KEY CHARACTERISTIC. ENSURE PROPER PROCEDURES ARE FOLLOWED.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

X-X

FOR ELECTRICAL CALLOUTS SEE DWG 000228177 344479-01-000

60M

HYDRAULIC LEVEL JACKS-AUTO

33F

GEN-3.5 KW ONAN DIESEL

52G

GEN-3.6KW ONAN LP MICROQUIET

265

CODES/STANDARDS-CSA/CMVSS

1B1

CODES/STANDARDS USA

1B1

265

WINNEBAGO

COPYRIGHT 2024 WINNEBAGO INDUSTRIES, INC.

DSNR:

DFTR:

UNSPECIFIED TOLERANCES:

WHOLE DIM (X) ± 3

ONE-PLACE (X.X) ± 1.5

TWO-PLACE (X.XX) ± 0.50

ANGLE ± 1°

ALL DIMENSIONS ARE IN MILLIMETERS

MATERIAL:

WEIGHT: (LBS)

FIRST USED:

20 524J

REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES

DESCRIPTION:

WIRING INSTL-CHASSIS


SHEET: 1 OF 8


ITEM/PART NO: 000164549 / 32929701000

REV:

REF:

1 21-Nov-2024

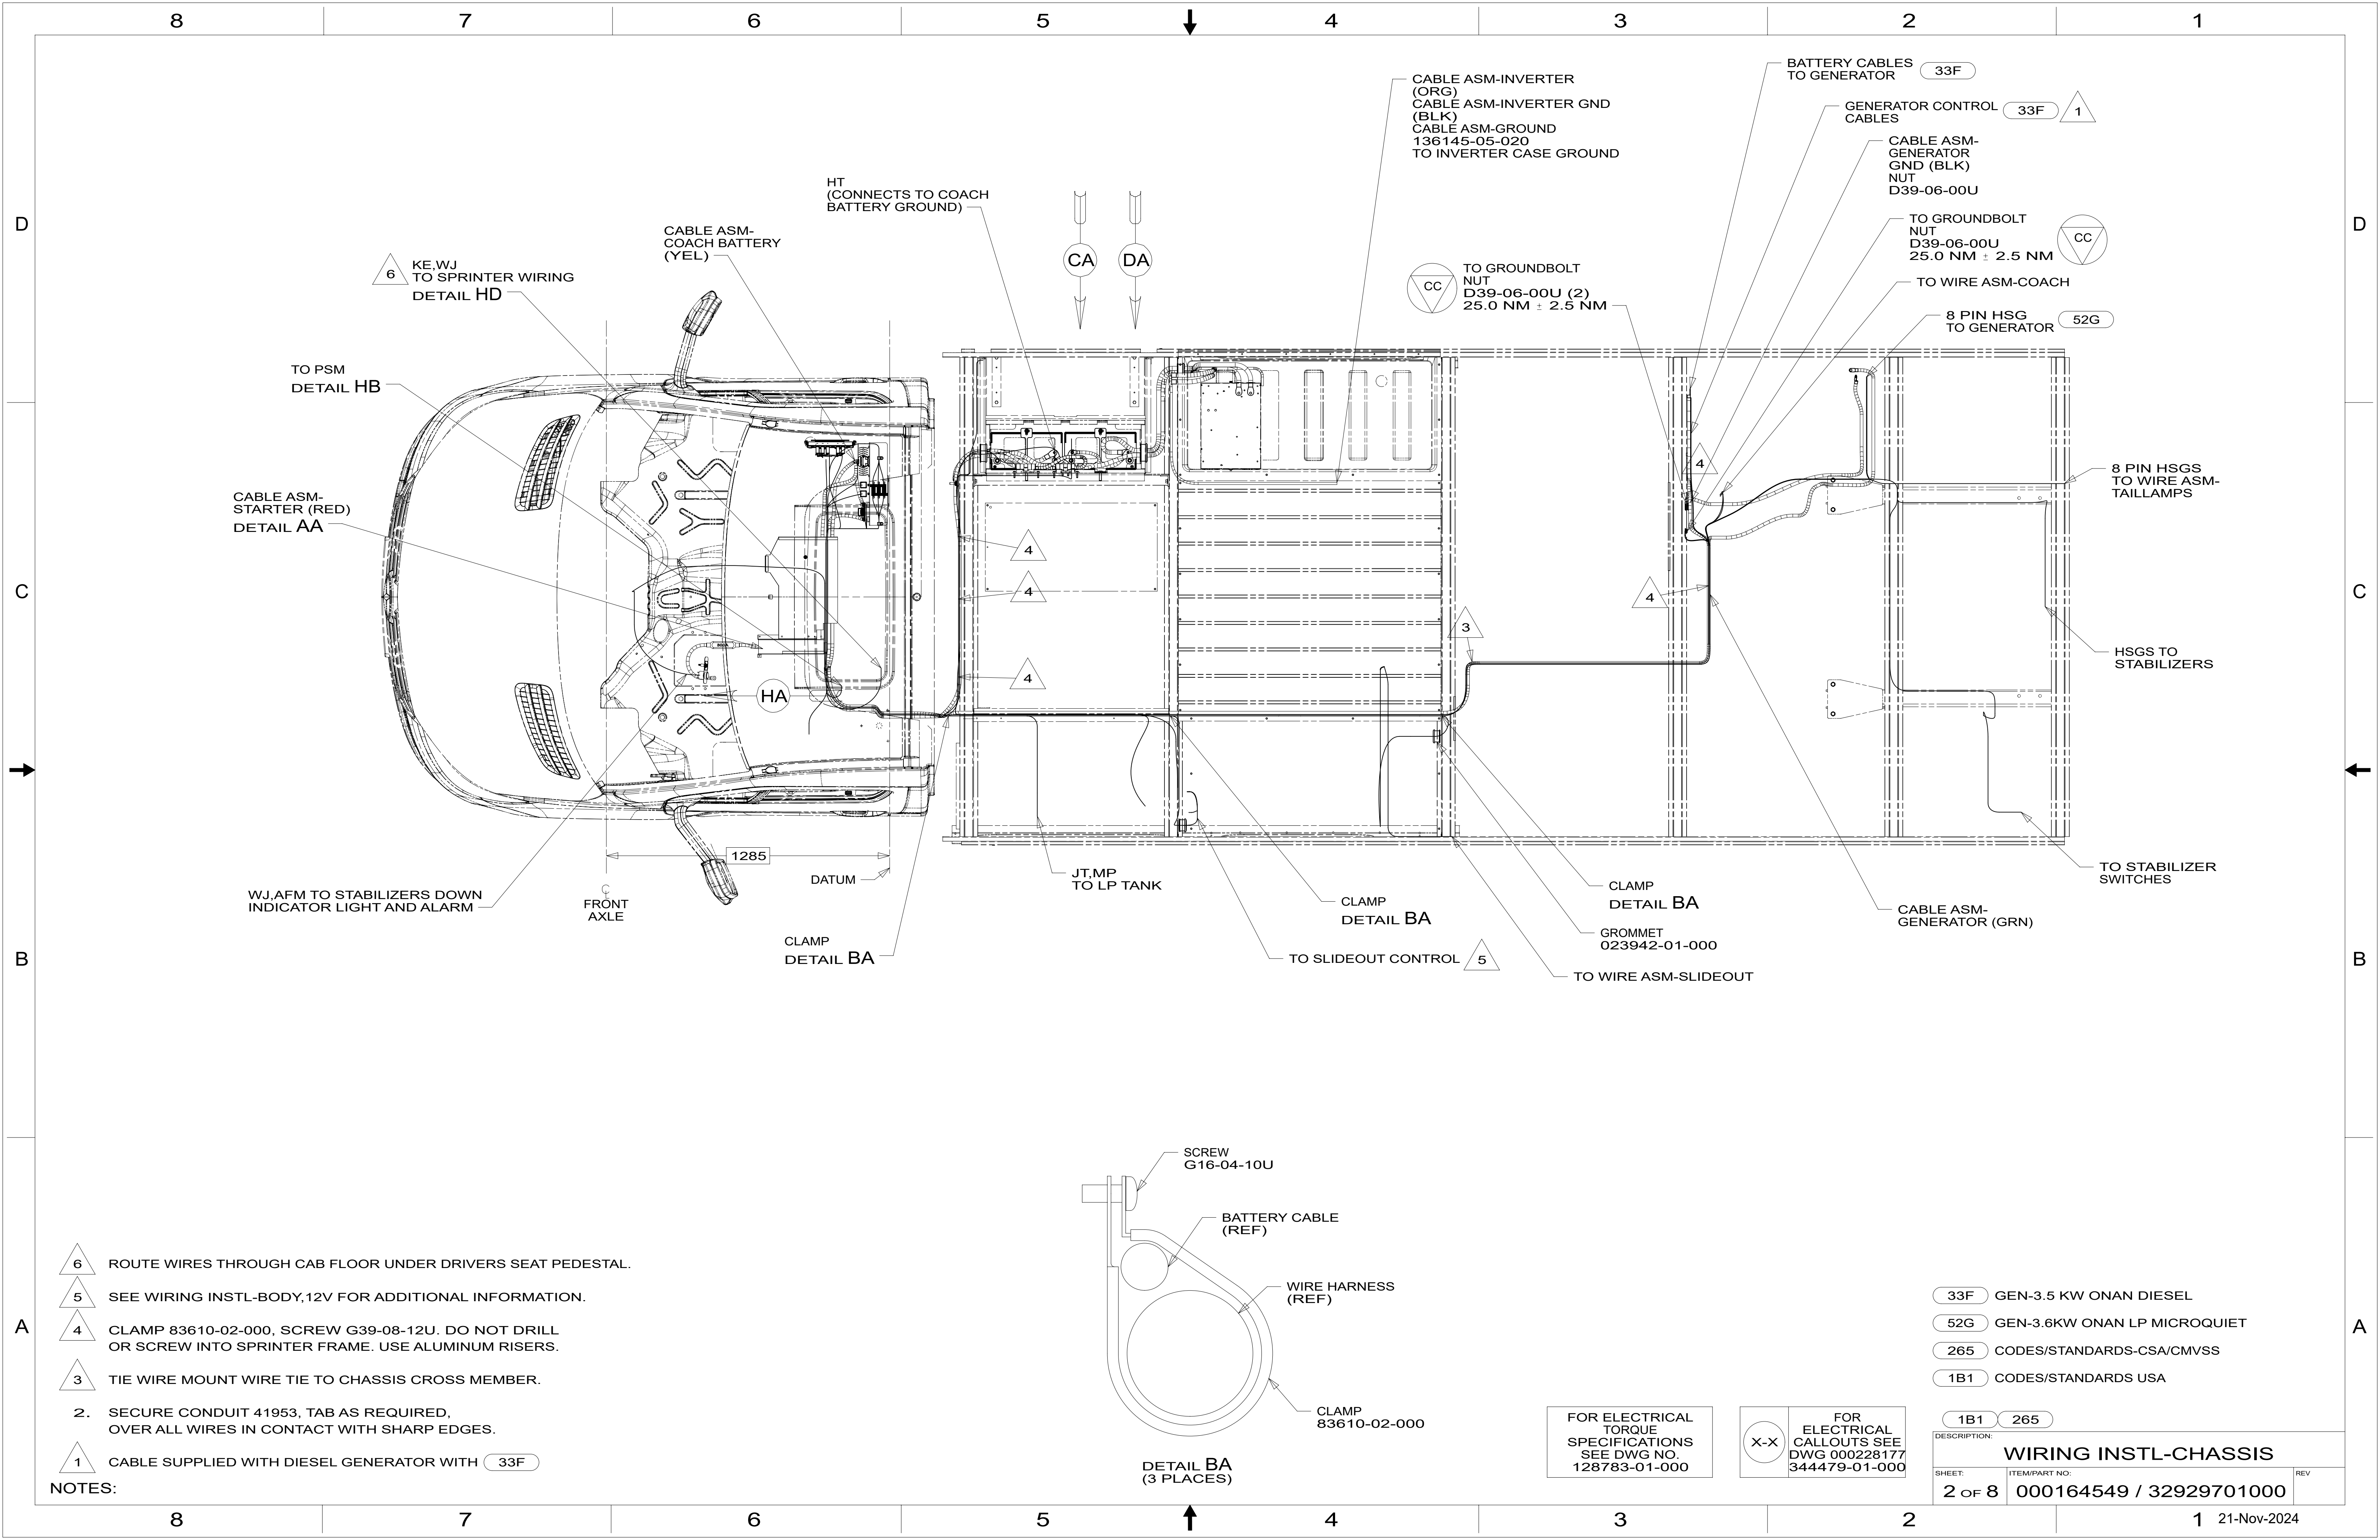

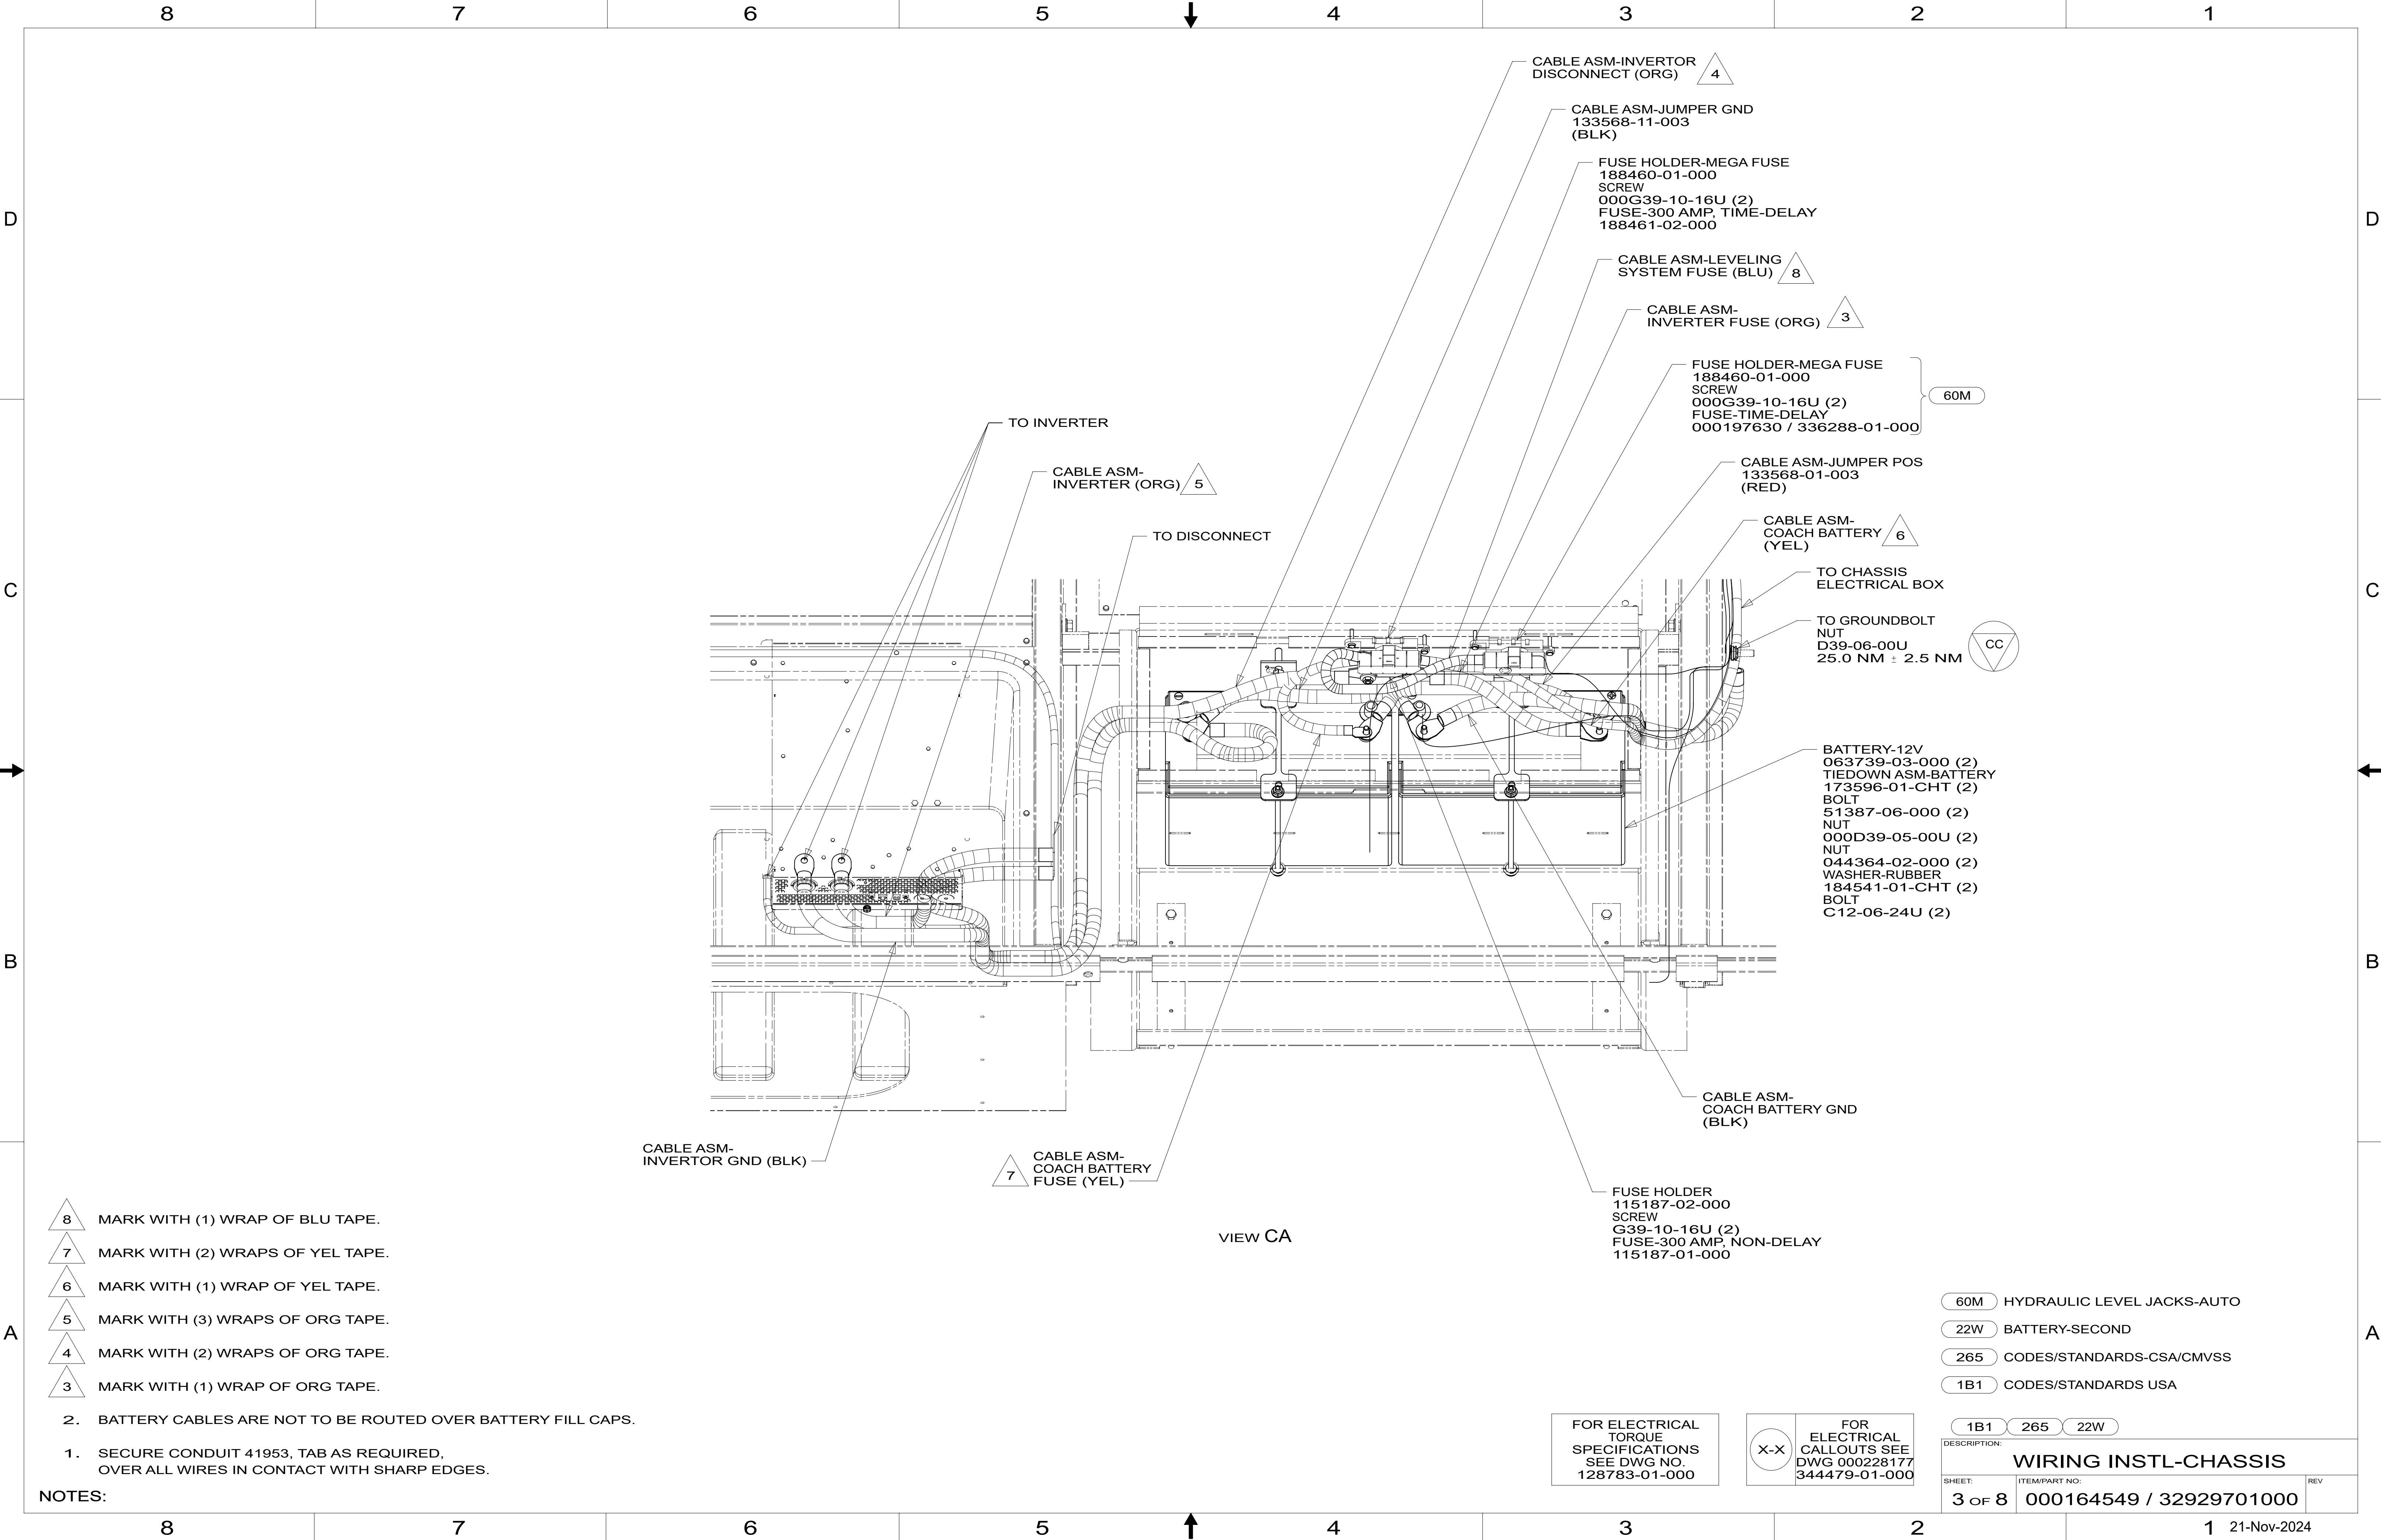

- 8 MARK WITH (1) WRAP OF BLU TAPE.
- 7 MARK WITH (2) WRAPS OF YEL TAPE.
- 6 MARK WITH (1) WRAP OF YEL TAPE.
- 5 MARK WITH (3) WRAPS OF ORG TAPE.
- 4 MARK WITH (2) WRAPS OF ORG TAPE.
- 3 MARK WITH (1) WRAP OF ORG TAPE.

- 2. BATTERY CABLES ARE NOT TO BE ROUTED OVER BATTERY FILL CAPS.
- 1. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.


NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


FOR
ELECTRICAL
CALLOUTS SEE
DWG 000228177
344479-01-000


60M	HYDRAULIC LEVEL JACKS-AUTO
22W	BATTERY-SECOND
265	CODES/STANDARDS-CSA/CMVSS
1B1	CODES/STANDARDS USA

1B1	265	22W
DESCRIPTION:		
WIRING INSTL-CHASSIS		
SHEET:	ITEM/PART NO:	REV
3 OF 8	000164549 / 32929701000	

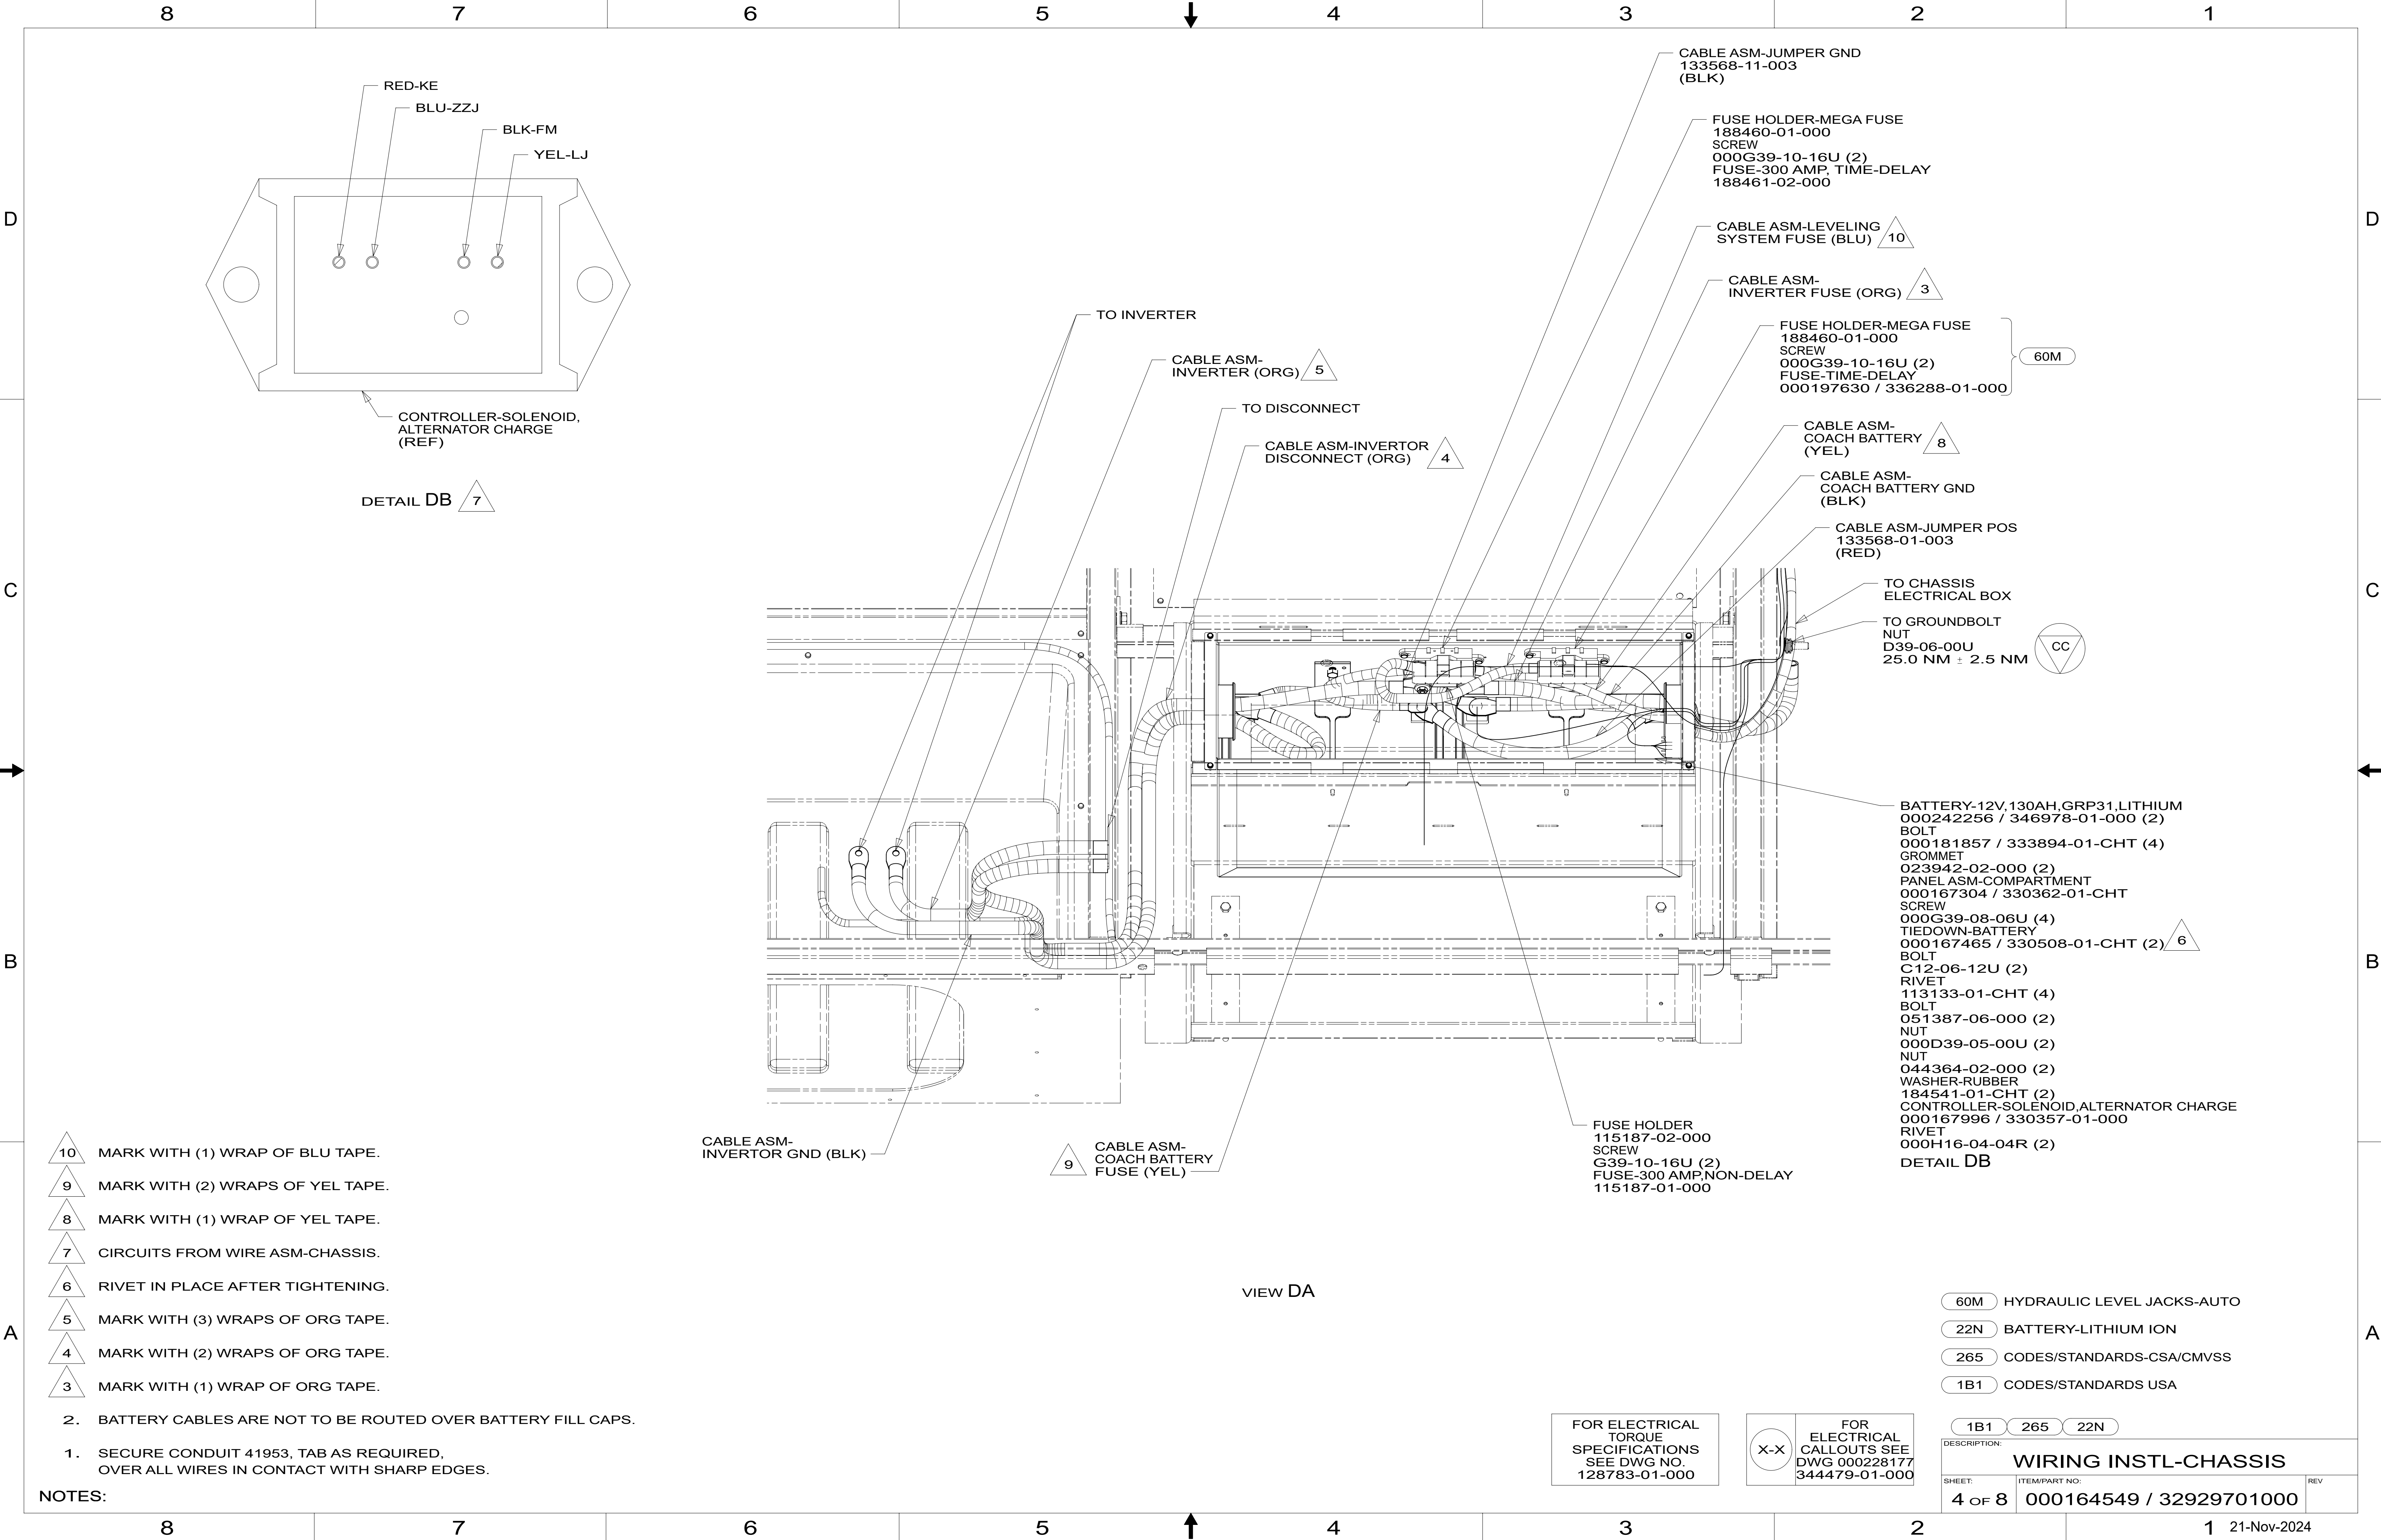

- 10 MARK WITH (1) WRAP OF BLU TAPE.
- 9 MARK WITH (2) WRAPS OF YEL TAPE.
- 8 MARK WITH (1) WRAP OF YEL TAPE.
- 7 CIRCUITS FROM WIRE ASM-CHASSIS.
- 6 RIVET IN PLACE AFTER TIGHTENING.
- 5 MARK WITH (3) WRAPS OF ORG TAPE.
- 4 MARK WITH (2) WRAPS OF ORG TAPE.
- 3 MARK WITH (1) WRAP OF ORG TAPE.

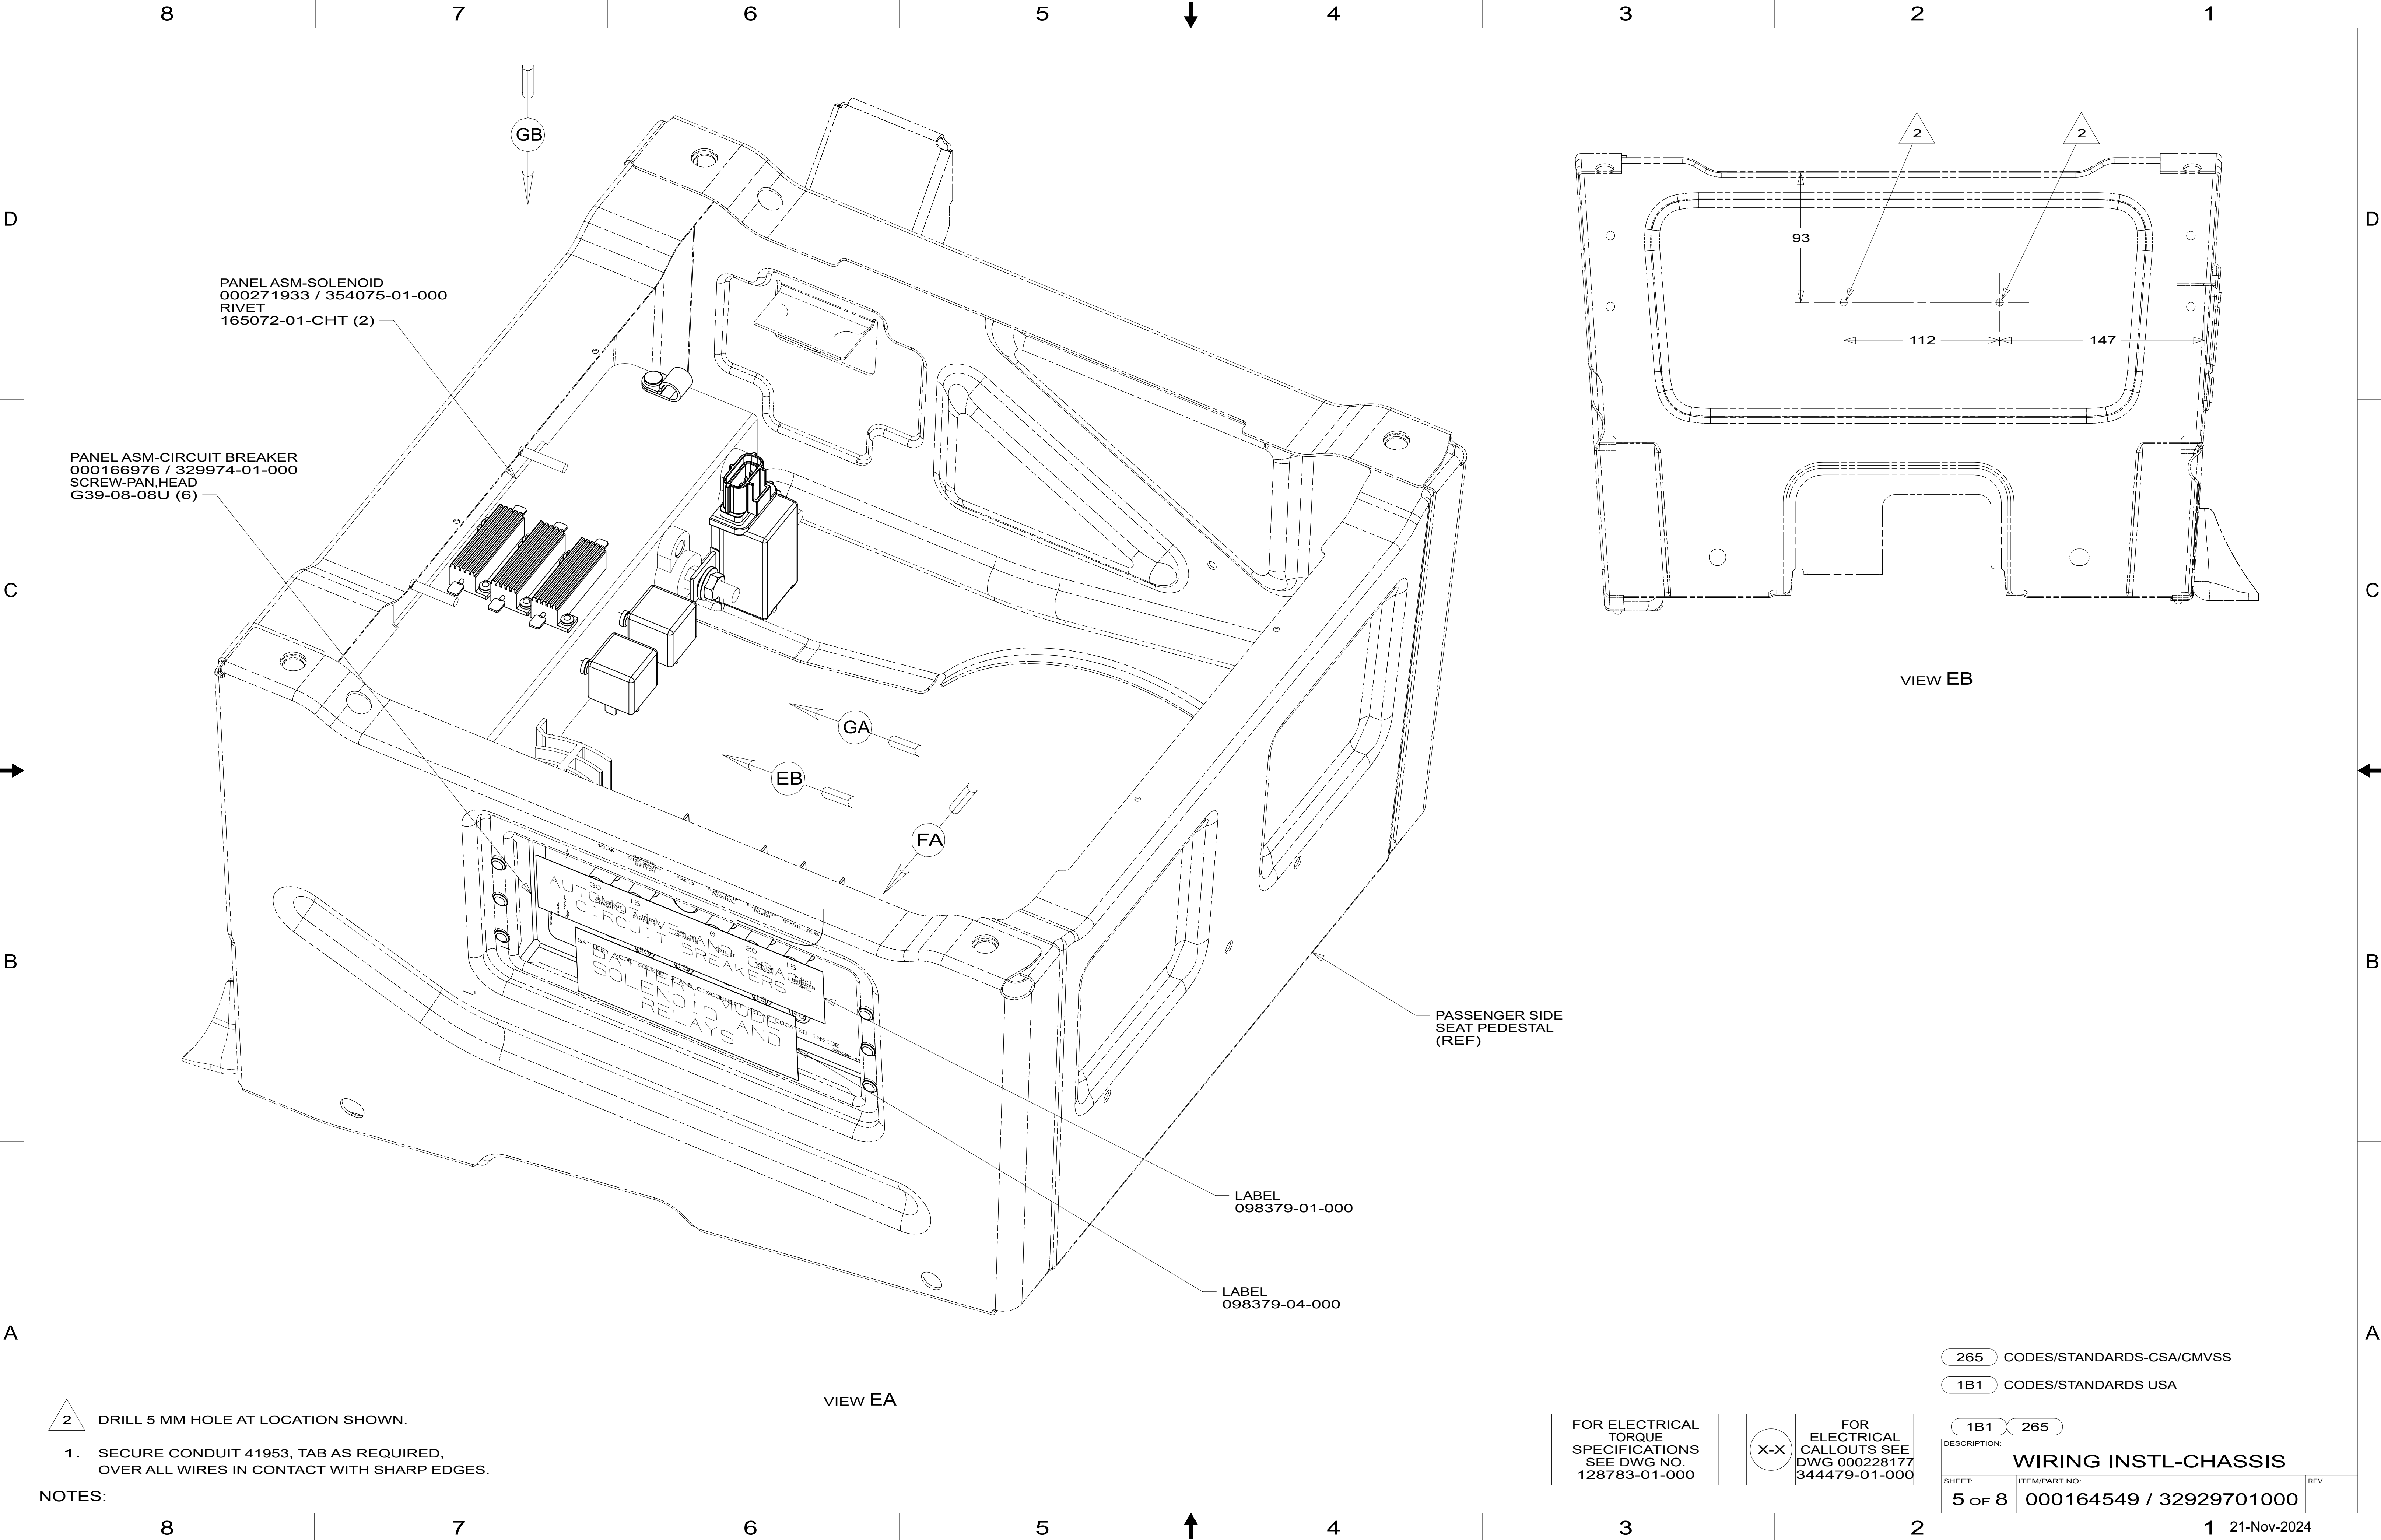

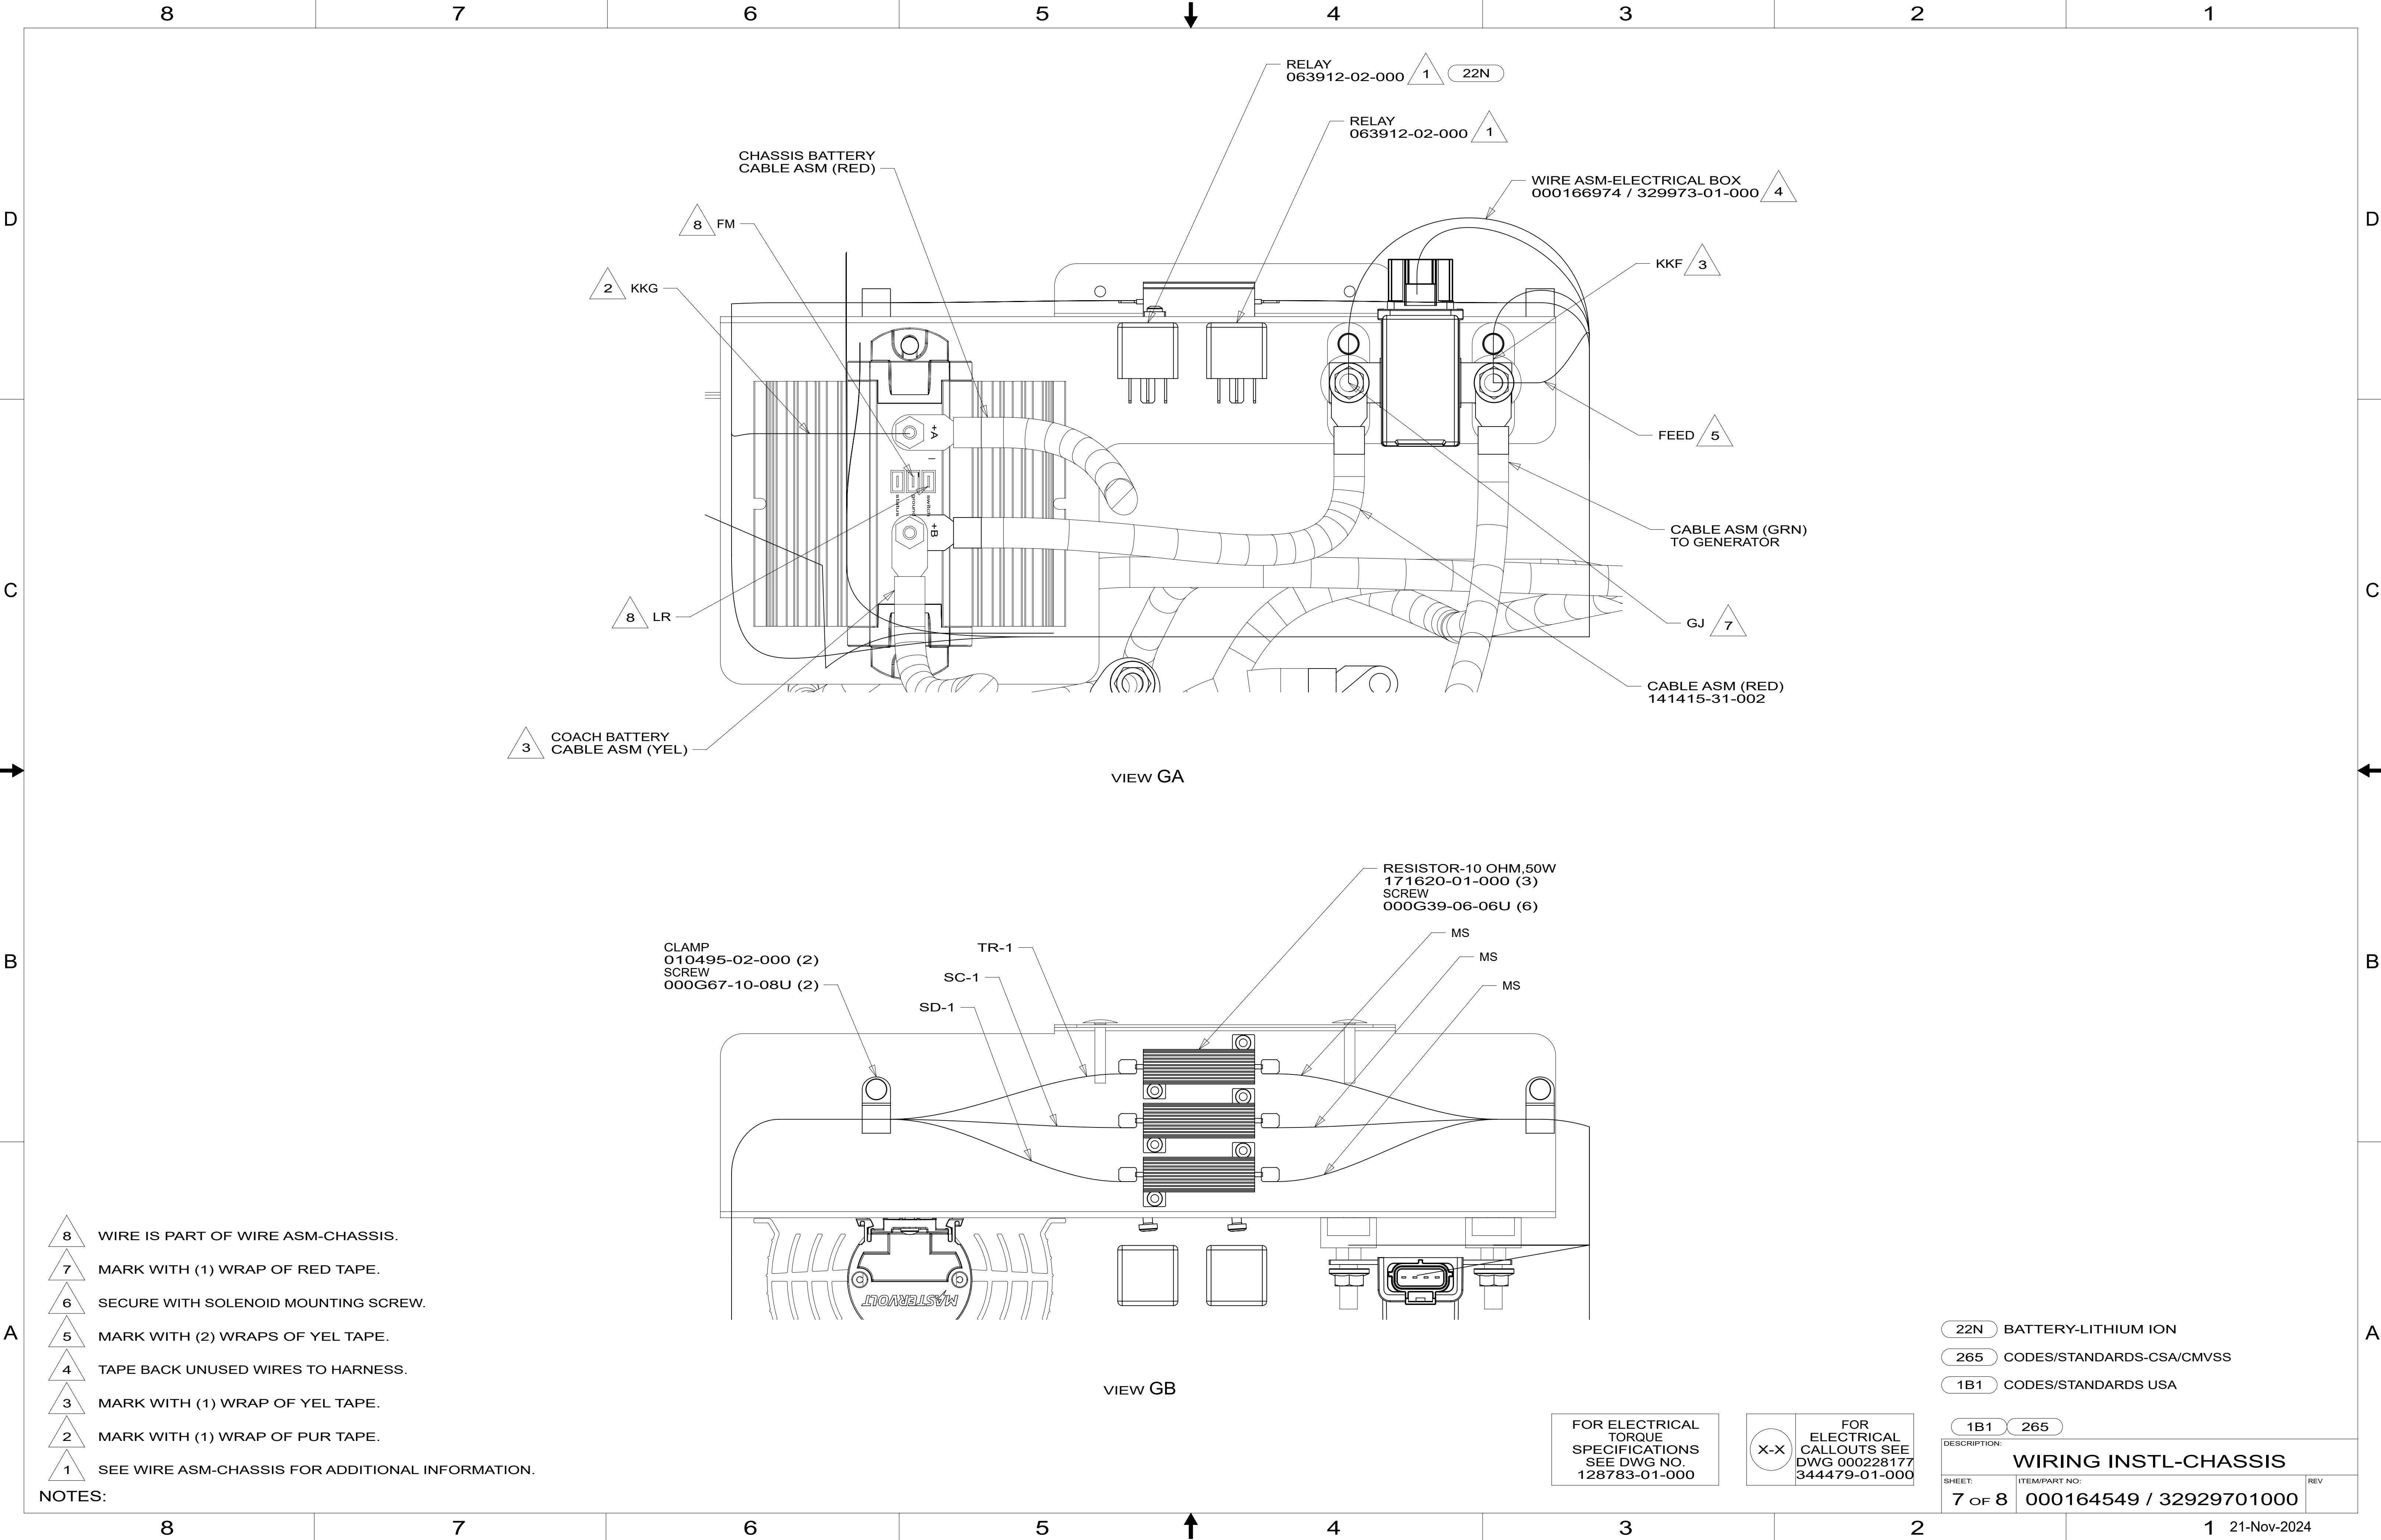

- 8 WIRE IS PART OF WIRE ASM-CHASSIS.
- 7 MARK WITH (1) WRAP OF RED TAPE.
- 6 SECURE WITH SOLENOID MOUNTING SCREW.
- 5 MARK WITH (2) WRAPS OF YEL TAPE.
- 4 TAPE BACK UNUSED WIRES TO HARNESS.
- 3 MARK WITH (1) WRAP OF YEL TAPE.
- 2 MARK WITH (1) WRAP OF PUR TAPE.
- 1 SEE WIRE ASM-CHASSIS FOR ADDITIONAL INFORMATION.


NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS SEE
DWG 000228177
344479-01-000


- 22N BATTERY-LITHIUM ION
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION:		
1B1 265		
WIRING INSTL-CHASSIS		
SHEET:	ITEM/PART NO:	REV
7 OF 8	000164549 / 32929701000	

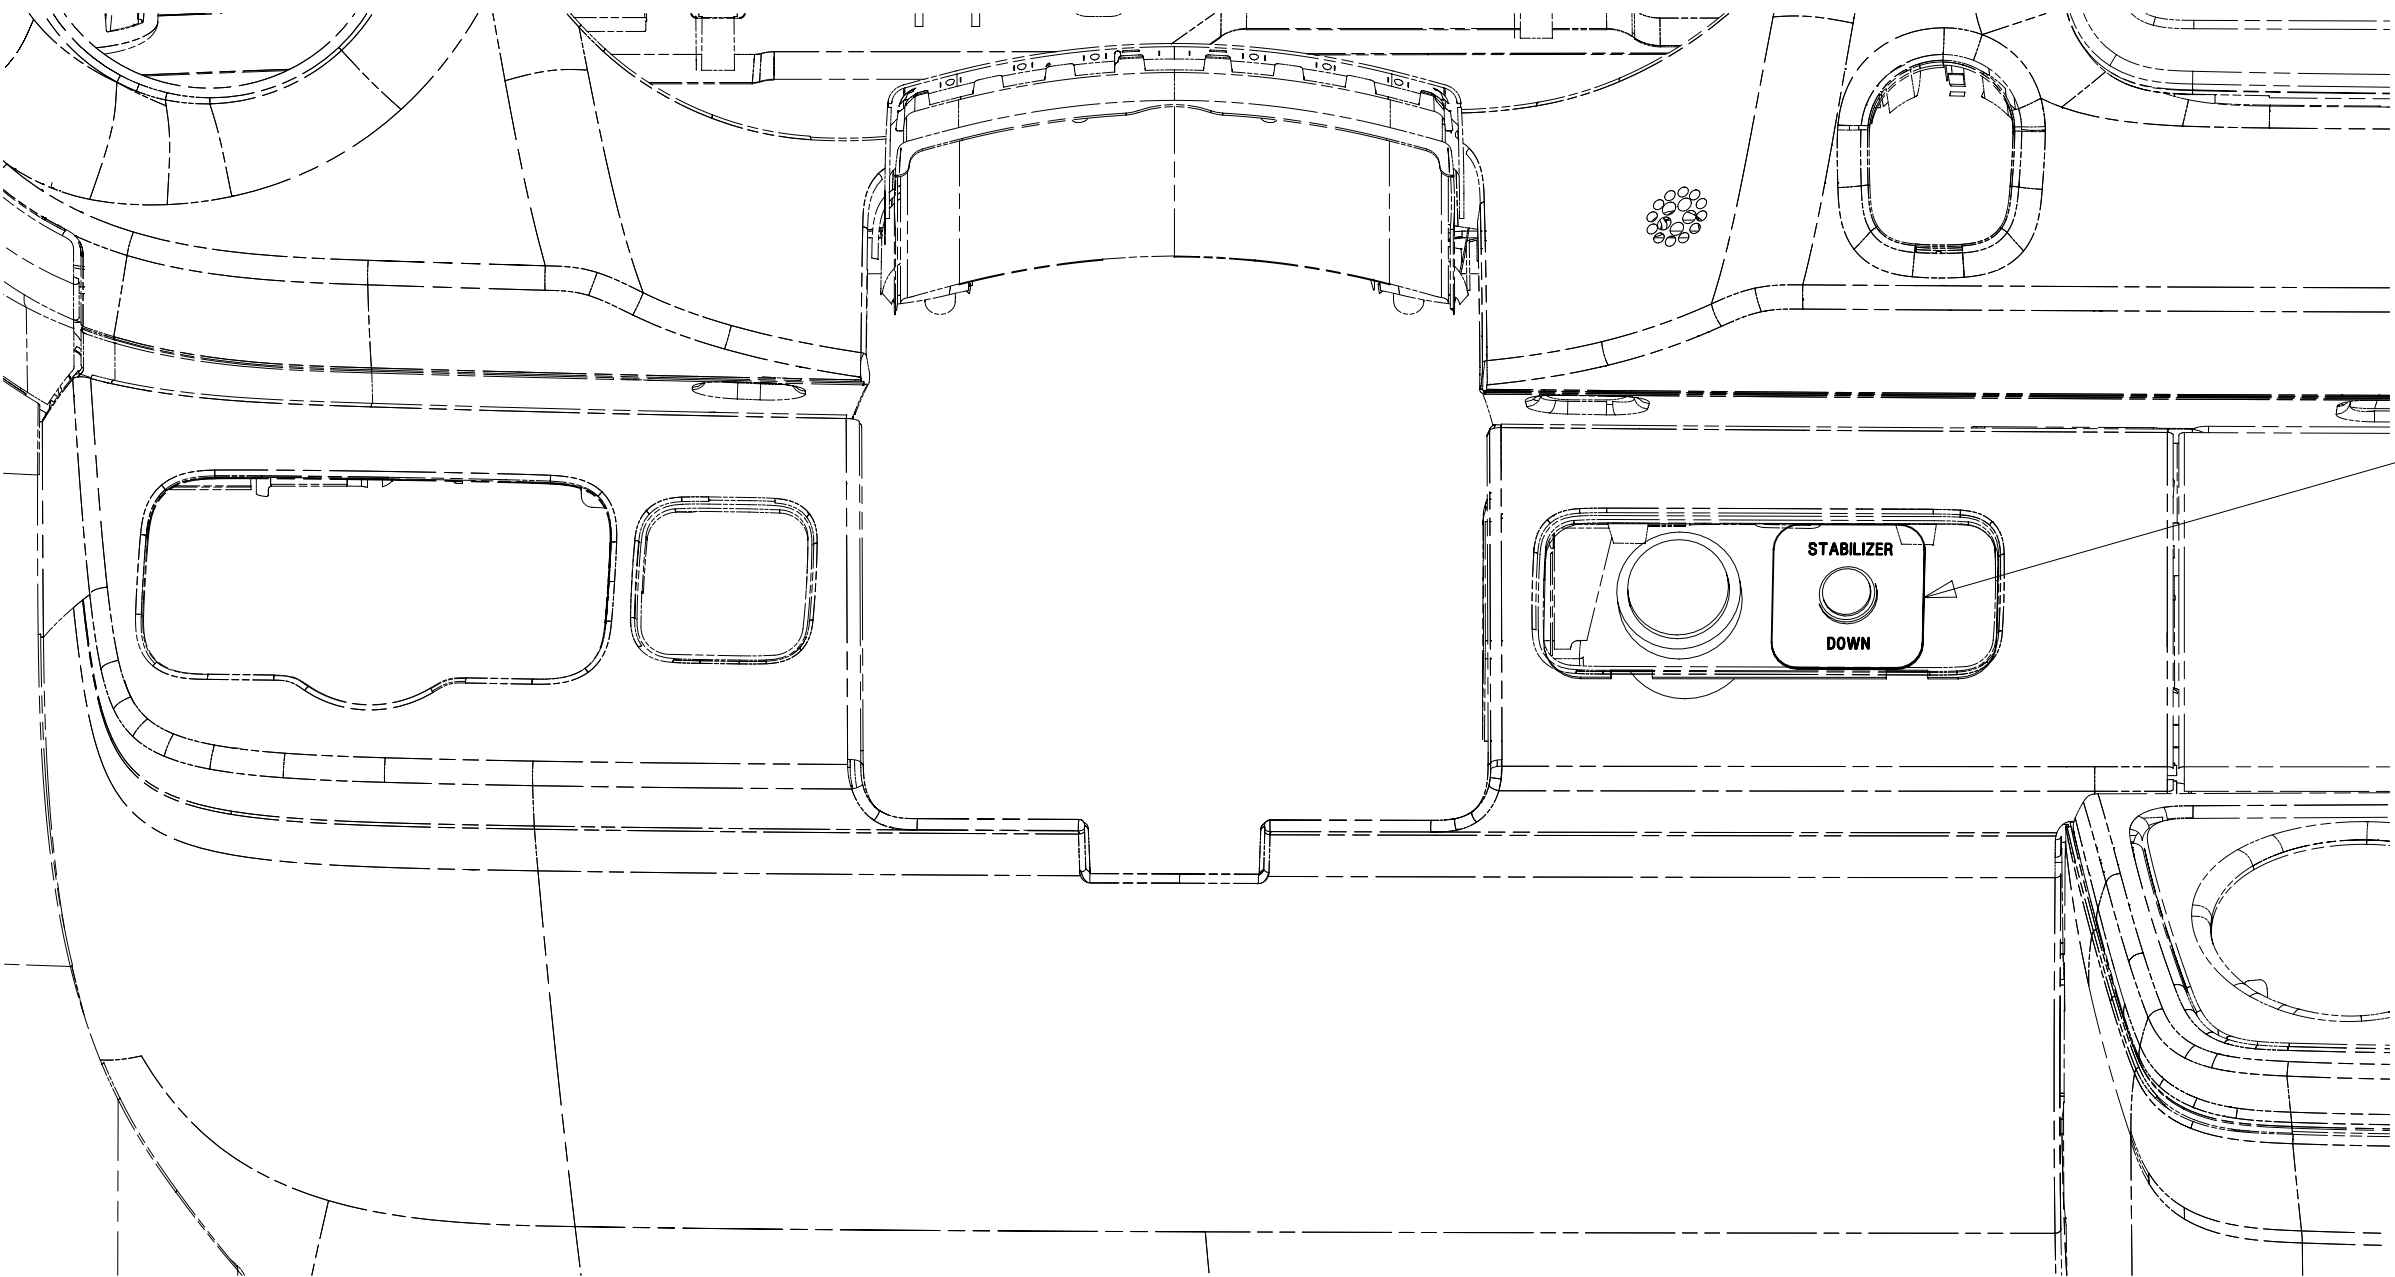

LIGHT ASM-INDICATOR,RED
190682-01-000
APPLIQUE-STABILIZER DOWN
000027561 / 316014-01-CHT
ALARM-JACKS DOWN
160876-01-000
PLATE-STABILIZER
000197759 / 336355-01-CHT
DETAIL HC


VIEW HA

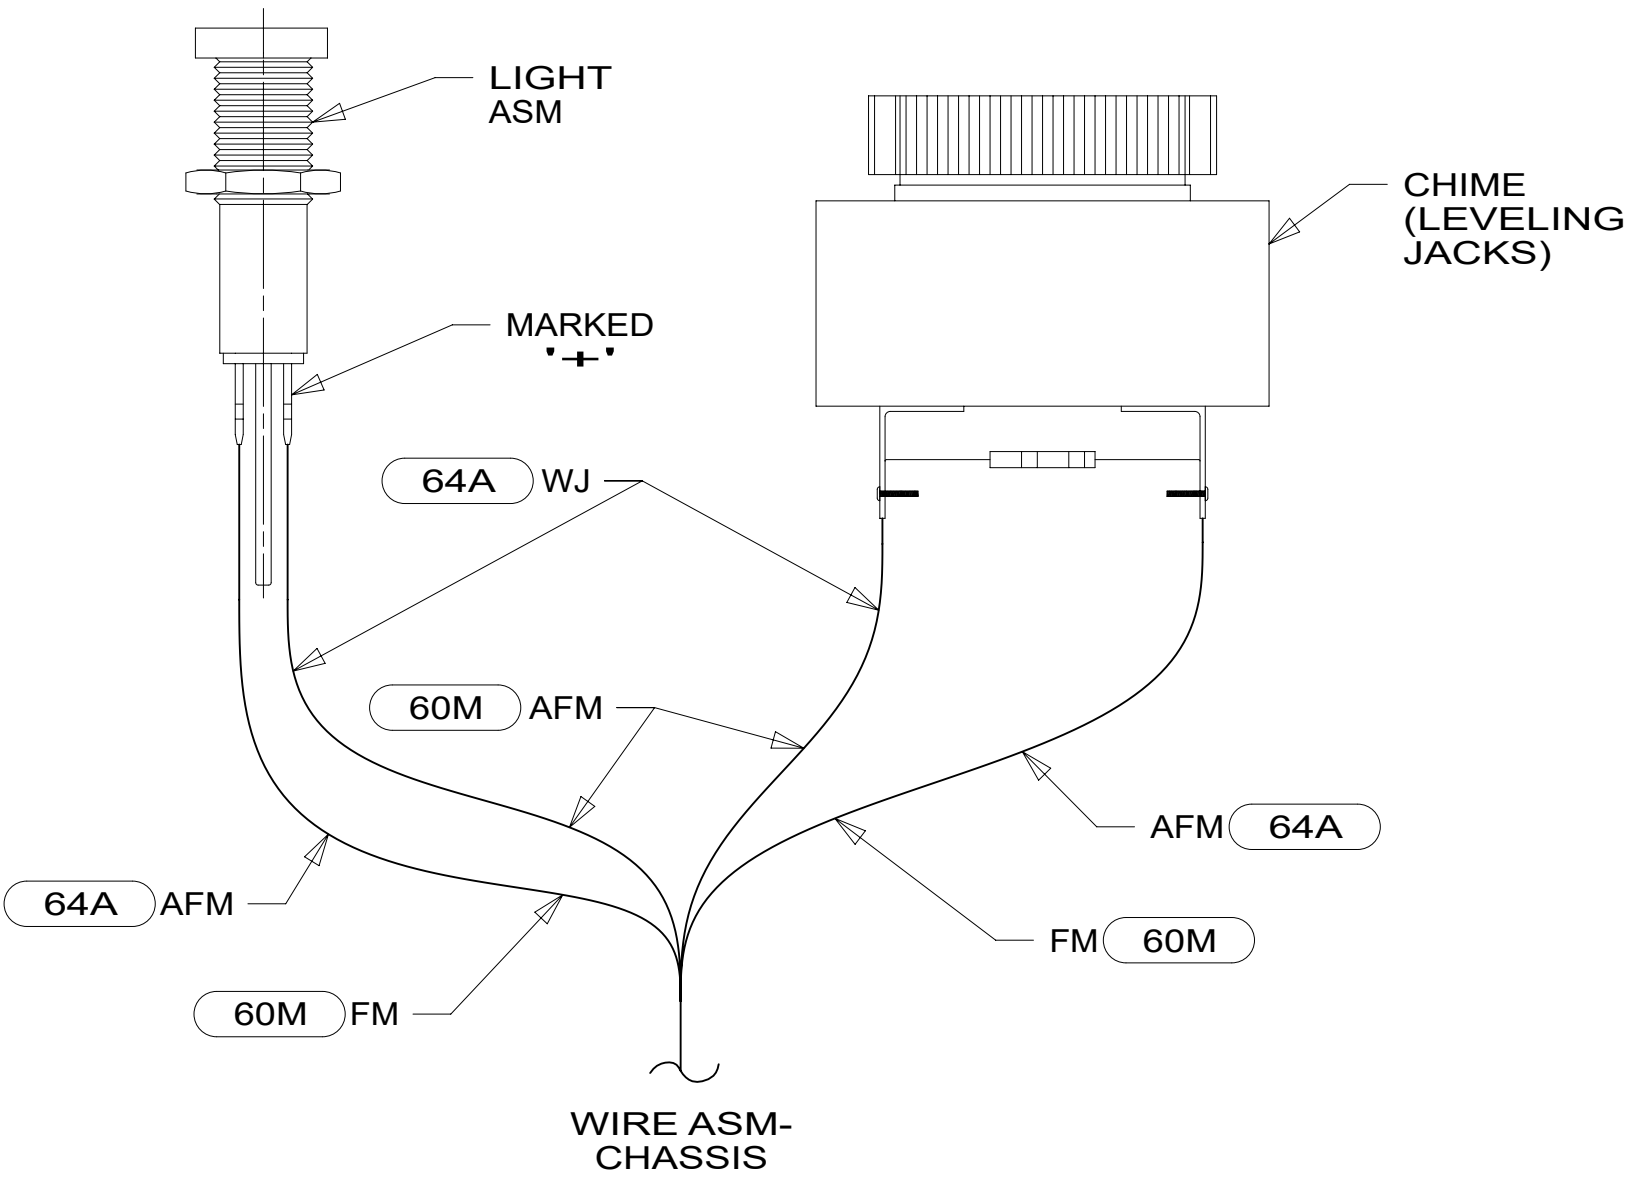


DETAIL HC



N26/15

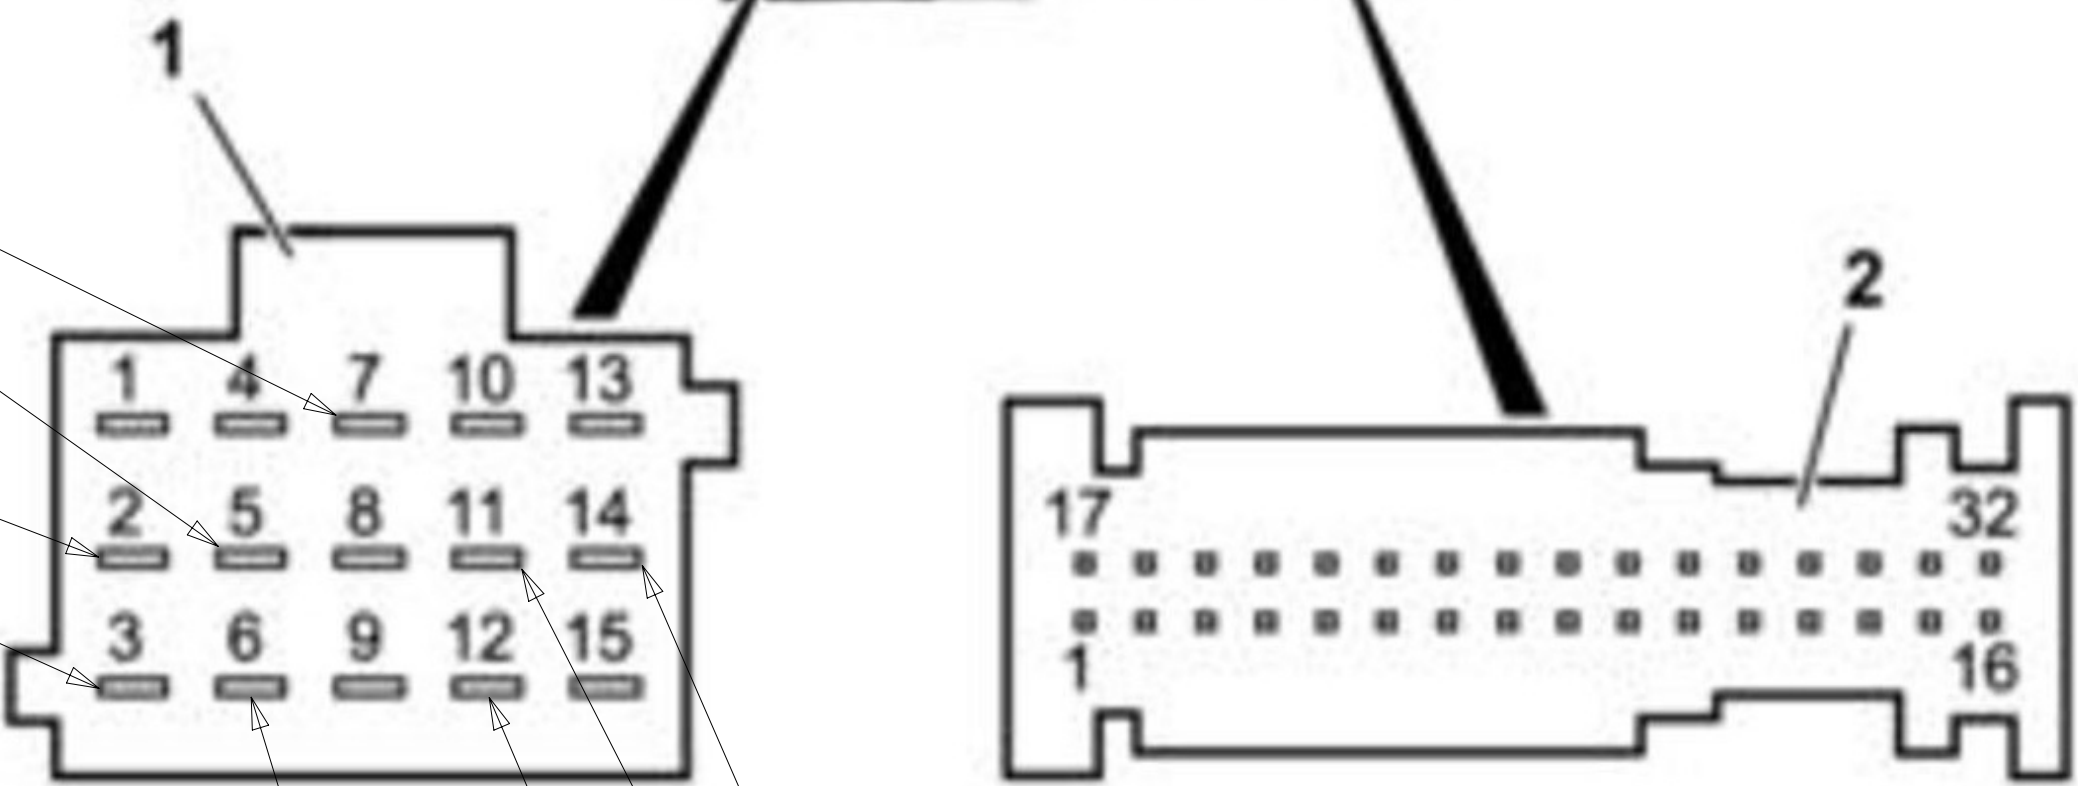

DETAIL HB 1

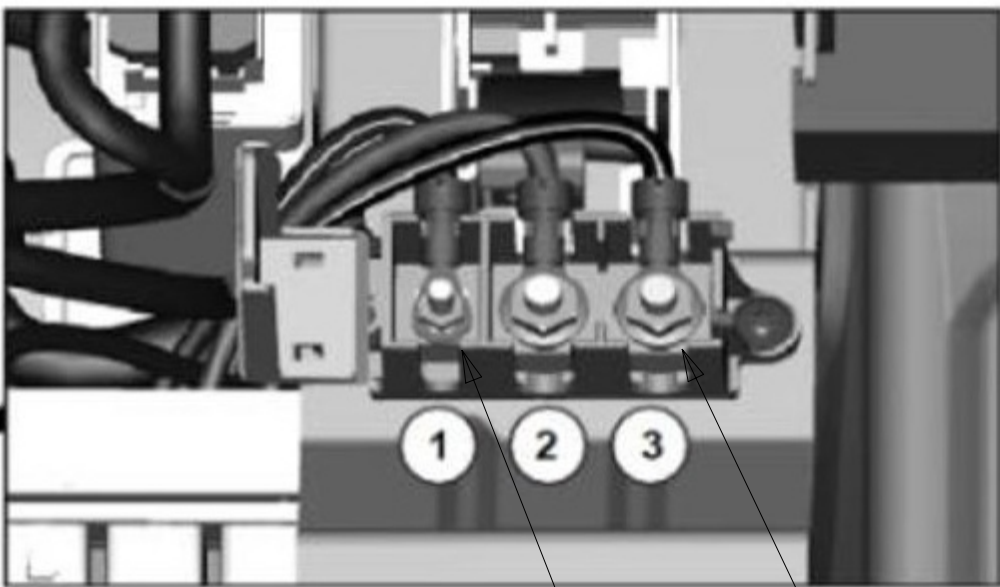

Terminal	U [V] / I [A]	wire color
1 st power with engine running	12V / 10A	blue/yellow
2 nd battery direct power	12V / 25A	red/gray
3 rd ignition power	12V / 15A	black/yellow

DETAIL HD 3

3 CONNECTION POINT IS LOCATED UNDER DRIVERS SEAT.

2. SECURE CONDUIT 41953, TAB AS REQUIRED, OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

1 PSM IS LOCATED UNDER DRIVERS SEAT.

NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG 000228177 344479-01-000

- 64A JACKS-STABILIZING, ELECTRIC
- 60M HYDRAULIC LEVEL JACKS-AUTO
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

DESCRIPTION: WIRING INSTL-CHASSIS		
SHEET: 8 OF 8	ITEM/PART NO: 000164549 / 32929701000	REV