


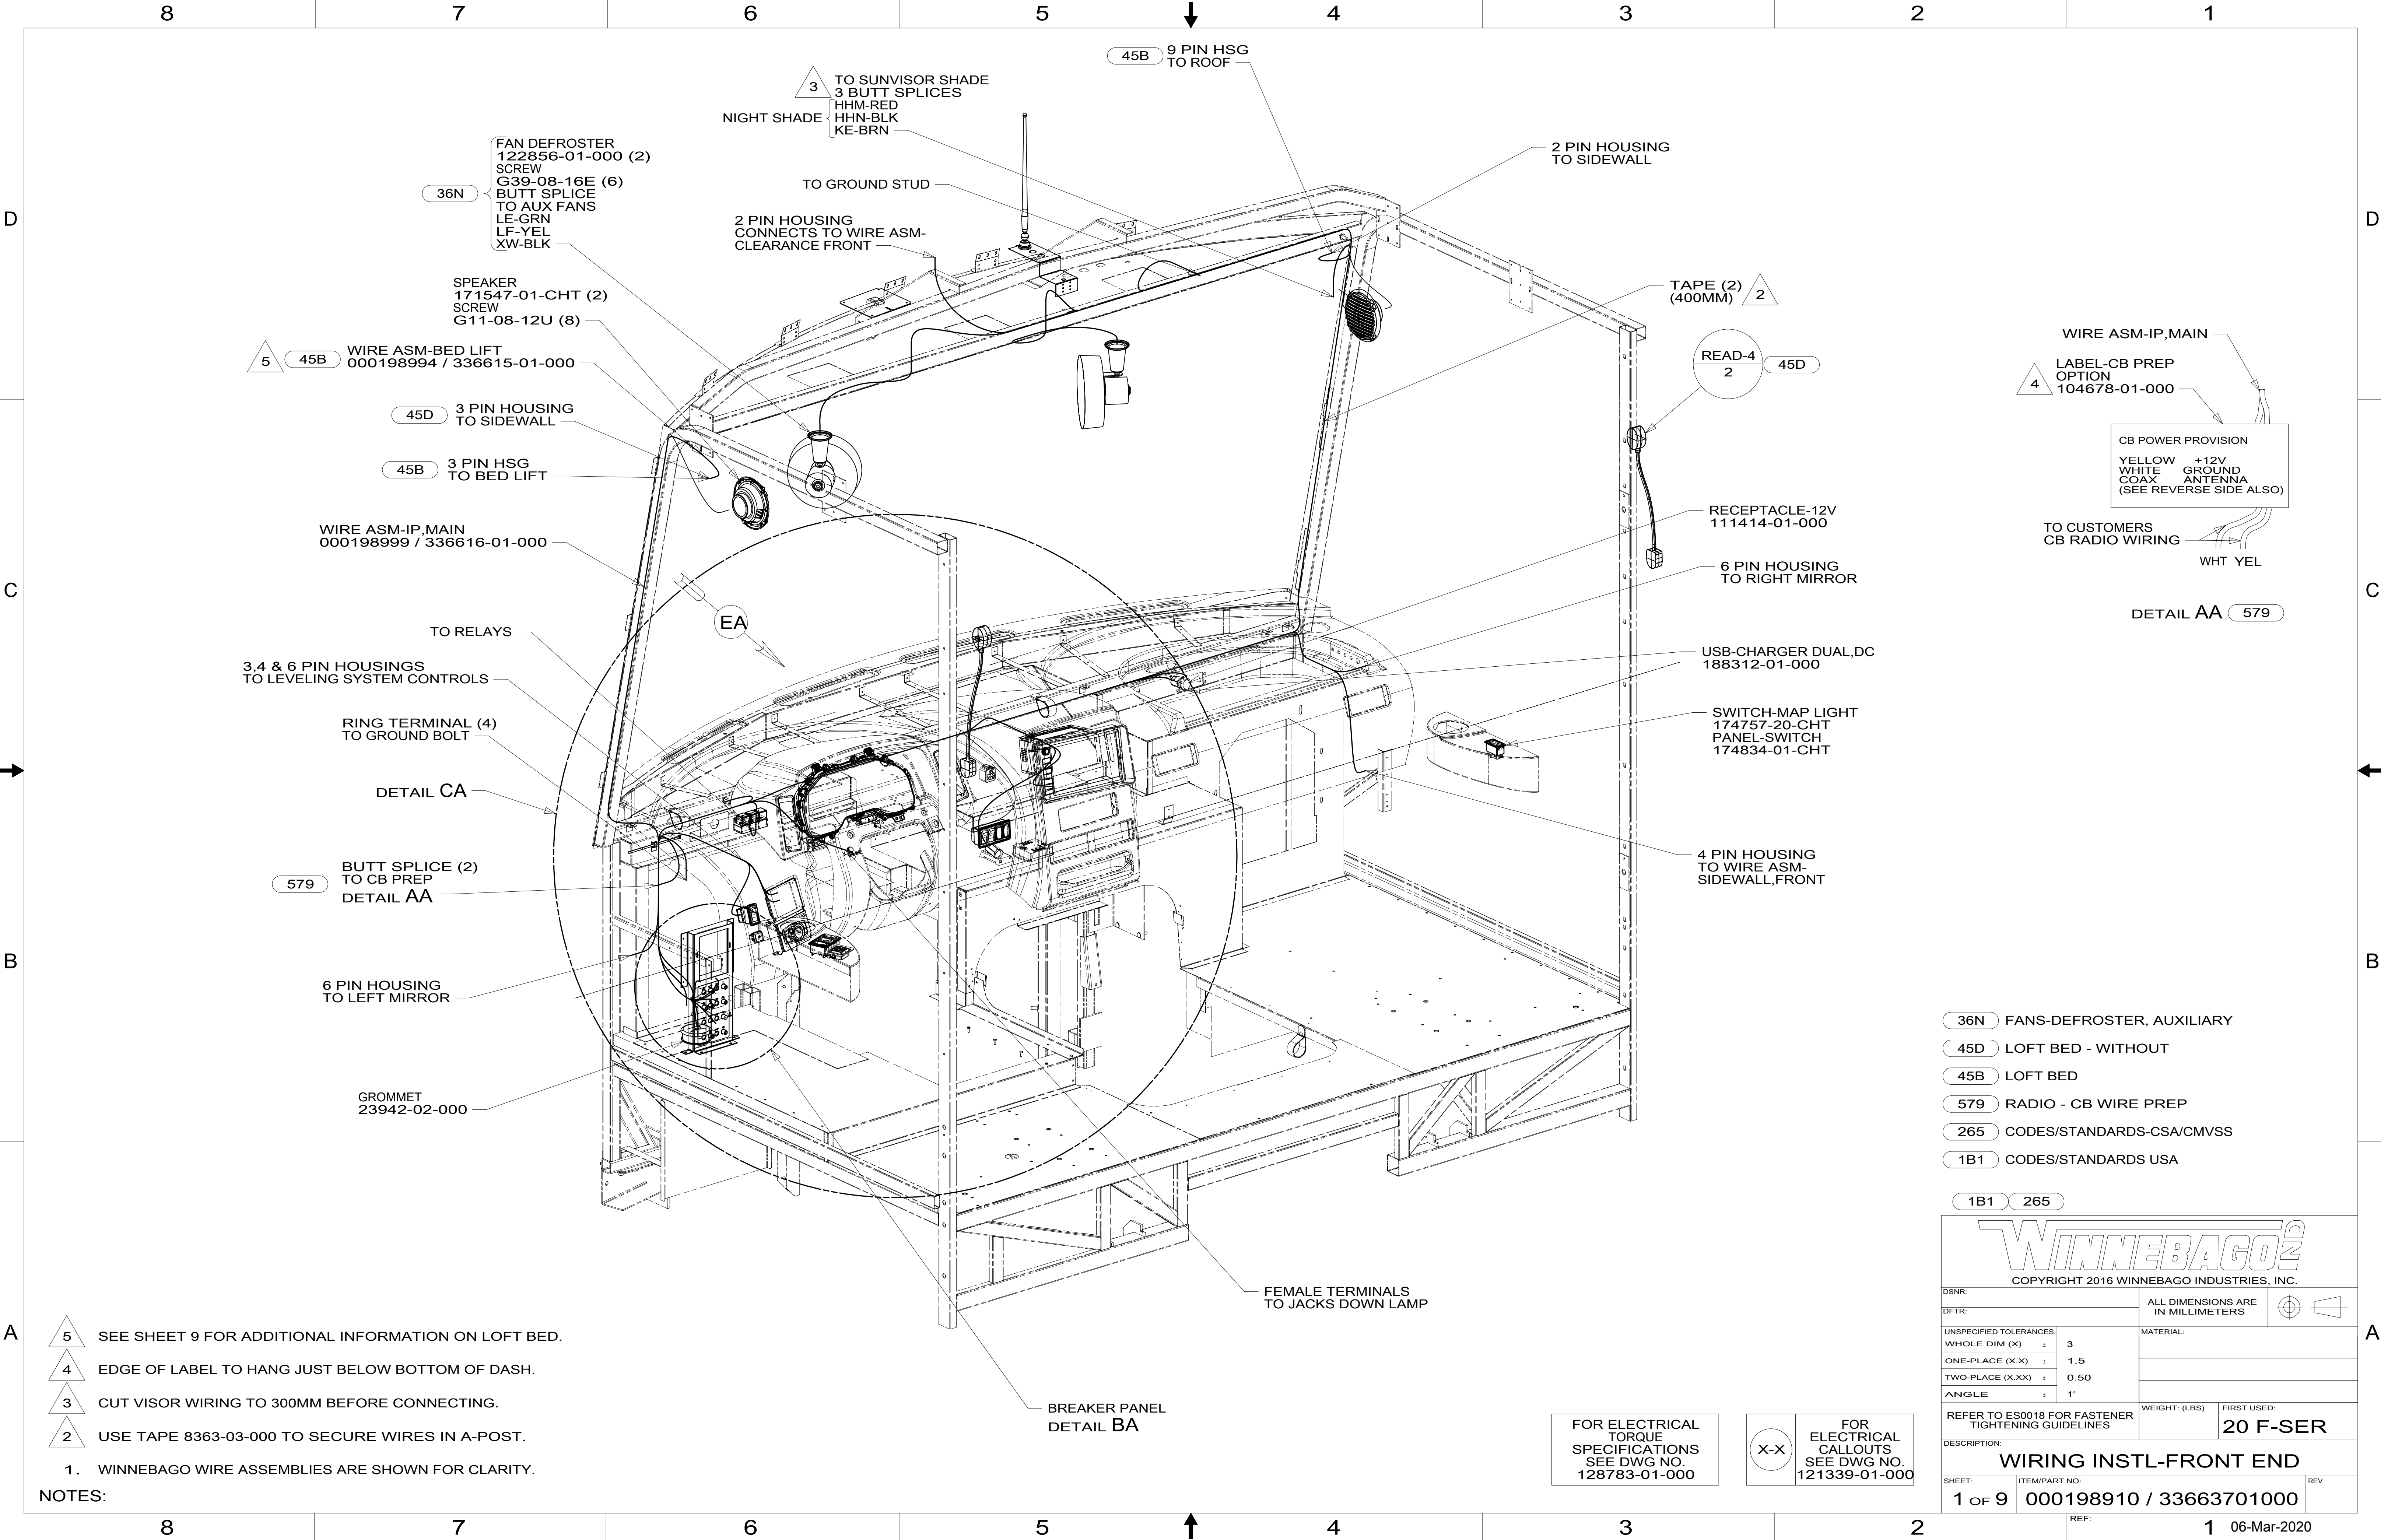

FAN DEFROSTER
122856-01-000 (2)
SCREW
G39-08-16E (6)
BUTT SPLICE
TO AUX FANS
LE-GRN
LF-YEL
XW-BLK

SPEAKER
171547-01-CHT (2)
SCREW
G11-08-12U (8)

5 45B WIRE ASM-BED LIFT
000198994 / 336615-01-000

45D 3 PIN HOUSING
TO SIDEWALL

45B 3 PIN HSG
TO BED LIFT

WIRE ASM-IP, MAIN
000198999 / 336616-01-000

TO RELAYS
3.4 & 6 PIN HOUSINGS
TO LEVELING SYSTEM CONTROLS

RING TERMINAL (4)
TO GROUND BOLT

DETAIL CA

579 BUTT SPLICE (2)
TO CB PREP
DETAIL AA

6 PIN HOUSING
TO LEFT MIRROR

GROMMET
23942-02-000

3 TO SUNVISOR SHADE
3 BUTT SPLICES
HHM-RED
HHN-BLK
KE-BRN

TO GROUND STUD

2 PIN HOUSING
CONNECTS TO WIRE ASM-
CLEARANCE FRONT

45B 9 PIN HSG
TO ROOF

2 PIN HOUSING
TO SIDEWALL

TAPE (2)
(400MM) 2

READ-4
2 45D


RECEPTACLE-12V
111414-01-000

6 PIN HOUSING
TO RIGHT MIRROR

USB-CHARGER DUAL,DC
188312-01-000

SWITCH-MAP LIGHT
174757-20-CHT
PANEL-SWITCH
174834-01-CHT

4 PIN HOUSING
TO WIRE ASM-
SIDEWALL, FRONT

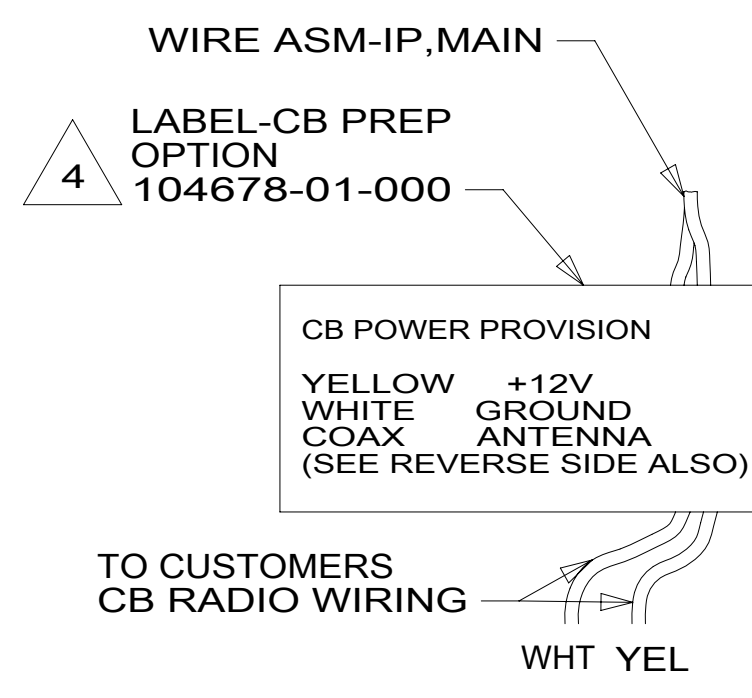

DETAIL AA 579

- 36N FANS-DEFROSTER, AUXILIARY
- 45D LOFT BED - WITHOUT
- 45B LOFT BED
- 579 RADIO - CB WIRE PREP
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265

DSNR:

DFTR:

UNSPECIFIED TOLERANCES:

WHOLE DIM (X)	± 3
ONE-PLACE (X.X)	± 1.5
TWO-PLACE (X.XX)	± 0.50
ANGLE	± 1°

REFER TO ES0018 FOR FASTENER
TIGHTENING GUIDELINES

DESCRIPTION:

1 OF 9 000198910 / 33663701000

ALL DIMENSIONS ARE
IN MILLIMETERS

MATERIAL:

WEIGHT: (LBS)

FIRST USED:

20 F-SER


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000


REF: 1 06-Mar-2020

- 5 SEE SHEET 9 FOR ADDITIONAL INFORMATION ON LOFT BED.
- 4 EDGE OF LABEL TO HANG JUST BELOW BOTTOM OF DASH.
- 3 CUT VISOR WIRING TO 300MM BEFORE CONNECTING.
- 2 USE TAPE 8363-03-000 TO SECURE WIRES IN A-POST.

NOTES:
1. WINNEBAGO WIRE ASSEMBLIES ARE SHOWN FOR CLARITY.

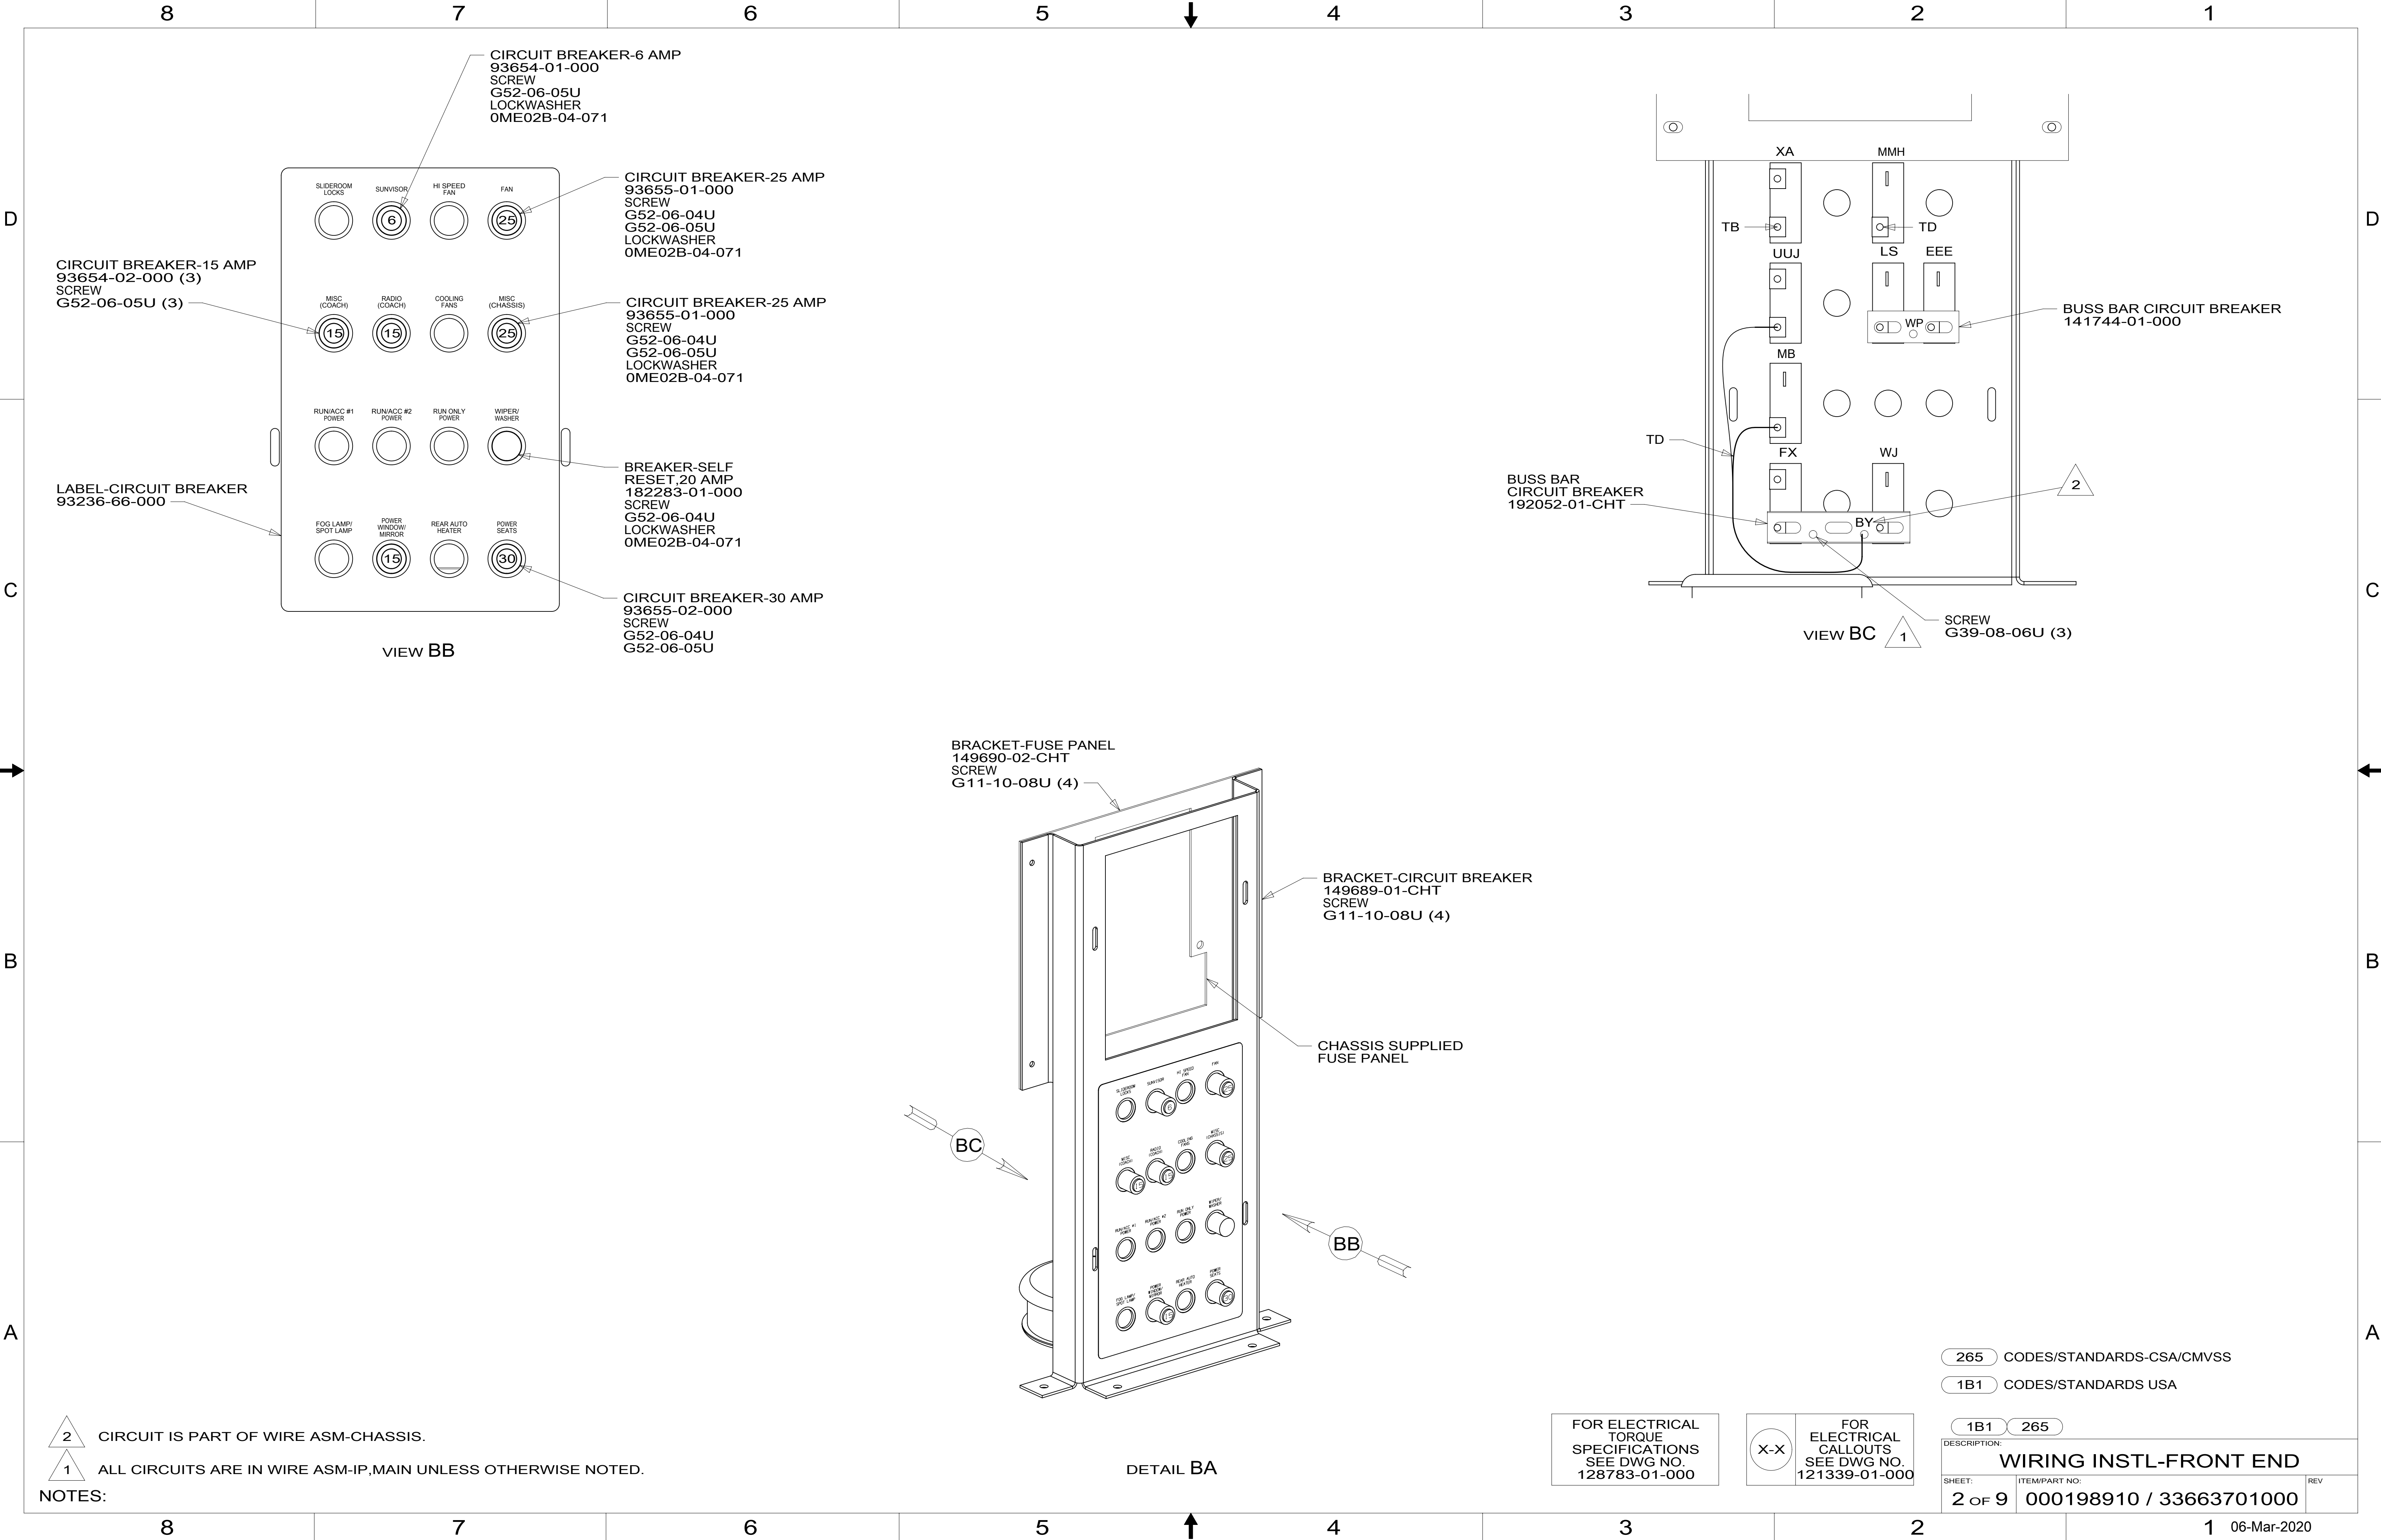

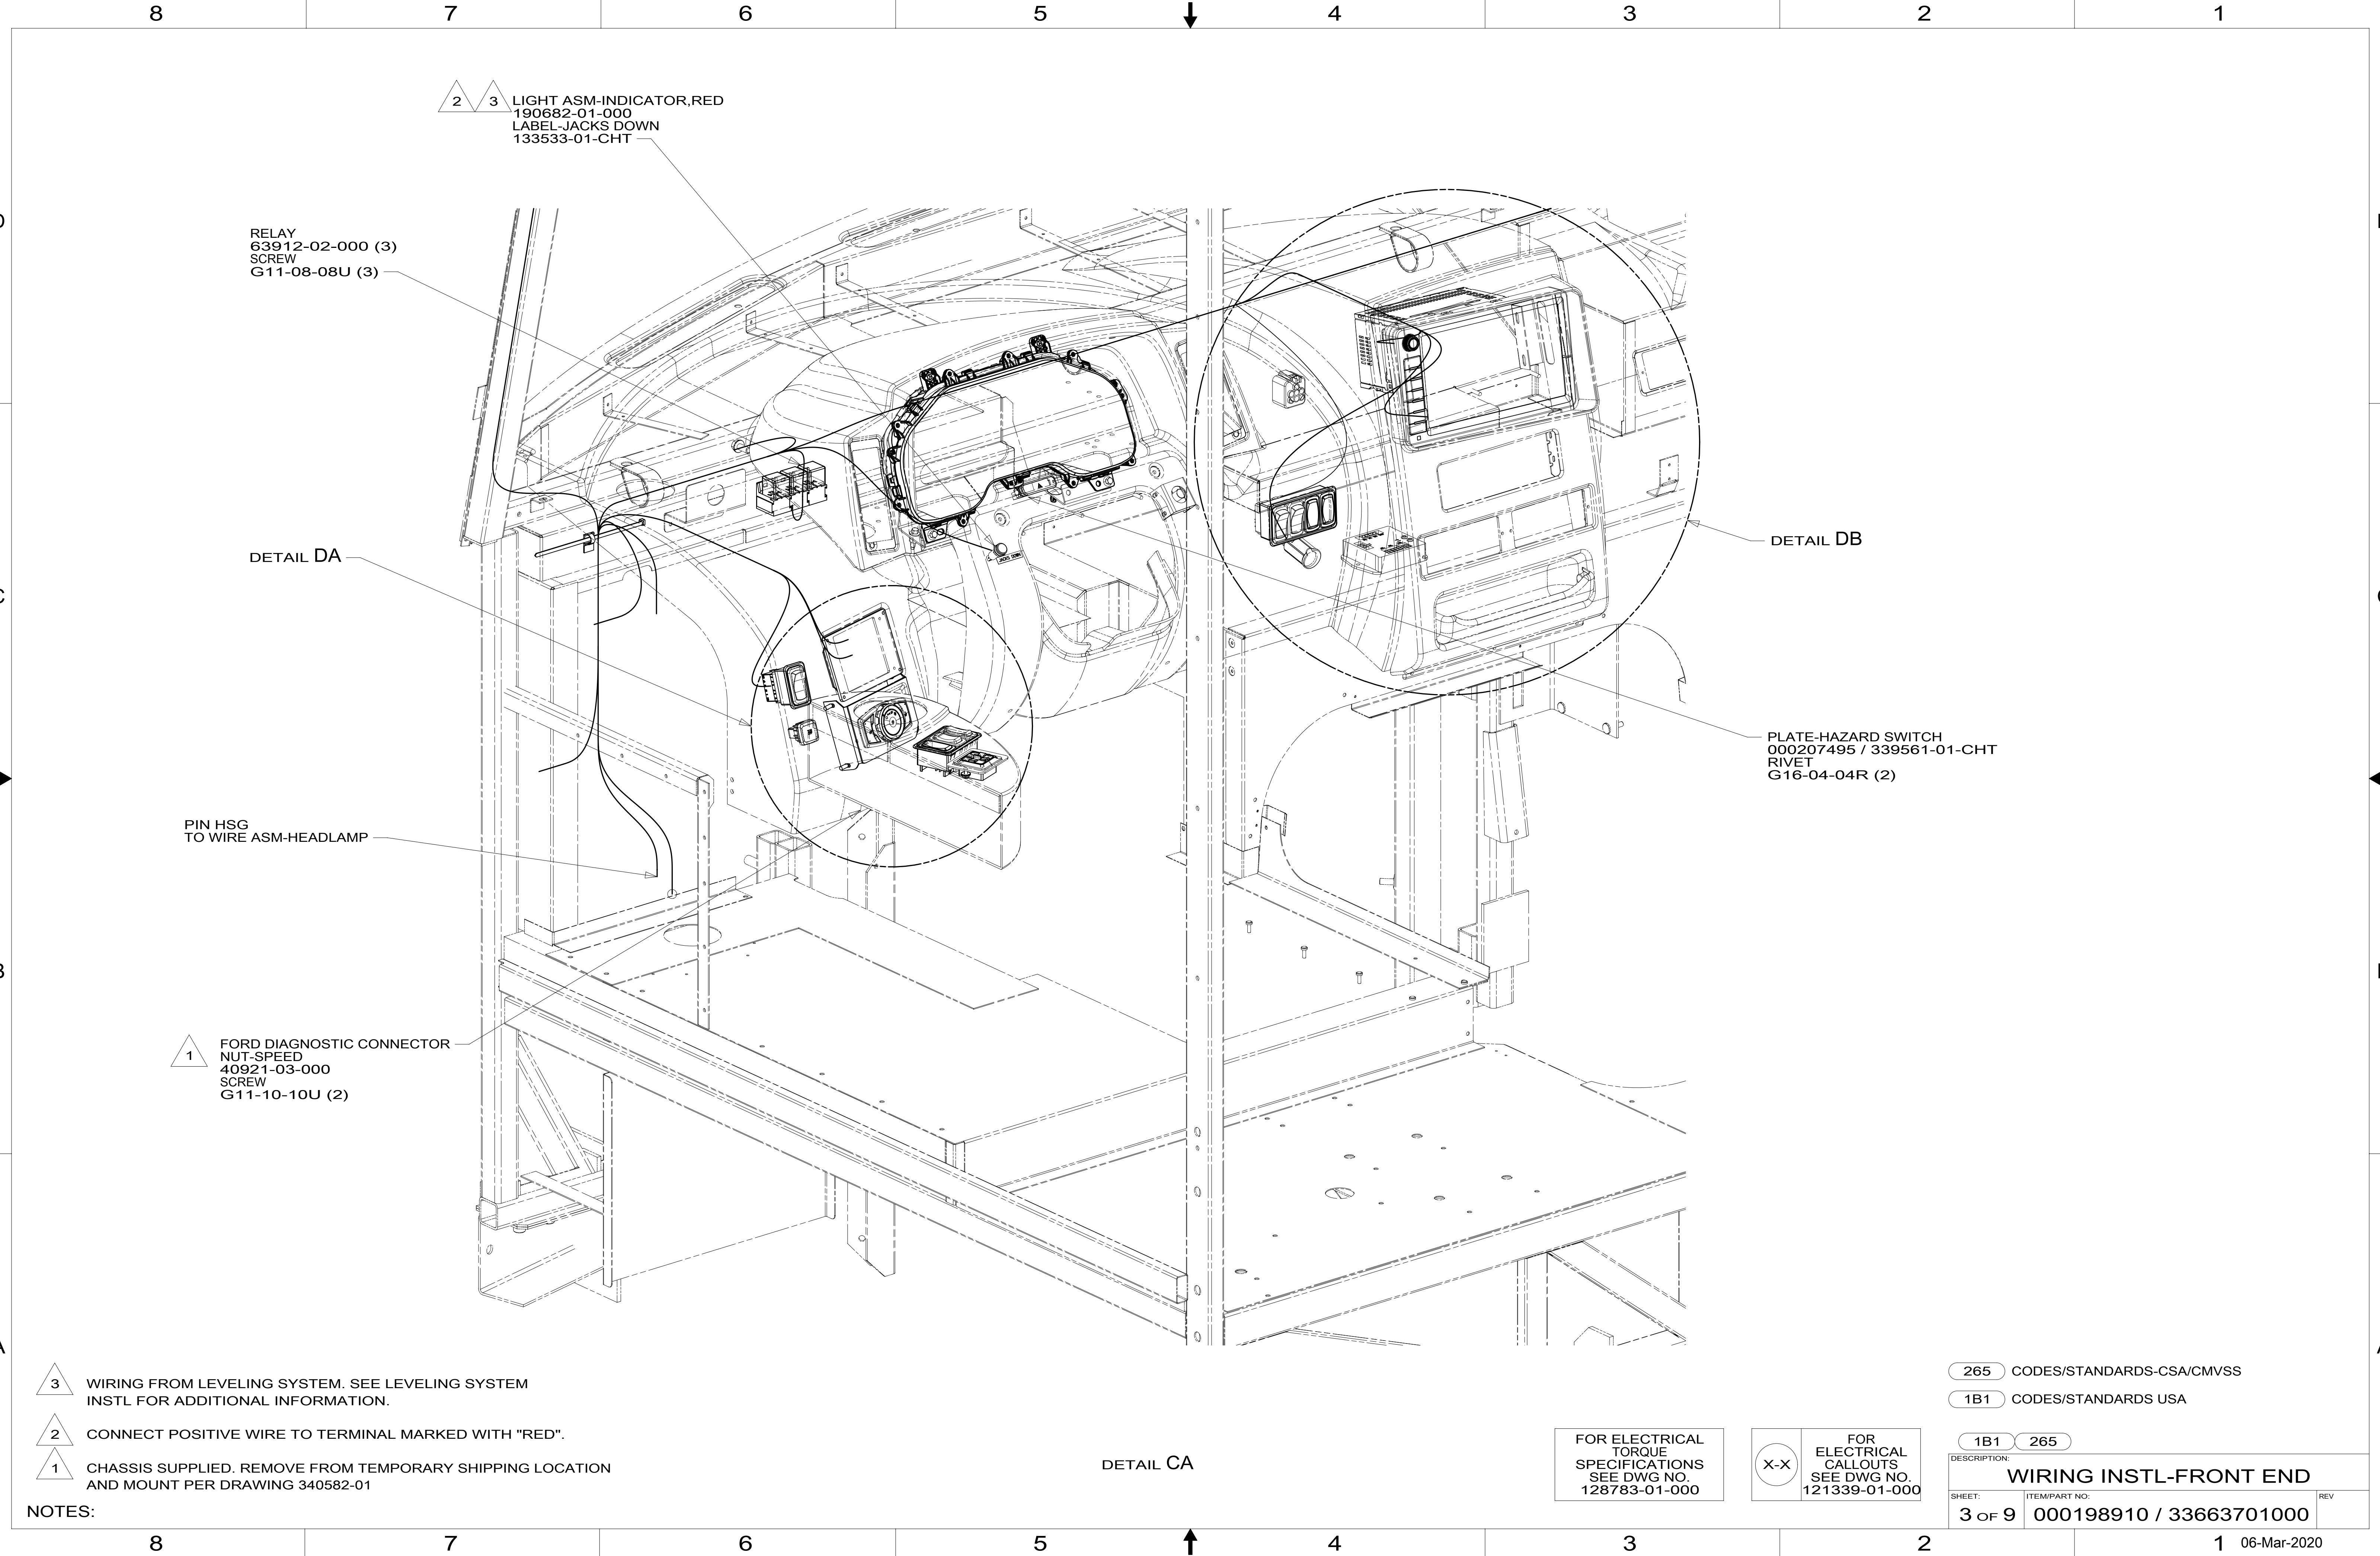

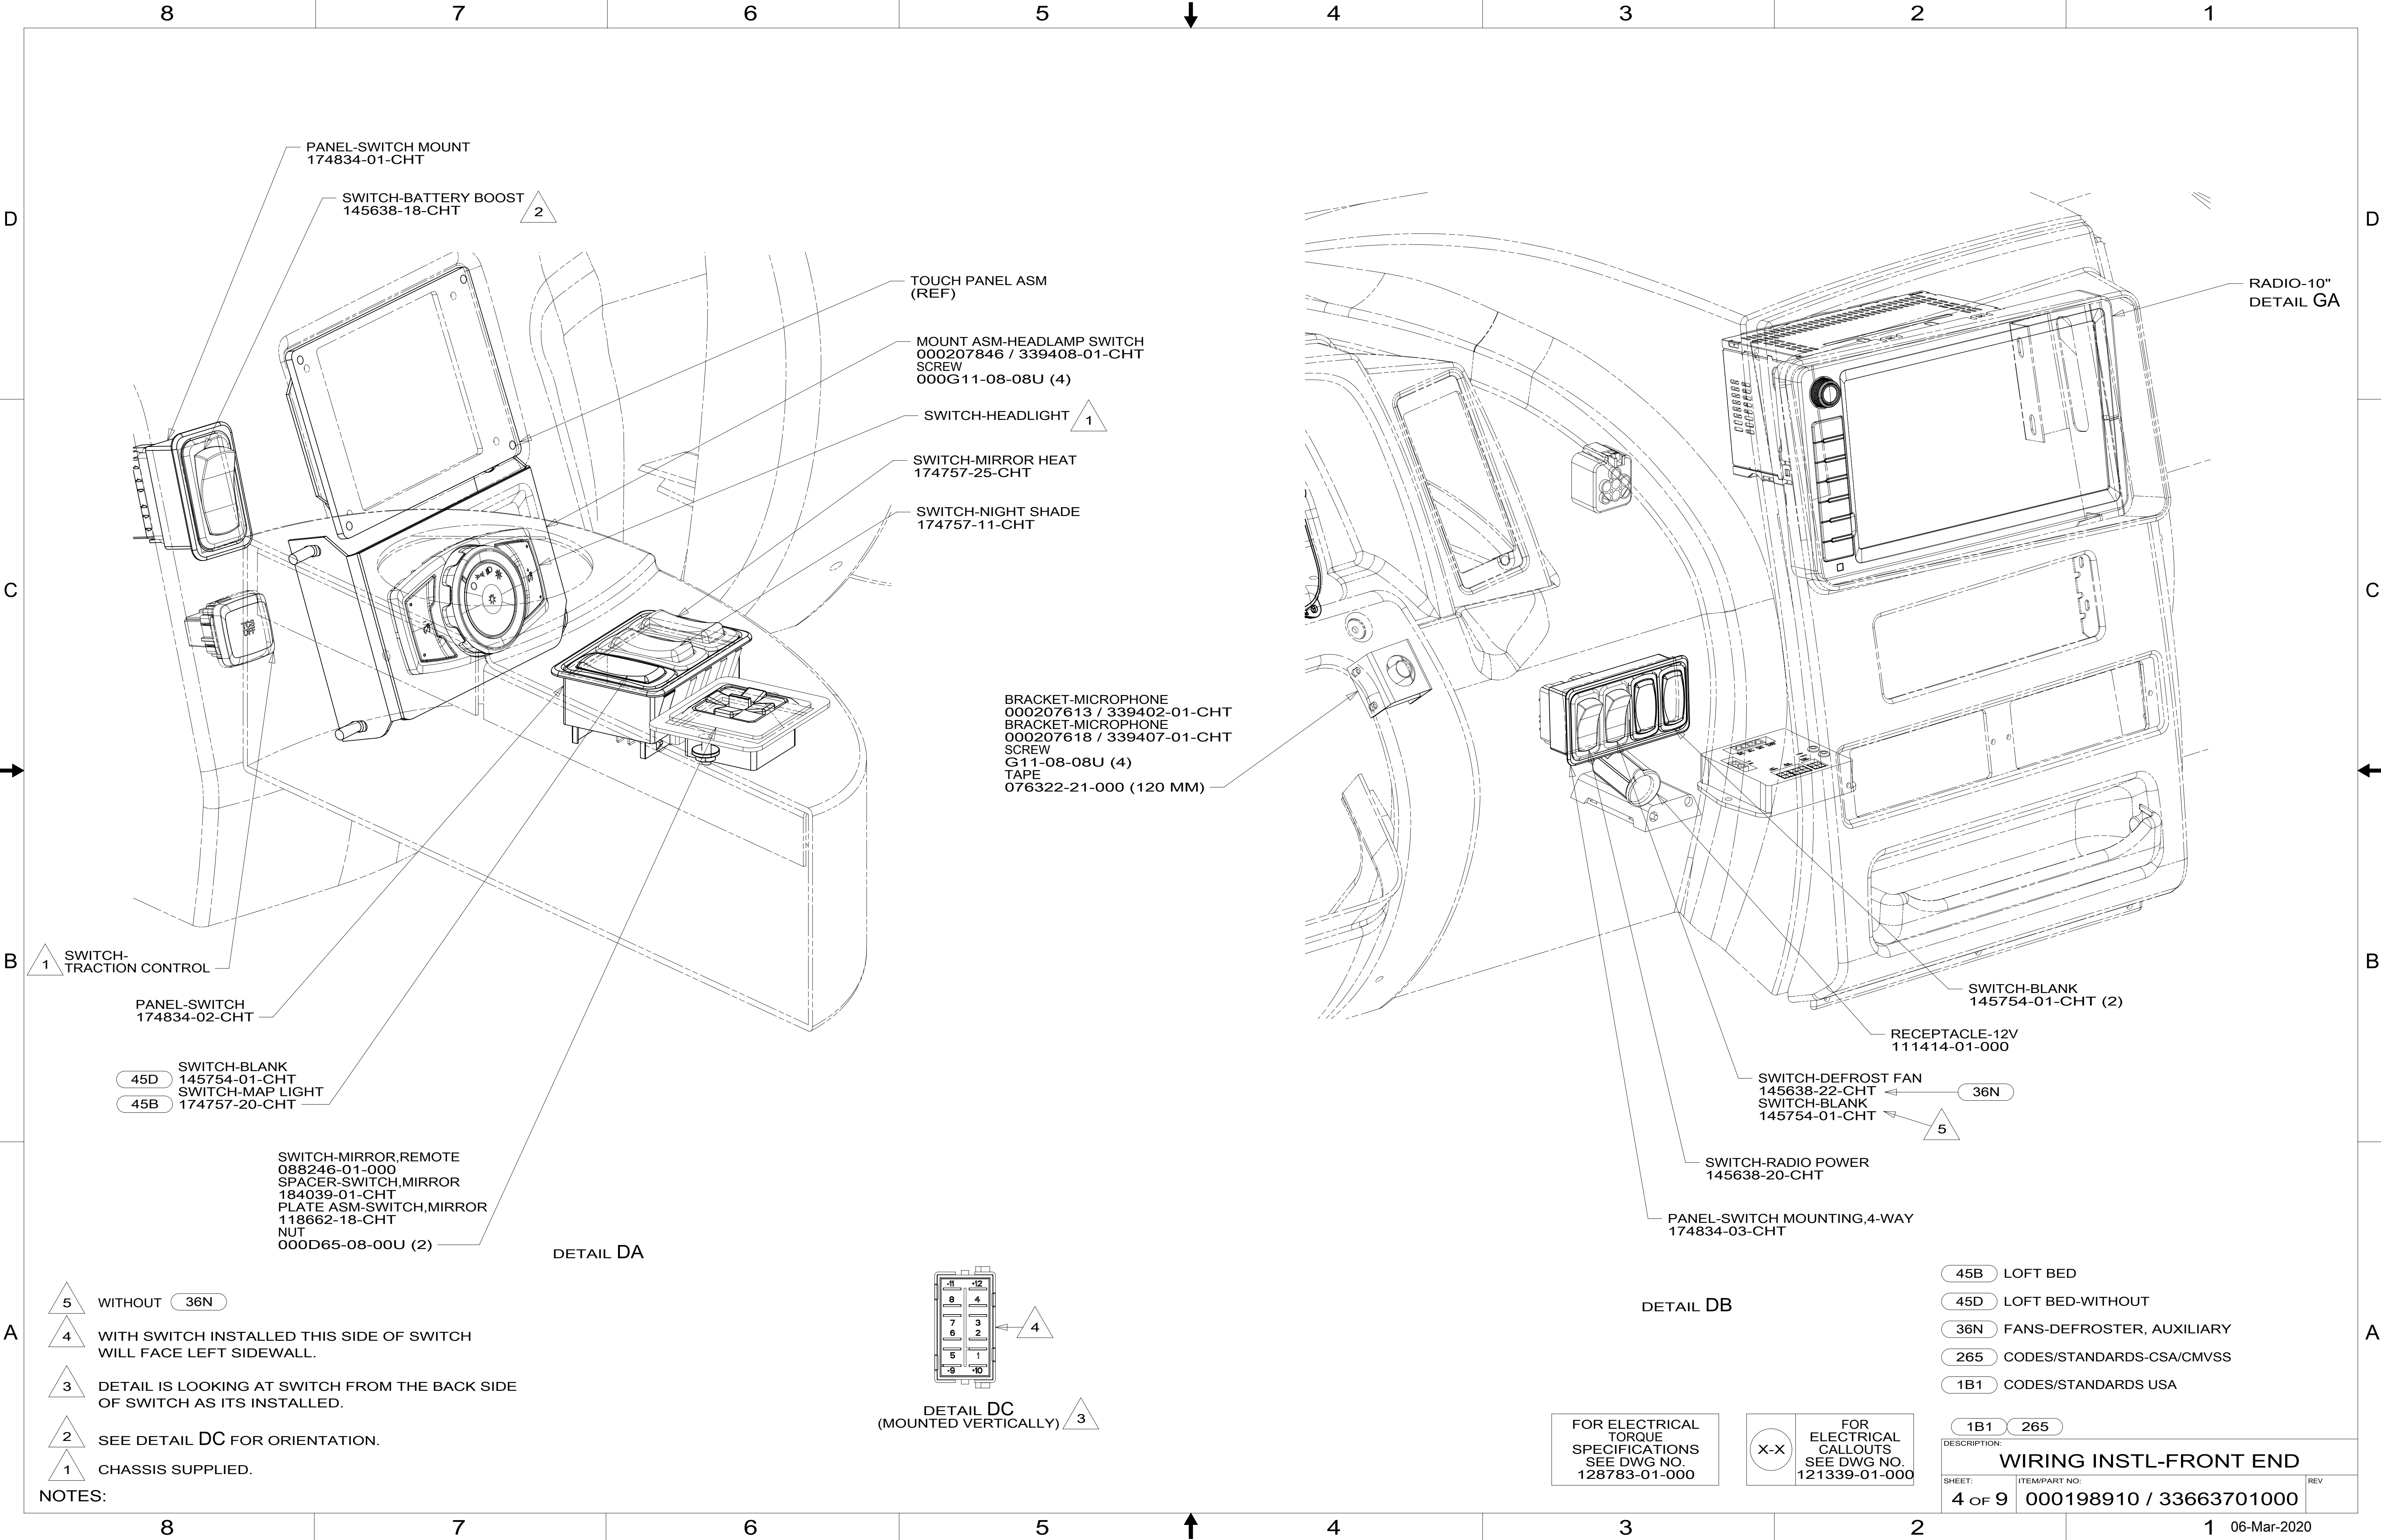

PANEL-SWITCH MOUNT
174834-01-CHT

SWITCH-BATTERY BOOST
145638-18-CHT

TOUCH PANEL ASM
(REF)

MOUNT ASM-HEADLAMP SWITCH
000207846 / 339408-01-CHT
SCREW
000G11-08-08U (4)

SWITCH-HEADLIGHT

SWITCH-MIRROR HEAT
174757-25-CHT

SWITCH-NIGHT SHADE
174757-11-CHT

BRACKET-MICROPHONE
000207613 / 339402-01-CHT
BRACKET-MICROPHONE
000207618 / 339407-01-CHT
SCREW
G11-08-08U (4)
TAPE
076322-21-000 (120 MM)

RADIO-10"
DETAIL GA

SWITCH-
TRACTION CONTROL

PANEL-SWITCH
174834-02-CHT

SWITCH-BLANK
145754-01-CHT
SWITCH-MAP LIGHT
174757-20-CHT

SWITCH-MIRROR,REMOTE
088246-01-000
SPACER-SWITCH,MIRROR
184039-01-CHT
PLATE ASM-SWITCH,MIRROR
118662-18-CHT
NUT
000D65-08-00U (2)

DETAIL DA

SWITCH-BLANK
145754-01-CHT (2)

RECEPTACLE-12V
111414-01-000

SWITCH-DEFROST FAN
145638-22-CHT
SWITCH-BLANK
145754-01-CHT

SWITCH-RADIO POWER
145638-20-CHT

PANEL-SWITCH MOUNTING,4-WAY
174834-03-CHT

LOFT BED

LOFT BED-WITHOUT

FANS-DEFROSTER, AUXILIARY

CODES/STANDARDS-CSA/CMVSS

CODES/STANDARDS USA

1B1 265

DESCRIPTION:

WIRING INSTL-FRONT END

SHEET:

4 OF 9

ITEM/PART NO:

000198910 / 33663701000

REV

06-Mar-2020

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

WITHOUT

WITH SWITCH INSTALLED THIS SIDE OF SWITCH
WILL FACE LEFT SIDEWALL.


DETAIL IS LOOKING AT SWITCH FROM THE BACK SIDE
OF SWITCH AS ITS INSTALLED.


SEE DETAIL DC FOR ORIENTATION.


CHASSIS SUPPLIED.


DETAIL DC
(MOUNTED VERTICALLY)

DETAIL DB

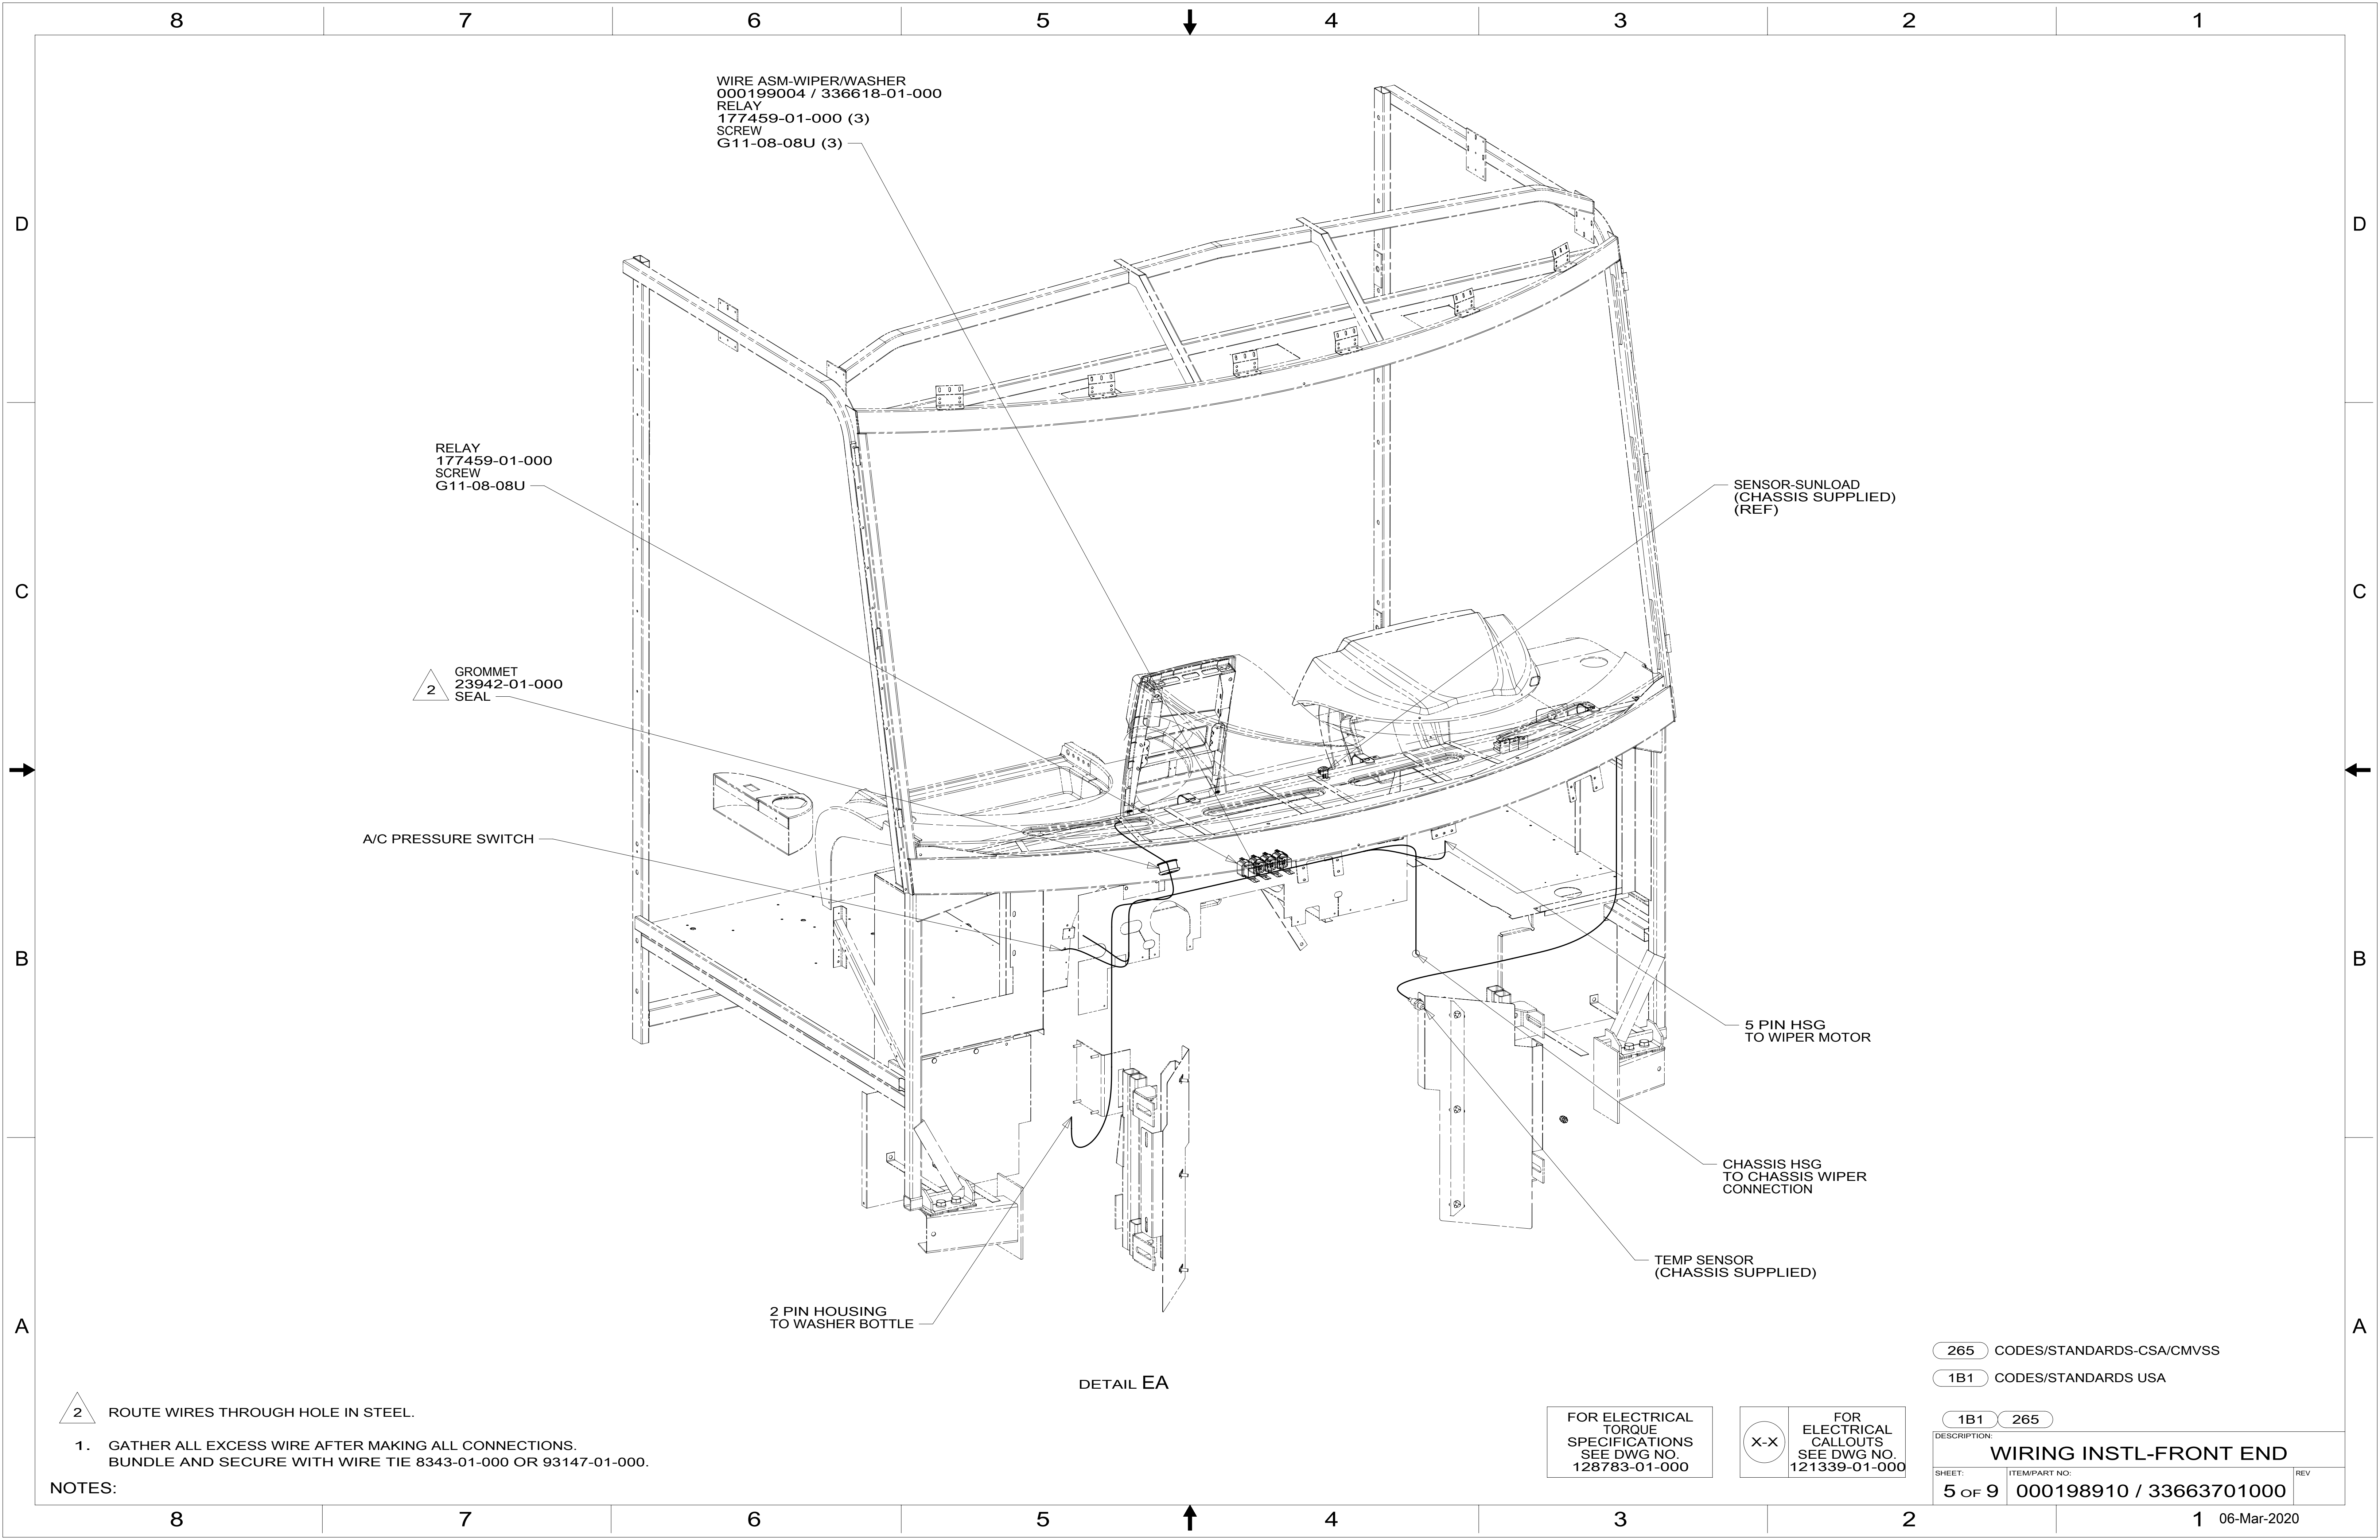

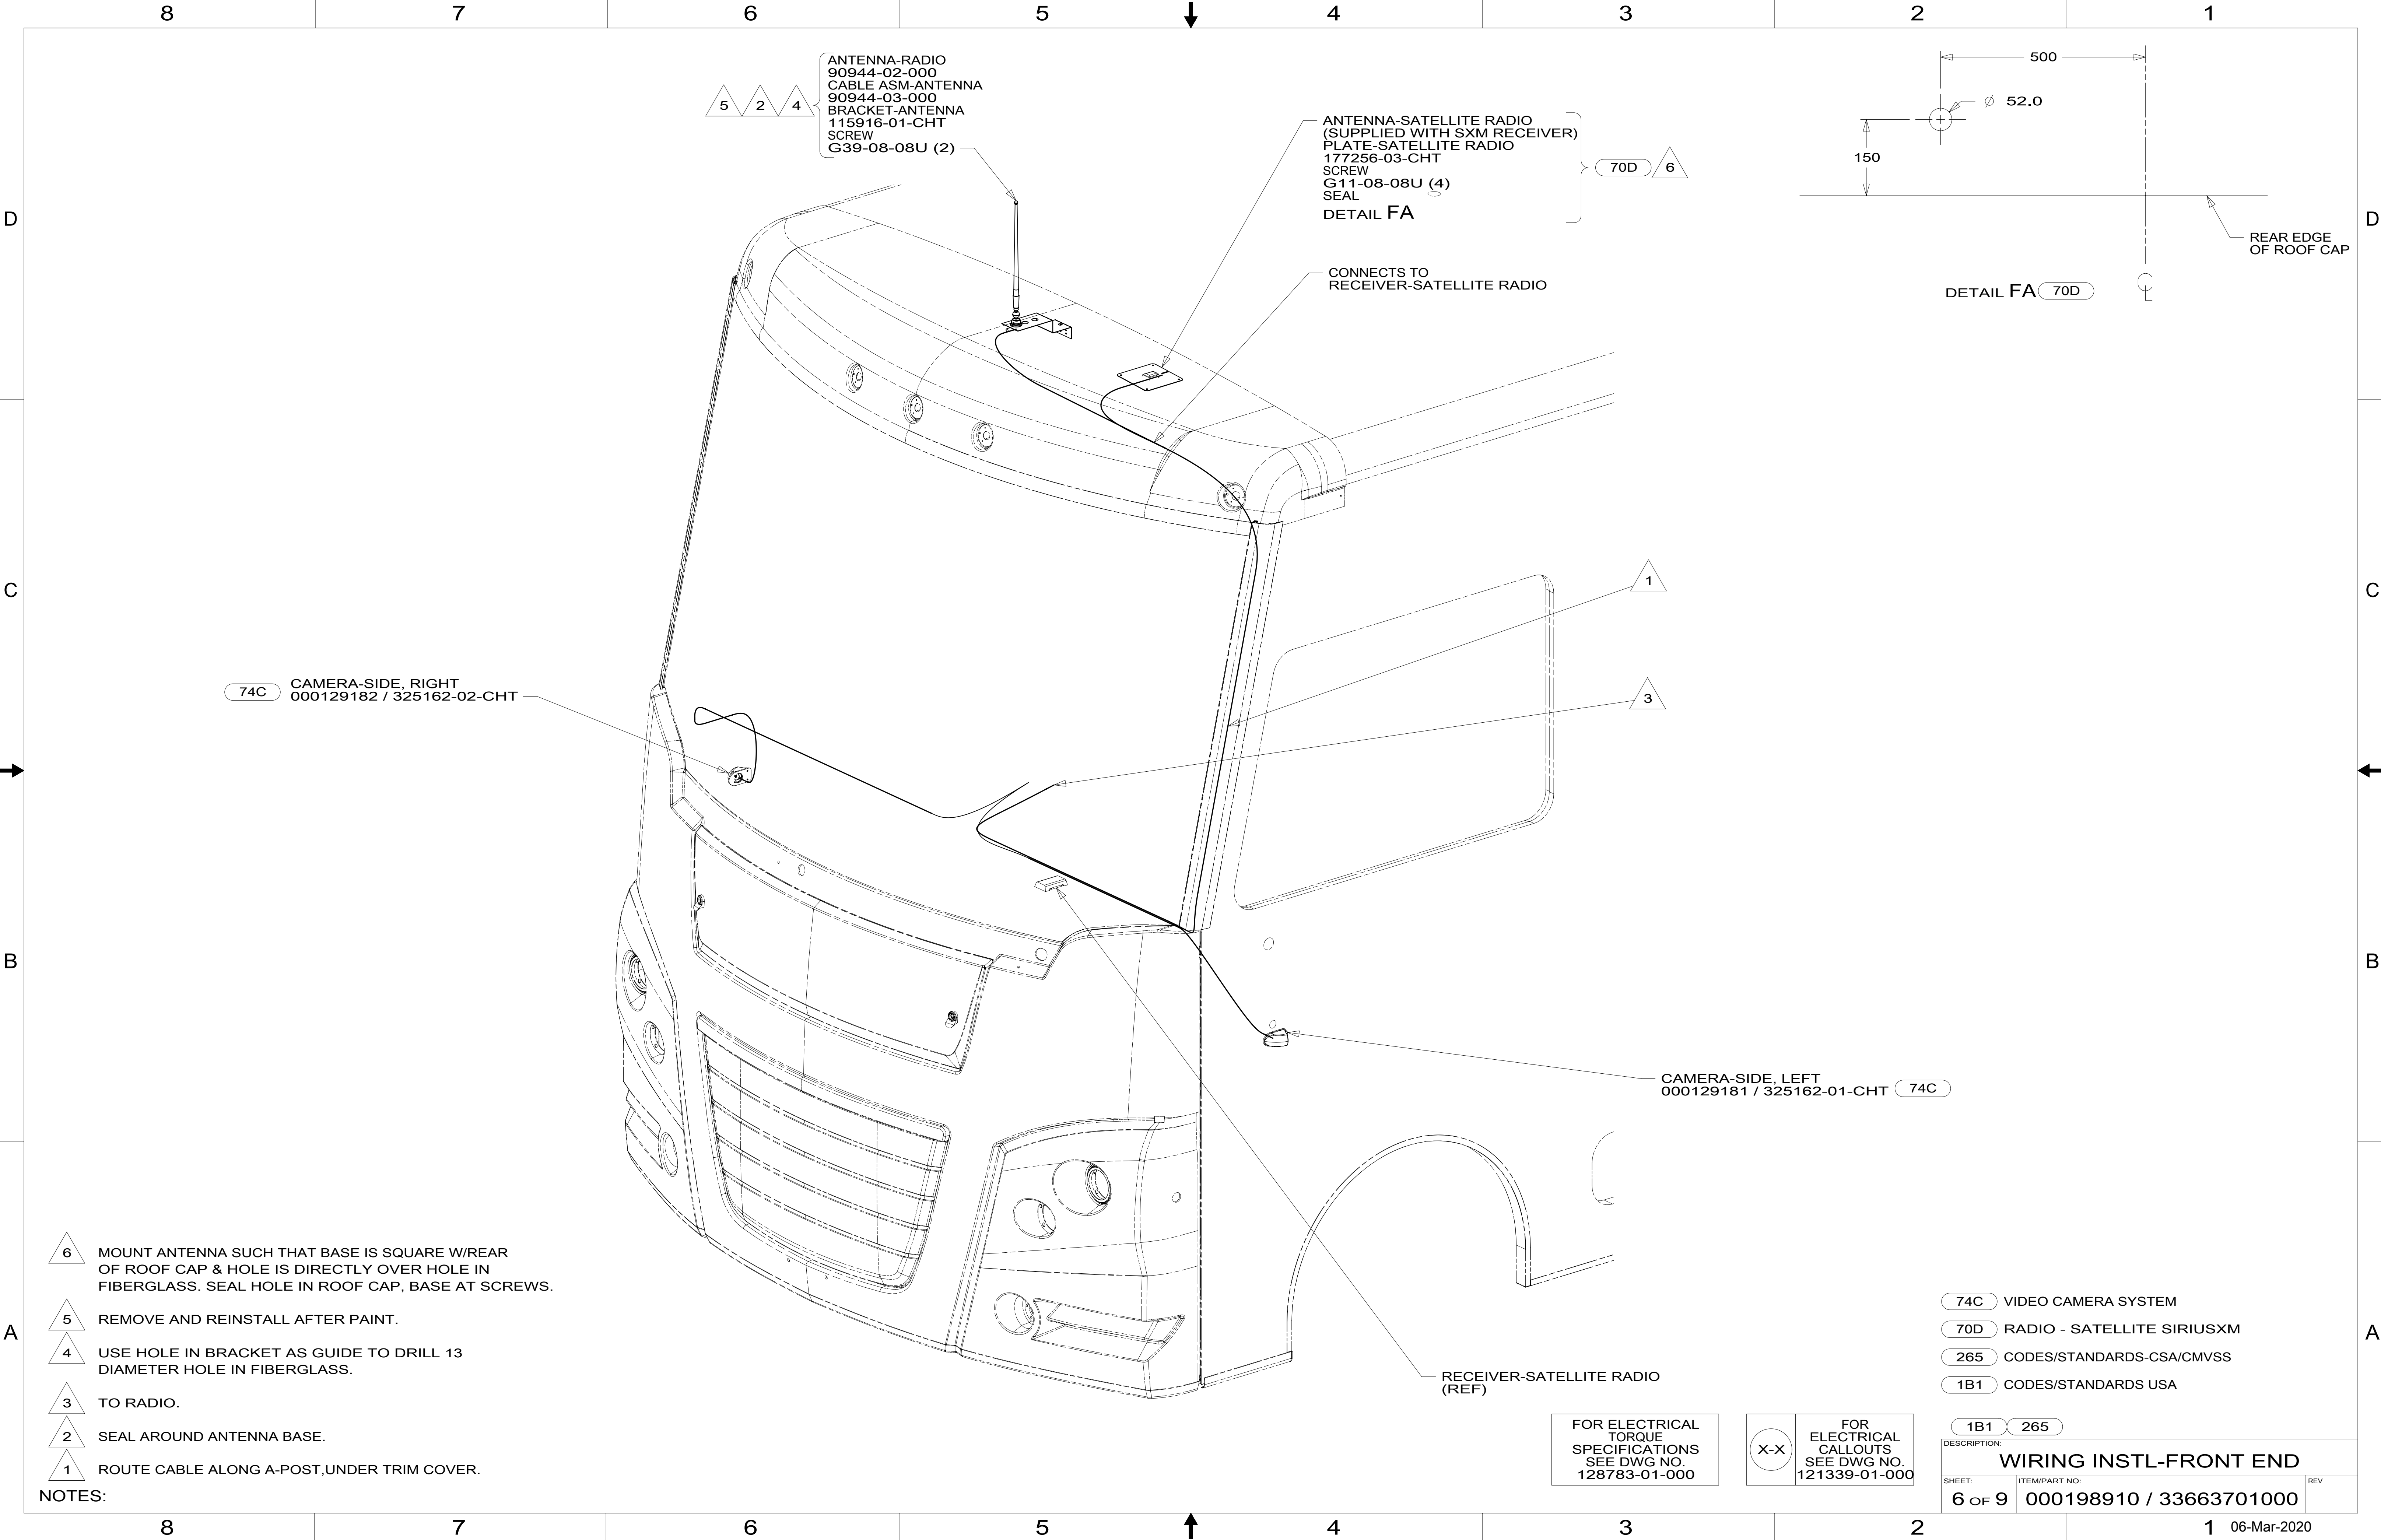

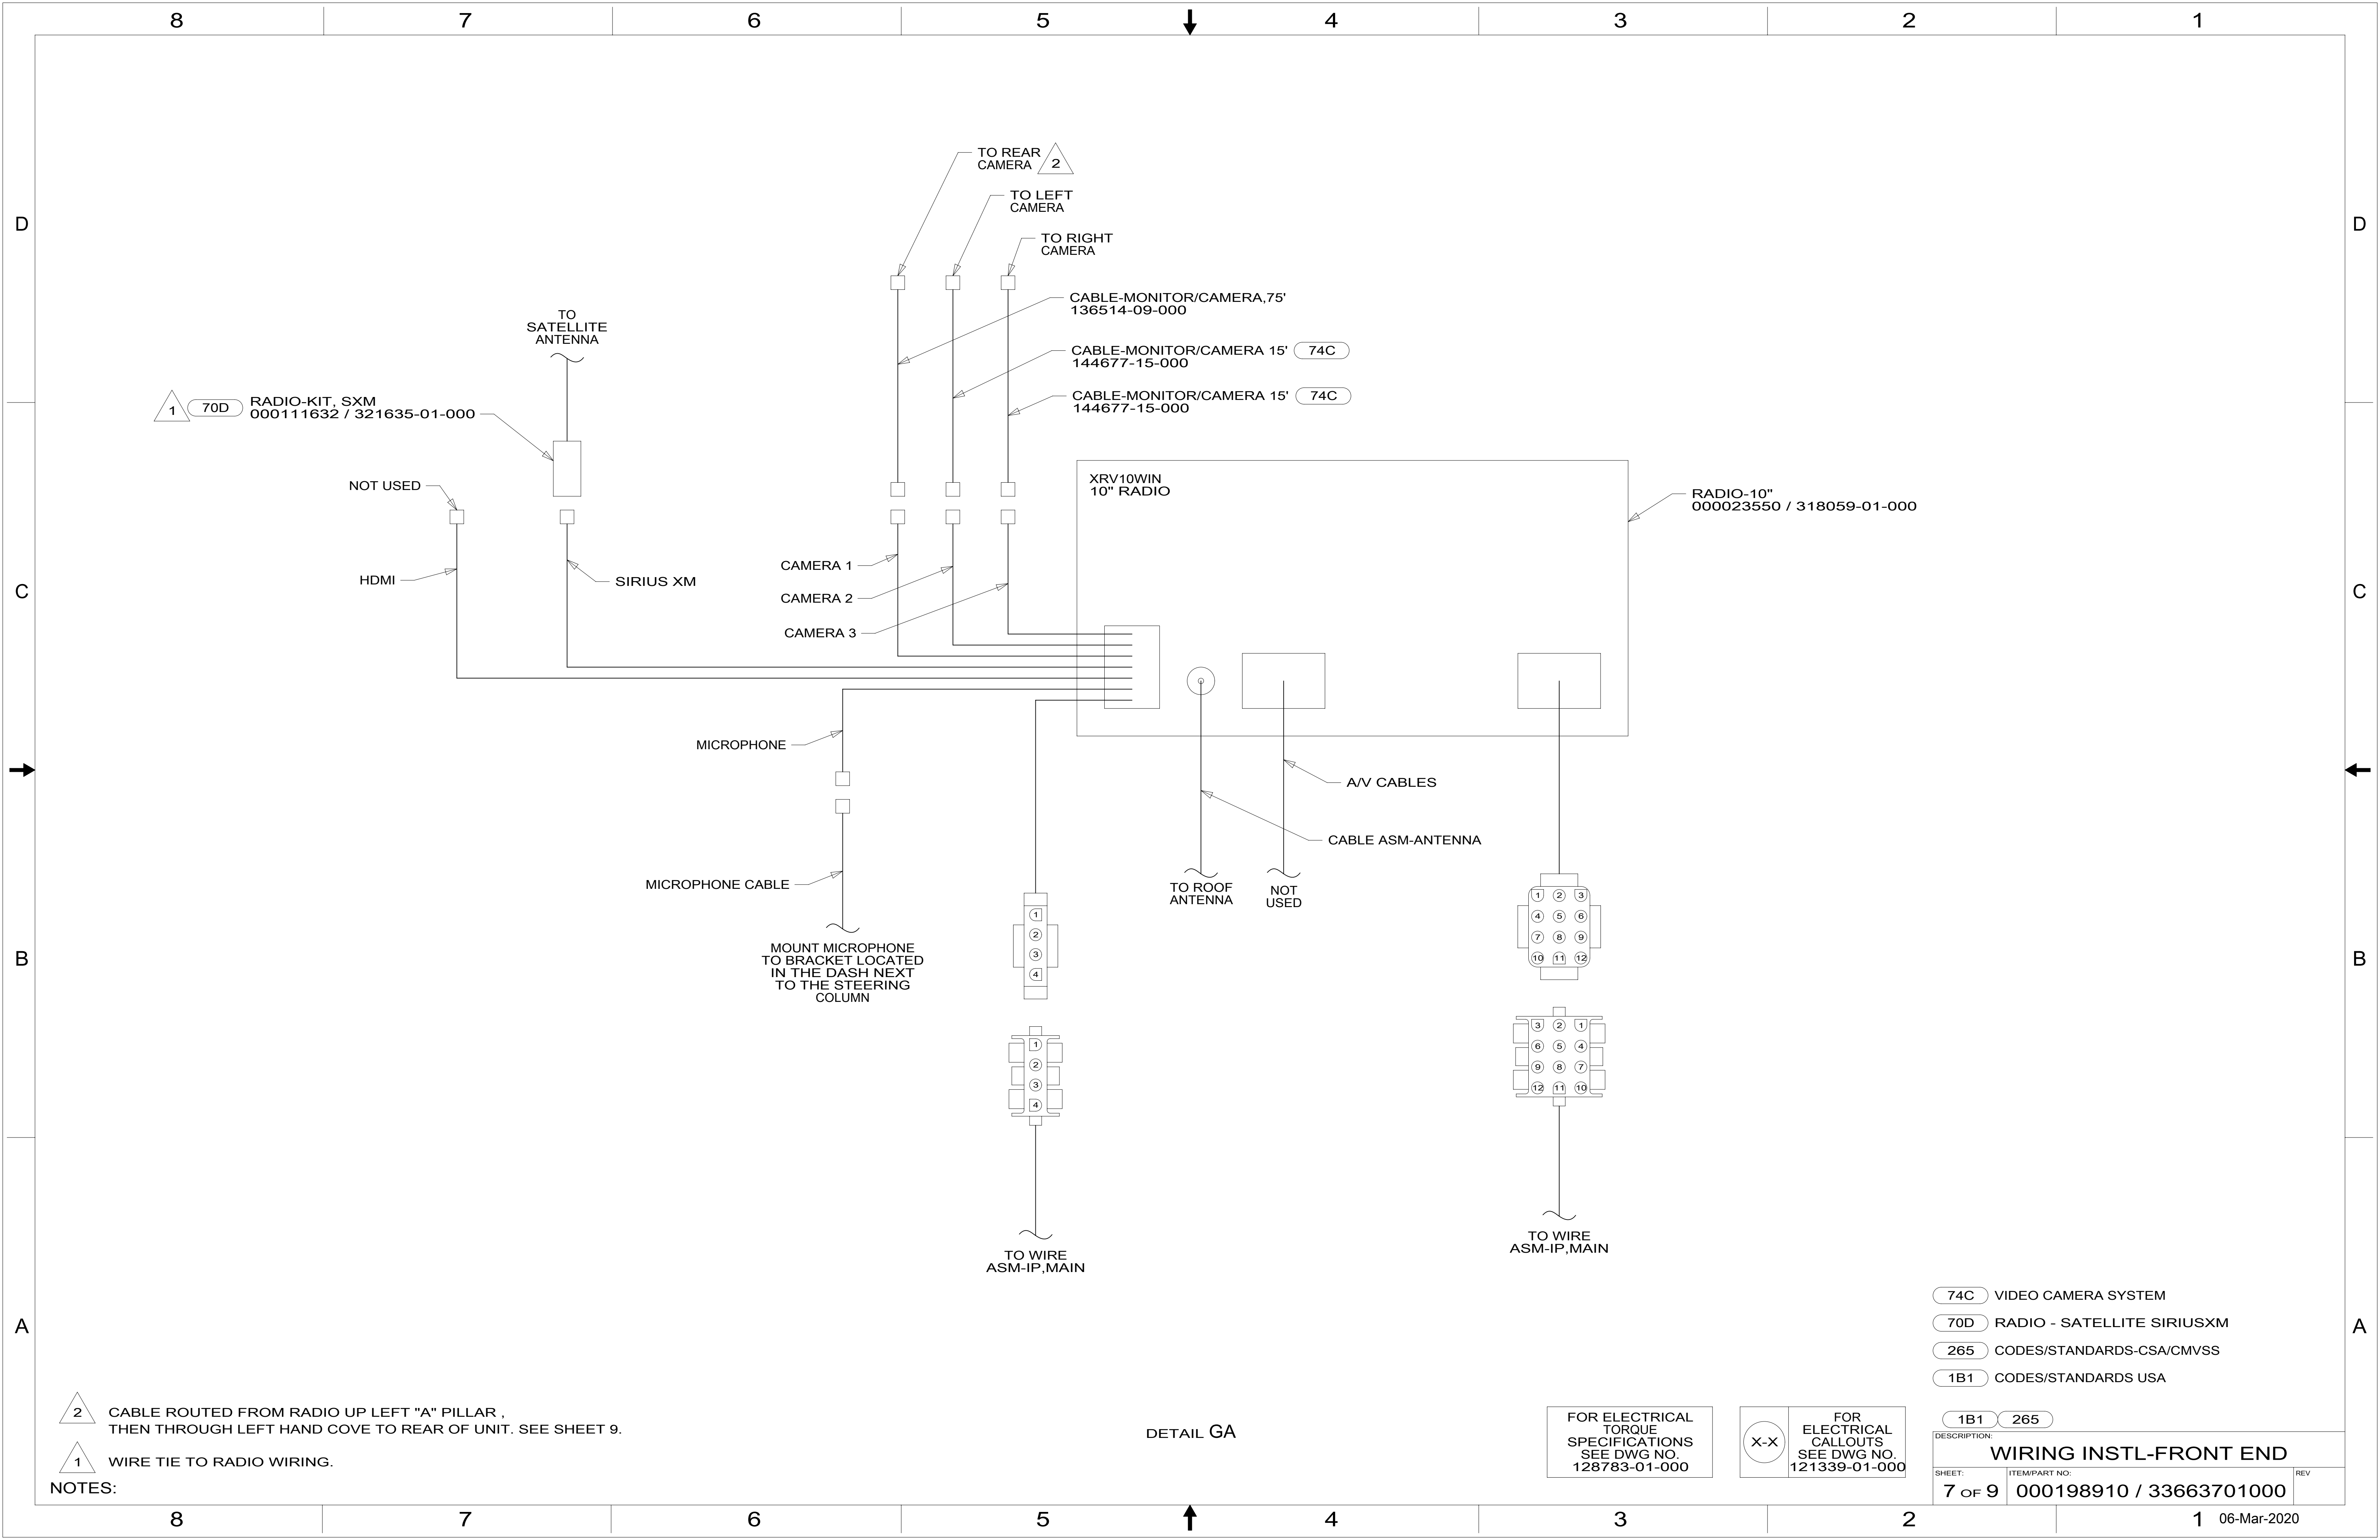

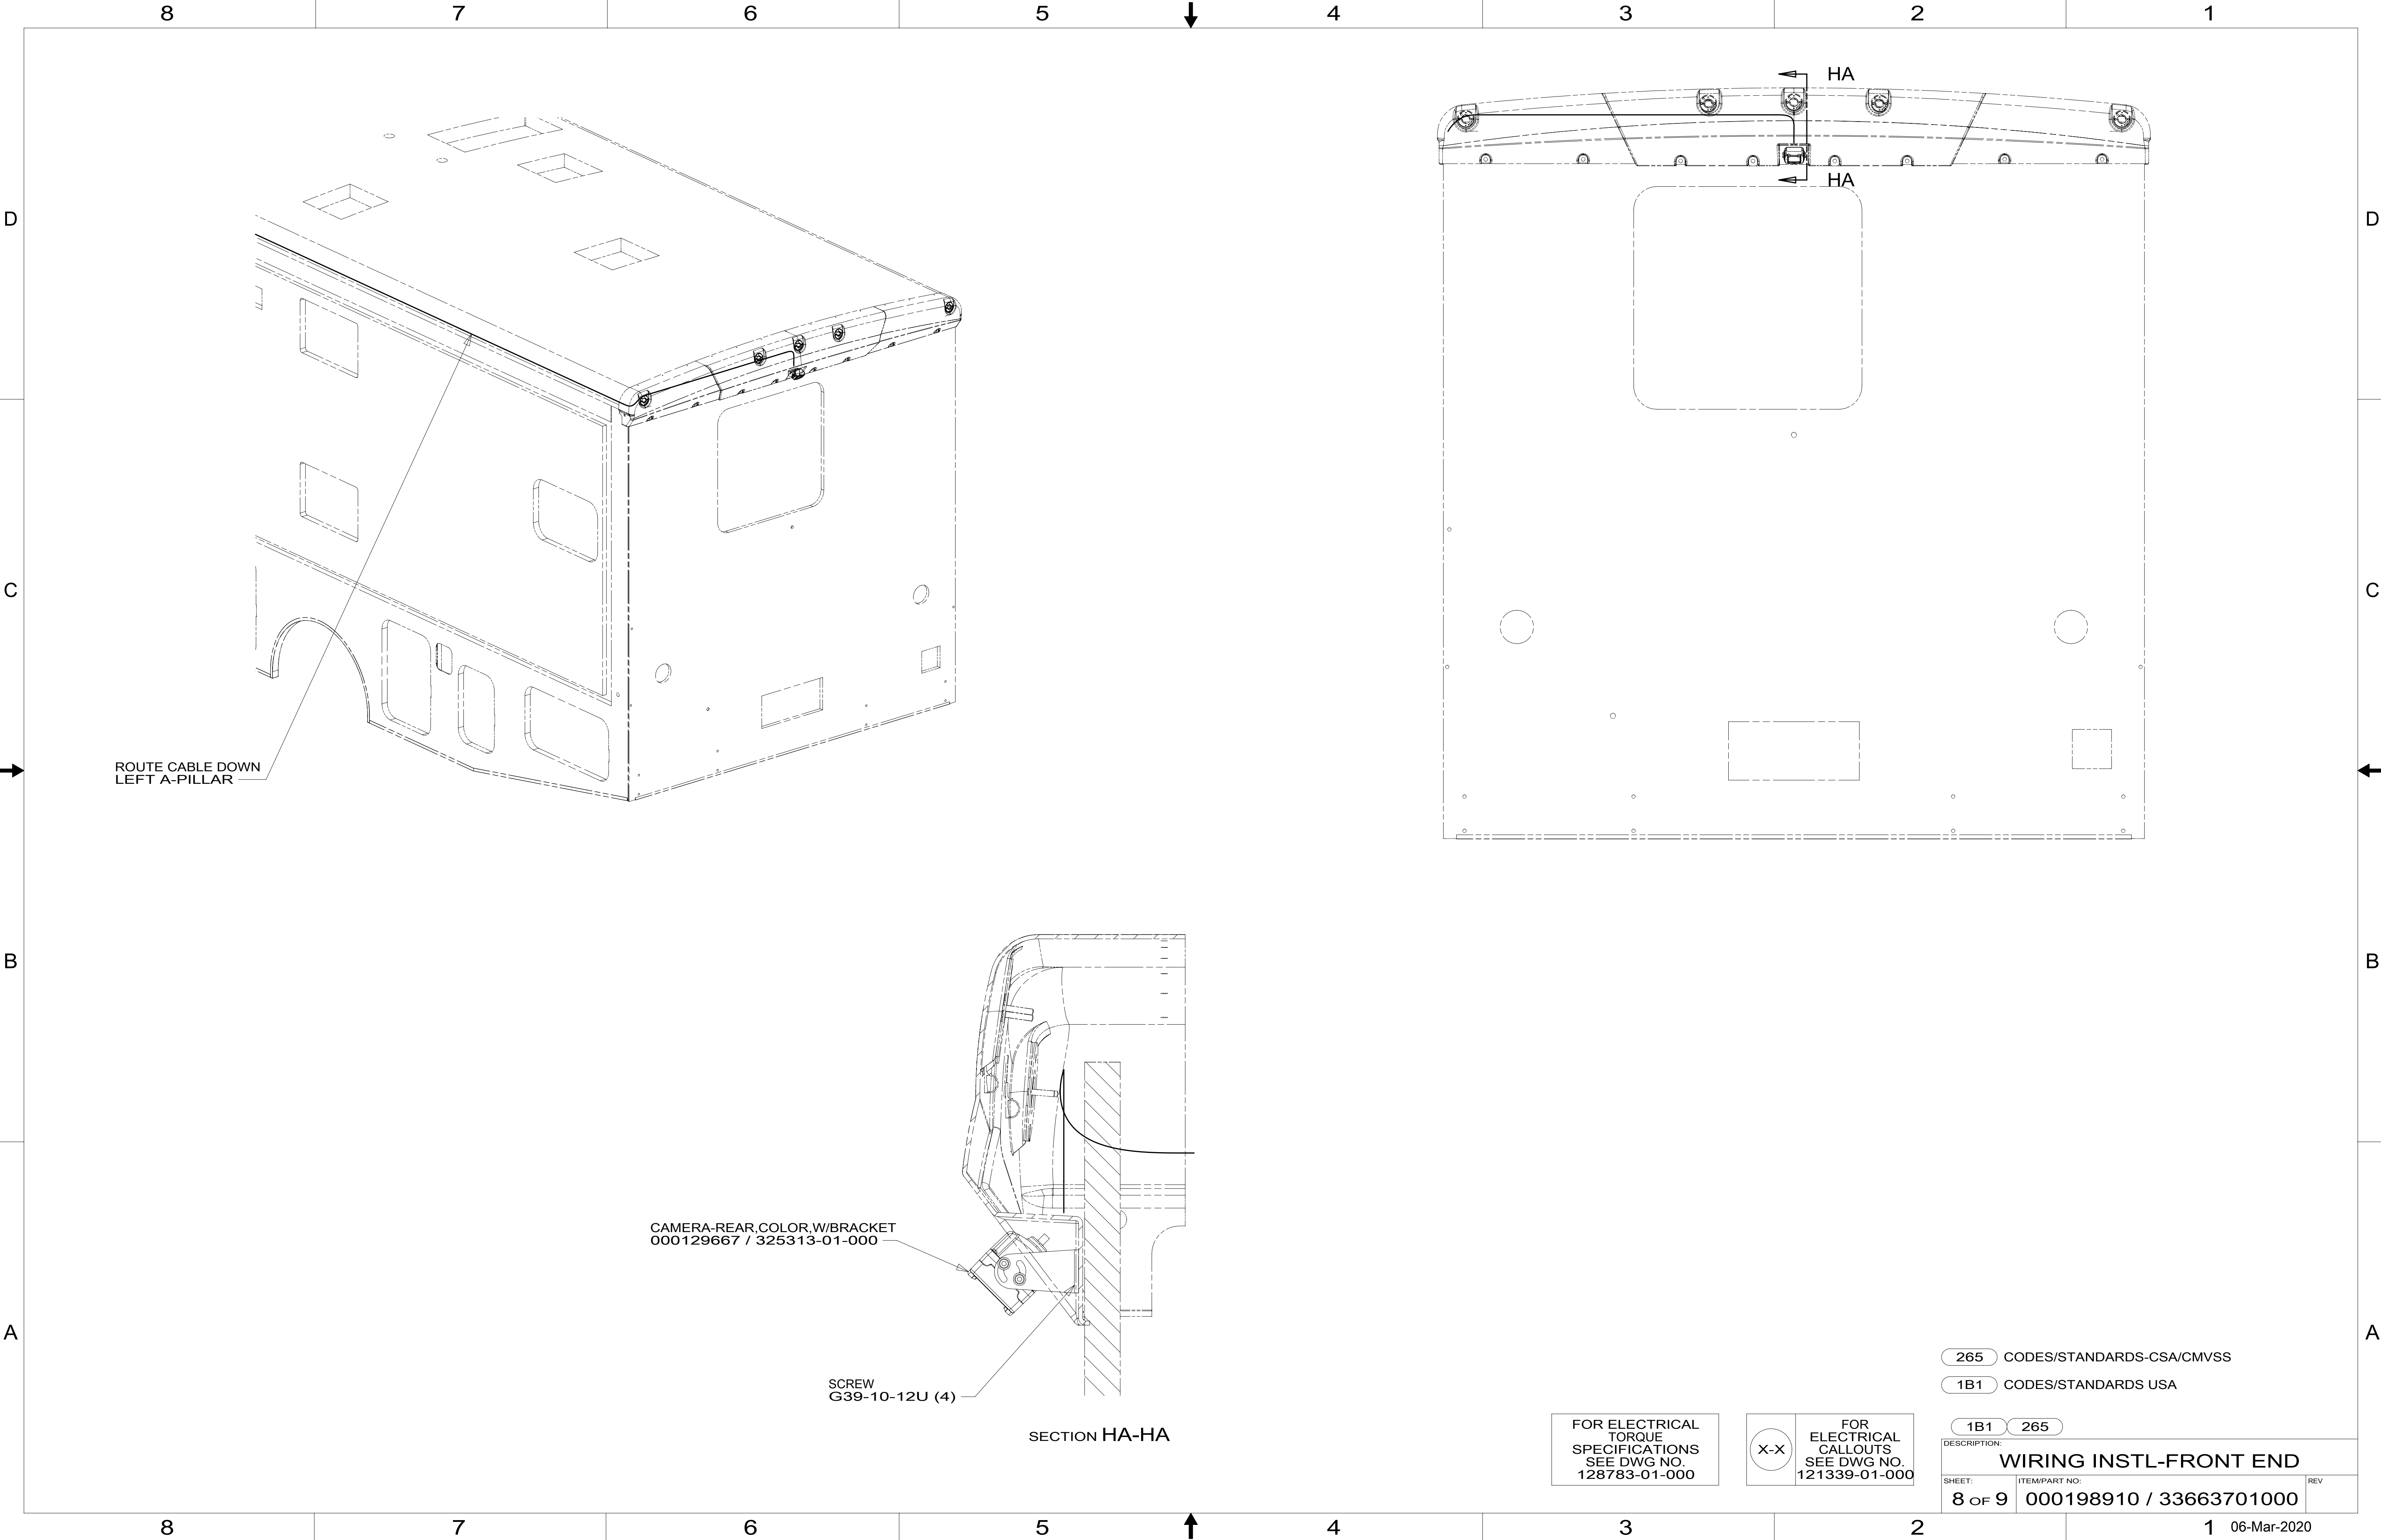

ROUTE CABLE DOWN
LEFT A-PILLAR

CAMERA-REAR, COLOR, W/BACKET
000129667 / 325313-01-000

SCREW
G39-10-12U (4)

SECTION HA-HA

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

DESCRIPTION:
WIRING INSTL-FRONT END

SHEET: 8 OF 9 ITEM/PART NO: 000198910 / 33663701000 REV

1 06-Mar-2020

