
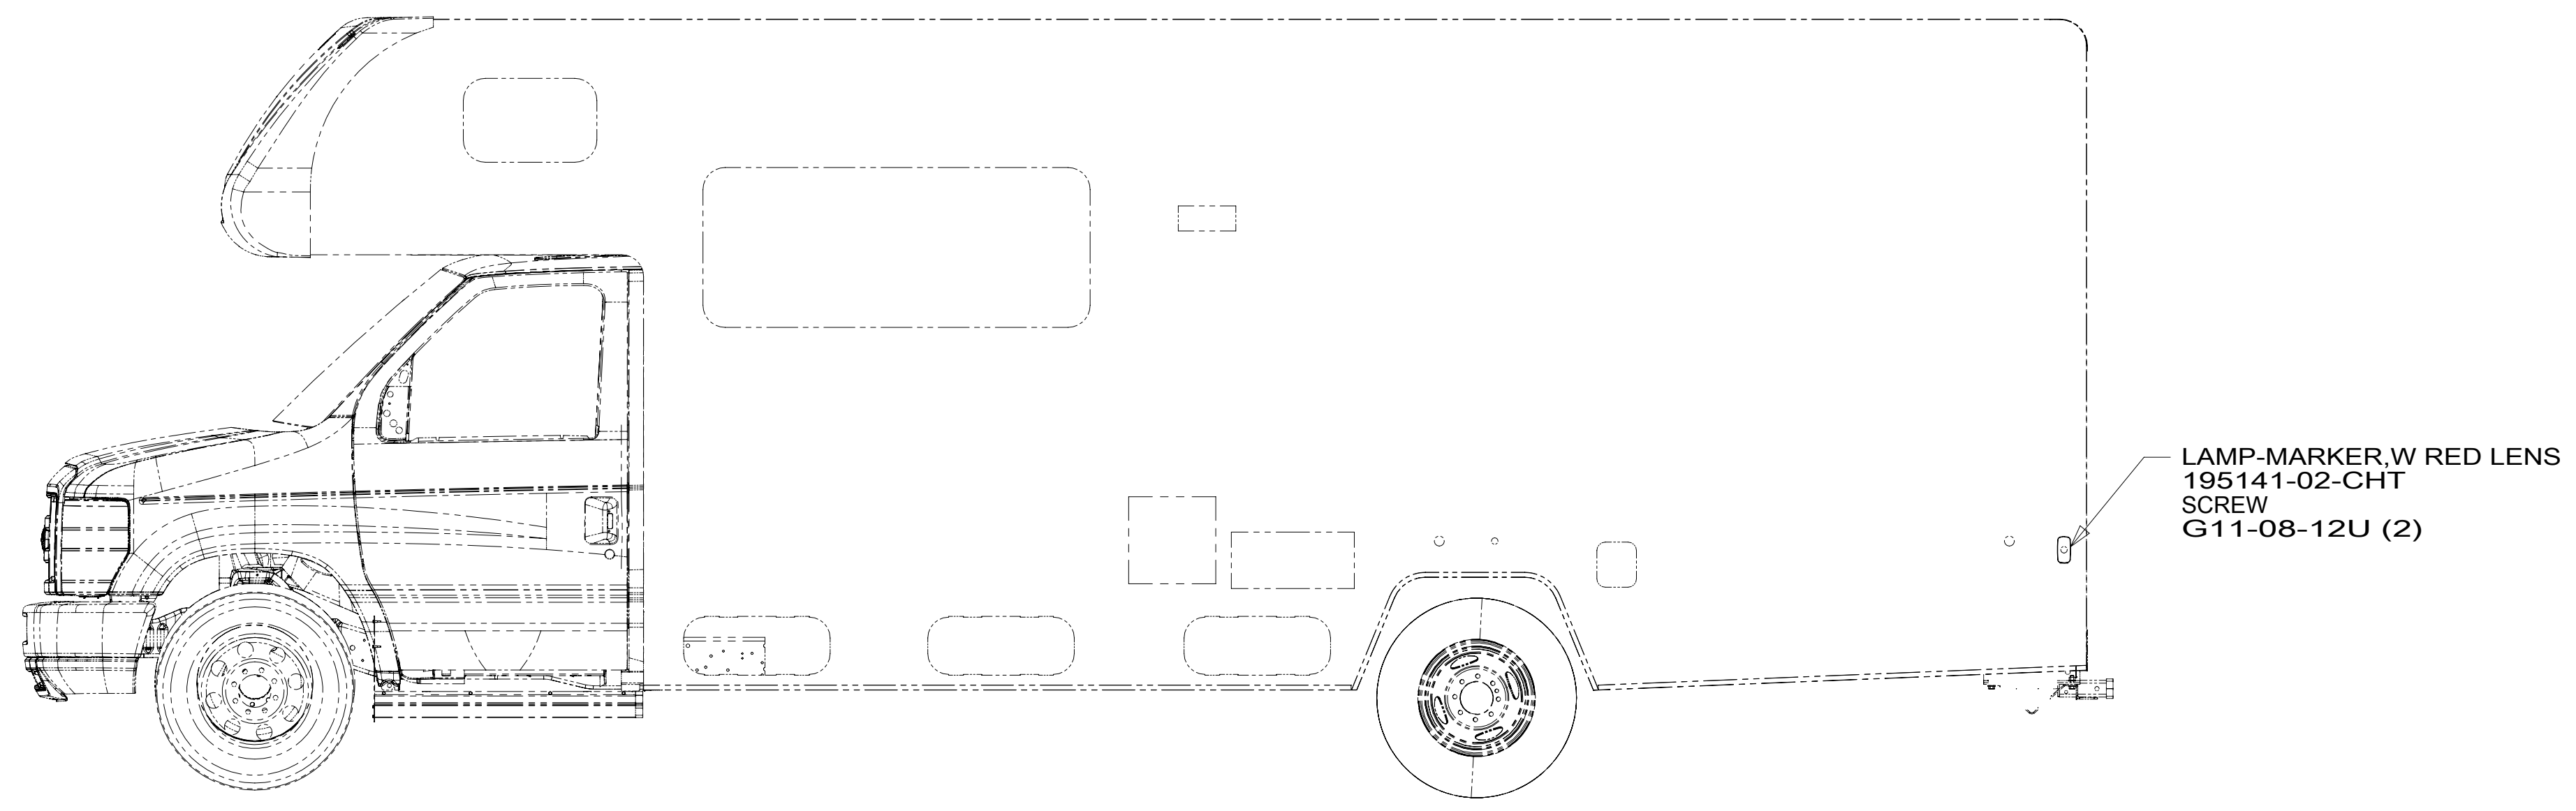


8 7 6 5 4 3 2 1

D
C
B
A

D
C
B
A

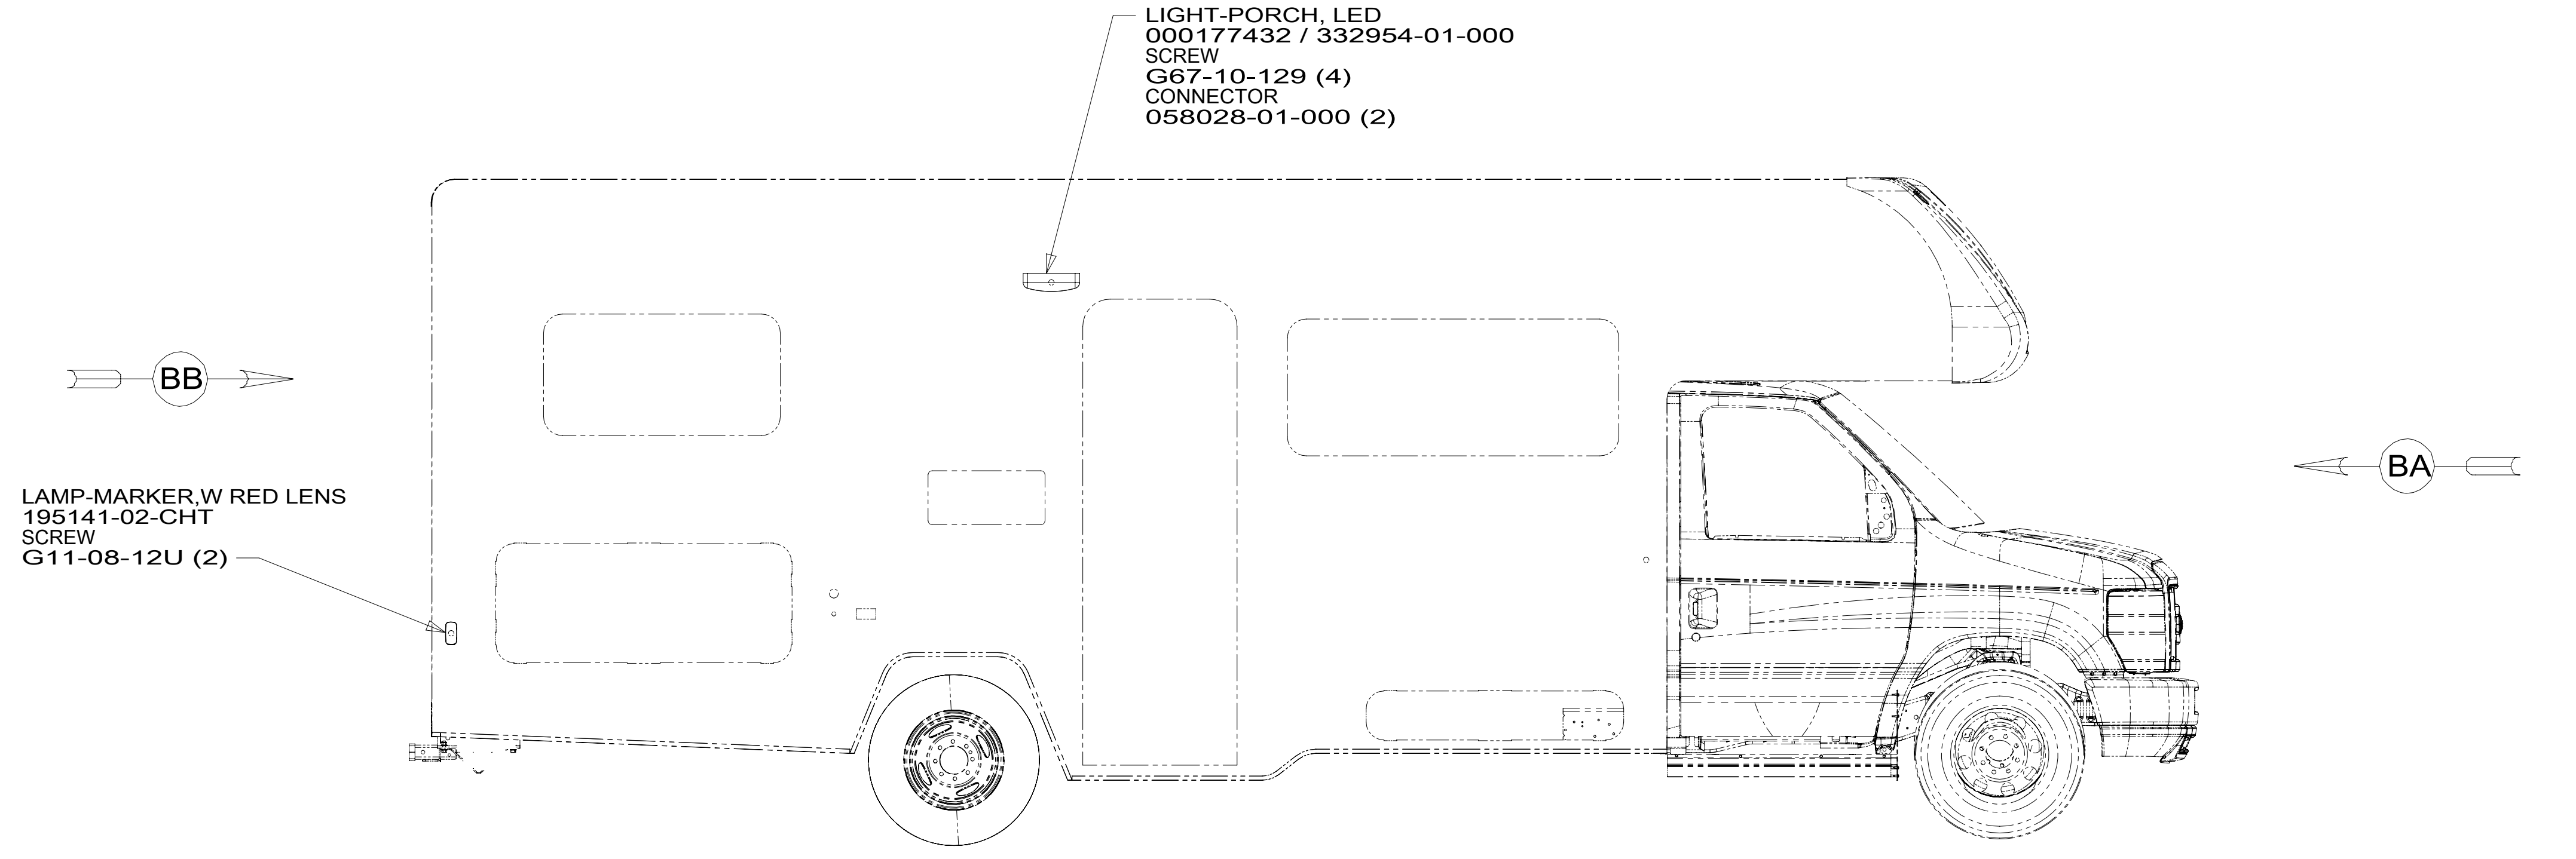

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265




| | | | |
|--|--------|-----------------------------------|-------------|
| DSNR: | | ALL DIMENSIONS ARE IN MILLIMETERS | |
| DFFR: | | MATERIAL: | |
| UNSPECIFIED TOLERANCES: | | | |
| WHOLE DIM (X) | : 3 | | |
| ONE-PLACE (X.X) | : 1.5 | | |
| TWO-PLACE (X.XX) | : 0.50 | | |
| ANGLE | : 1° | | |
| REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES | | WEIGHT: (LBS) | FIRST USED: |
| | | | 20 325B |

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000


FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

WIRING INSTL-EXTERIOR LAMPS

SHEET: 1 OF 2 ITEM/PART NO.: 000207867 / 33936501000 REF: 1 29-Jan-2021

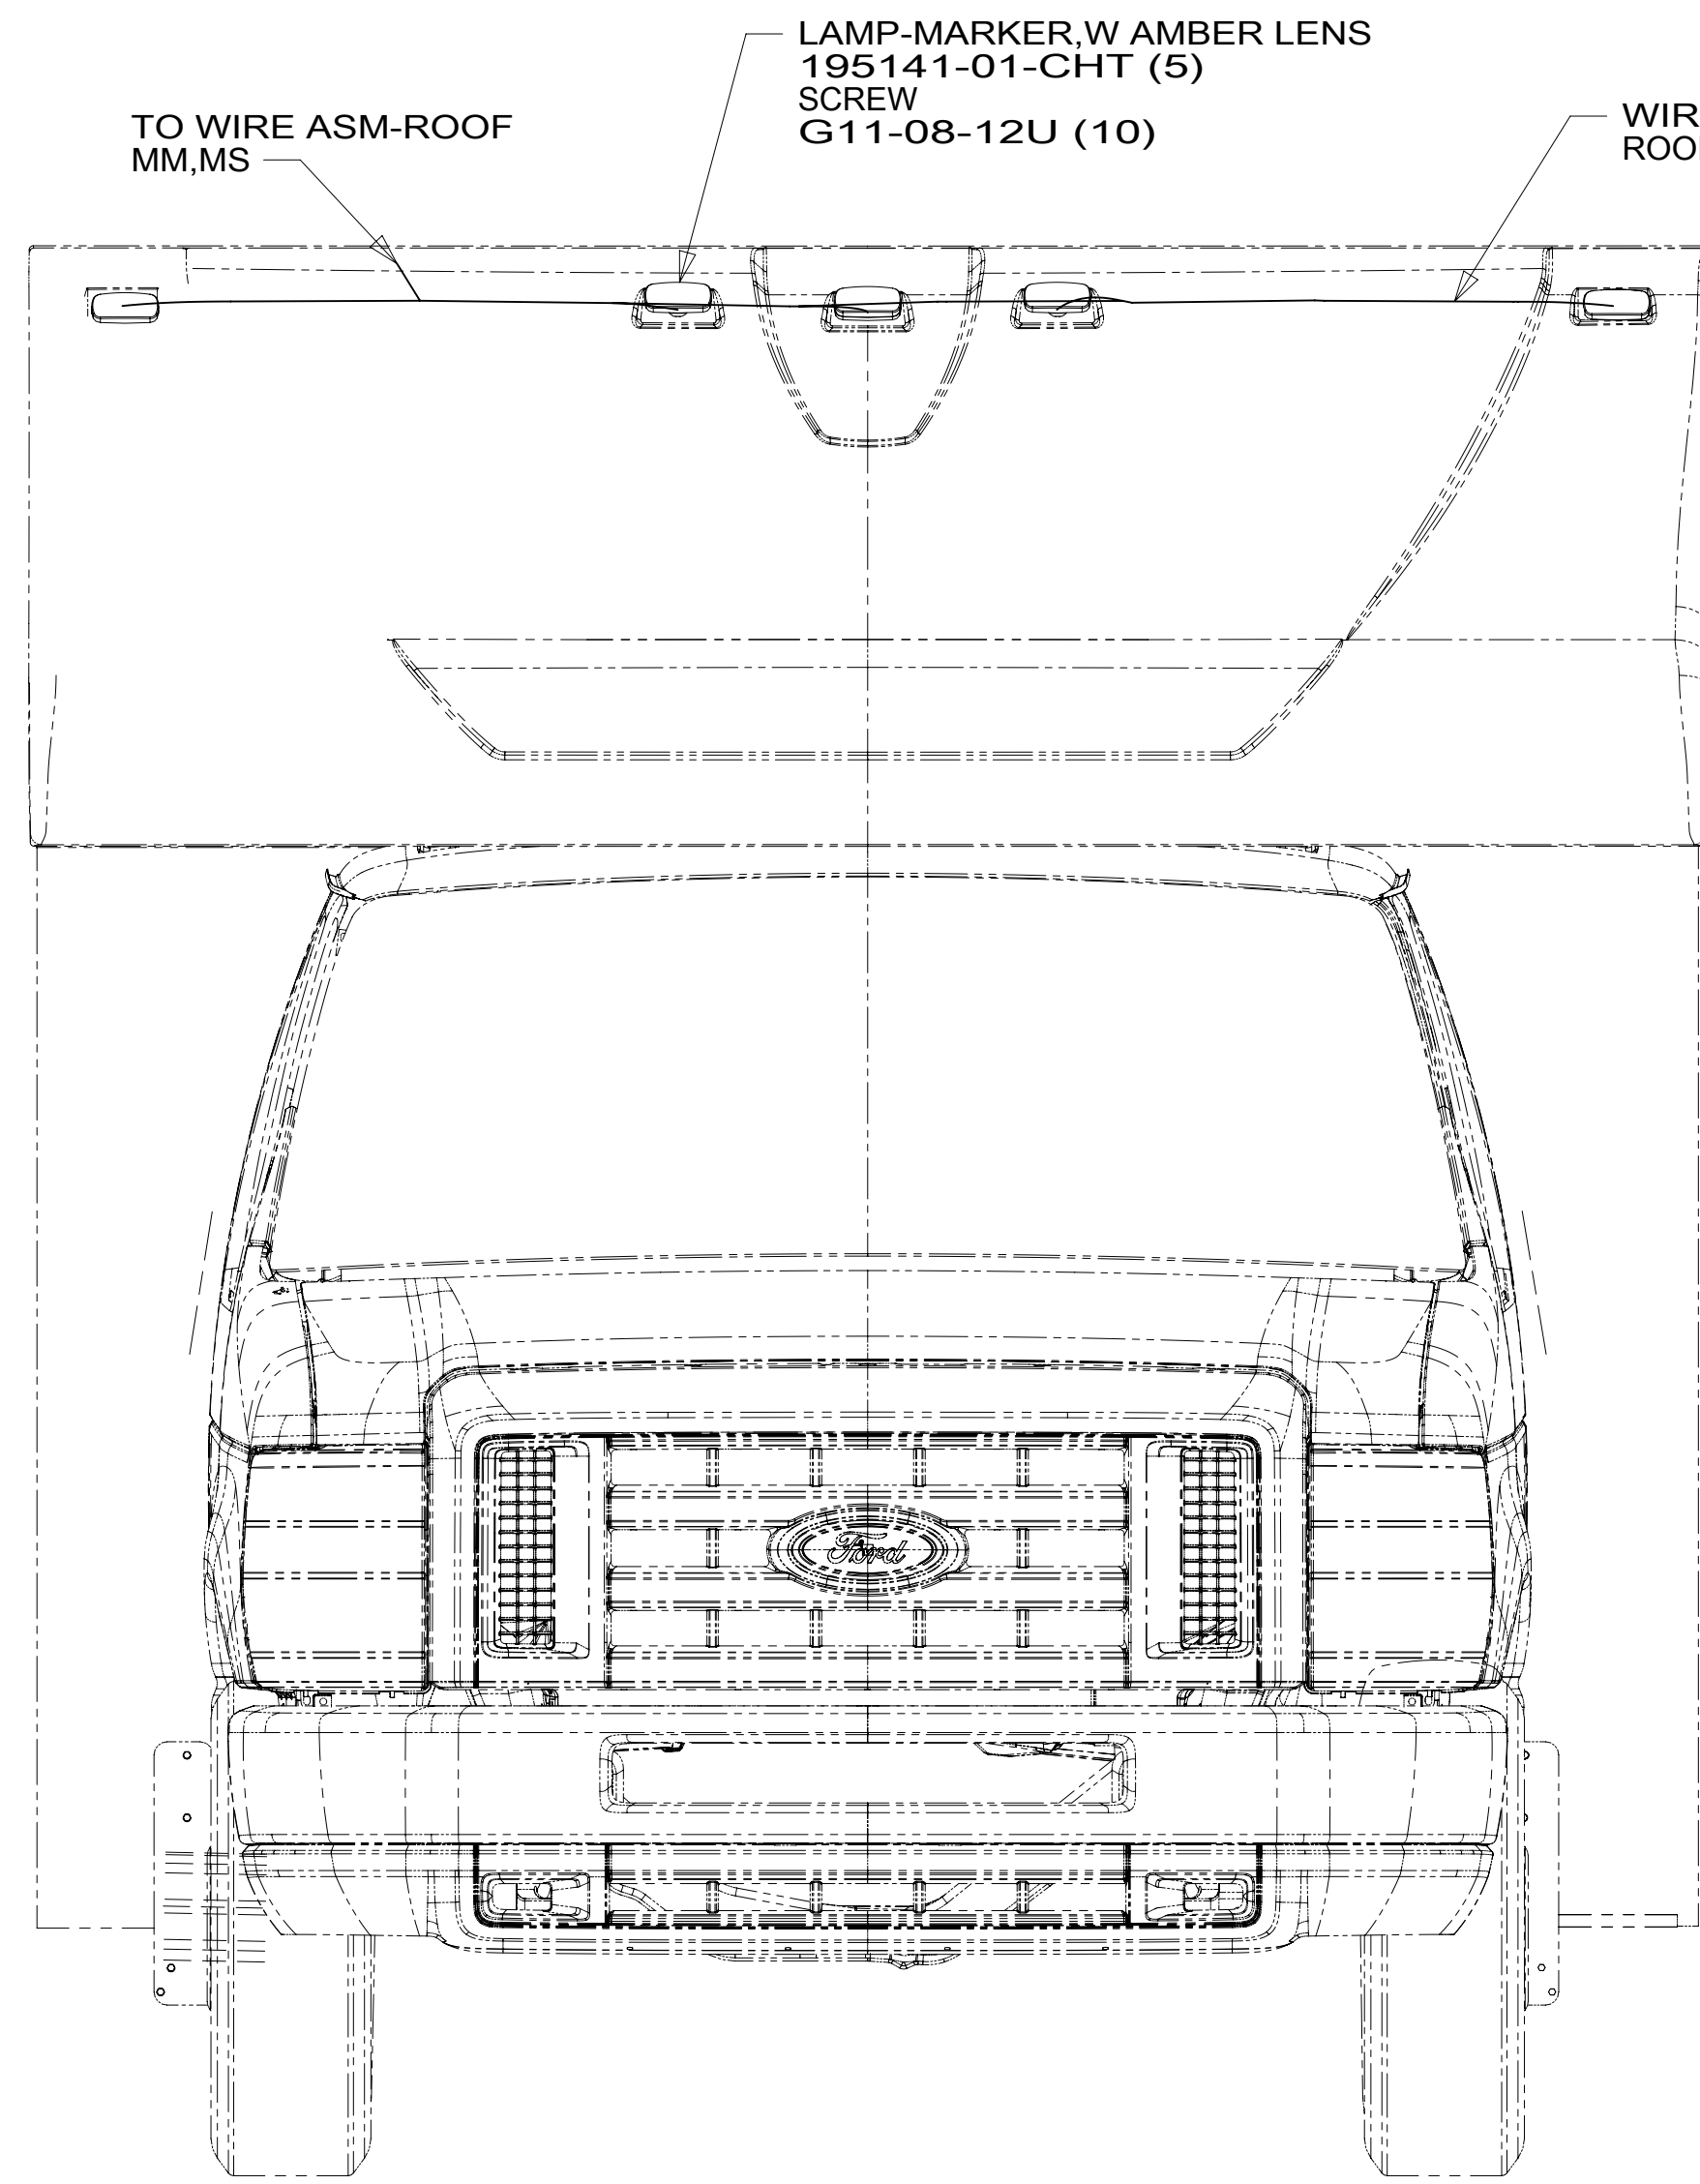

VIEW BA

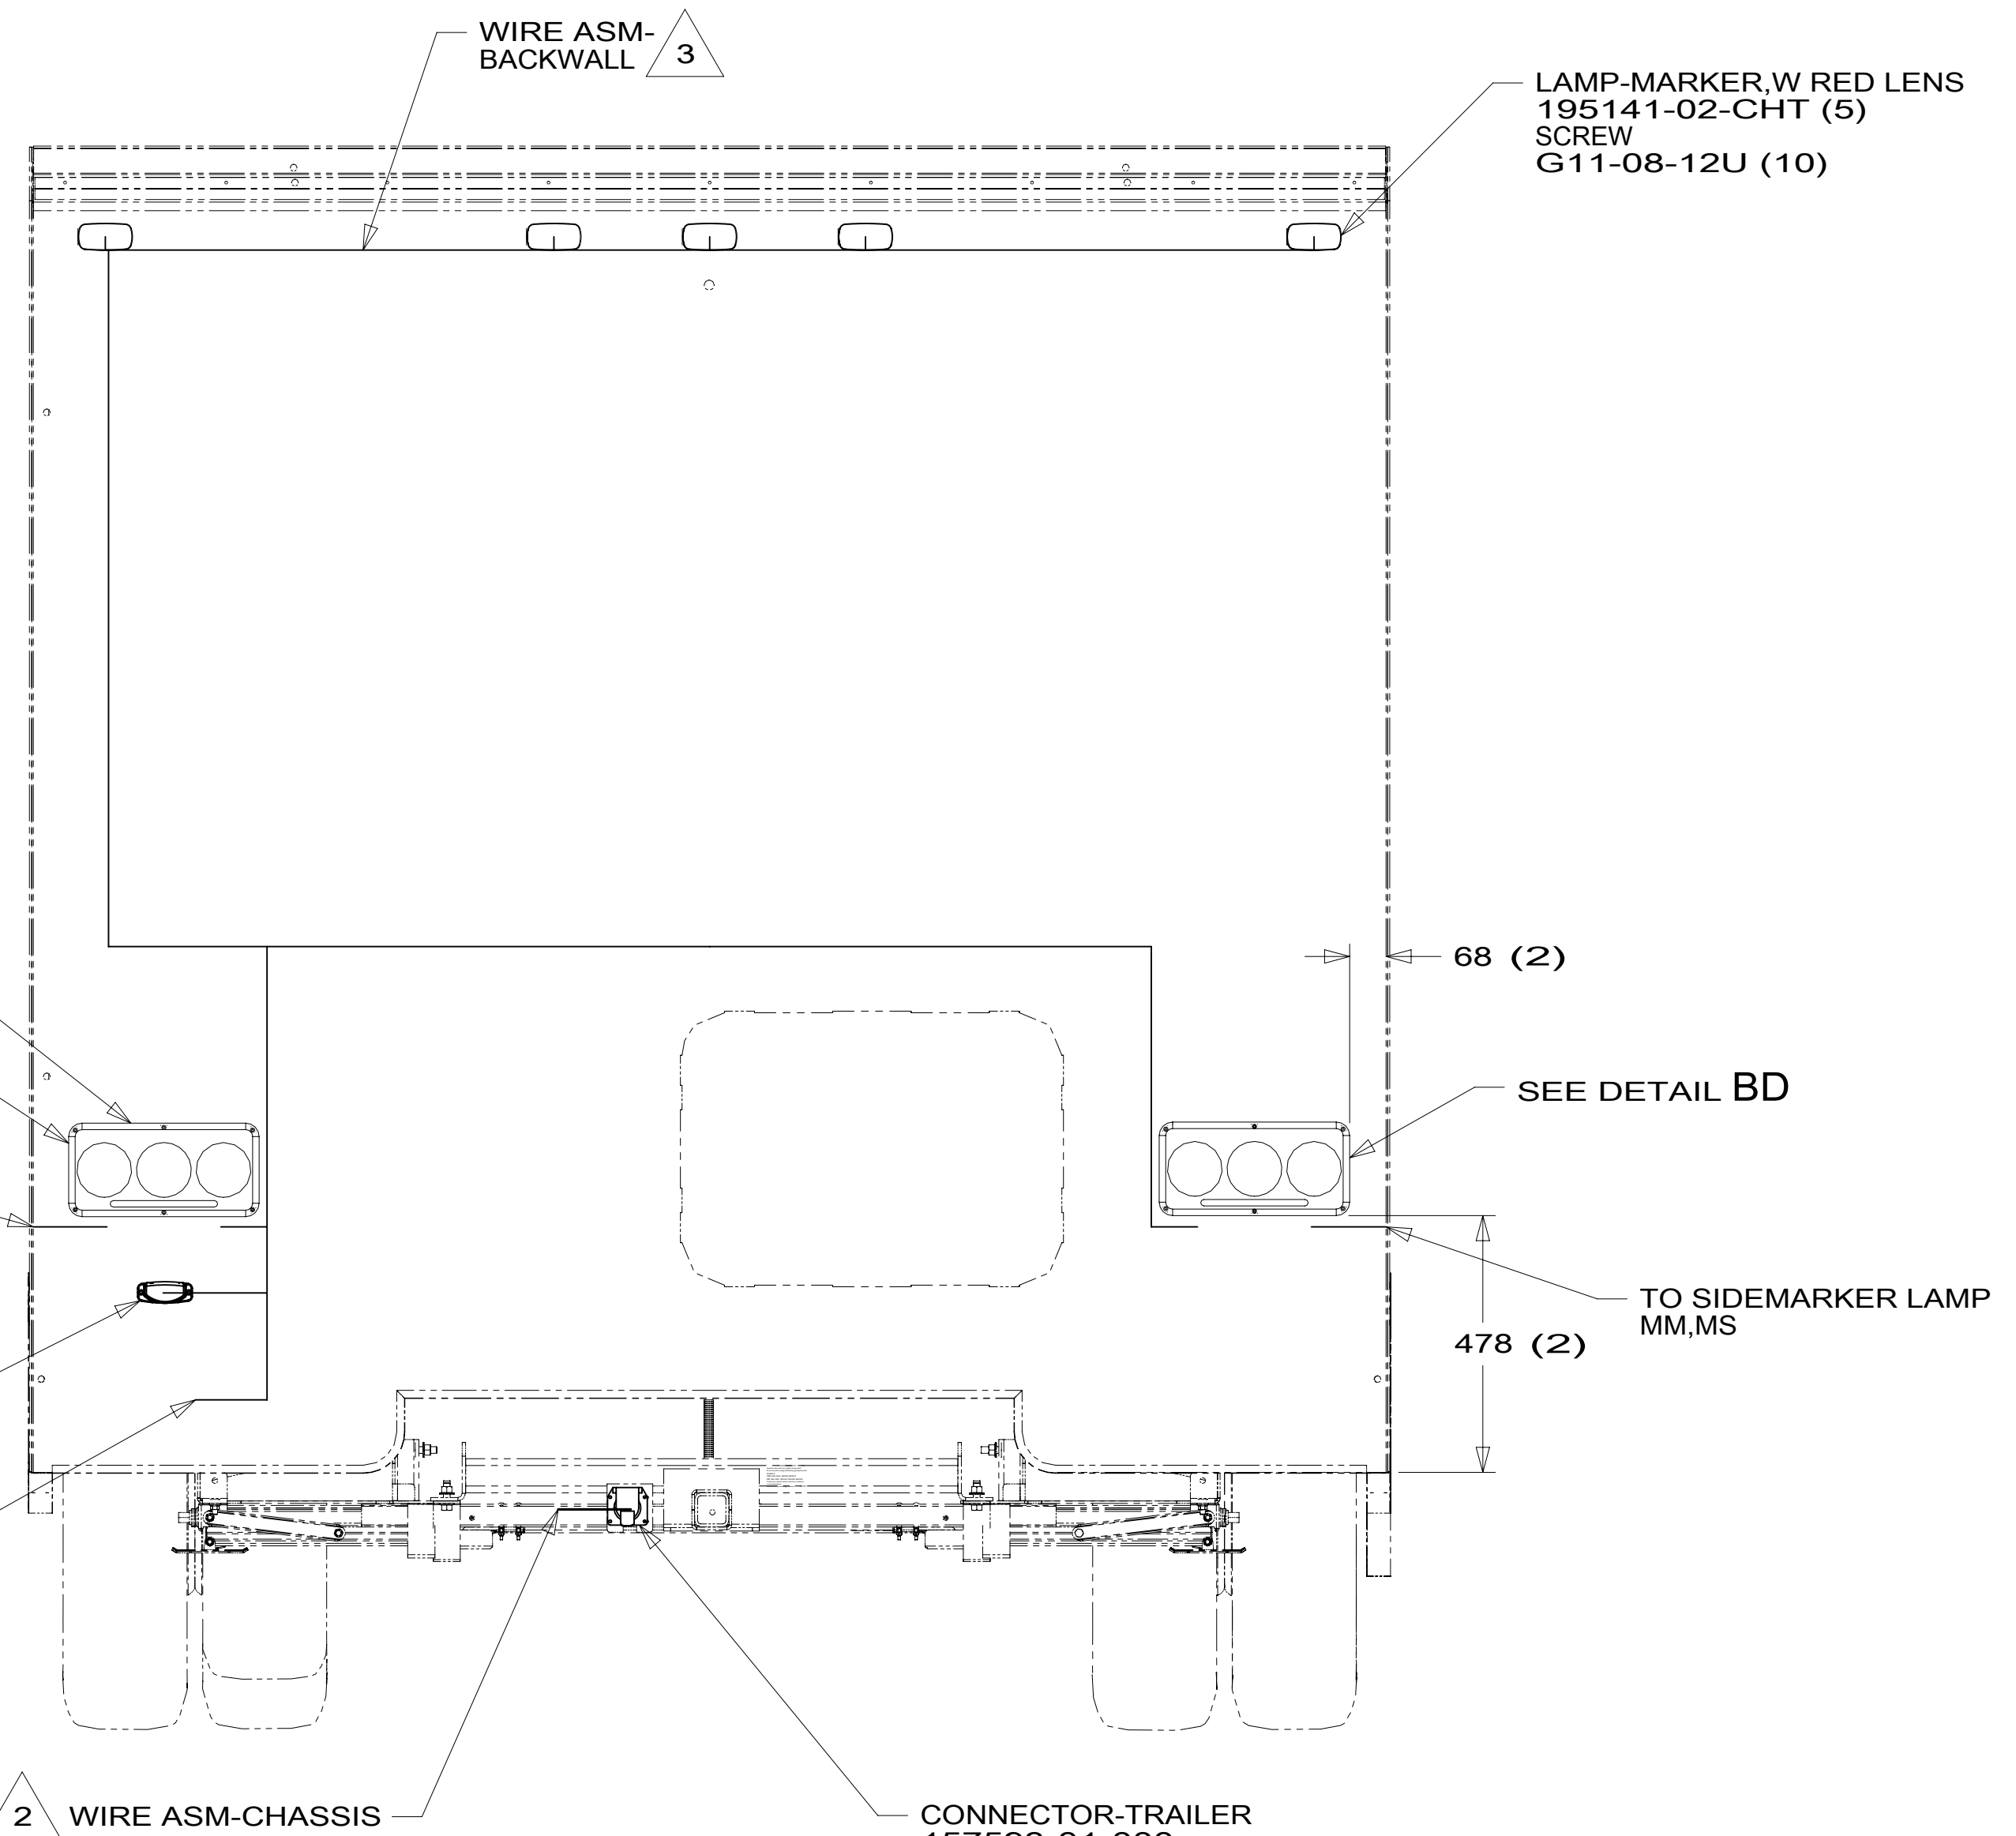

VIEW BB


4 LAMP ASM-STOP/TURN/TAI/BACK-UP,LED
000200304 / 336941-01-000 (2)
SCREW
G11-07-12U (12)
CONNECTOR
58028-01-000 (8)

SEE DETAIL BC

TO SIDEMARKER LAMP
MM,MS


BRACKET-LICENSE
66432-03-000
SCREW
G67-10-129 (2)
LIGHT-LICENSE
66432-02-000
SCREW
G39-08-12U (2)
CONNECTOR
58028-01-000 (2)

8-PIN HOUSING
TO WIRE ASM-CHASSIS

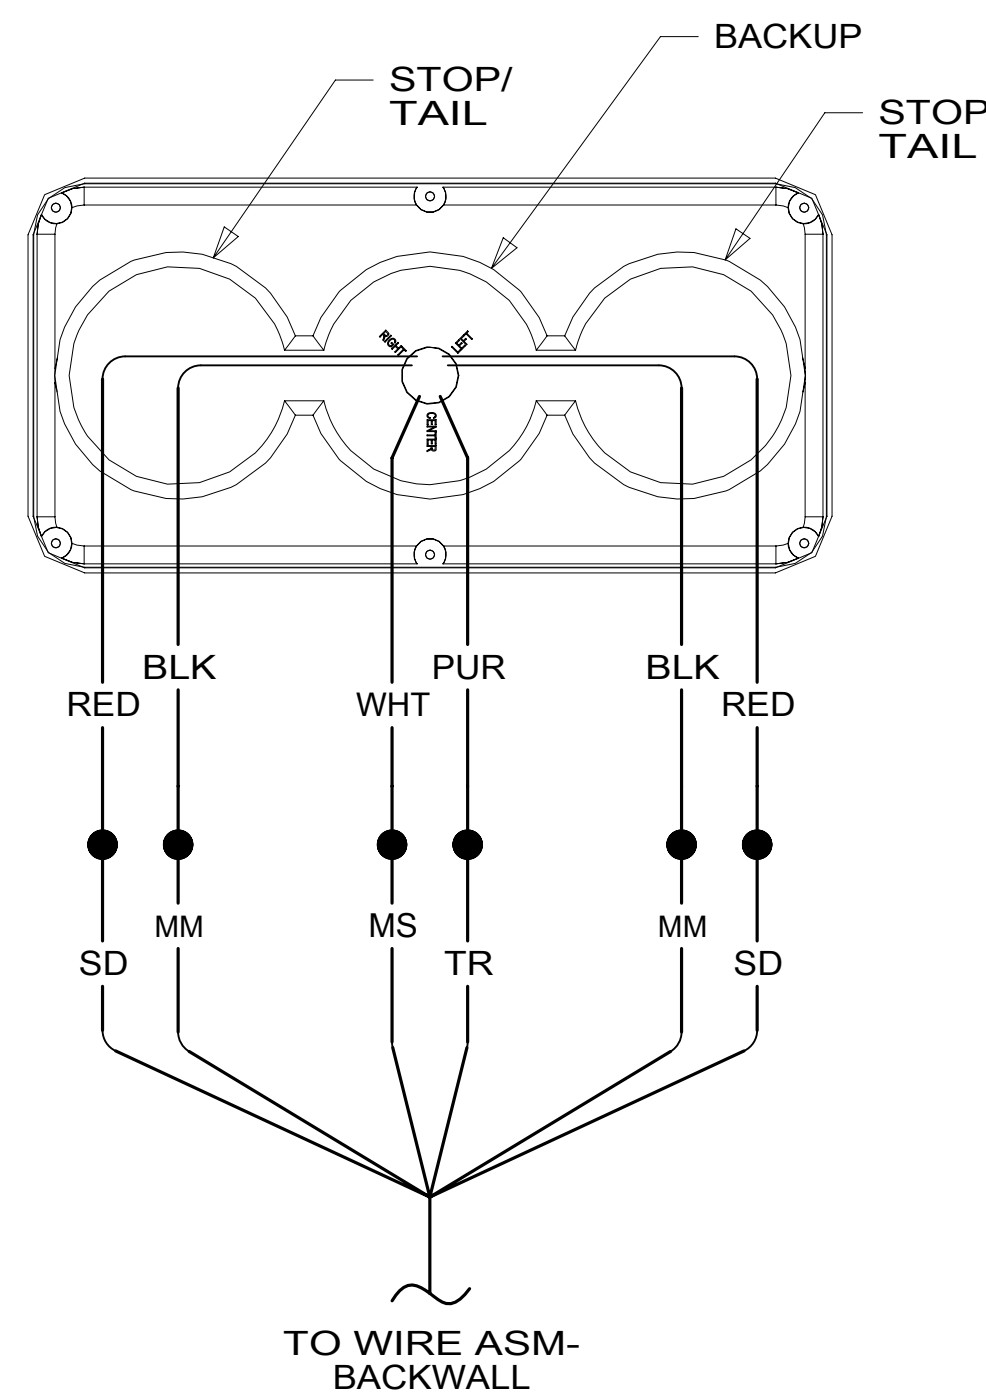

TO WIRE ASM-
BACKWALL

DETAIL BC

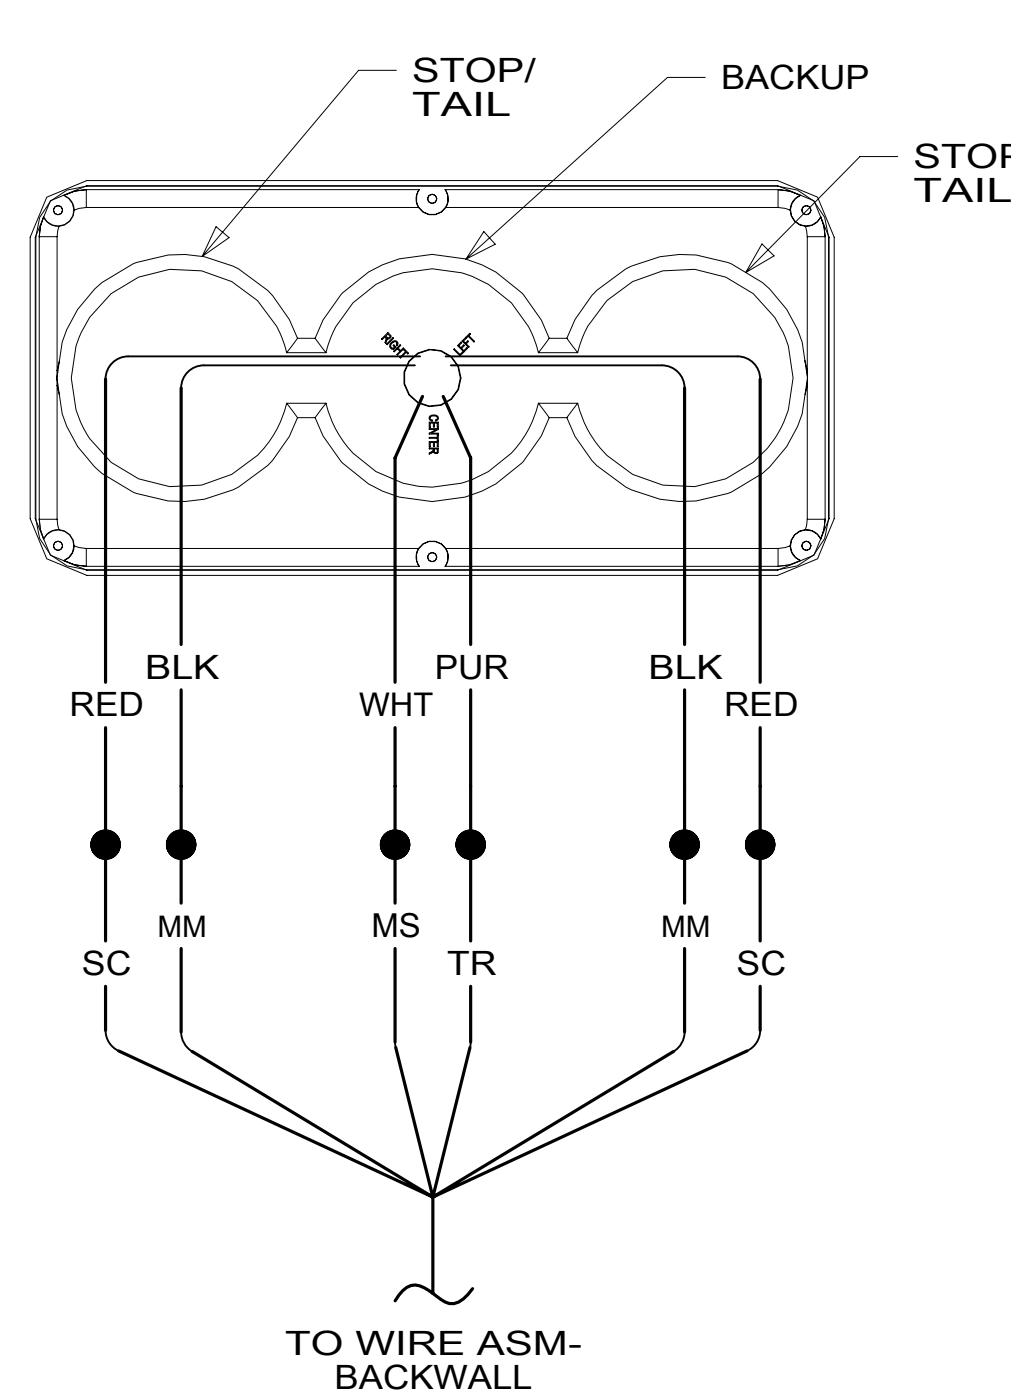

TO WIRE ASM-
BACKWALL

DETAIL BD

- NOTES:
- 4 TAIL LAMP MUST BE INSTALLED WITH WIRES DOWN.
 - 3 LOCATED IN BACKWALL ASSEMBLY.
 - 2 SECURE WIRE BELOW COACH WITH CLAMP 10495-01-000 AND SCREW G67-10-12B.
 - 1 LOCATED IN ROOF ASSEMBLY FRONT.

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

DESCRIPTION:
WIRING INSTL-EXTERIOR LAMPS

SHEET: 2 OF 2 ITEM/PART NO: 000207867 / 33936501000 REV