
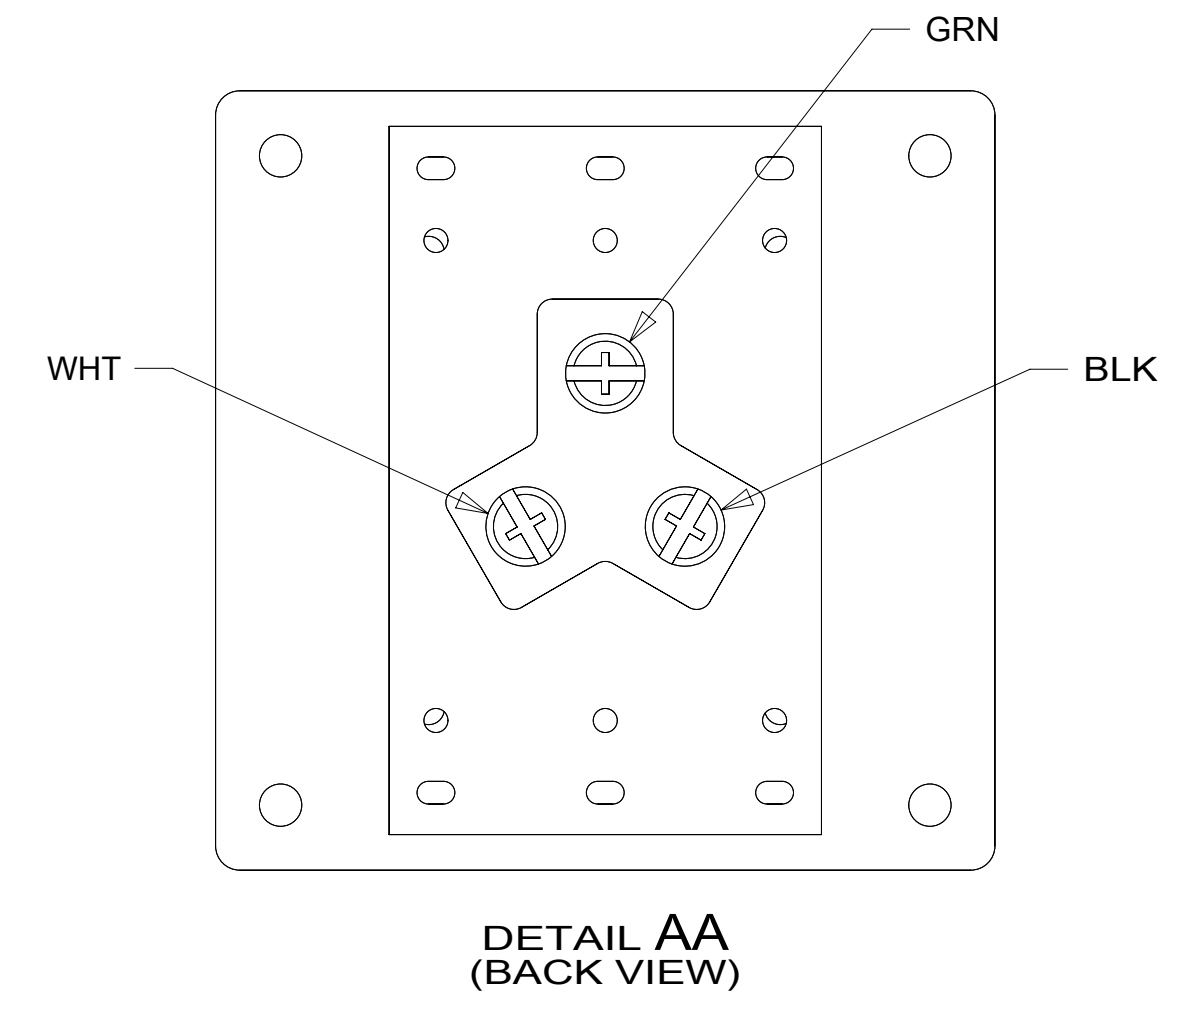


8 7 6 5 4 3 2 1

D
C
B
A

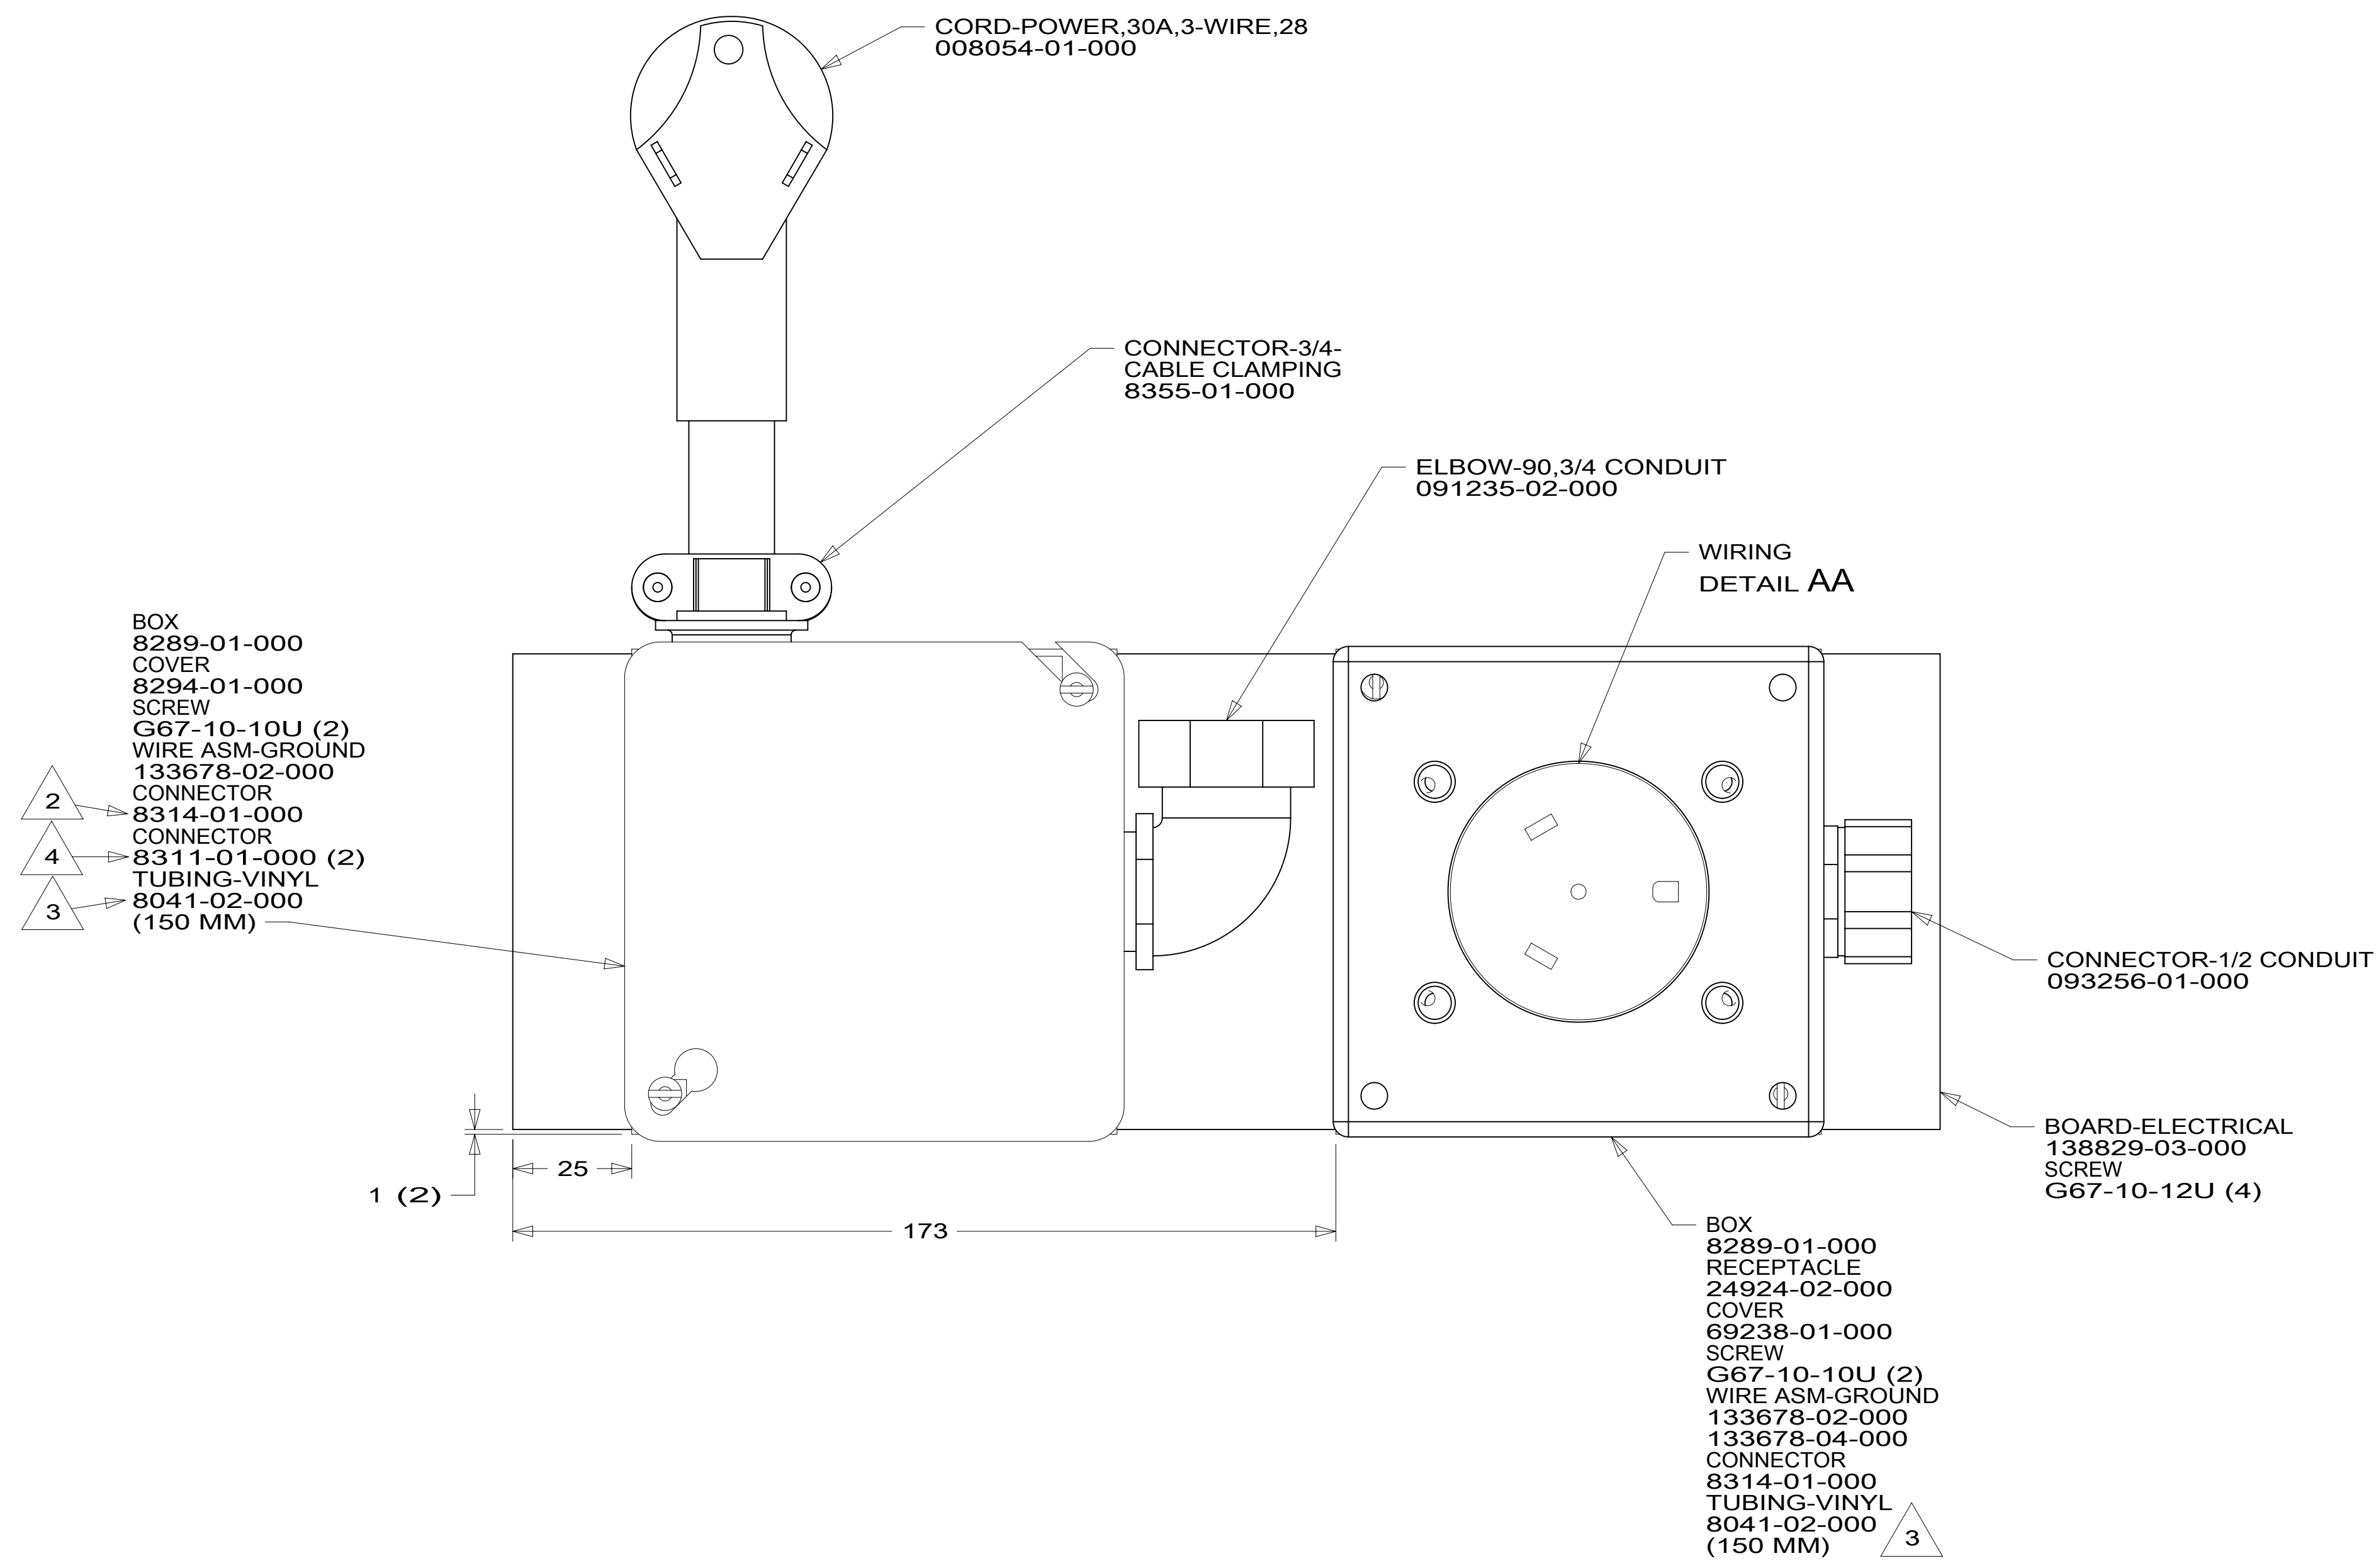

- 4 CONNECT BLK TO BLK, WHT TO WHT.
 - 3 APPLY TUBING TO BARE GROUND WIRES.
 - 2 CONNECT GRNDS TO GRNDS.
1. ALL GROUND WIRES TO BE COVERED WITH TUBING 8041-02-000.

NOTES:

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR ELECTRICAL
CALLOUTS
SEE DWG NO.
121339-01-000

- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA
- 1B1 265

WINNEBAGO
COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.

DSNR:	ALL DIMENSIONS ARE IN MILLIMETERS	
DFFR:	MATERIAL:	
UNSPECIFIED TOLERANCES:	WHOLE DIM (X) :	3
	ONE-PLACE (X.X) :	1.5
	TWO-PLACE (X.XX) :	0.50
	ANGLE :	1°
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES	WEIGHT: (LBS)	FIRST USED: 18 E32YE
DESCRIPTION: POWER CORD BOX ASM		
SHEET: 1 OF 1	ITEM/PART NO: 000140643 / 32582601000	REV:

8 7 6 5 4 3 2 1

D
C
B
A

1 15-Jul-2021