

CONNECT HT FROM WIRE ASM-SOLAR CHASSIS TO THIS BATTERY TERMINAL

4 PIN HOUSING TO ELECTRIC STEP

MP,KD TO STEP DOOR JAMB SWITCH

HOUSINGS TO ENTRANCE SWITCHES

WIRE ASM-GROUNDS 136145-01-060

MAIN DROP TO WIRE ASM-COACH 2-PIN HSG FROM WIRE ASM-SOLAR CHASSIS

TO INVERTER 4

GROMMET 023942-02-000

TO FORD SUPPLIED TAILLAMP CIRCUIT

2 PIN HOUSING TO PASSENGER SEAT

2 PIN HOUSING TO DRIVER SEAT

AA

796

GROMMET 023942-01-000

BATTERY INSTL 000210704 / 339975-01-000

GROUNDS DETAIL BB

SEAL-TRIM 113452-02-000 (153 MM)

8

5

5

5

5

5

5

5

5

8

7 PIN HSG TO TRAILER CONNECTOR

600 DROP JM,JJ,JB,JH TO FURNACE

TO GROUND BOLT

946

1009

WIRE ASM-SOLAR CHASSIS 000177459 / 332951-01-000

TO SLIDEOUT CONTROL MODULE

ROUTE HS FROM WIRE ASM-SOLAR CHASSIS INTO CHASSIS ELECTRICAL BOX

TO WIRE ASM-ELECTRICAL BOX

GROMMET 023942-01-000 (3)

CHASSIS ELECTRICAL BOX ASM 000210733 / 340004-01-000

CIRCUIT J AND BARE ENDS OF WIRE ASM-GROUNDS TO LOAD CENTER

CABLE ASM-GENERATOR (GRN) 4

6081

6 PIN HSG TO BACKWALL

TO LEFT SLIDEOUT REAR MOTOR

8 PIN HOUSING TO GENERATOR

CABLE ASM-GENERATOR GND (BLK) TO GROUND STUD 4

697

DATUM

FRONT AXLE

WIRE ASM-CHASSIS 000210710 / 339979-01-000

BY TO BUSS BAR IN CHASSIS FUSE BOX

TO WIRE ASM-IP MAIN (THRU HOLE IN FLOOR)

TO FRONT LEFT SLIDEOUT FRONT MOTOR

LEVELING SYSTEM POWER CABLE

MP,JT TO LP TANK

GROMMET 023942-01-000 (3)

CHASSIS ELECTRICAL BOX ASM 000210733 / 340004-01-000

TO WIRE ASM-ELECTRICAL BOX

ROUTE HS FROM WIRE ASM-SOLAR CHASSIS INTO CHASSIS ELECTRICAL BOX

TO SLIDEOUT CONTROL MODULE

WIRE ASM-SOLAR CHASSIS 000177459 / 332951-01-000

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5

5



5

5

5

8 7 6 5 4 3 2 1

D
C
B
A

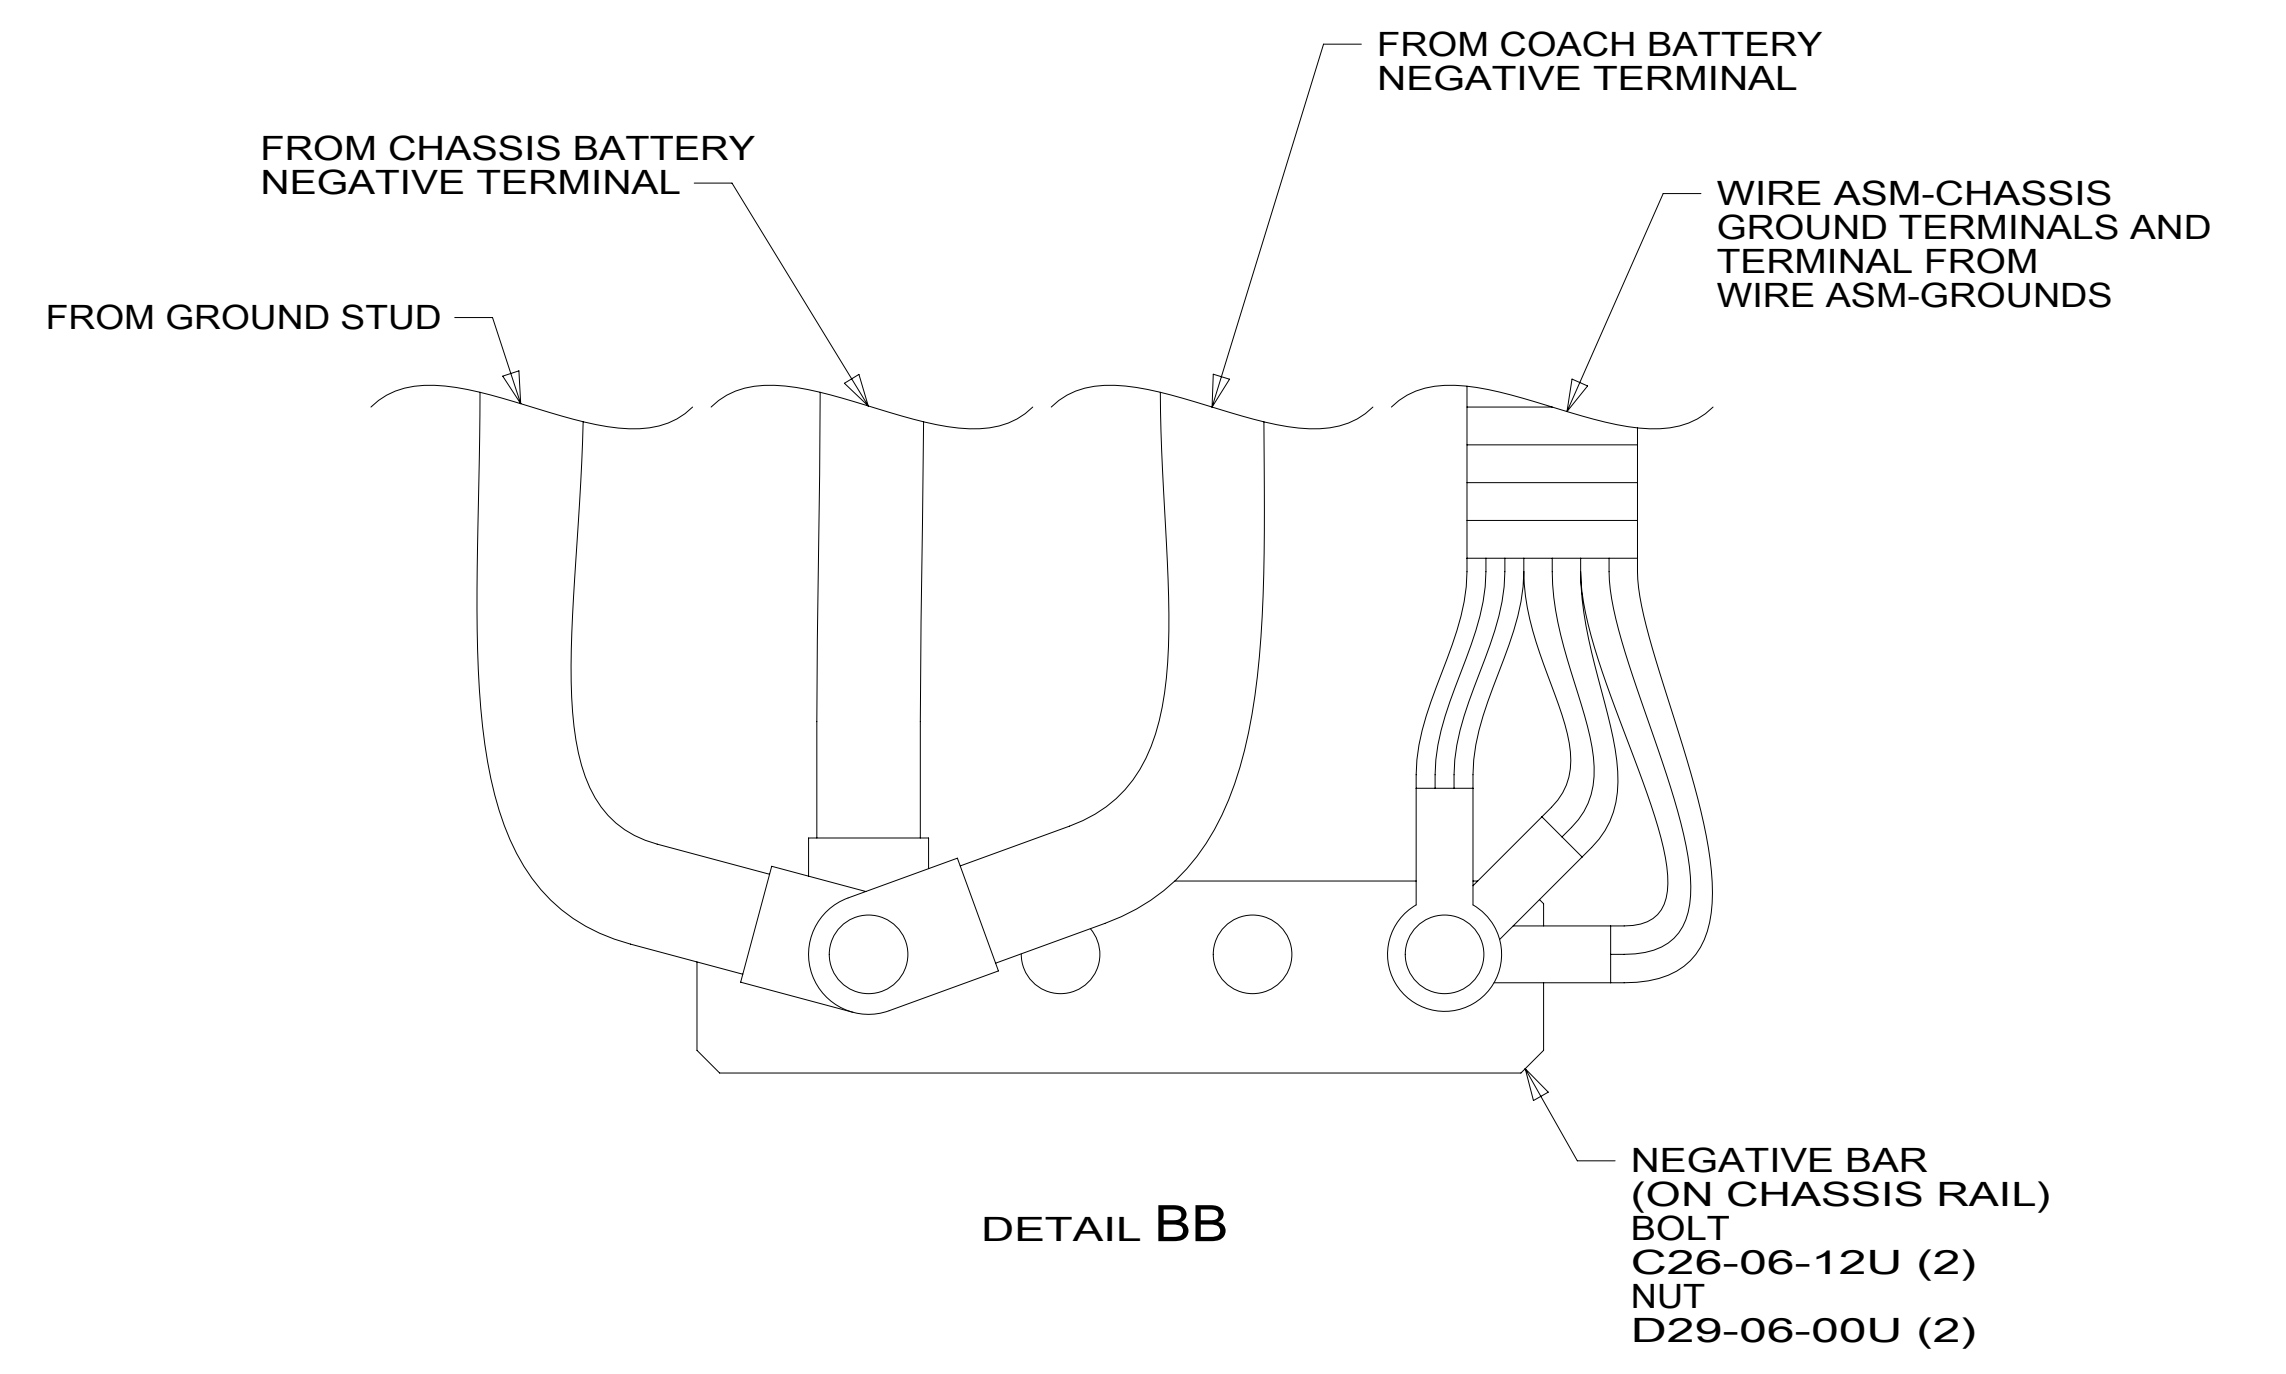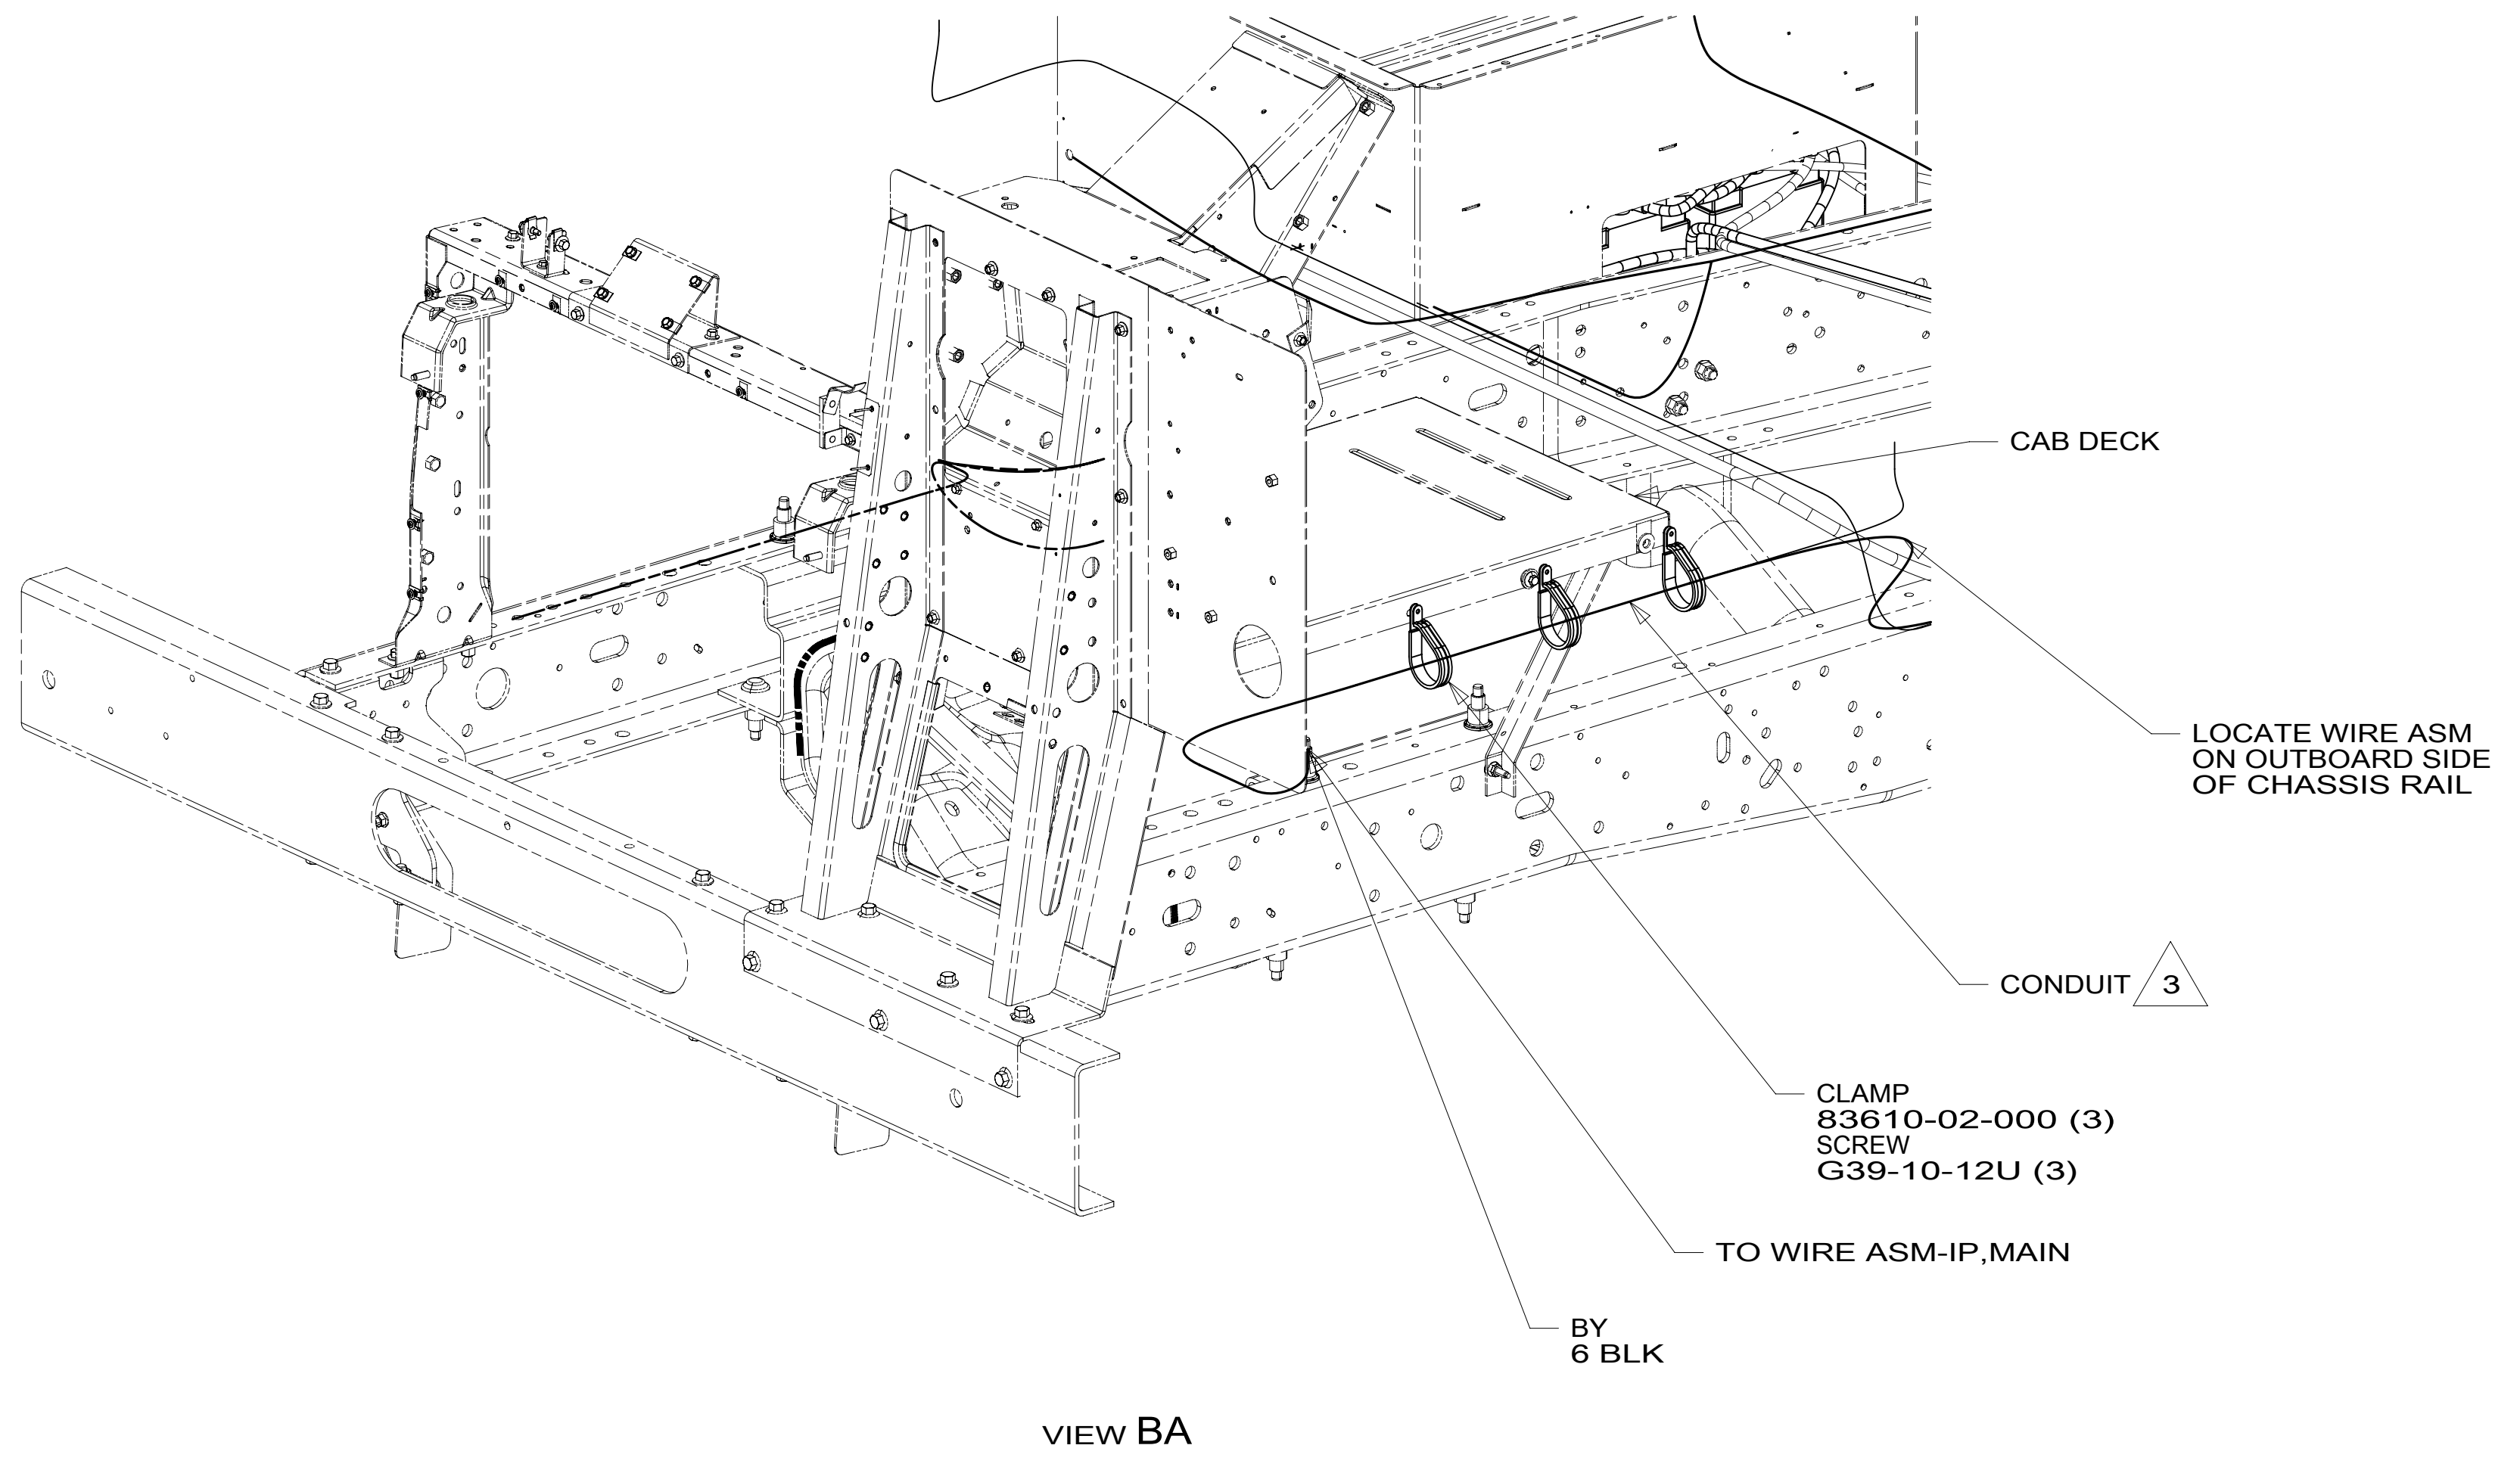

3 COVER WITH CONDUIT 41953-10-000 AND 41953-11-000 AS REQUIRED.

- 2. CONNECT CABLES TO COACH SIDE OF BATTERY DISCONNECT WHEN BATTERY DISCONNECT IS USED.
- 1. CUT OFF EXCESS END OF WIRE TIE.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

DESCRIPTION:		1B1 265
WIRING INSTL-CHASSIS		
SHEET:	ITEM/PART NO.:	REV
2 OF 2	000210667 / 33996301000	

8 7 6 5 4 3 2 1 28-Jan-2021