

8 7 6 5 4 3 2 1

D

D

C

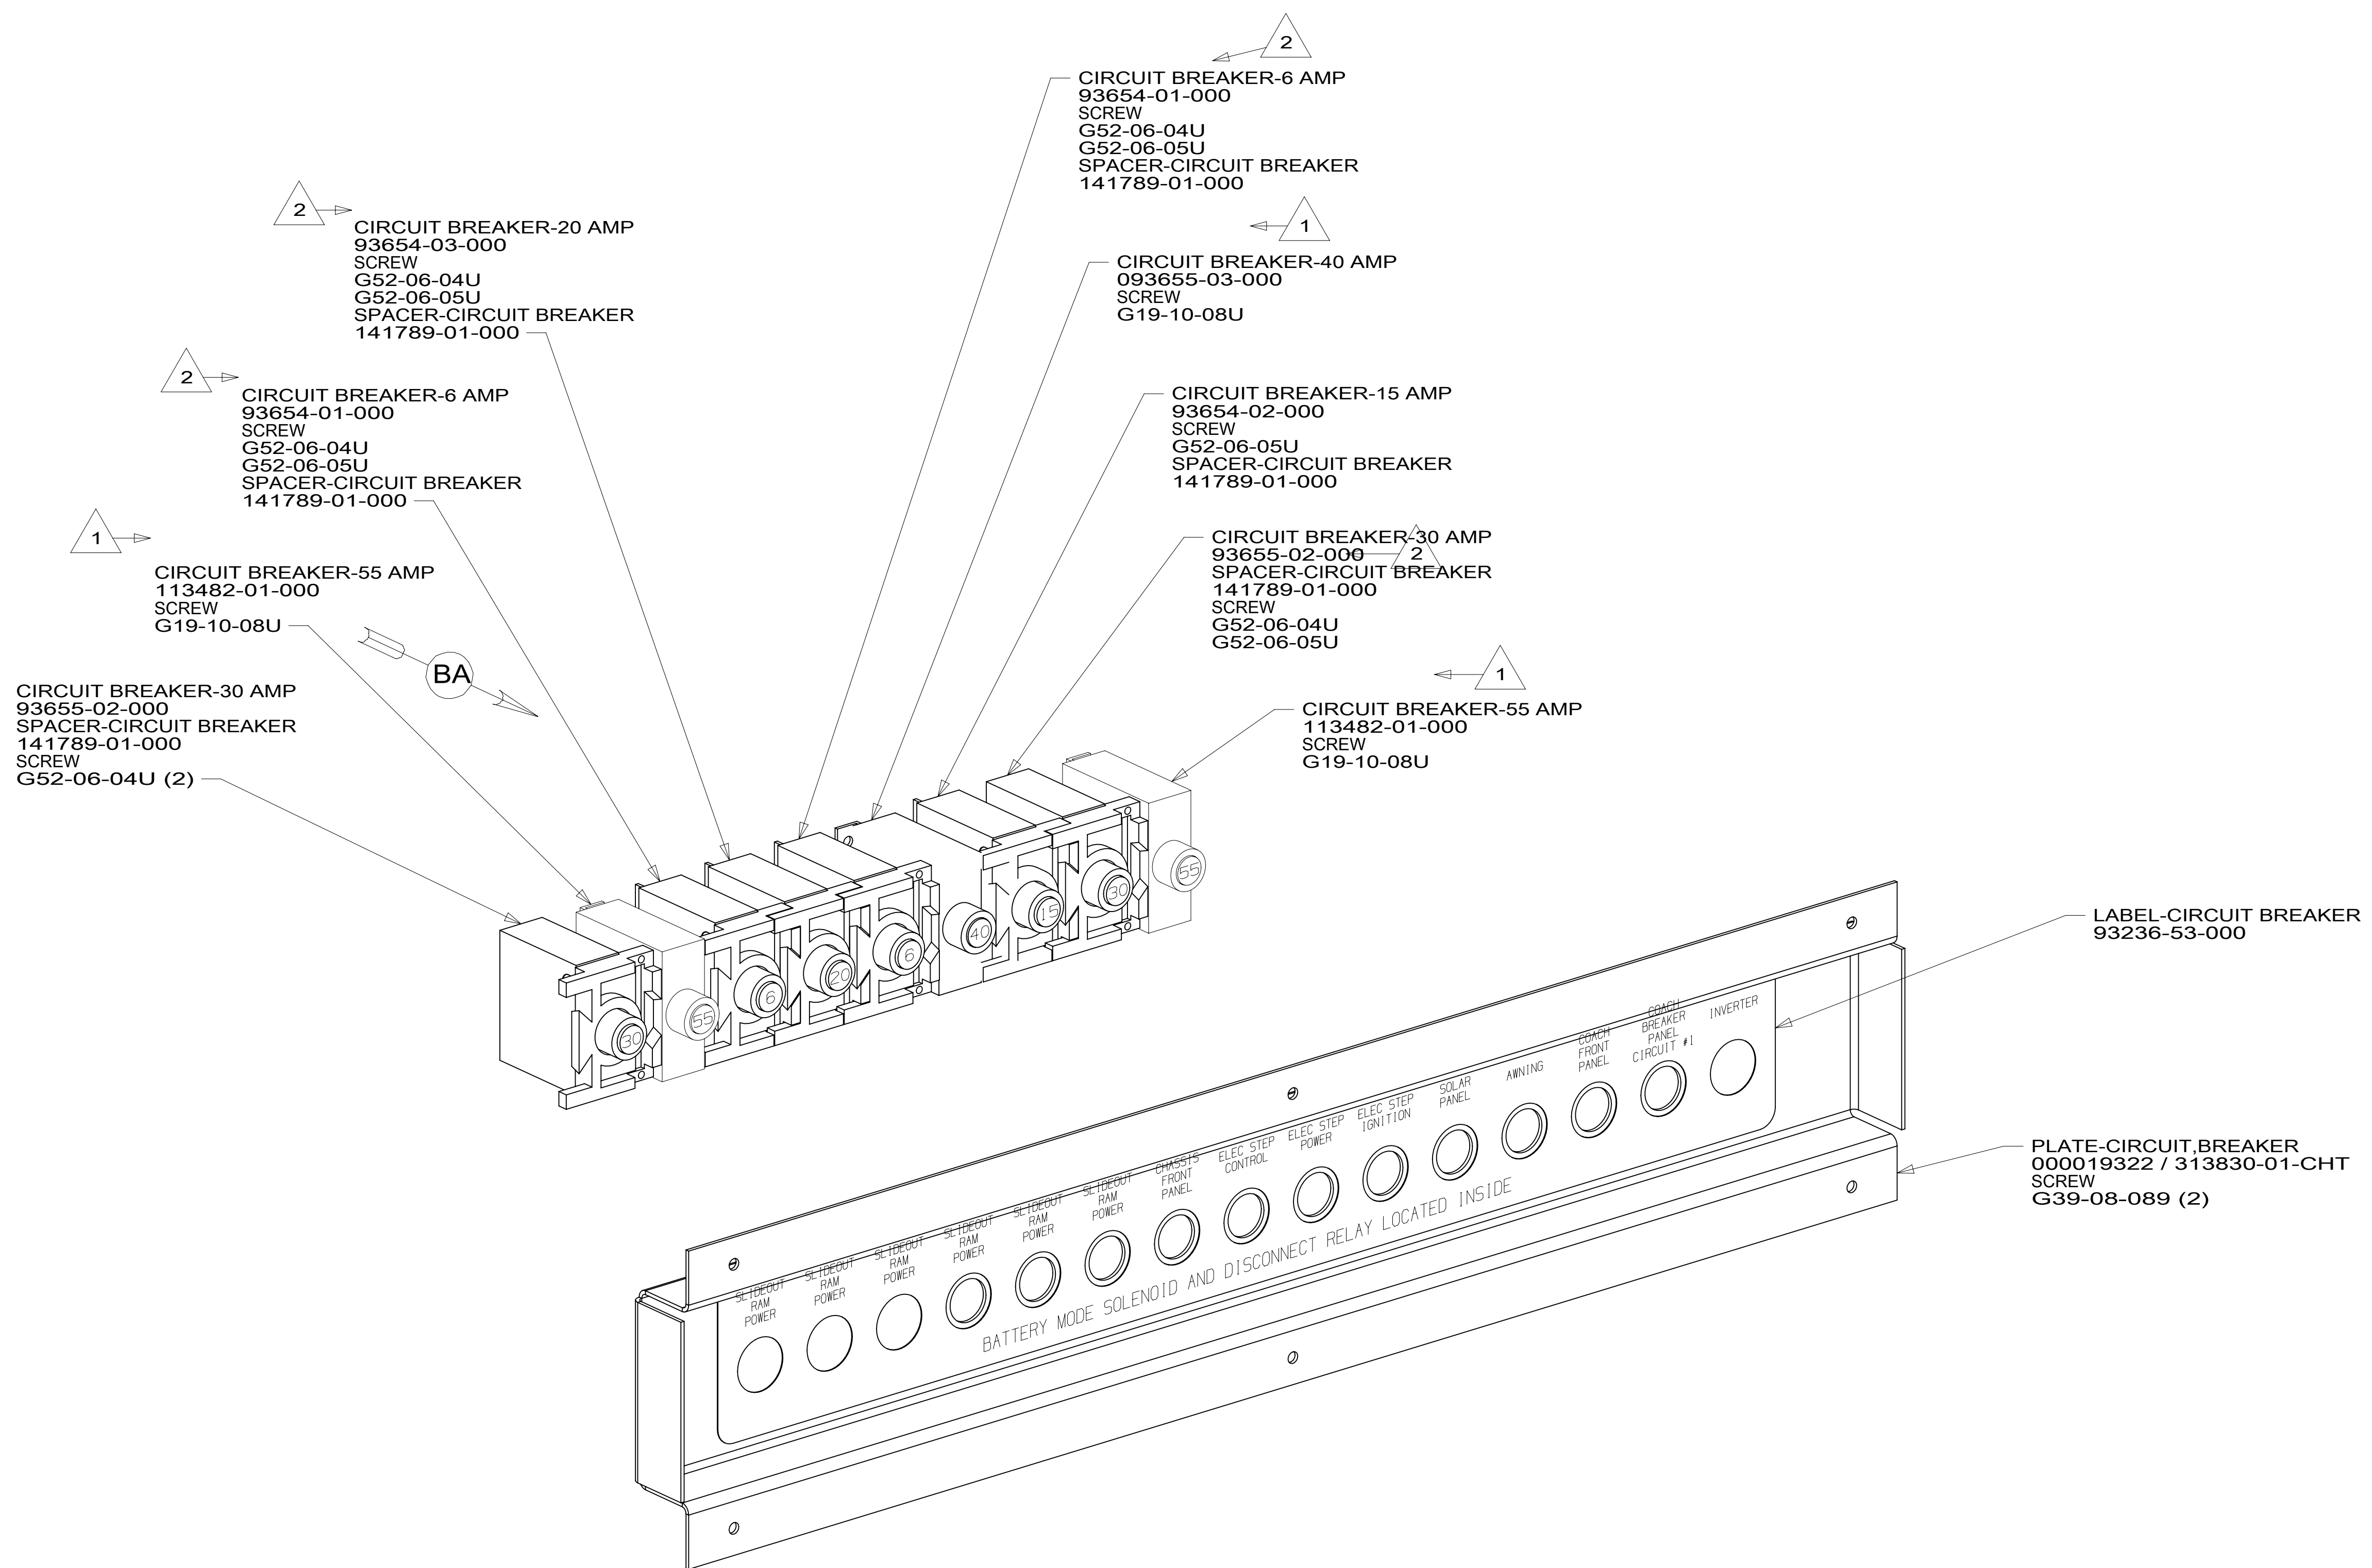
C



B

B

A

A







-  USE THE LONGER SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.
-  REPLACE EXISTING SCREW TO PROPERLY ATTACH BREAKER TO BUSS BAR.


NOTES:

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

-  CODES/STANDARDS-CSA/CMVSS
-  CODES/STANDARDS USA
-  

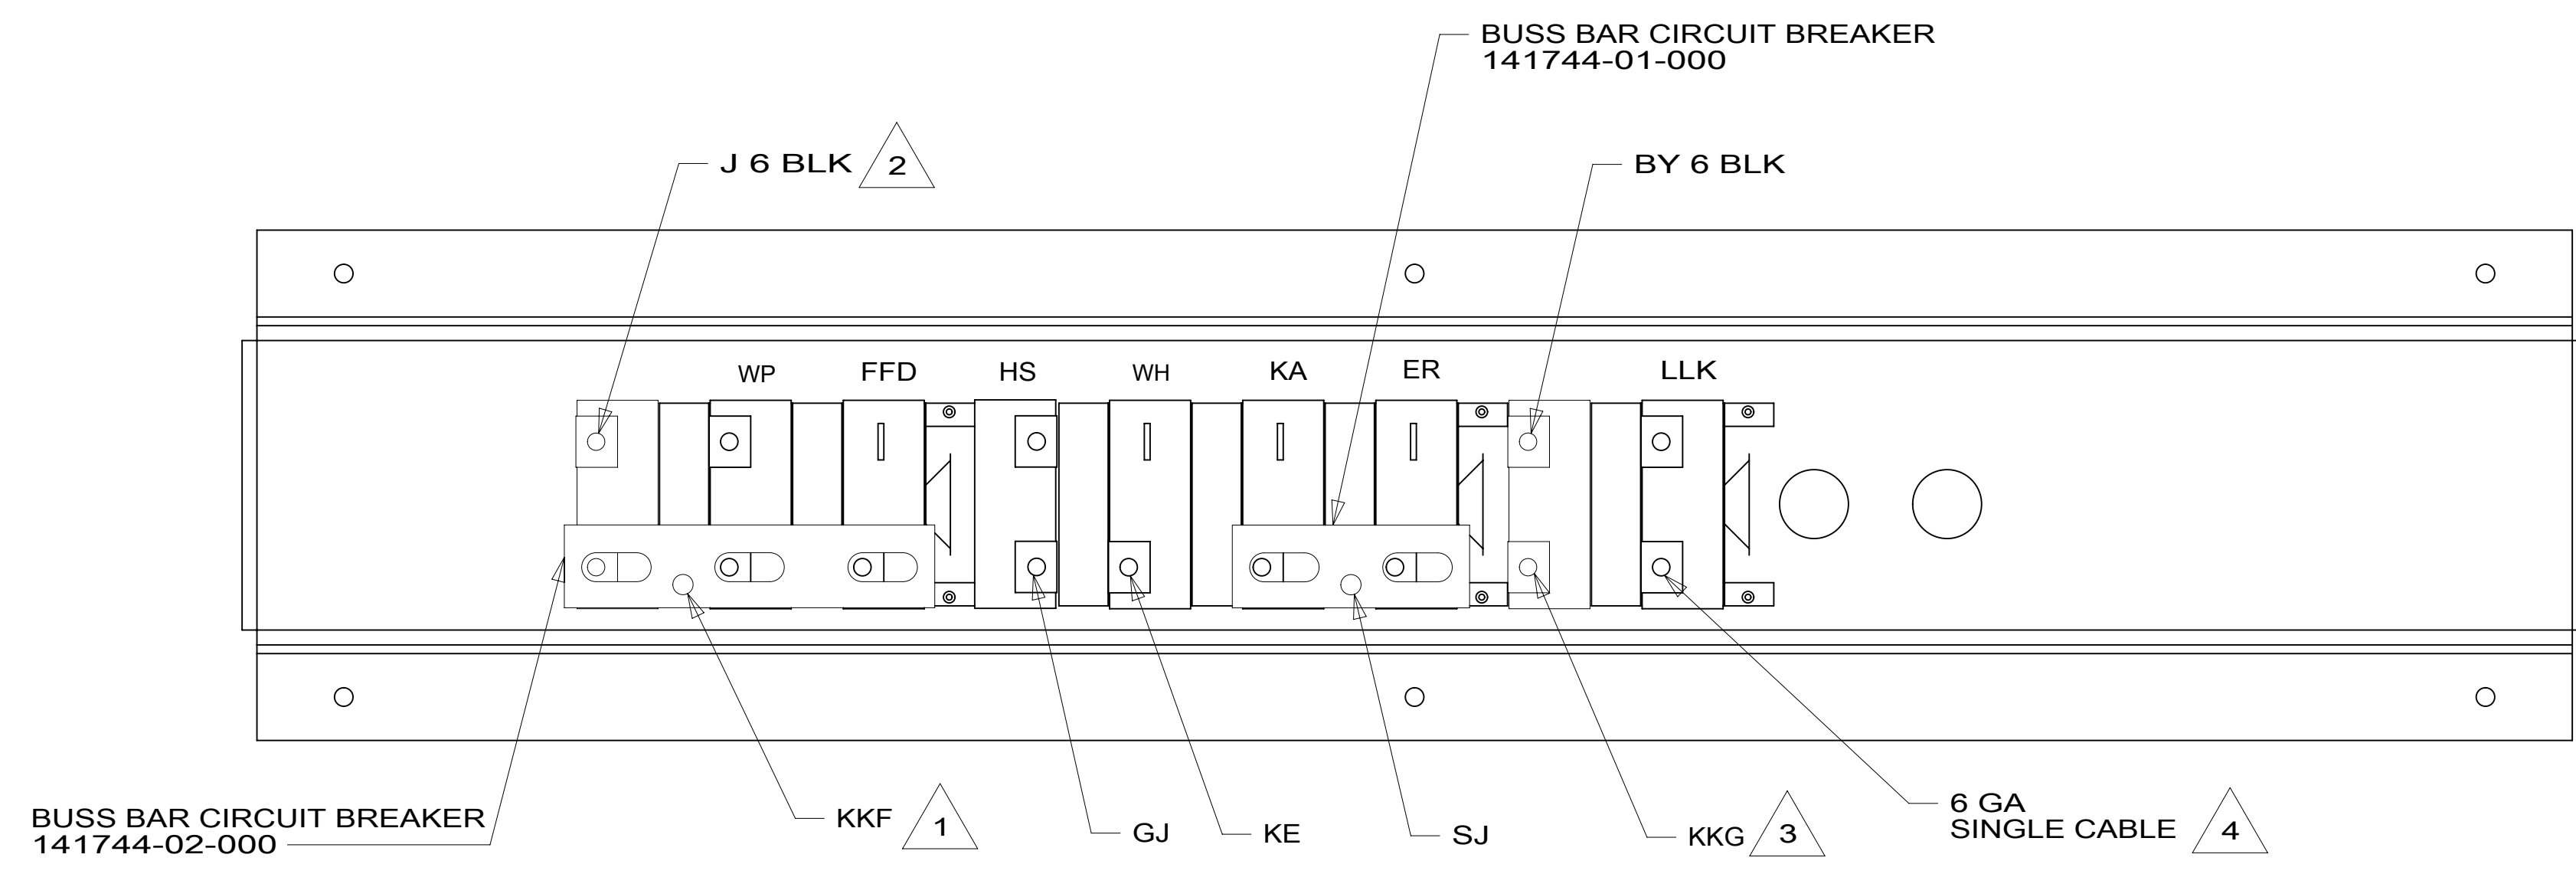
**WINNEBAGO**  
COPYRIGHT 2016 WINNEBAGO INDUSTRIES, INC.

DSNR:		ALL DIMENSIONS ARE IN MILLIMETERS	
DIFFR:			
UNSPECIFIED TOLERANCES:		MATERIAL:	
WHOLE DIM (X)	: 3		
ONE-PLACE (X.X)	: 1.5		
TWO-PLACE (X.XX)	: 0.50		
ANGLE	: 1°		
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES		WEIGHT: (LBS)	FIRST USED:
			<b>21 F29B</b>
<b>CHASSIS ELECTRICAL BOX ASM</b>			
SHEET:	ITEM/PART NO.:	REV	
1 OF 3	000210733 / 34000401000		
REF:		1 28-Jan-2021	

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1

D  
C  
B  
A



DETAIL BA

- NOTES:
- 4 WIRE MARKED WITH RED TAPE.
  - 3 WIRE MARKED WITH PURPLE TAPE.
  - 2 WIRE MARKED WITH YELLOW TAPE.
  - 1 WIRE MARKED WITH 2 WRAPS OF YELLOW TAPE.

FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG NO. 121339-01-000

265 CODES/STANDARDS-CSA/CMVSS  
1B1 CODES/STANDARDS USA

DESCRIPTION:	
CHASSIS ELECTRICAL BOX ASM	
SHEET:	ITEM/PART NO. REV
2 OF 3	000210733 / 34000401000

8 7 6 5 4 3 2 1 28-Jan-2021

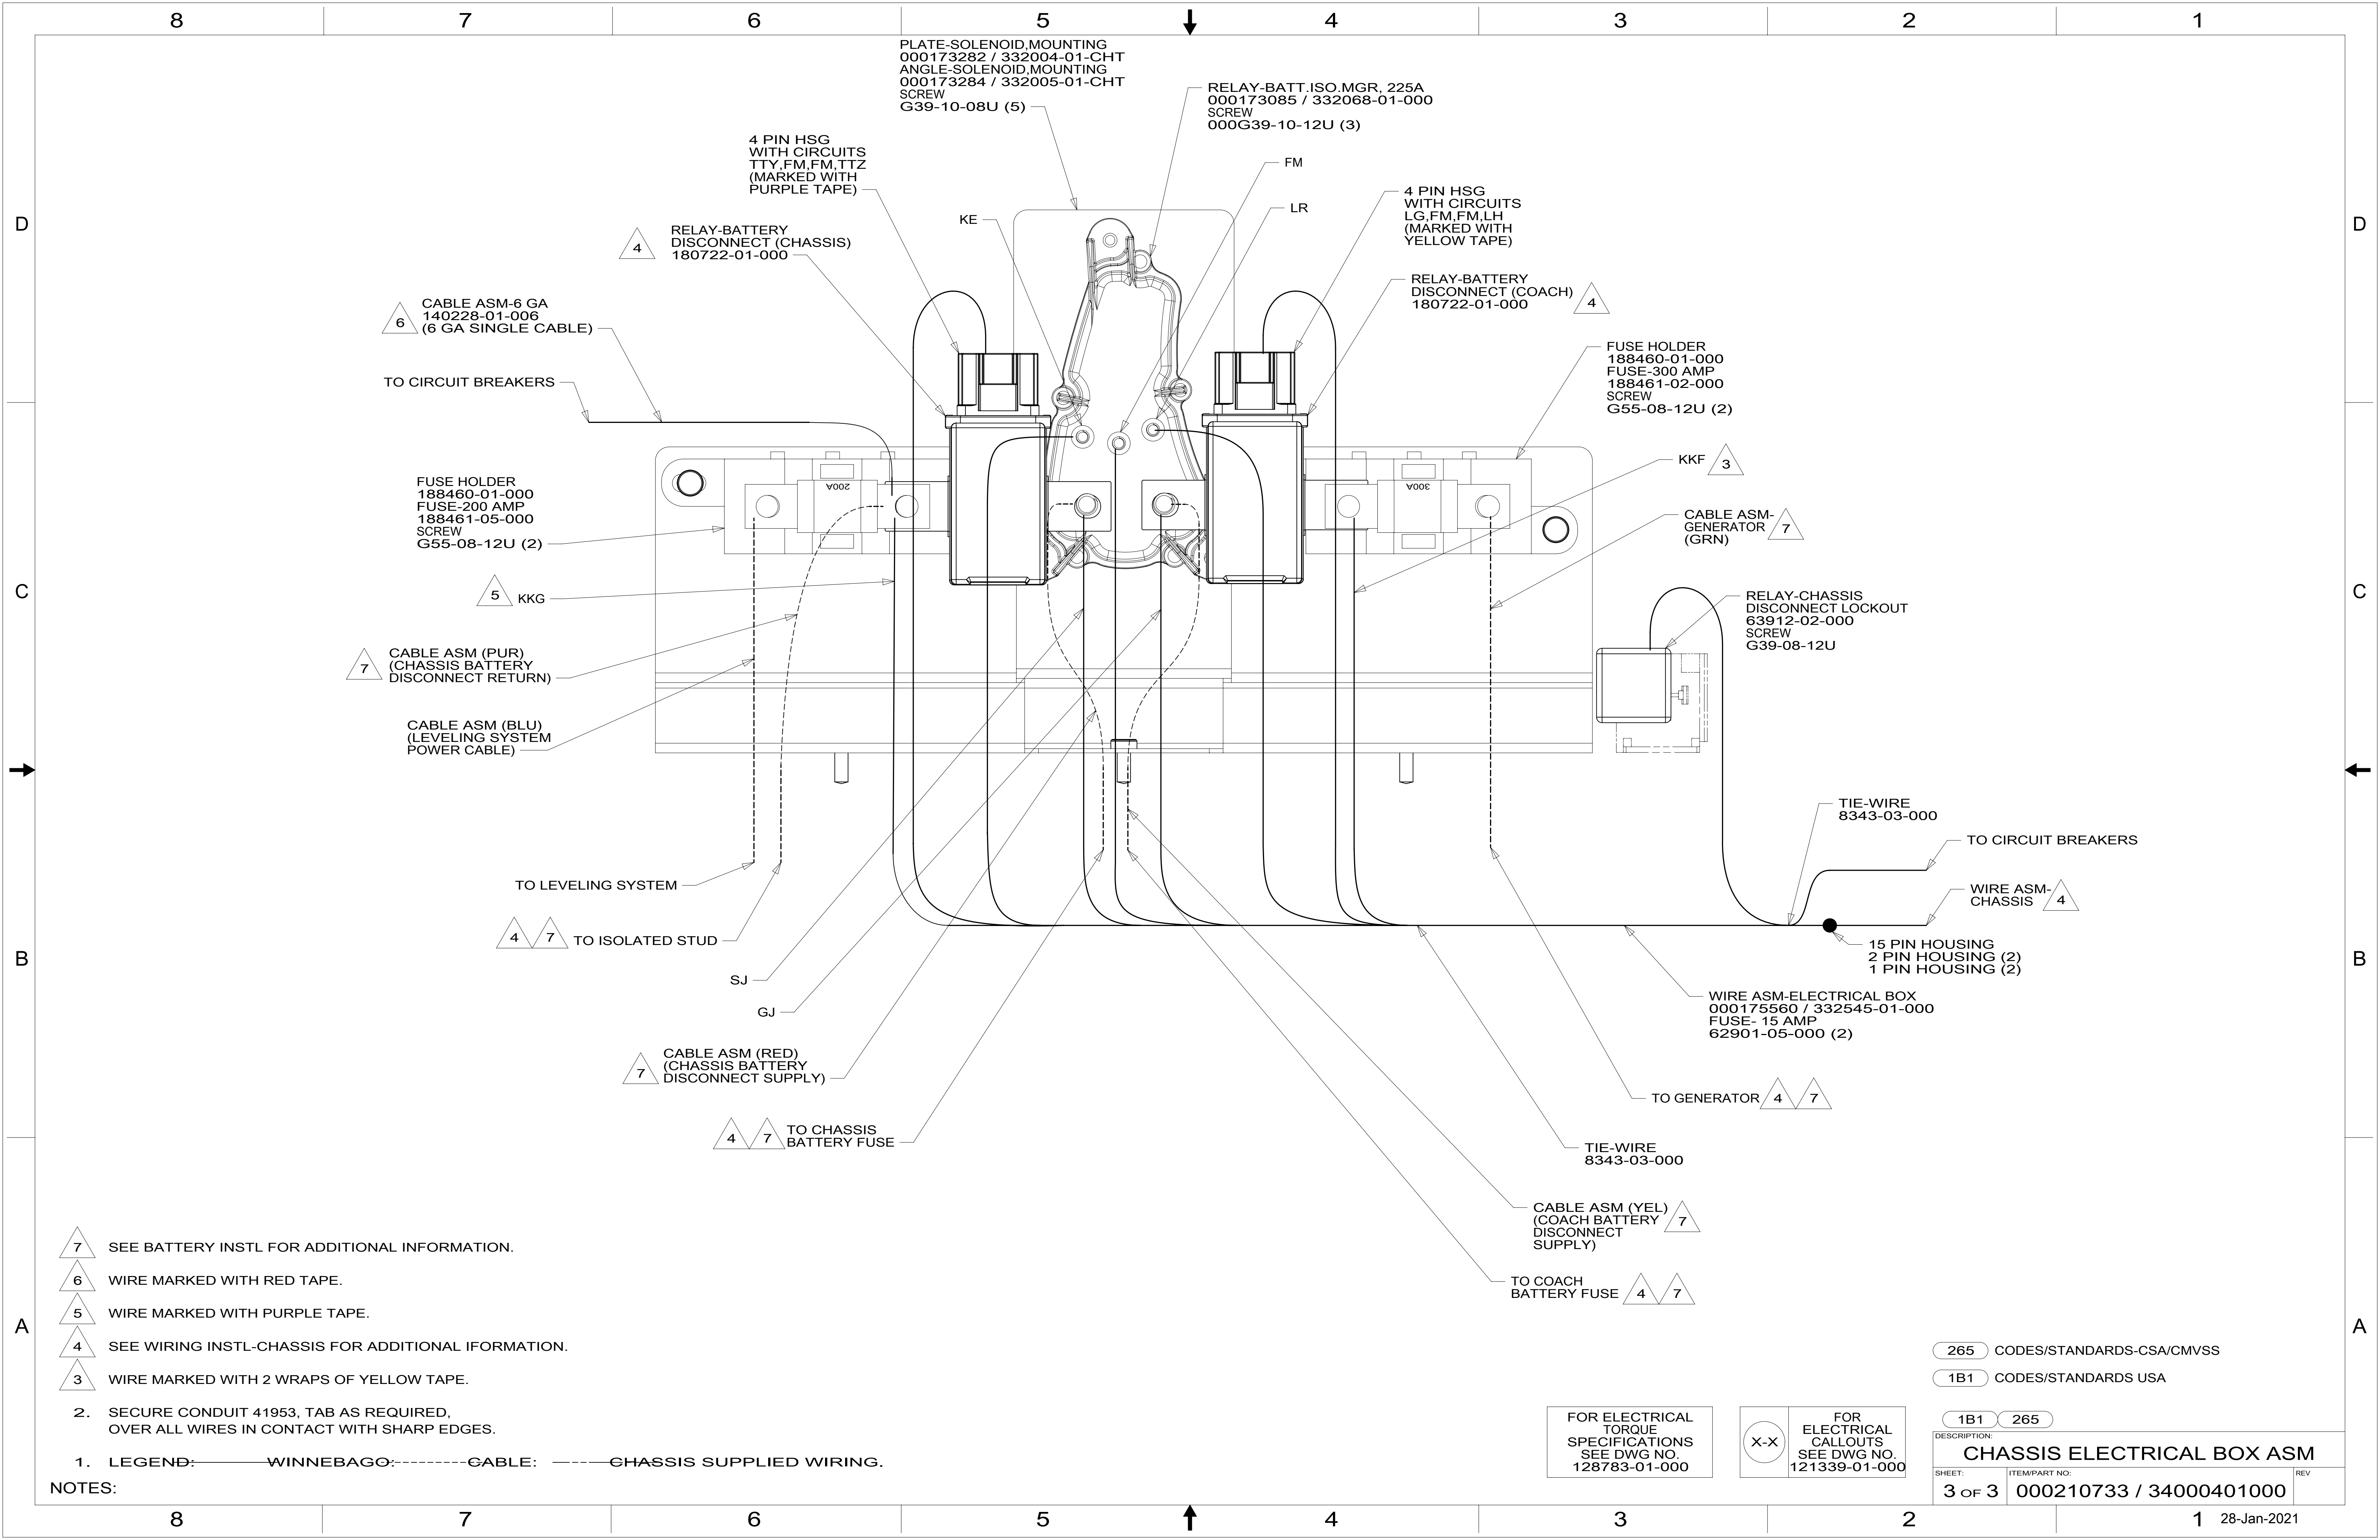


PLATE-SOLENOID.MOUNTING  
000173282 / 332004-01-CHT  
ANGLE-SOLENOID.MOUNTING  
000173284 / 332005-01-CHT  
SCREW  
G39-10-08U (5)

RELAY-BATT.ISO.MGR, 225A  
000173085 / 332068-01-000  
SCREW  
000G39-10-12U (3)

4 PIN HSG  
WITH CIRCUITS  
TTY,FM,FM,TTZ  
(MARKED WITH  
PURPLE TAPE)

4 PIN HSG  
WITH CIRCUITS  
LG,FM,FM,LH  
(MARKED WITH  
YELLOW TAPE)

RELAY-BATTERY  
DISCONNECT (CHASSIS)  
180722-01-000

RELAY-BATTERY  
DISCONNECT (COACH)  
180722-01-000

CABLE ASM-6 GA  
140228-01-006  
(6 GA SINGLE CABLE)

FUSE HOLDER  
188460-01-000  
FUSE-300 AMP  
188461-02-000  
SCREW  
G55-08-12U (2)

TO CIRCUIT BREAKERS

FUSE HOLDER  
188460-01-000  
FUSE-200 AMP  
188461-05-000  
SCREW  
G55-08-12U (2)

KKF 3

5 KKG

CABLE ASM-  
GENERATOR  
(GRN) 7

CABLE ASM (PUR)  
(CHASSIS BATTERY  
DISCONNECT RETURN) 7

RELAY-CHASSIS  
DISCONNECT LOCKOUT  
63912-02-000  
SCREW  
G39-08-12U

CABLE ASM (BLU)  
(LEVELING SYSTEM  
POWER CABLE)

TIE-WIRE  
8343-03-000

TO LEVELING SYSTEM

TO CIRCUIT BREAKERS

TO ISOLATED STUD 4 7

WIRE ASM-  
CHASSIS 4

SJ

15 PIN HOUSING  
2 PIN HOUSING (2)  
1 PIN HOUSING (2)

GJ

WIRE ASM-ELECTRICAL BOX  
000175560 / 332545-01-000  
FUSE- 15 AMP  
62901-05-000 (2)

CABLE ASM (RED)  
(CHASSIS BATTERY  
DISCONNECT SUPPLY) 7

TO GENERATOR 4 7

TO CHASSIS  
BATTERY FUSE 4 7

TIE-WIRE  
8343-03-000

CABLE ASM (YEL)  
(COACH BATTERY  
DISCONNECT  
SUPPLY) 7

TO COACH  
BATTERY FUSE 4 7

7 SEE BATTERY INSTL FOR ADDITIONAL INFORMATION.

6 WIRE MARKED WITH RED TAPE.

5 WIRE MARKED WITH PURPLE TAPE.

4 SEE WIRING INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

3 WIRE MARKED WITH 2 WRAPS OF YELLOW TAPE.

2. SECURE CONDUIT 41953, TAB AS REQUIRED,  
OVER ALL WIRES IN CONTACT WITH SHARP EDGES.

1. LEGEND: — WINNEBAGO: - - - - - CABLE: - - - - - CHASSIS SUPPLIED WIRING.

NOTES:

265 CODES/STANDARDS-CSA/CMVSS

1B1 CODES/STANDARDS USA

1B1 265

FOR ELECTRICAL  
TORQUE  
SPECIFICATIONS  
SEE DWG NO.  
128783-01-000

FOR  
ELECTRICAL  
CALLOUTS  
SEE DWG NO.  
121339-01-000

DESCRIPTION:  
**CHASSIS ELECTRICAL BOX ASM**

SHEET: 3 OF 3 ITEM/PART NO: 000210733 / 34000401000 REV

1 28-Jan-2021