
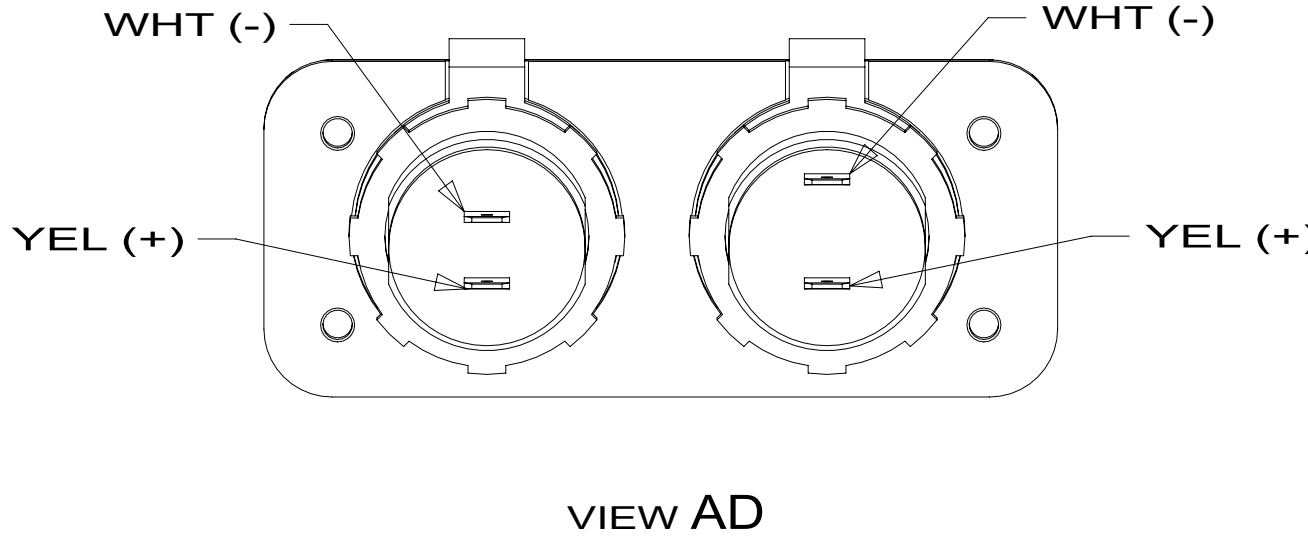
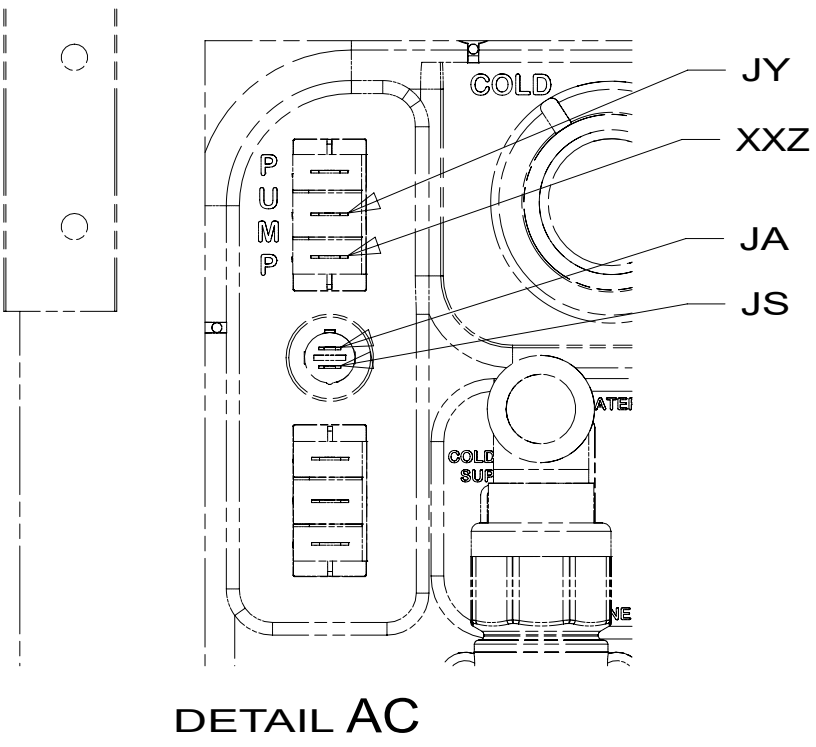
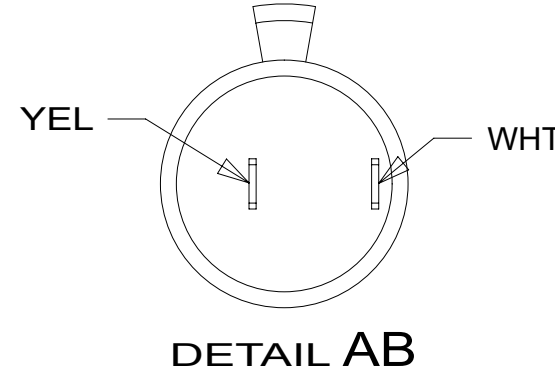


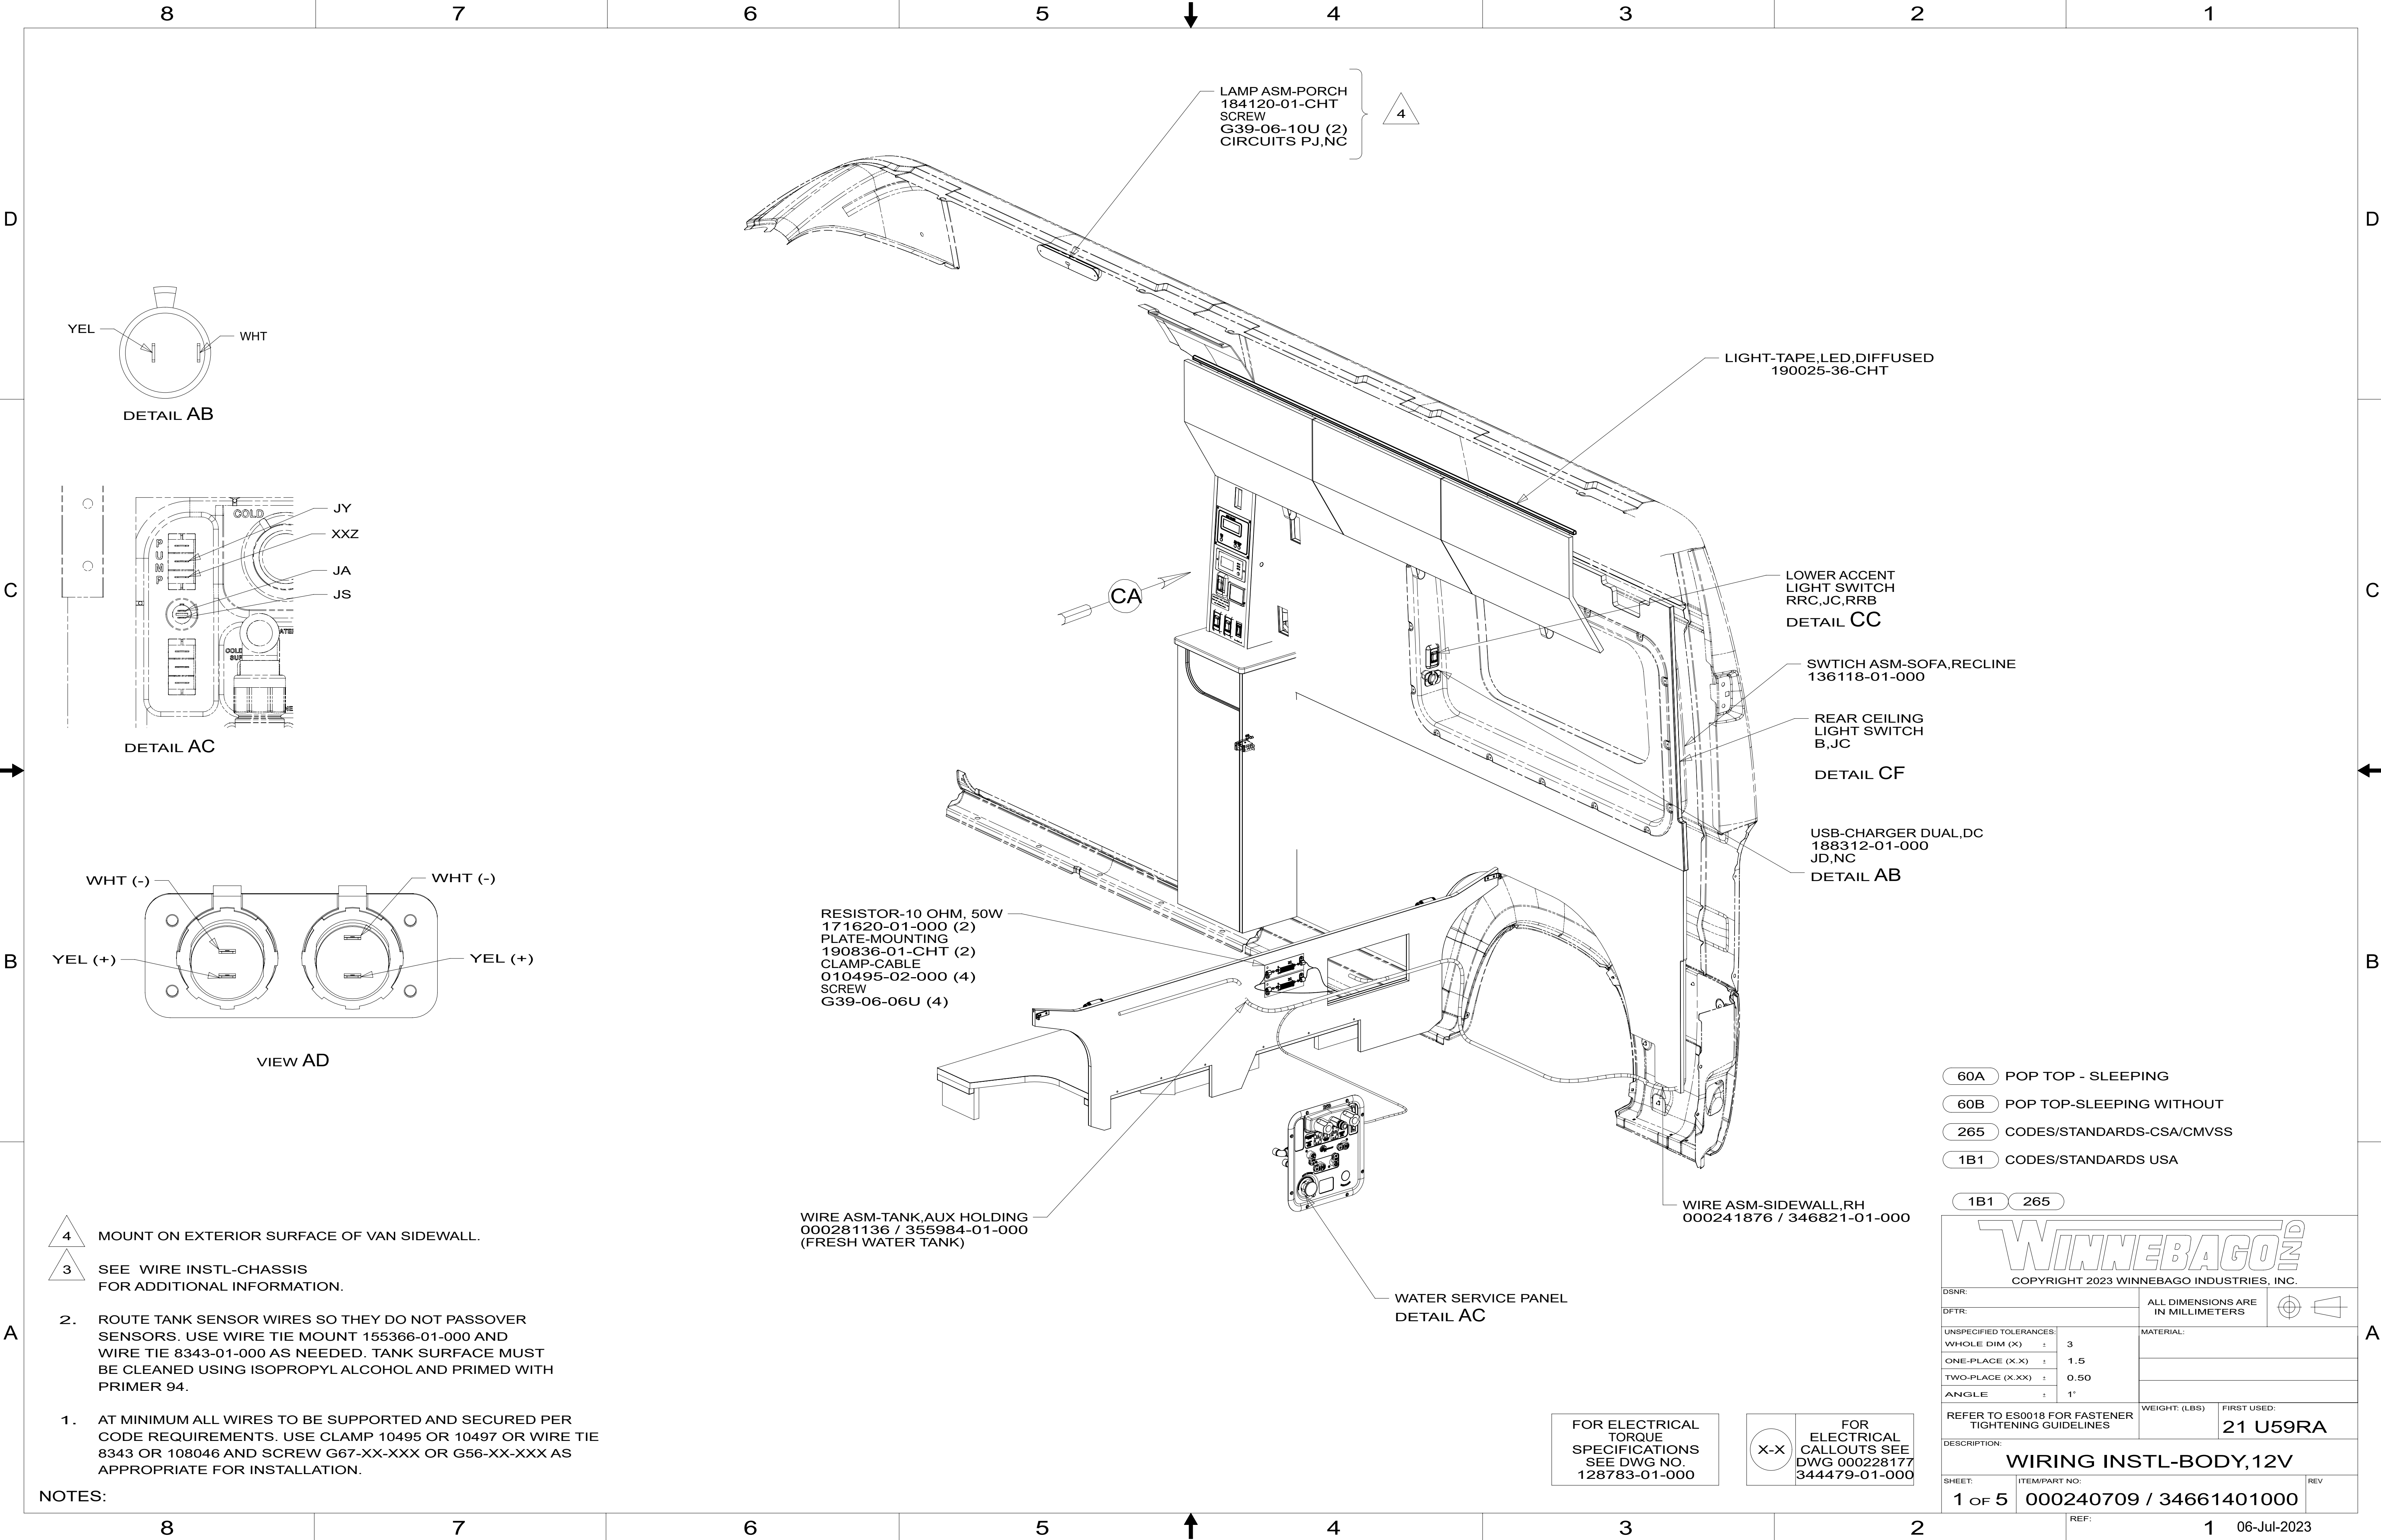

- 4 MOUNT ON EXTERIOR SURFACE OF VAN SIDEWALL.
- 3 SEE WIRE INSTL-CHASSIS FOR ADDITIONAL INFORMATION.

- ROUTE TANK SENSOR WIRES SO THEY DO NOT PASSOVER SENSORS. USE WIRE TIE MOUNT 155366-01-000 AND WIRE TIE 8343-01-000 AS NEEDED. TANK SURFACE MUST BE CLEANED USING ISOPROPYL ALCOHOL AND PRIMED WITH PRIMER 94.
- AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE 8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS APPROPRIATE FOR INSTALLATION.

NOTES:


FOR ELECTRICAL TORQUE SPECIFICATIONS SEE DWG NO. 128783-01-000

FOR ELECTRICAL CALLOUTS SEE DWG 000228177 344479-01-000

- 60A POP TOP - SLEEPING
- 60B POP TOP-SLEEPING WITHOUT
- 265 CODES/STANDARDS-CSA/CMVSS
- 1B1 CODES/STANDARDS USA

COPYRIGHT 2023 WINNEBAGO INDUSTRIES, INC.

DSNR:		ALL DIMENSIONS ARE IN MILLIMETERS	
DFTR:			
UNSPECIFIED TOLERANCES:		MATERIAL:	
WHOLE DIM (X)	± 3		
ONE-PLACE (X.X)	± 1.5		
TWO-PLACE (X.XX)	± 0.50		
ANGLE	± 1°		
REFER TO ES0018 FOR FASTENER TIGHTENING GUIDELINES		WEIGHT: (LBS)	FIRST USED:
			21 U59RA
DESCRIPTION:			
WIRING INSTL-BODY,12V			
SHEET:	ITEM/PART NO:	REV	
1 OF 5	000240709 / 34661401000		
REF:		1 06-Jul-2023	

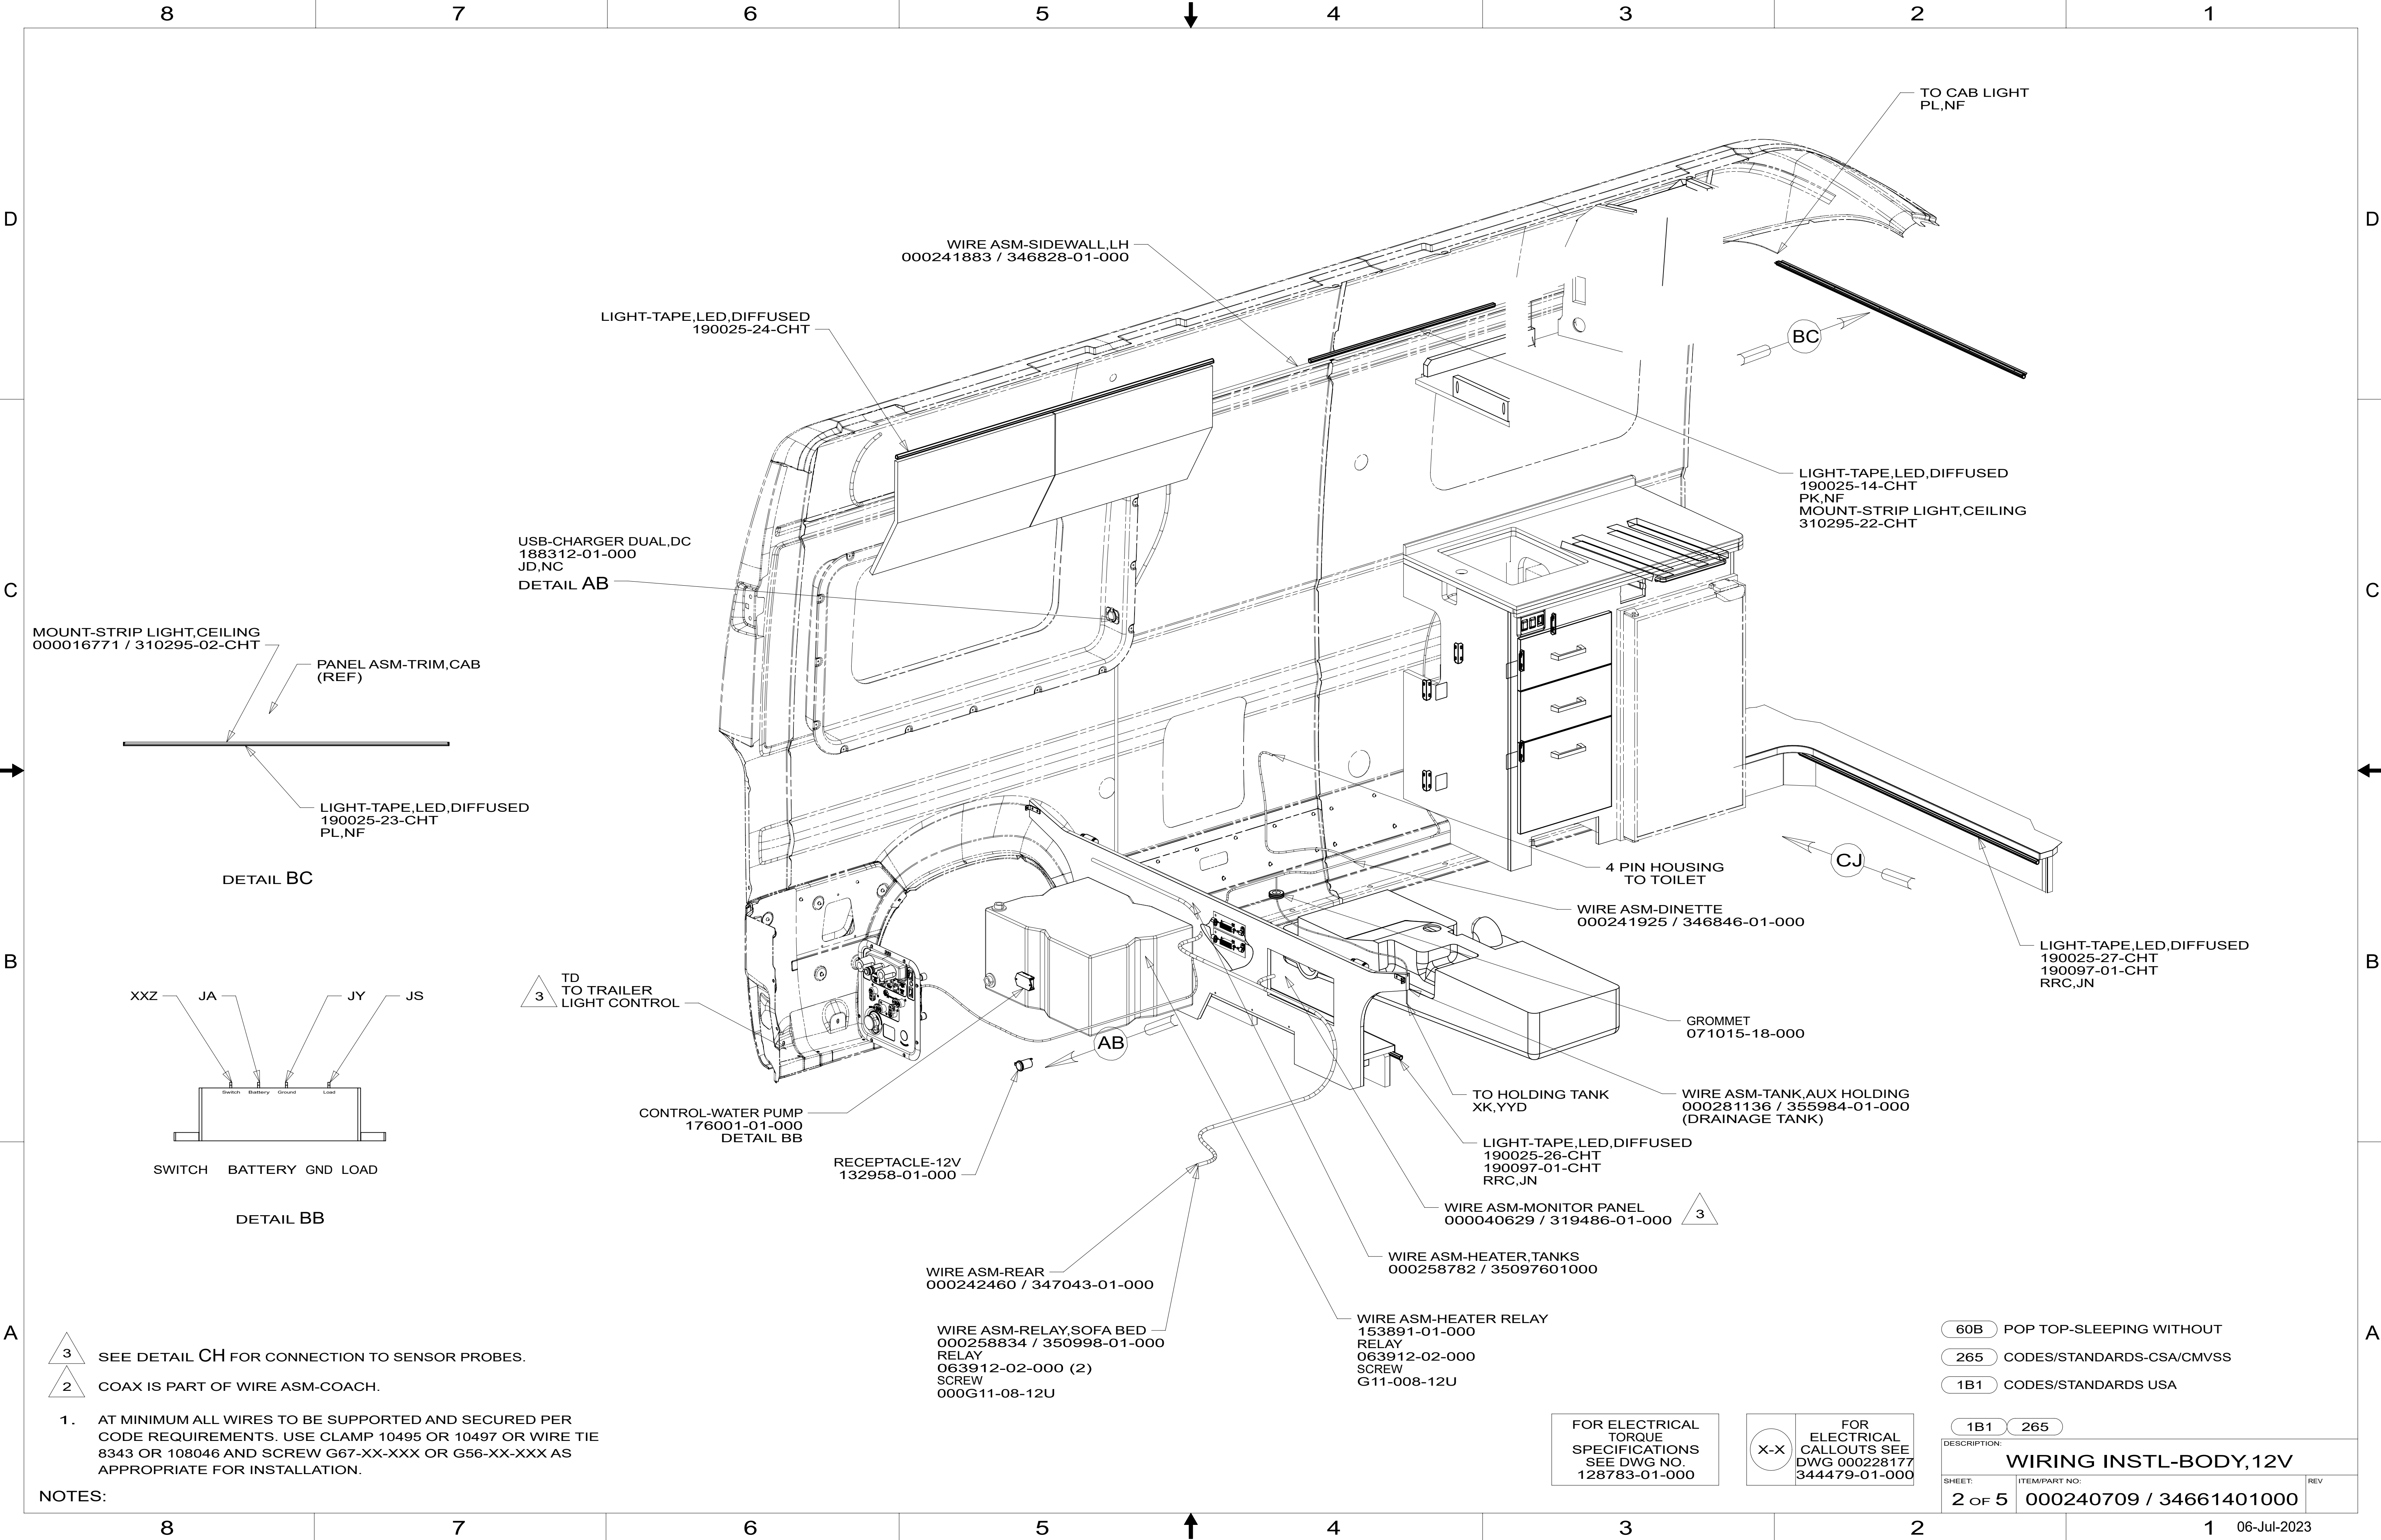


MOUNT-STRIP LIGHT, CEILING
000016771 / 310295-02-CHT

PANEL ASM-TRIM, CAB
(REF)

LIGHT-TAPE, LED, DIFFUSED
190025-23-CHT
PL, NF

DETAIL BC

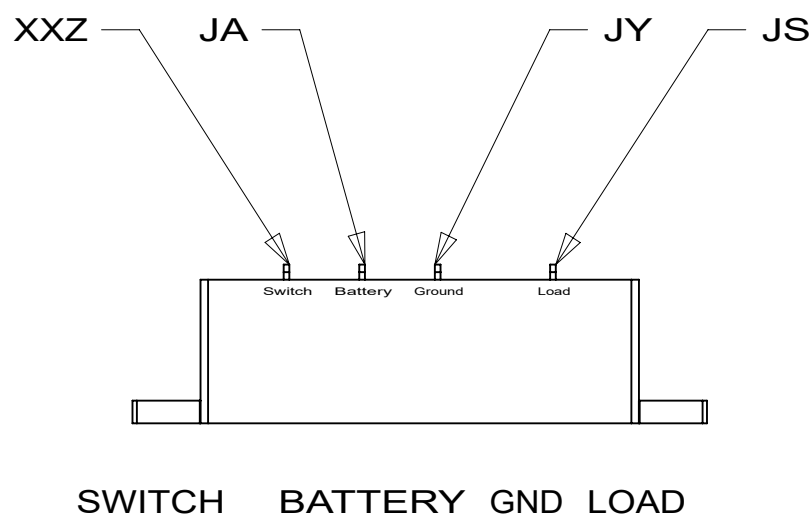

SWITCH BATTERY GND LOAD

DETAIL BB

3 TD
TO TRAILER
LIGHT CONTROL

CONTROL-WATER PUMP
176001-01-000
DETAIL BB

RECEPTACLE-12V
132958-01-000

WIRE ASM-REAR
000242460 / 347043-01-000

WIRE ASM-RELAY, SOFA BED
000258834 / 350998-01-000
RELAY
063912-02-000 (2)
SCREW
000G11-08-12U

WIRE ASM-HEATER RELAY
153891-01-000
RELAY
063912-02-000
SCREW
G11-008-12U

WIRE ASM-HEATER, TANKS
000258782 / 35097601000

TO HOLDING TANK
XK, YYD

WIRE ASM-TANK, AUX HOLDING
000281136 / 355984-01-000
(DRAINAGE TANK)

LIGHT-TAPE, LED, DIFFUSED
190025-26-CHT
190097-01-CHT
RRC, JN

WIRE ASM-MONITOR PANEL
000040629 / 319486-01-000


FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000


FOR
ELECTRICAL
CALLOUTS SEE
DWG 000228177
344479-01-000


60B POP TOP-SLEEPING WITHOUT
265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

1B1 265
DESCRIPTION:
WIRING INSTL-BODY, 12V
SHEET: 2 OF 5 ITEM/PART NO: 000240709 / 34661401000 REV

NOTES:
1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER
CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE
8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS
APPROPRIATE FOR INSTALLATION.

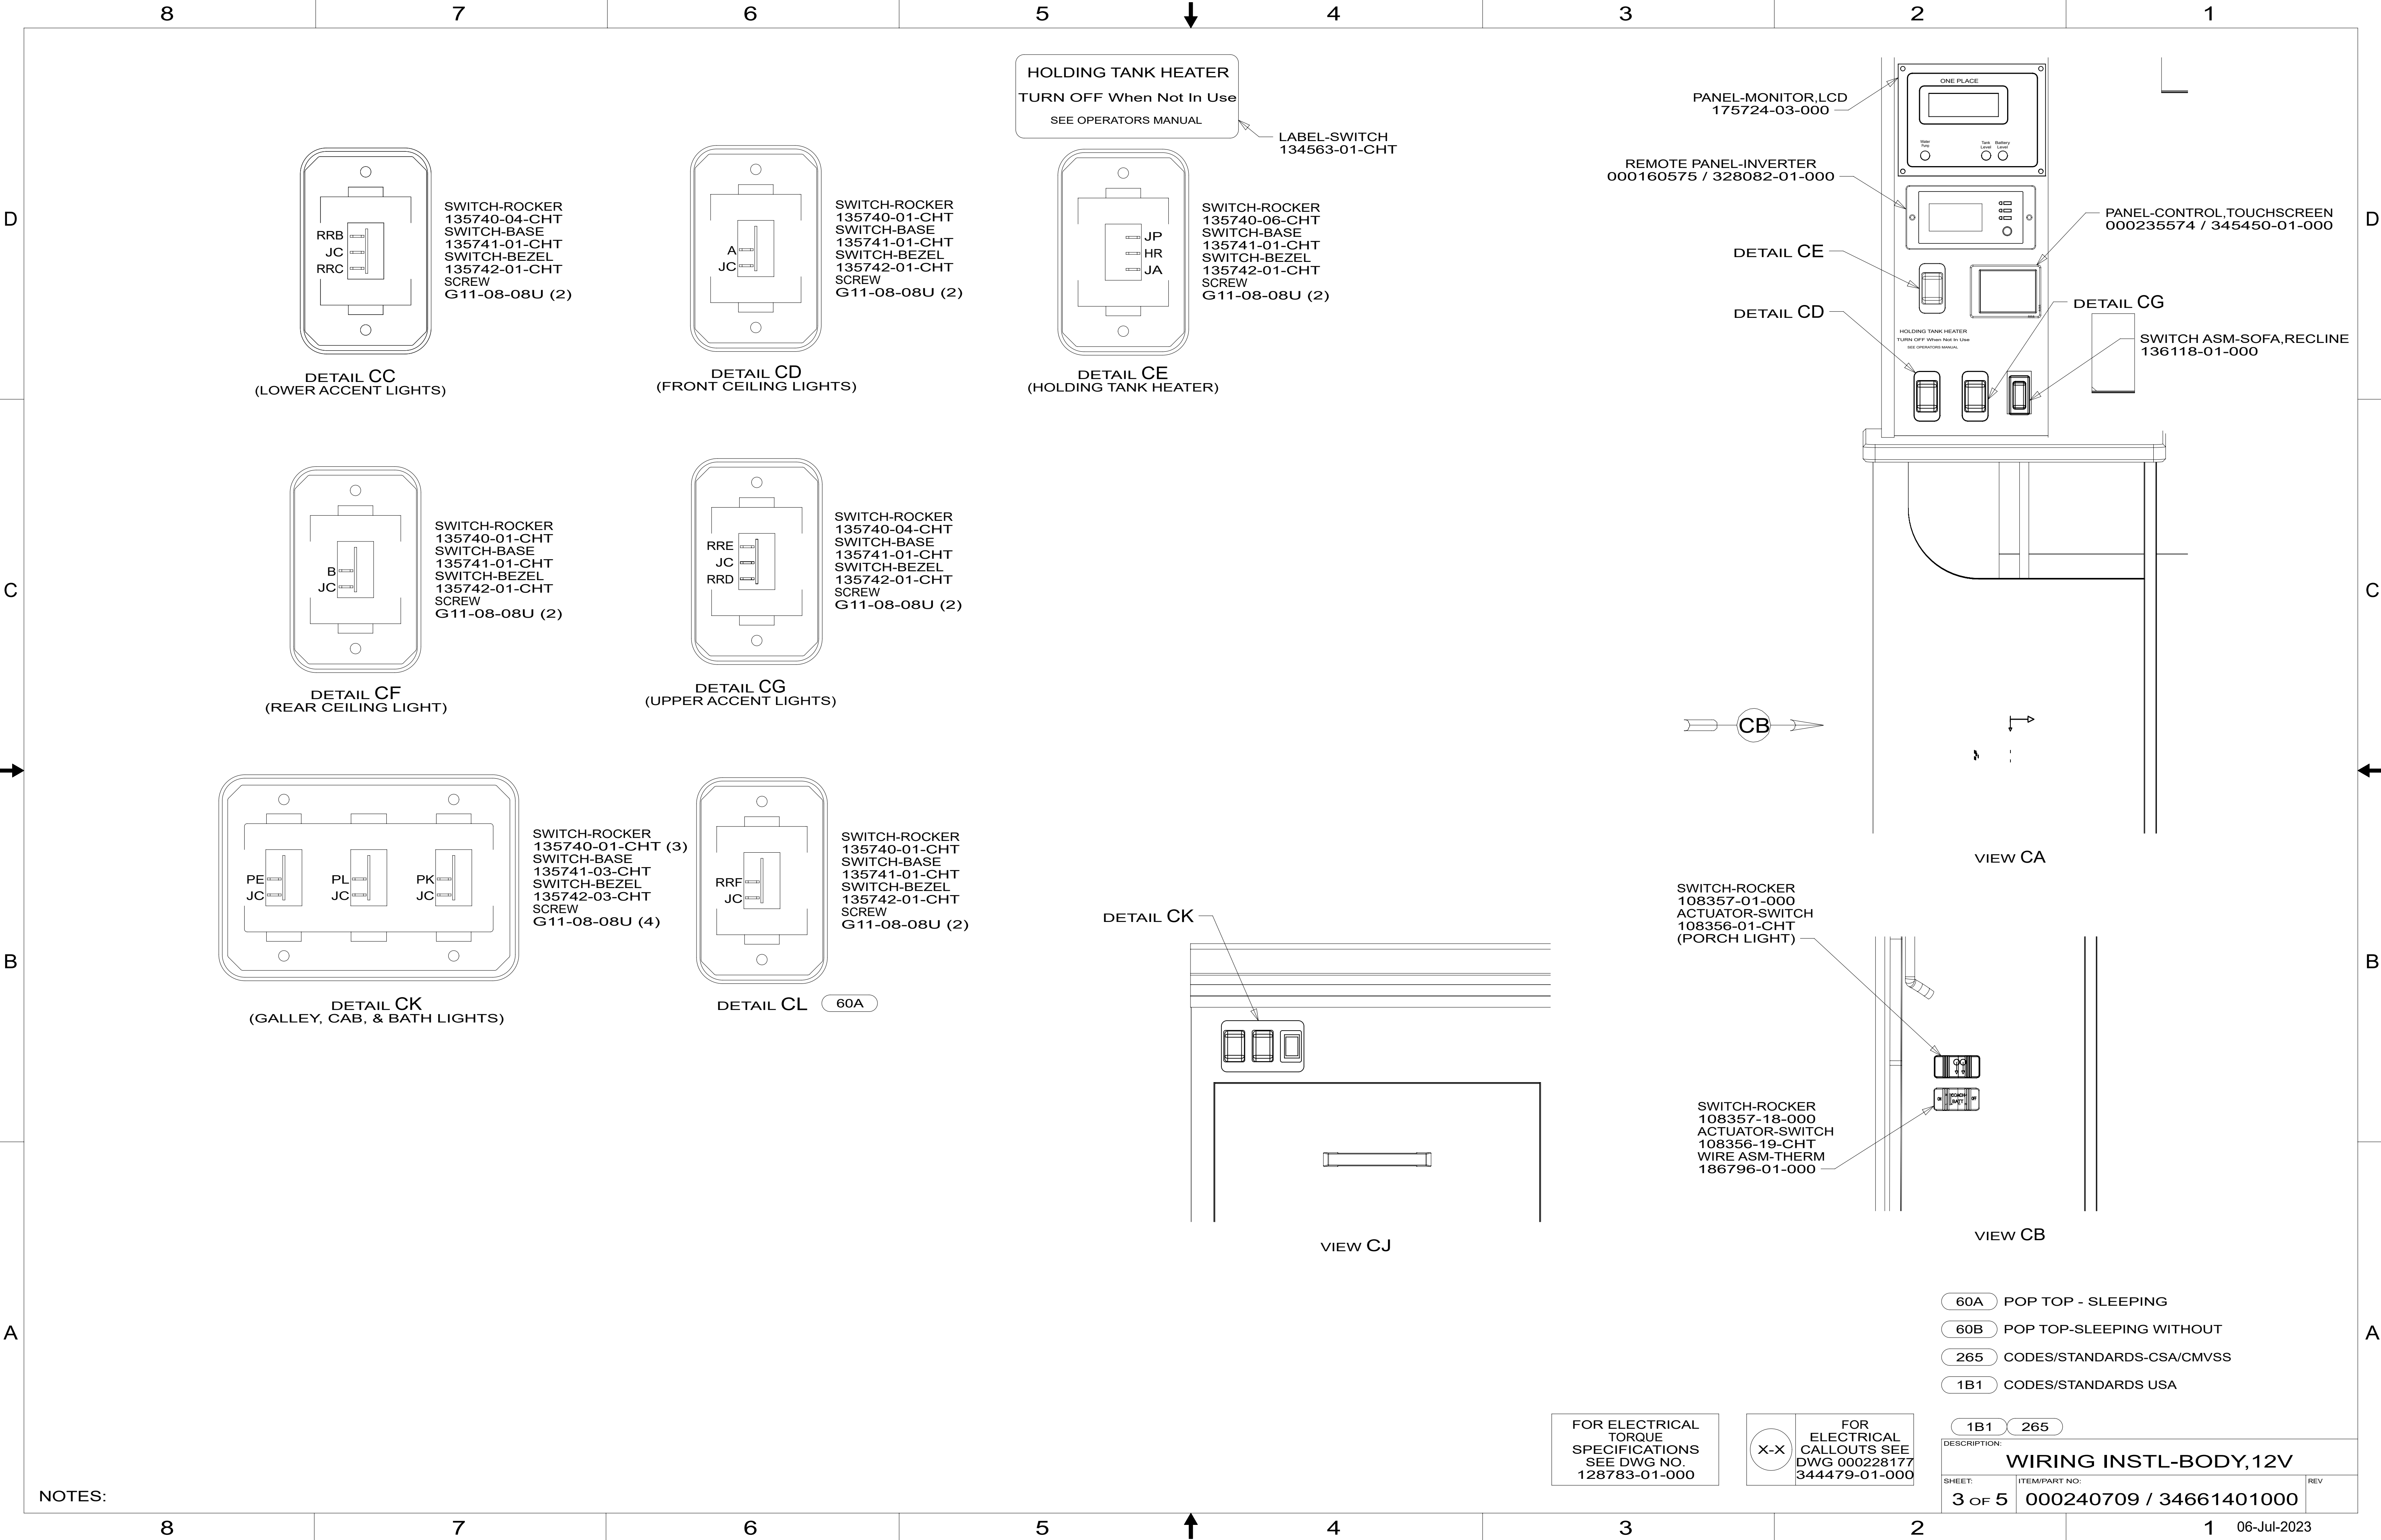

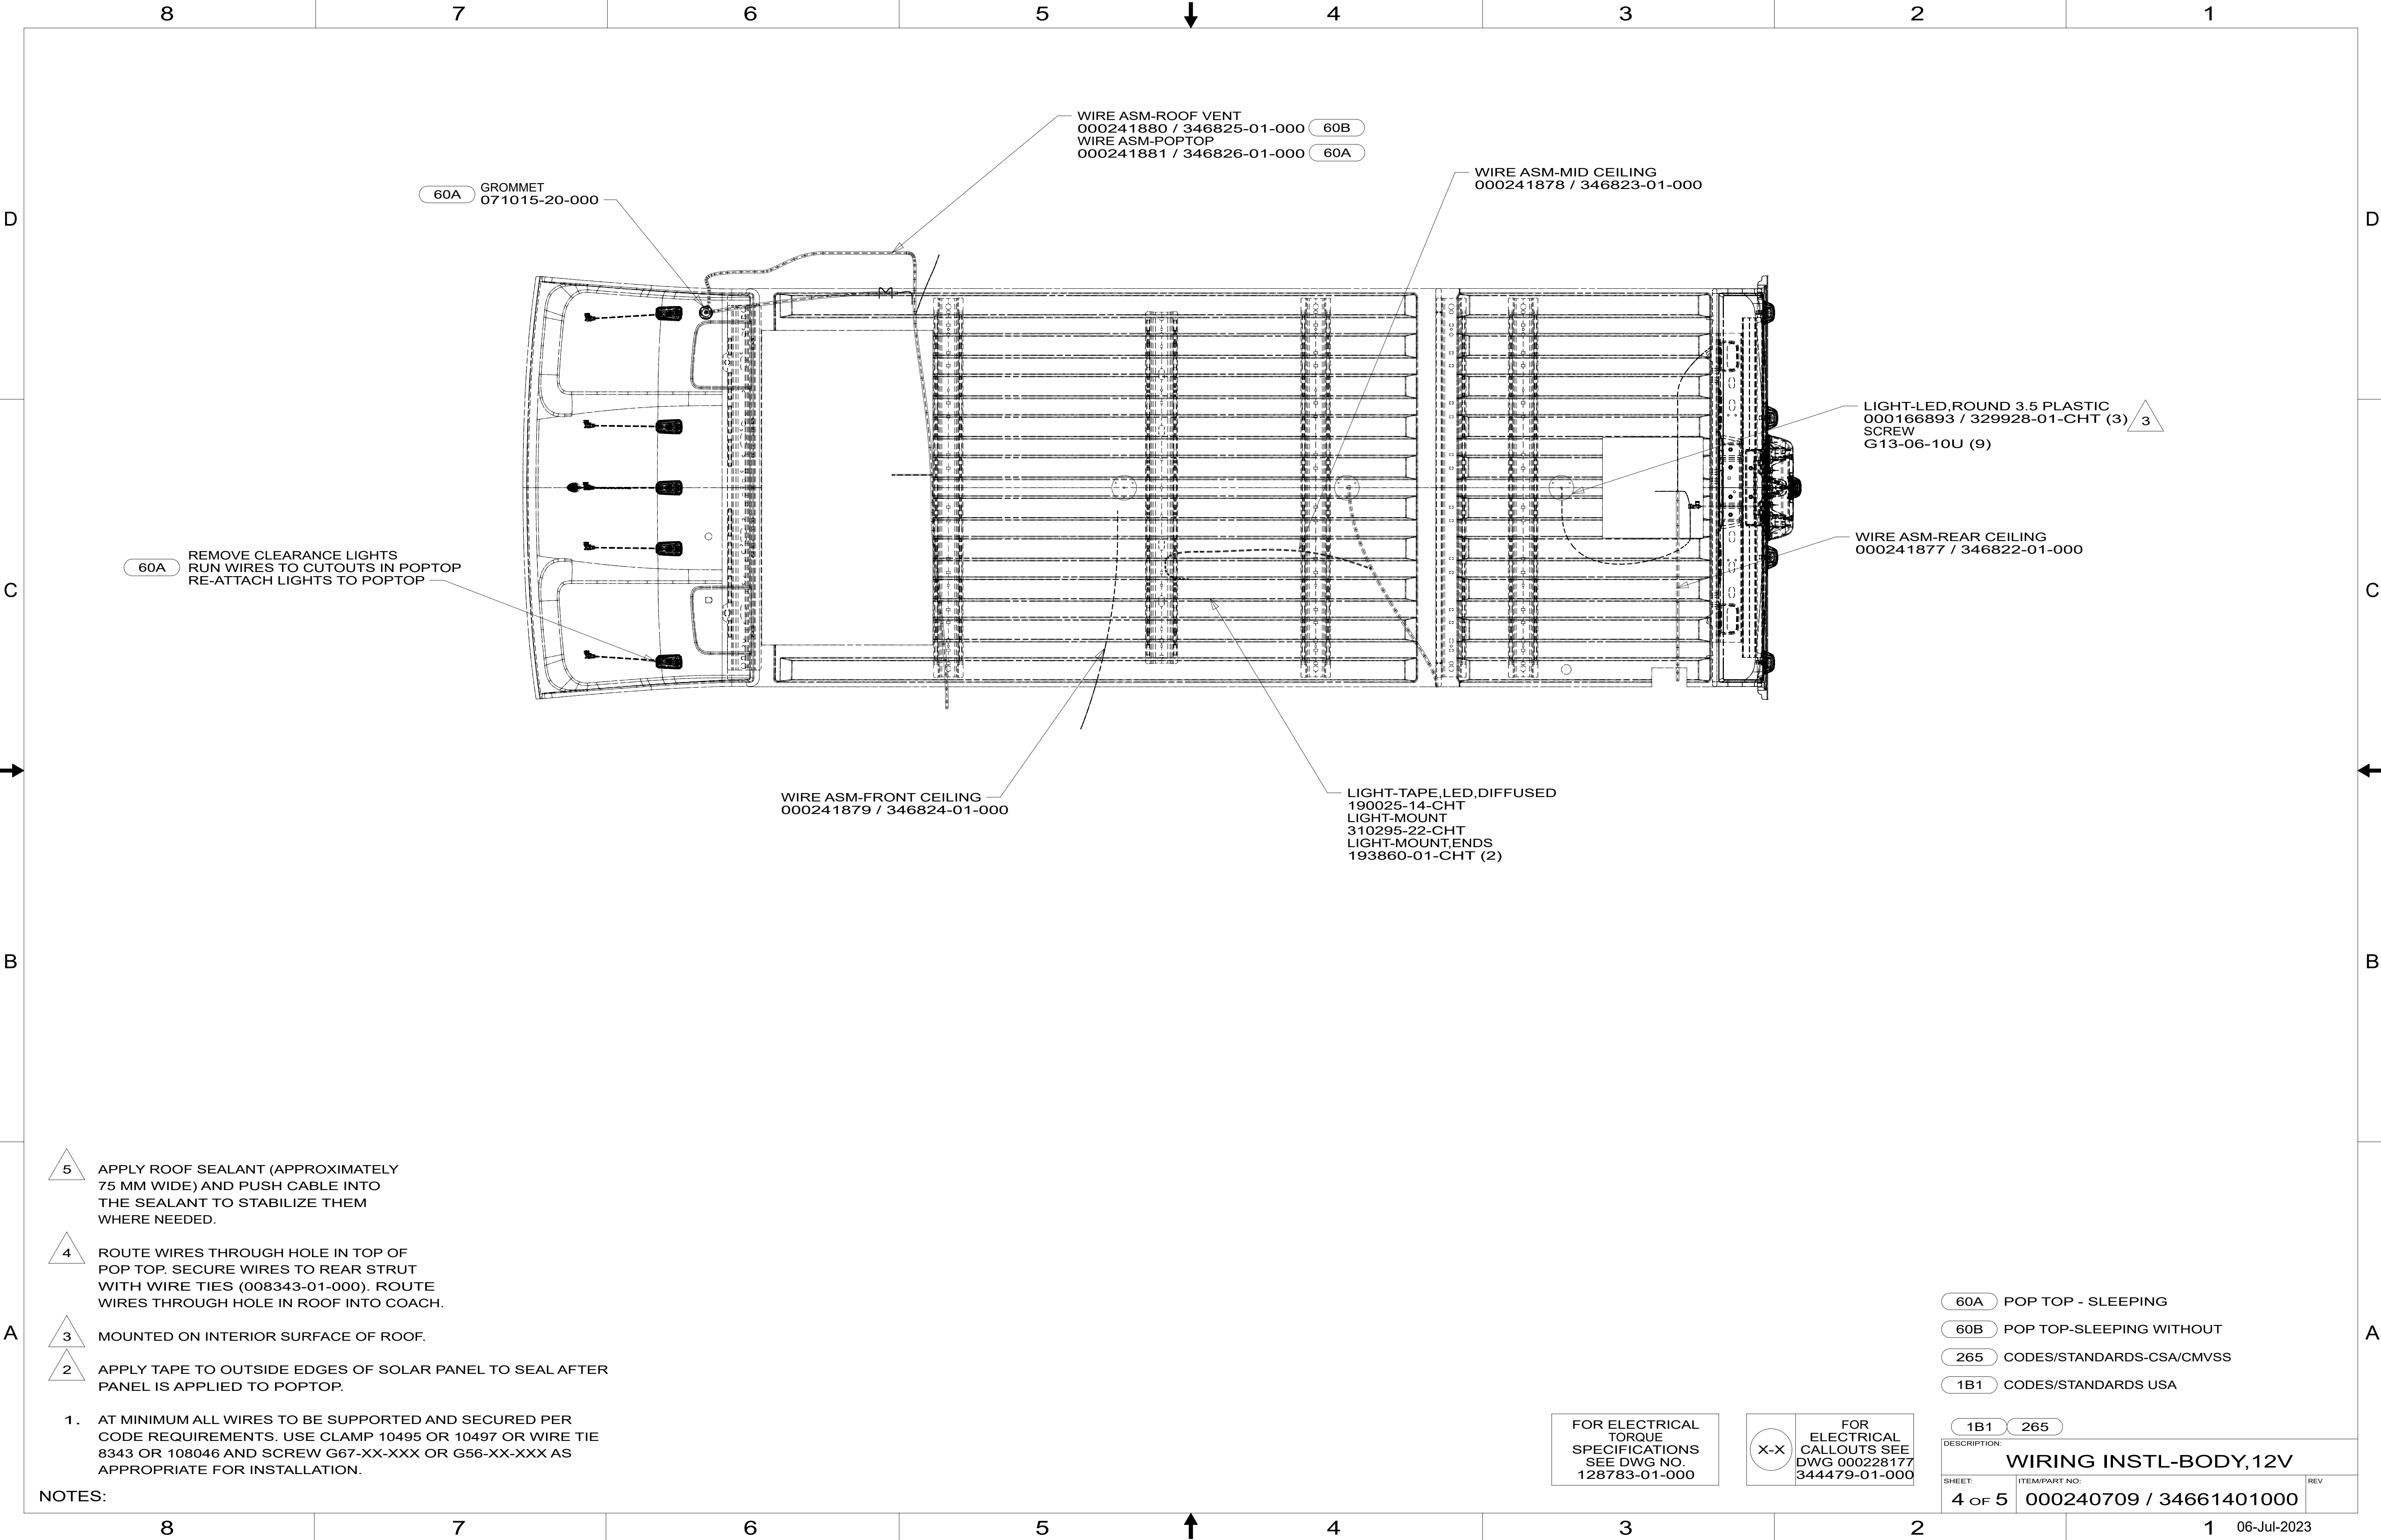

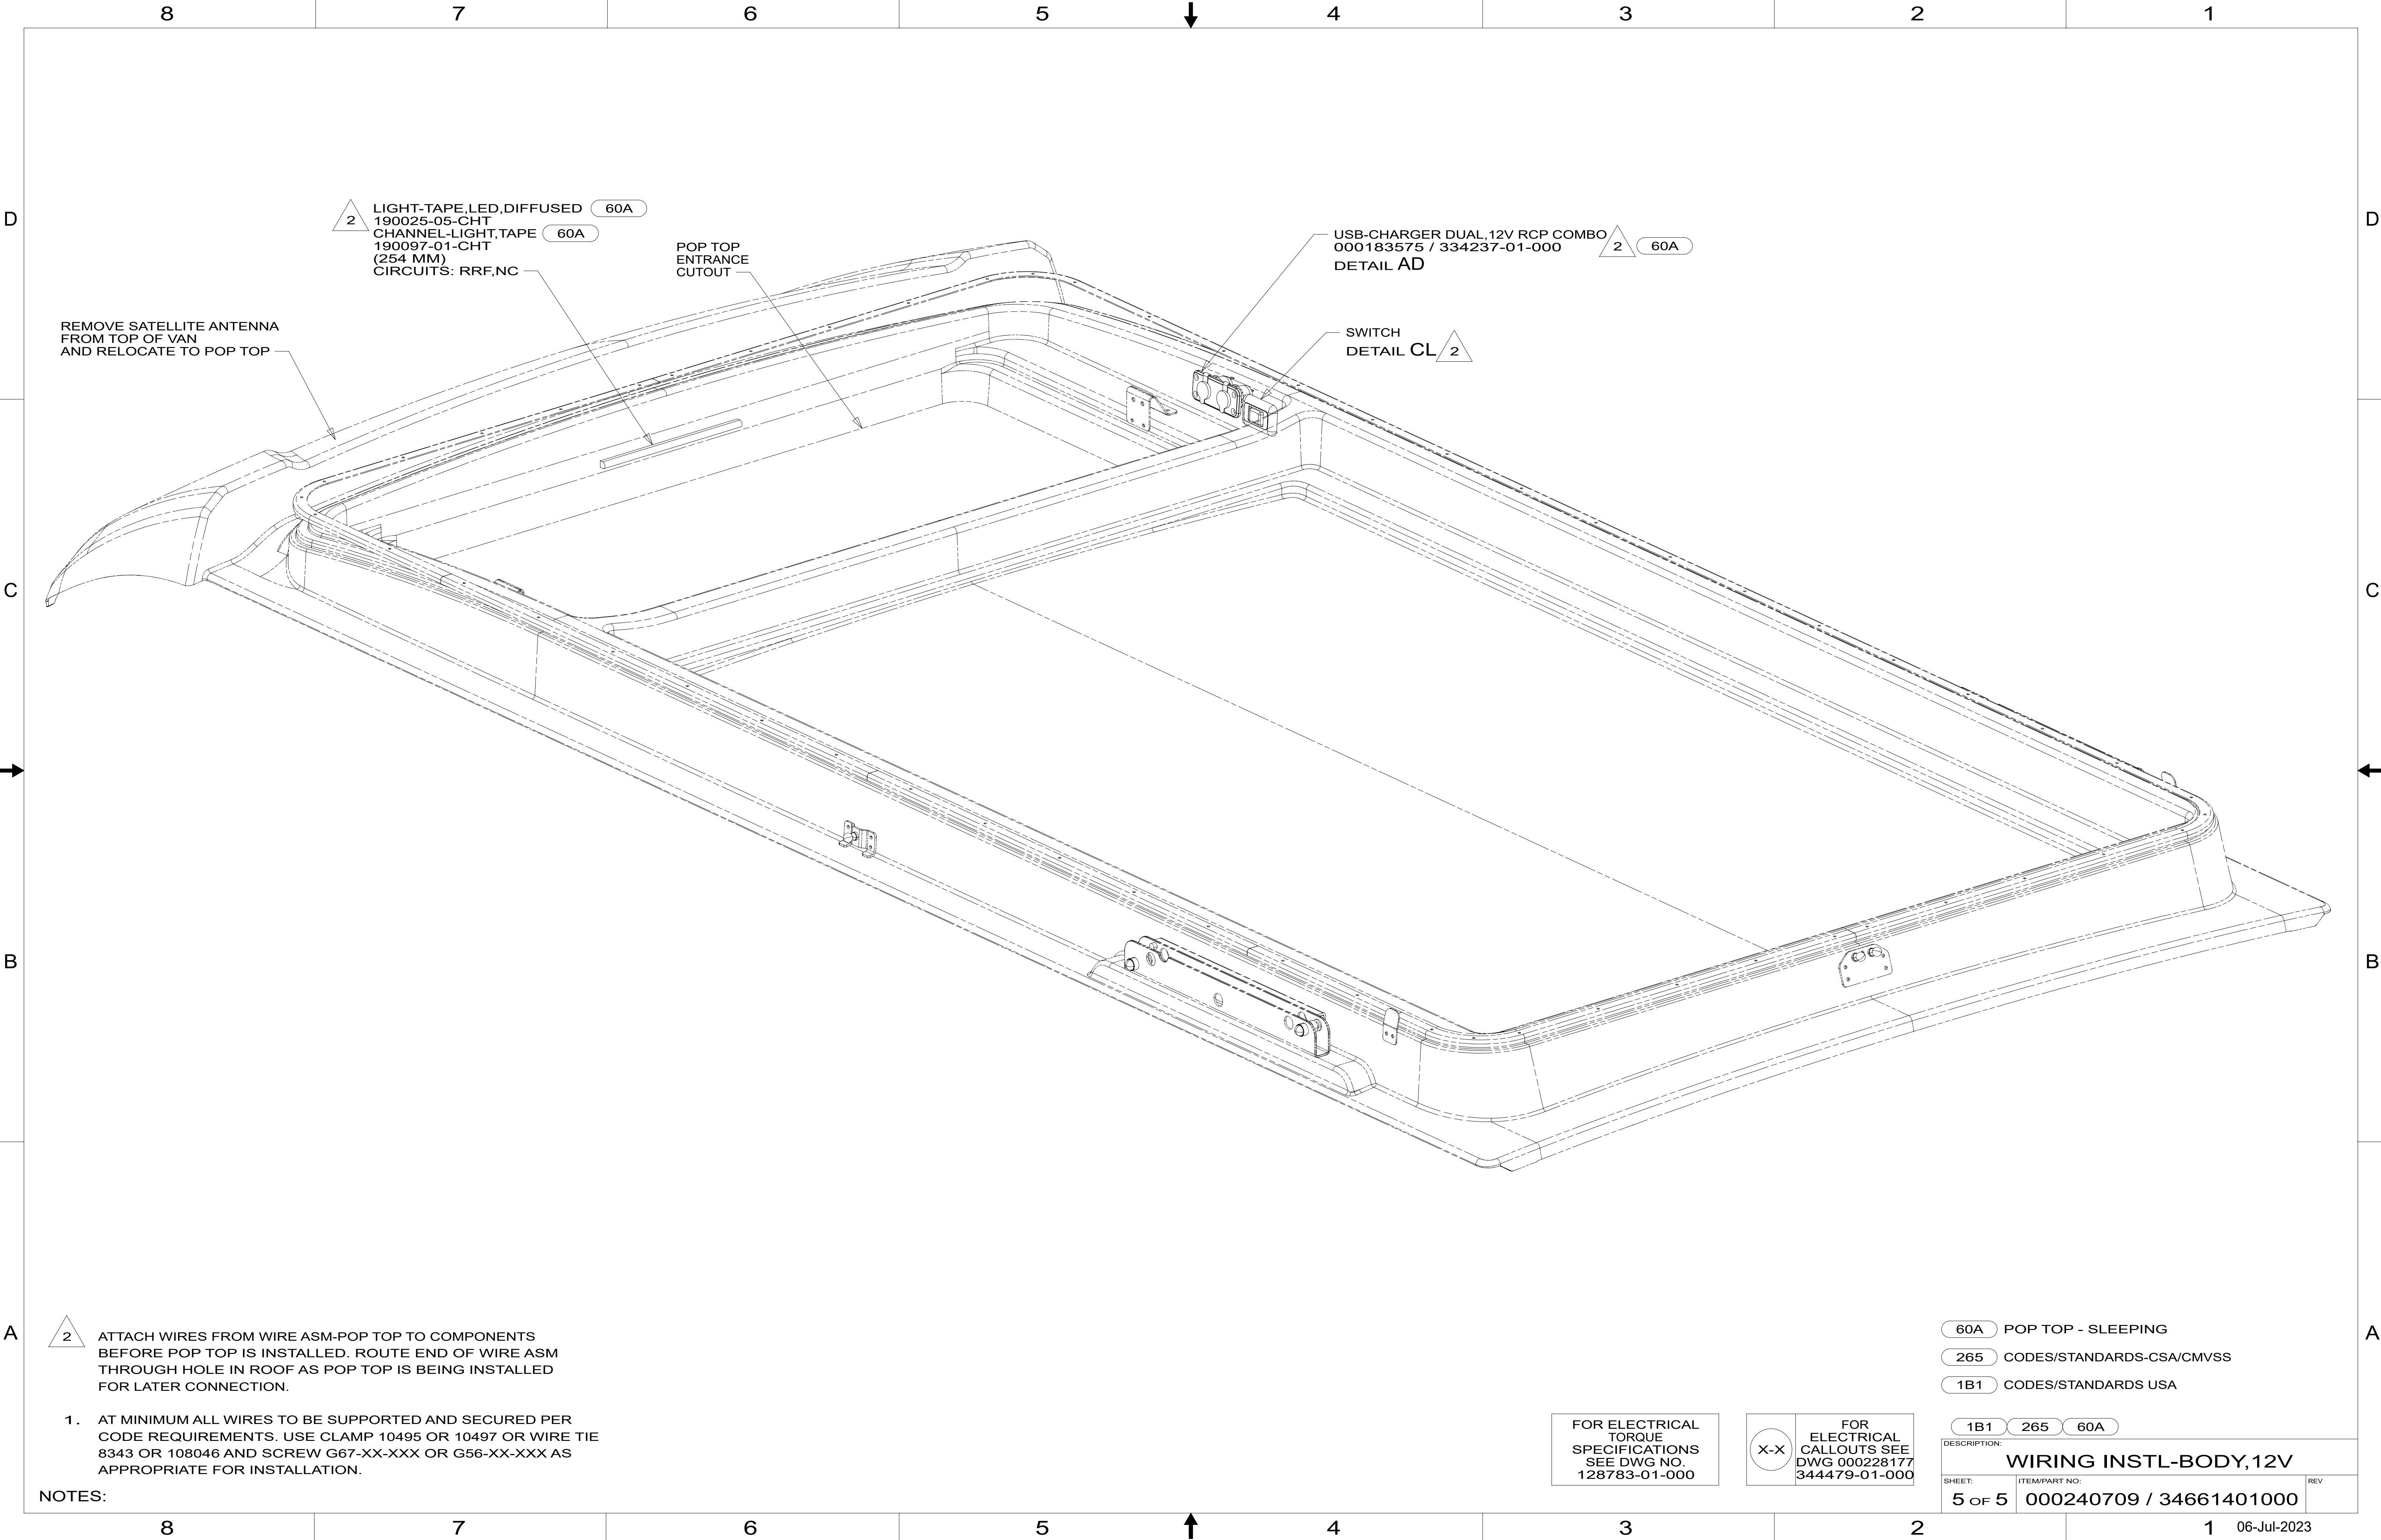

2 LIGHT-TAPE,LED,DIFFUSED 60A
190025-05-CHT
CHANNEL-LIGHT,TAPE 60A
190097-01-CHT
(254 MM)
CIRCUITS: RRF,NC

POP TOP
ENTRANCE
CUTOUT

USB-CHARGER DUAL,12V RCP COMBO
000183575 / 334237-01-000
DETAIL AD 2 60A

SWITCH
DETAIL CL 2

REMOVE SATELLITE ANTENNA
FROM TOP OF VAN
AND RELOCATE TO POP TOP

2 ATTACH WIRES FROM WIRE ASM-POP TOP TO COMPONENTS
BEFORE POP TOP IS INSTALLED. ROUTE END OF WIRE ASM
THROUGH HOLE IN ROOF AS POP TOP IS BEING INSTALLED
FOR LATER CONNECTION.

1. AT MINIMUM ALL WIRES TO BE SUPPORTED AND SECURED PER
CODE REQUIREMENTS. USE CLAMP 10495 OR 10497 OR WIRE TIE
8343 OR 108046 AND SCREW G67-XX-XXX OR G56-XX-XXX AS
APPROPRIATE FOR INSTALLATION.

NOTES:

60A POP TOP - SLEEPING
265 CODES/STANDARDS-CSA/CMVSS
1B1 CODES/STANDARDS USA

FOR ELECTRICAL
TORQUE
SPECIFICATIONS
SEE DWG NO.
128783-01-000

FOR
ELECTRICAL
CALLOUTS SEE
DWG 000228177
344479-01-000

DESCRIPTION: WIRING INSTL-BODY,12V		
SHEET: 5 OF 5	ITEM/PART NO: 000240709 / 34661401000	REV